
Inv_AdvancedGetFlightData 15.2.2 EDIFACT Interface

Version 15.2.2
Amadeus confidential information
Unauthorized use and disclosure is strictly forbidden

amadeus

Author: Inv_AdvancedGetFlightData 15.2.2 / jterrade
Published by: AMADEUS Development / Marketing Company
155 Route du Pin Montard - B.P. 69
06902 Sophia Antipolis - FRANCE

Copyright © 2016 - 2016 Amadeus s.a.s. - All Rights Reserved

Document revisions

Publishing date	Version	Author	Description
2015-06-23	1.0	jterrade	Document created

1. Introduction

1.1. Document Structure

This document contains the following sections :

Introduction

Contains an overview and guidelines for use of the document.

EDIFACT data mapping

Mapping between the data described in the analysis document and the EDIFACT data elements.

EDIFACT messages per function

Shows each EDIFACT message (branching diagram) and details of the data segments used for each function covered by the document.

Data Segments Directory

List in alphabetical order of all data segments that are part of the messages contained in this document.

Code Sets Directory

List of all code sets associated to the data elements that are part of the messages contained in this document. The code mentioned are the ones that are used by the application.

Examples

Examples of different exchanges are provided.

Glossary

1.2. EDIFACT Guidelines and Rules

The EDIFACT Guidelines and Rules are described in the following documents :

- IATA PSS/DA Working Group Final Report / October 1987.
- ISO 9735-1987 Electronic Data Interchange For Administration Commerce and Transport.
- IATA EDIFACT Message Documentation / December 1988.

Hereinafter are described the areas where the EDIFACT Guidelines and Rules have been disobeyed; below are also described the IATA conventions.

It is assumed that all the other areas the EDIFACT Rules are followed; such rules are not shown in this document and the designers and programmers have to refer to the documents listed above.

1.3. AMADEUS Guidelines and Rules

1.3.1. Character Set

The character set used is the EDIFACT Character set level B plus the characters :

Table 1-1. Additions to the character set.

Additional Character	ASCII	EBCDIC
Carriage Return	0001101	00010101
Line Feed	0001010	
End of Message	0000011	00000011
Start of Header	0000001	00000001
Start of Text	0000010	00000010

1.3.2. EDIFACT Separators

The following EDIFACT Separators are used :

In examples in the remainder of this document, the separators are displayed by the character in the 'Rep' Column in the following table.

Table 1-2. Terminators used.

Use	Name	Representation	ASCII	EBCDIC
Segment terminator	IS4	'	0011100 Hexa '1C'	00011100 Hexa '1C'
Segment tag terminator and Data Element Separator	IS3	+	0011101 Hexa '1D'	00011101 Hexa '1D'
Component Data Element separator	IS1	:	0011111 Hexa '1F'	00011111 Hexa '1F'
Repetition separator for a Composite or standalone Data Element		+	0001101 Hexa '1D'	00011101 Hexa '1D'
Release character	Question mark	?	Because the separators '1C', '1D', '1F', '19' are used in Amadeus, and not the characters '","+', ':", '*'', the release character is used only in the EDIFACT message external representation (print or display) to indicate that the following character is not one of the above separators. E.g. (A?+B)? :C=?? This is only a representation concern, the release '?' is not coded in the EDIFACT message. E.g (A+B):C=?	

1.3.3. Data Segment Structure

For those segments that do not fully conform to the EDIFACT standards the following is the general segment structure.

Table 1-3. General non-conforming segment structure.

Element name	Representation	Maximum	Mandatory/Conditional
Segment Identifier	an3	1	M
Segment Tag Terminator	IS3	1	M
Data Element	an..	1	M
Segment Terminator	IS4	1	M

1.3.4. Requirement Designator Definitions

- **C Conditional**

This element becomes mandatory under certain circumstances which have to be specified. The element may be omitted if these circumstances do not prevail.

● **M Mandatory**

This element is a fundamental part of a message and must always be included.

● **M* Mandatory**

This indicates that the status differs from the IATA PADIS Data Dictionary. If a composite or a data element is defined as conditional in the IATA approved message but must be mandatory to complete a business function, the composite or data element will be indicated with an M for Mandatory along with an asterix (*).

● **N/A Not Applicable**

This indicates that for the composite or data element no applicable use has been identified.

1.4. Functional references

Change Request: [CR09018521](#)

1.5. Functional definitions

Status: Draft

This document describes the following functions :

Function supported	Related transaction code	EDIFACT message used	
		Input	Output
Inv_AdvancedGetFlightData 15.2.2		Provide Complete Data for a Flight request message	Provide Complete Data for a Flight response message

2. List of messages

2.1. IFLIRQ 1A 15.2.2 (NGINV) - Provide Complete Data for a Flight request message

Function Requests full information about a flight.
Average size 50 bytes
Maximum size 100 bytes
Status **Promoted**

2.1.1. Branching diagram




2.1.2. Message structure


Tag	Name	St.	Rep.	Comments
ORG 1A 02.2.10 (NGINV)	ORIGINATOR OF REQUEST DETAILS <i>requestOriginator</i>	C	1	Represents the request originator. This originator information is used to check the user has the relevant permissions to view the Inventory. The content of the ORG segment is mainly a UserID and an OfficeID (identifying the RMS), that must be defined on Amadeus side under LSS. e.g example of a valid ORG segment: ORG+00+:NCE1A07CY++++A0154QVRC'
FDQ 1A 10.1.16 (NGINV)	FLIGHT DETAILS QUERY <i>flightDate</i>	M	1	Flight-date for which information are to be provided to the RMS. boardPoint and offPoint can specify a segment. In that case departureDate becomes the boarding date for the segment and the flight-date retrieved is the one containing this segment with this boarding date. If only one of this information is missing, the other is ignored. e.g. for a flight with 2 legs AAA-BBB and BBB-CCC with the respective boarding date 25-MAR-02 and 26-MAR-02 the following FDQ segment will retrieve the same flight-date: - FDQ+6X+42+250302' - FDQ+6X+42+250302+AAA+BBB' - FDQ+6X+42+250302+AAA+CCC' - FDQ+6X+42+250302+BBB' - FDQ+6X+42+250302++CCC' - FDQ+6X+42+260302+BBB+CCC'
STX 1A 07.1.6 (NGCOM)	STATUS DETAILS <i>grabLock</i>	M	1	Indicates whether or not the lock should be grabbed on the flight-date. type is not used, and should not be filled. Possible values for statusIndicator are: - GBL: Grab the lock (mandatory) Possible value for actionRequest are: - 2: Retrieve the flight-date information without grabbing any lock (mandatory) The RMS must hardcode statusIndicator to "GBL", and actionRequest to "2". e.g: STX+GBL:2'

2.2. IFLIRR 1A 15.2.2 (DOC_GENERATION) - Provide Complete Data for a Flight response message

Function Provide complete data for a flight response message
Average size 12 KB
Maximum size 1 MB
Status **Promoted**

2.2.1. Branching diagram

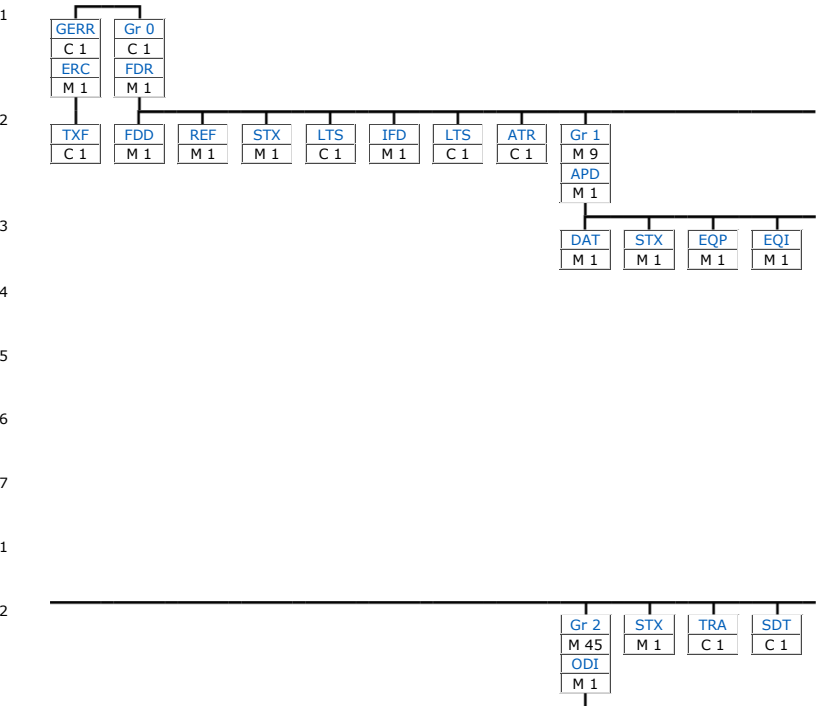

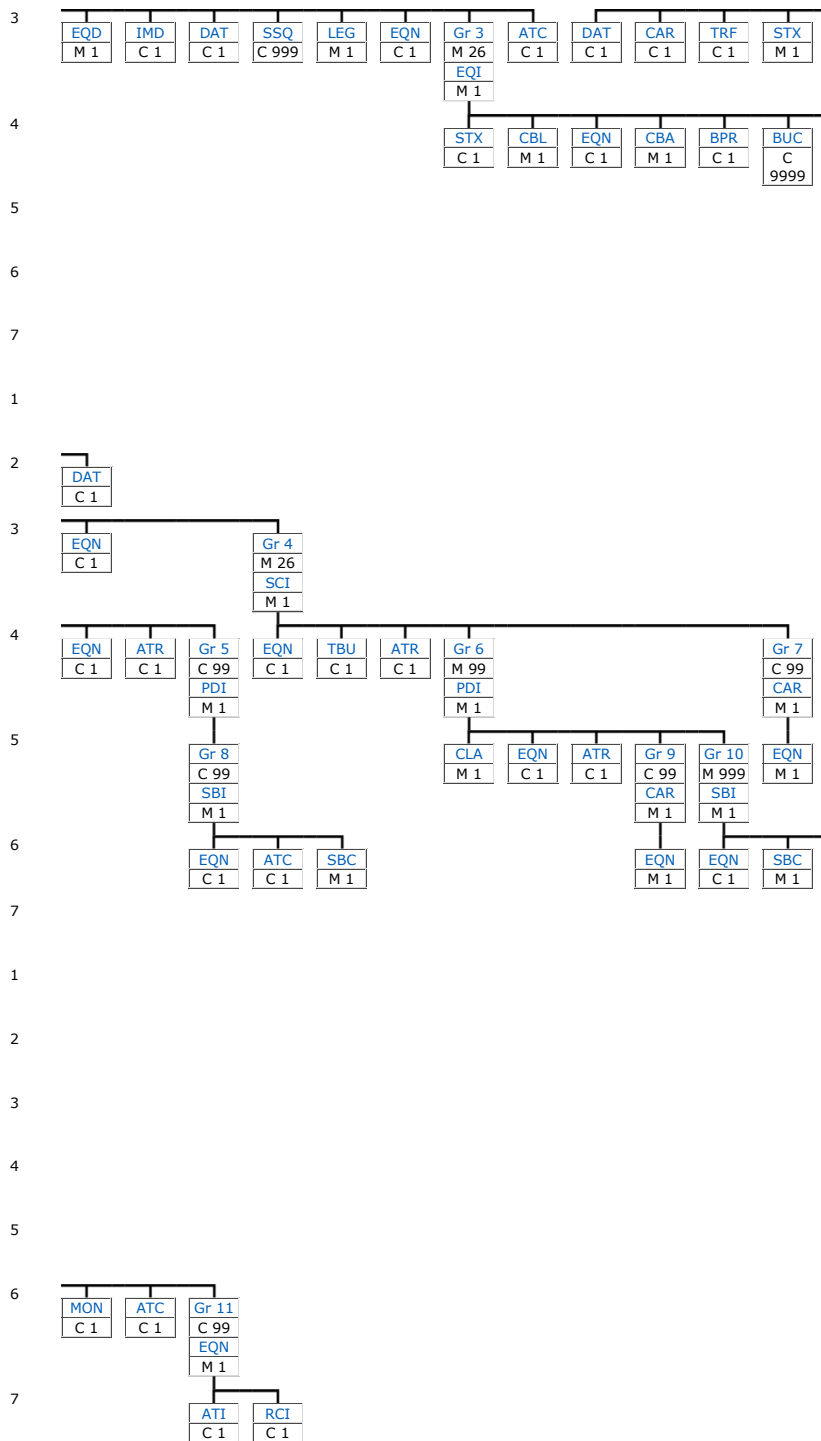

2.2.2. Message structure

Tag	Name	St.	Rep.	Comments
GERR	Error Group errorInfo	C	1	Error information group. In BIF, this group is not encoded.
ERC 1A 10.1.20 (NGINV)	APPLICATION ERROR INFORMATION applicationErrorInfo	M	1	Identify the type of application error within a message. Possible values for codeListQualifierCode are: - EC: Error code - INF: Information code - WEC: Warning code e.g : ERC+6732:WEC'
TXF 1A 11.1.29 (NGINV)	Free Text information interactiveFreeText	C	1	Provide free text information about the error. e.g : IFT+ZZZ+Invalid airline code.'
Gr 0	Group flightDateInformation	C	1	Flight-date information group.
FDR 1A 02.1.15 (NGINV)	FLIGHT DETAILS RESPONSE flightDateDesignator	M	1	Flight-date for which information are provided. e.g the flight 6X 66 on May the 21th 2007: FDR+6X+66+210507'
FDD 1A 02.1.4 (NGINV)	FLIGHTDATE LEVEL DATA flightLevelInfo	M	1	Information at flight-date level. Possible values for flightStatus are: - : No special status - SO : Flight is cancelled - BRB: Flight is under inventory and seat rebuild

				Possible values for flightCharacteristics are: - INT: International - DOM: Domestic - GRD: Ground handling - HID: Hidden - PSD: Pseudo Flights are either INT or DOM. In addition, they can have the other characteristics GRD, HID or PSD. e.g : FDD++INT+PSD'
REF IA 02.2.49 (NGINV)	REFERENCE INFORMATION lockId	M	1	Lock information. Possible values for qualifier are: - : No lock - LID: GUI lock - ELC: Emergency lock In Interactive IFLIRR, the REF segment is always encoded, even if no lock is set on the flight-date. e.g no lock: REF' e.g emergency lock: REF+ELC' In case the flight-date is GUI-locked, the User Id of the user which is locking the flight-date is encoded in Interactive IFLIRR. e.g GUI-lock: REF+LID:NCE1A0955/8235CN' In BIF, the REF segment is always empty, as if no lock was set on the flight-date.
STX IA 10.1.68 (NGINV)	STATUS DETAILS flightFlags	M	1	DCS flight-date status. Possible values for statusIndicator are: - ACT: Flight active in DCS - DCS: Flight sent to DCS - INA: Link broken between NGI and DCS - VMS: AutoVMS process triggered Flight-date DCS status is either ACT or DCS or INA. In addition, AutoVMS status can be added. e.g flight active in DCS and AutoVMS triggered: STX+ACT+VMS'
LTS IA 02.2.7 (NGINV)	LONG TEXT STRING massComment	C	1	Mass comment from Amadeus Business Rule (ABR). e.g : LTS+MASS COMMENT' LTS can not be sent empty.
IFD IA 02.1.74 (NGINV)	INVENTORY PARAMETERS FOR FLIGHTDATE inventoryParametersFD	M	1	Inventory parameters for the flight-date (leg revenue control type used in availability calculation, airline currency...). Possible values for controlType are: - R: Flight-date is revenue controlled - C: Flight-date is class controlled Possible values for isUnderActiveRevControl are: - Y: Flight-date is under active revenue control - N: Flight-date is not under active revenue control e.g : IFD+++C+GBP++N'
LTS IA 02.2.7 (NGINV)	LONG TEXT STRING userComment	C	1	User comment entered through the GUI or an IOPTAQ message. e.g : LTS+USER COMMENT' LTS can not be sent empty.
ATR IA 02.1.48 (NGINV)	ATTRIBUTE rmsAdditionalAtFlightDateLevel	C	1	Flight Date Level Additional Forecast Data provided by Altea RMS for External Softwares. Possible values for attributeType are: - ACHDMD : Achievable demand - EXPBKG : Expected final bookings - EXPLF : Expected final load factor - EXPRASK : Expected final RASK - EXPREV : Expected final Revenue - CRITICAL : Critical flag - SPECIALEVENT : Special events flag - CURREV : Revenue e.g: ATR++ACHDMD:23.8+EXPBKG:16+EXPLF:88.6+EXPRASK:3.84+EXPREV:51436.0+CRITICAL:Y+SPECIALEVENT:N+CURREV:10891.0
Gr 1	Group legs	M	9	Information on all the legs of the flight-date.
APD IA 02.2.6 (NGINV)	ADDITIONAL PRODUCT DETAILS leg	M	1	Leg for which information are provided, identified by its board/off point. e.g departure Berlin, arrival London: APD+:::TXL:LHR'
DAT IA 02.2.16 (NGINV)	DATE AND TIME INFORMATION scheduledTiming	M	1	Leg scheduled departure and arrival times (local time). Possible values for qualifier are: - 708: Departure time - 707: Arrival time e.g departure on May the 25th 2007 at 6h55 am, arrival on May the 25th 2007 at 8h00 am: DAT+708:250507:0655+707:250507:0800'
STX IA 10.1.58 (NGINV)	STATUS DETAILS dcInformation	M	1	Information provided by Departure Control System (DCS) about the leg. Possible values for statusIndicator are: - INA: None (default status) - FD: Departed - SL: Boarding - ACT: Boarded figures received - PNL: Passenger name list received In case of ACT or PNL only, possible values for actionRequest are: - 1 : Yes

				Leg are either INA or FD or SL. In addition, they can have received boarded figures or the PNL. e.g leg is boarding and has received the PNL: STX+SL+PNL:1' In BIF, SL and ACT statuses are not conveyed.
EQP SS 01.2.6 (NGINV)	EQUIPMENT INFORMATION <i>aircraftInformation</i>	M	1	Aircraft type, service type and aircraft owner. The aircraft owner is derived from Schedule DEI 3. DEI 3 can be: - Empty : In that case, the current airline is set as aircraft owner - A 2-letter code : In that case, this code is set as aircraft owner - X : In this case, aircraft owner is empty since it is specified in DEI 113 as free text e.g : EQP+J+320+6X
EQI 1A 02.1.22 (NGINV)	AIRCRAFT CONFIGURATION VERSION <i>acvInformation</i>	M	1	Information about the leg aircraft configuration version (ACV). e.g ACV code 32U: EQI+++++:::32U'
EQD IA 06.1.9 (NGINV)	EQUIPMENT INFORMATION <i>saleableConfiguration</i>	M	1	Leg saleable configuration information. e.g saleable configuration code 011: EQD+++++011'
IMD IA 02.2.6 (NGINV)	ITEM DESCRIPTION <i>flixType</i>	C	1	Leg operational data information (FLIX). Possible values for itemCharacteristic are: - FD : FLIX-Disruption (offPoint changed) - FX : FLIX-FX (flight cancelled) - LX : FLIX-LX (landing cancelled) e.g FLIX-FX: IMD++FX' In BIF, IMD is not encoded.
DAT IA 02.2.8 (NGINV)	DATE AND TIME INFORMATION <i>flixTiming</i>	C	1	Leg timing operational data information (FLIX). DAT segment is never encoded.
SSQ 1A 15.1.1 (NGINV)	SPECIAL REQUIREMENTS QUOTA <i>newSSR</i>	C	999	Information on Special Service Requests (SSR) and Seat Families (SF).
LEG 1A 02.1.64 (NGINV)	LEG DATA <i>legData</i>	M	1	List of parameters used by the cross cabin availability calculation (capacity sharing). Possible values for crossCabinControls are: - NXC: No cross cabin - NCC: No configuration change allowed - CCA: Configuration change allowed - DGR: Protect for downgrades flag (in addition to CCA) - UGR: Protect for excess upgrades flag (in addition to CCA) The current saleable configuration code is provided in crossCabinConfiguration. The list of valid saleable configurations that can be considered in cross cabin is provided in crossCabinConfigList. e.g : LEG+007:C24M120:C28M114:C32M108:C48M84:C52M78:C56M72:C60M66:C64M60+CCA+DGR+UGR'
EQN 1A 10.1.145 (NGINV)	NUMBER OF UNITS <i>legCounters</i>	C	1	Leg-date counters. Possible values for unitQualifier are: - MEL : Maximum at equipment level, integer e.g maximum of 4: EQN+4:MEL'
Gr 3	Group <i>legCabins</i>	M	26	Information on all the cabins of the leg.
EQI 1A 02.1.27 (NGINV)	AIRCRAFT CONFIGURATION VERSION <i>legCabin</i>	M	1	Leg-cabin capacity and AU. Possible values for qualifier: - : Capacity - S : Saleable capacity - A : Autorisation level (AU) - O : Operational capacity (OCap) - E : Effective capacity S, A, O and E qualifiers are only used for airlines using AU availability calculation method (airline parameter USE_HYBRID_NESTING set to 'Y'). e.g with AU: EQI+C:31:S+C:32:A+C:31:O+C:31:E' e.g without AU: EQI+F:14'
STX 1A 10.1.64 (NGINV)	STATUS DETAILS <i>legCabinStatus</i>	C	1	Indicate special flags at leg cabin level. Possible values for indicator are: - PHF : Protected Name Handling Flag - RHF : Release Handling Flag Possible values for action are: - 1 : Yes - 0 : No
CBL 1A 02.1.15 (NGINV)	LEG CABIN <i>legCabinDetails</i>	M	1	Leg-cabin details (notification level, regrades,...). Details for each leg-cabin blockspace are provided in blockedSpaceDetails. Possible values for blockSpaceType are: - S: Codeshare blockspace, integer - P: Protected seats (non commercial bookings/ZZ PNRs), integer - Z: Seats blocked for other reasons (broken seats, deadload,...), integer - A: Allotment (CTP/Customer Transfer Process is on-going), integer e.g : CBL+0+0+0++Y++0+36.167++0+S:6X5141:175+Z::1' In BIF, avsFlag is not encoded.
EQN 1A 10.1.146 (NGINV)	NUMBER OF UNITS <i>legCabinCounters</i>	C	1	Leg-cabin counters. Possible values for unitQualifier are: - COF: Cabin overbooking factor, integer

				- MLC: Maximum at leg-cabin level, integer - BUB: Booking upper boundary, integer - BLB: Booking lower boundary, integer e.g a cabin overbooking factor of 56% and a maximum at cabin level of 33: EQN+56:COF+33:MLC'
CBA 1A 02.1.11 (NGINV)	LEG CABIN AVAILABILITIES <i>cabinAvailabilities</i>	M	1	Leg-cabin availabilities. waitlistBookingsCounter and groupBookingCounter are never encoded. The decimal values netAvailability and grossAvailability are rounded up to integers. e.g : CBA+0+0+31+32+0+27+0' In BIF, staffStandbyCounter is not encoded and netAvailability/grossAvailability are not rounded to integers.
BPR 1A 02.1.66 (NGINV)	BIDPRICE OPTIMISER RECOMMENDATIONS <i>optimiserRecommendations</i>	C	1	Revenue Management System (RMS) recommendations for bid price. Can only be filled for airlines using revenue buckets as leg revenue control type (airline parameter INV_LEG_CONTROL_TYPE set to 'B'). e.g : BPR+10+0+100+5+1000' Otherwise, it is left empty. e.g empty: BPR' In BIF, BPR segment is not encoded.
BUC 1A 02.1.32 (NGINV)	REVENUE BUCKET <i>revenueBucket</i>	C	9999	Revenue control value for the leg-cabin. For airlines using bid-price vectors as leg revenue control type (airline parameter INV_LEG_CONTROL_TYPE set to 'V'), availabilityConstraint, deltaSeatsEquivalent, av1, av2, yieldRangeLowerValue, subclassId and numberOfSeatsTaken are never encoded. e.g : BUC+500+++++18+++++10' For airlines using revenue buckets as leg revenue control type (airline parameter INV_LEG_CONTROL_TYPE set to 'B'), seatIndex is never encoded. e.g : BUC+900+13+0+13+13+13+800'
EQN 1A 10.1.156 (NGINV)	NUMBER OF UNITS <i>dcsCounters</i>	C	1	Counters for DCS adjustments. Possible values for nbOfUnitsQualifier: - CSY: Accepted stand-by, integer - DAJ: DCS adjustments, integer e.g : EQN+0:DAJ' In BIF, EQN segment is not encoded.
ATR 1A 02.1.49 (NGINV)	ATTRIBUTE <i>rmsAdditionalAtLegCabinLevel</i>	C	1	Leg Cabin Level Additional Forecast Data provided by Altea RMS for External Softwares. Possible values for attributeType are: - ACHDMD : Achievable demand - EXPBKG : Expected final bookings - OBRATE : Overbooking percentage - REMCNLRATE : Remaining cancellation rate forecast - NSHRATE : No-Show Rate forecast - SHRATE : Show-rate forecast - AVGMATRATE : Average materialisation rate forecast - EGS: Effective Group Size e.g: ATR++ACHDMD:23.8+EXPBKG:16+OBRATE:1.5+REMCNLRATE:9.2+NSHRATE:3.6+SHRATE:87.5+AVGMATRATE:96.7+EGS:23
Gr 5	Group <i>legBookingClasses</i>	C	99	Leg level information on all the booking classes of the leg-cabin, returned only if the leg inventory is used by the airline. In Interactive IFLIRR, the booking classes appearing in this Group are ordered thanks to the content of the Schedule Booking Class rule. In BIF, the booking classes appearing in this Group are ordered like in the Interactive IFLIRR only on explicit airline request.
PDI 1A 02.2.18 (NGINV)	PRODUCT INFORMATION <i>bookingClassID</i>	M	1	Booking class identifier. e.g booking class C: PDI++C'
Gr 8	Group <i>legSubclasses</i>	C	99	Leg level information on all the subclasses of the booking class.
SBI 1A 14.1.2 (NGINV)	SUBCLASS IDENTIFICATION <i>subclass</i>	M	1	Subclass identifier. For airlines needing subclasses in IFLIRR, indicates the subclass number inside the booking class. e.g subclass number 1: SBI+1' For airlines needing booking classes in IFLIRR, hardcoded to 0. e.g : SBI+0'
EQN 1A 10.1.161 (NGINV)	NUMBER OF UNITS <i>subclassCounters</i>	C	1	Class counters. Possible values for nbOfUnitsQualifier are: - SLP: Subclass Limit Percentage - SLT: Subclass Limit Threshold e.g a subclass limit threshold of 5: EQN+5:SLT'
ATC 1A 02.1.198 (NGINV)	CODED ATTRIBUTE <i>subclassFlags</i>	C	1	Class flags. Possible values for attributeType are: - SLS: Segment limit (apply for standalone segment) - SLC: Segment limit (apply for connecting segment) In case attributeType is SLS or SLC, possible values for attributeDescription are: - 'Y': Yes - 'N': No

SBC 1A 14.1.3 (NGINV)	SUBCLASS DATA <i>subclassDetails</i>	M	1	Class controls details (protections, parent booking class, AU...) e.g : SBC+0+++++:::70:::12:::B:27++0:0'
ATC 1A 02.1.196 (NGINV)	CODED ATTRIBUTE <i>moveableCurtainInformation</i>	C	1	Moveable curtain information. Possible values for attributeType: - E : Euroconcept - V : Standard - R : Moveable curtain e.g, a moveable curtain in Euroconcept version: ATC++R'
Gr 2	Group <i>segments</i>	M	45	Information on all the segments of the flight-date.
ODI 1A 02.2.38 (NGINV)	ORIGIN AND DESTINATION DETAILS <i>segment</i>	M	1	Segment for which information are provided, identified by its board point and its off point. e.g : ODI+TXL+LHR'
DAT 1A 02.2.17 (NGINV)	DATE AND TIME INFORMATION <i>segmentTiming</i>	C	1	Segment scheduled departure and arrival times (local time). Possible values for qualifier are: - 708: Departure time - 707: Arrival time e.g departure on 25 May 2007 at 6h55 am, arrival on 25 May 2007 at 8h00 am: DAT+708:250507:0655+707:250507:0800' In BIF, DAT segment is never encoded.
CAR 1A 02.1.12 (NGINV)	COMMERCIAL AGREEMENTS <i>codeshareFlights</i>	C	1	Information about codeshare partner at segment level. Possible values for transportStageQualifier are: - O : Operating partner information - D : Marketing partner information Possible value for codeshareType are: - BS : Blockspace - FF : Free-flow - CF : Capped Free-Flow In Interactive IFLIRR, for an operating flight, CAR segment is completely filled with all marketing partners information; for a marketing flight, CAR segment is filled with operating partner information, and the codeshare type is given in STX segment. e.g for an operating segment with flight ZZ 9999 as a marketing partner with a free-flow agreement: CAR++D:ZZ:9999::FF' e.g for a marketing segment with flight ZZ 9999 as an operating partner with a free-flow agreement : CAR++O:ZZ:9999' STX+MAN:1+CFF:1+CCF:0+CBS:0+CBS:0' In BIF, CAR segment is not encoded for operating flights; for marketing flights, only the codeshare type is encoded. e.g in BIF, for a marketing segment with a free-flow agreement: CAR+::::FF'
TRF SS 01.2.4 (NGINV)	TRAFFIC RESTRICTION INFORMATION <i>trafficRestriction</i>	C	1	Traffic restriction at segment level. There can be until 9 traffic restriction codes by segment. e.g. : TRF+A+I+L+E'
STX 1A 10.1.61 (NGINV)	STATUS DETAILS <i>segmentFlags</i>	M	1	Segment statuses. Possible value for statusIndicator: - MAN: UseManualStatus - CBS: Codeshare blockspace (first occurrence) or true inventory codeshare (second occurrence) - CFF: Codeshare free-flow - CCF: Codeshare capped free-flow - ACT: Flight active in DCS - CLS: Closure indicator MAN is always encoded first. In Interactive IFLIRR, for a marketing flight, the STX segment contains all the codeshare agreement types. If applicable, ACT and CLS flags are also encoded. e.g for a marketing flight with a blockspace agreement: STX+MAN:1+CFF:0+CCF:0+CBS:1+CBS:0' e.g for a flight with a closed segment and active in DCS: STX+MAN:0+ACT:1+CLS:1' In BIF, MAN and CLS are encoded.
EQN 1A 10.1.165 (NGINV)	NUMBER OF UNITS <i>segmentCounters</i>	C	1	Counters for the associated segment such as OnD carriers steering keys: - PGF: Prognosis Factor - DBD: Days Before Departure - CLF: Current Load Factor - EFC: Effective Capacity - HRD: High Revenue Demand Value - GLF: Group Load Factor
Gr 4	Group <i>segmentCabins</i>	M	26	Information on all the cabins of the segment.
SCI 1A 02.1.22 (NGINV)	SEGMENT CABIN IDENTIFICATION <i>segCabin</i>	M	1	Segment cabin information (cabin code, booking counter,...). e.g segment-cabin C information: SCI+C++0+0+0+27+0' In BIF, only the cabin code is encoded. e.g segment-cabin C: SCI+C'
EQN 1A 10.1.166 (NGINV)	NUMBER OF UNITS <i>boardingFiguresDcs</i>	C	1	Boarded figures sent by the Departure Control System (DCS), after the segment departure. EQN is encoded when boarded figures are defined at segment cabin level (airline parameter DCS_AT_CLASS_LEVEL set to 'N') and when boarding figures has been received. It is encoded also when steering keys are present for OnD carriers. Possible values for nbOfUnitsQualifier are: - BOA: Boarded passengers, integer - NOS: Noshow, integer - GNS: Group noshow, integer - OFF: Offloaded passengers, integer - GBO: Group boarded, integer - CBO: Commercial stand-by boarded, integer - CNB: Commercial stand-by not boarded, integer - UGI: Upgrades into, integer

				- UGO: Upgrades out, integer - DGI: Downgrades into, integer - DGO: Downgrades out, integer - GOS: Go-Show passengers, integer - SBO: Staff Stand-by boarded, integer - SNB: Staff Standby not boarded, integer - VOL: Voluntary offloaded, integer - DNB: Denied boarding, integer - NOR: No-Rec, integer - PGF: Prognosis Factor - DBD: Days Before Departure - CLF: Current Load Factor - EFC: Effective Capacity - HRD: High Revenue Demand Value - GLF: Group Load Factor e.g 3 people boarded and 2 people did not show: EQN+3:BOA+2:NOS'
TBU 1A 02.1.66 (NGINV)	TRANSIENT BUCKET <i>transientBucket</i>	C	1	Expert parameters for the segment-cabin (link class, link subclass, minimum group Yield,...). Only used by airlines using revenue buckets as leg revenue control type (airline parameter INV_LEG_CONTROL_TYPE set to 'B'). e.g with values: TBU+16+I+0+19' e.g empty: TBU+++0' In BIF, minimumGroupYield is not encoded.
ATR 1A 02.1.50 (NGINV)	ATTRIBUTE <i>rmsAdditionalAtSegmentCabinLevel</i>	C	1	Segment Cabin Level Additional Forecast Data provided by Altea RMS for External Softwares. Possible values for attributeType are: - ACHDMD : Achievable demand - EXPBKG : Expected final bookings - SLACKSPACE : Slack space - SEASON : Season label e.g: ATR++ACHDMD:23.8+EXPBKG:16+SLACKSPACE:3+SEASON:FULL YEAR
Gr 6	Group <i>bookingClasses</i>	M	99	Information on all the booking classes of the segment-cabin. In Interactive IFLIRR, the booking classes appearing in this Group are ordered thanks to the content of the Schedule Booking Class rule. In BIF, the booking classes appearing in this Group are ordered like in the Interactive IFLIRR only on explicit airline request.
PDI 1A 02.2.17 (NGINV)	PRODUCT INFORMATION <i>bookingClassID</i>	M	1	Booking class identifier. e.g booking class C: PDI++C'
CLA 1A 02.1.53 (NGINV)	BOOKINGCLASS COMPLETE DATA <i>bkgClassDetails</i>	M	1	Booking class details for AVS status. receivedAvsStatus always contains LA or a dummy value (technical arrangement). e.g LA encoded: CLA+LA' The real AVS status (received or computed) can be found in SBC segment at subclass level. In BIF, a dummy value is encoded.
EQN 1A 10.1.177 (NGINV)	NUMBER OF UNITS <i>boardingFiguresDcs</i>	C	1	Boarded figures sent by the Departure Control System (DCS), after the segment departure. EQN is encoded only when boarded figures are defined at segment cabin level (airline parameter DCS_AT_CLASS_LEVEL set to 'N') and when boarding figures has been received. Possible values for nbOfUnitsQualifier are: - BOA: Boarded passengers, integer - NOS: Noshow, integer - GNS: Group noshow, integer - OFF: Offloaded passengers, integer - GBO: Group boarded, integer - CBO: Commercial stand-by boarded, integer - CNB: Commercial stand-by not boarded, integer - UGI: Upgrades into, integer - UGO: Upgrades out, integer - DGI: Downgrades into, integer - DGO: Downgrades out, integer - GOS: Go-Show passengers, integer - SBO: Staff Stand-by boarded, integer - SNB: Staff Standby not boarded, integer - VOL: Voluntary offloaded, integer - DNB: Denied boarding, integer - NOR: No-Rec, integer e.g 3 people boarded and 2 people did not show: EQN+3:BOA+2:NOS'
ATR 1A 02.1.47 (NGINV)	ATTRIBUTE <i>rmsAdditionalAtBookingClassLevel</i>	C	1	Booking Classes Level Additional Forecast Data provided by Altea RMS for External Softwares. Possible values for attributeType are: - ACHDMD : Achievable demand - EXPBKG : Expected final bookings - DMDCTSTDDEV : Remaining demand standard deviation - EGS: Effective Group Size e.g: ATR++ACHDMD:23.8+EXPBKG:16+DMDCTSTDDEV:2.8+EGS:23
Gr 9	Group <i>partnerBoardingFiguresDcs</i>	C	99	Boarding Figures of marketing partners sent by DCS.
CAR 1A 02.1.11 (NGINV)	COMMERCIAL AGREEMENTS <i>codeshareFlight</i>	M	1	Codeshare blockspace marketing partner information. e.g for blockspace codeshare partner 6X 66: CAR+:6X:66:_'
EQN 1A 10.1.141 (NGINV)	NUMBER OF UNITS <i>boardingFiguresDcs</i>	M	1	Boarded figures sent by the Departure Control System (DCS), after the segment departure. EQN is encoded only when boarded figures are defined at segment cabin level (airline parameter DCS_AT_CLASS_LEVEL set to 'N') and when boarding figures has been received. Possible values for nbOfUnitsQualifier are: - BOA: Boarded passengers, integer

				- NOS: Noshow, integer - GNS: Group noshow, integer - OFF: Offloaded passengers, integer - GBO: Group boarded, integer - CBO: Commercial stand-by boarded, integer - CNB: Commercial stand-by not boarded, integer - UGI: Upgrades into, integer - UGO: Upgrades out, integer - DGI: Downgrades into, integer - DGO: Downgrades out, integer - GOS: Go-Show passengers, integer - SBO: Staff Stand-by boarded, integer - SNB: Staff Standby not boarded, integer - VOL: Voluntary offloaded, integer - DNB: Denied boarding, integer - NOR: No-Rec, integer e.g 3 people boarded and 2 people did not show: EQN+3:BOA+2:NOS'
Gr 10	Group <i>subclasses</i>	M	999	Information on all the subclasses of the booking class.
SBI 1A 14.1.3 (NGINV)	SUBCLASS IDENTIFICATION <i>subclass</i>	M	1	Subclass identifier. For airlines needing subclasses in IFLIRR, indicates the subclass number inside the booking class. e.g subclass number 1: SBI+1' For airlines needing booking classes in IFLIRR, hardcoded to 0. e.g : SBI+0'
EQN 1A 10.1.167 (NGINV)	NUMBER OF UNITS <i>subclassCounters</i>	C	1	Class counters. Possible values for nbOfUnitsQualifier are: - SLM: Segment limit, integer - OWN: Own Availability, integer - BCA: Booking cancellation counter, integer - GAS: Assigned names in groups, integer - NEG: Total number of nego bookings, integer - AU: Authorisation - SLP: Subclass Limit Percentage - SLT: Subclass Limit Threshold - SLS: Segment Limit Stand-alone - SLC: Segment Limit Connecting - SLV: Segment Limit Value - IWL: Inhibit Waitlist - IWL: Inhibit Waitlist Clearance - MWP: Maximum Waitlist Percentage - MWL: Maximum Waitlist Thershold e.g a segment limit of 3: EQN+3:SLM'
SBC 1A 14.1.4 (NGINV)	SUBCLASS DATA <i>subclassDetails</i>	M	1	Class controls details (protections, max, min, AU...). Possible values for flag are: - GR : Accept group bookings - RED: Accept redemption bookings - STA: Accept firm staff bookings - NPR: Not protected flag - WL : Allow waitlist - WLC: Allow waitlist clearance Possible values for minNestType and maxNestType are: - A : Stand alone - P : Primary - S : Secondary Possible values for profileType are, when the airline is using overbooking profiles (airline parameter USE_OVERBOOKING_PROFILES set to 'Y'): - GO : global overbooking profile - OP : open cancellation profile - OV : override cancellation profile - AH : ad-hoc cancellation profile Possible values for avsStatus are: - L0..9: Class open with availability of 0..9 (only used in Interactive IFLIRR) - LA : Class open for sale - LC : No space, waitlist closed - LL : No space, only waitlist - LN : Flight cancelled - LR : Availability request needed e.g : SBC+0++++GR:WLC+:::32:::7:117.21+0:0:0:0:26:0++32:32:0' In BIF, waitlistMax and waitlistMaxPercentageOfAU are not encoded.
MON 1A 08.1.4 (NGINV)	MONETARY INFORMATION <i>subclassYield</i>	C	1	Class yield. Possible values for amountTypeQualifier are: - GBL: Global yield - FLD: Flightdate segment yield - SDR: Segment yield If not encoded, no yield associated to this class was found. The currency encoded in valueCurrency is the airline's currency, which comes from the System Settings. e.g a global yield of 100 euros: MON+GBL:100:EUR' In BIF, MON is not encoded.
ATC 1A 02.1.197 (NGINV)	CODED ATTRIBUTE <i>subclassFlags</i>	C	1	Class flags. Possible values for attributeType are: - SLS: Segment limit (apply for standalone segment) - SLC: Segment limit (apply for connecting segment) - NCO: Nego control parameter - EDC: Effective date for connecting segments - DDC: Discontinue date for connecting segments In case attributeType is SLS or SLC, possible values for attributeDescription are: - 'Y': Yes - 'N': No

				In case attributeType is NCO, possible values for attributeDescription are: - 'C': Confirm - 'D': Deny - 'A': Check availability In case attributeType are EDC or DDC, possible value for attributeDescription is a date, in format DDMYY.
Gr 11	Group negoBlockDetails	C	99	Details about the nego blocks for this class. This group can be filled only for airlines using negotiated space (airline parameter COM_USE_NEGOTIATED_SPACE set to 'Y'). In the BIF, this group is not encoded.
EQN 1A 10.1.144 (NGINV)	NUMBER OF UNITS negoSizeDetails	M	1	Details on the size and the number of booked seats in the nego block. Possible values for nbOfUnitsQualifier are: - ALO: number of allotted seats, integer - SLD: number of sold seats in the allotment, integer e.g 3 seats are allotted, and 2 bookings are already made: EQN+3:ALO+2:SLD' In BIF, EQN segment is not encoded.
ATI 1A 02.2.4 (NGINV)	TOUR INFORMATION tourName	C	1	Tour name of the nego block. e.g TESTTOUR: ATI+:TESTTOUR' In BIF, ATI segment is not encoded.
RCI 1A 02.2.7 (NGINV)	RESERVATION CONTROL INFORMATION allotmentReference	C	1	DBID of the nego block. e.g XXXXXX: RCI+:XXXXXX' In BIF, RCI segment is not encoded.
Gr 7	Group segmentCabinBlockSpace	C	99	Information on all the codeshare blockspaces at segment-cabin level.
CAR 1A 02.1.11 (NGINV)	COMMERCIAL AGREEMENTS codeshareFlight	M	1	Codeshare blockspace marketing partner information. e.g for blockspace codeshare partner 6X 66: CAR+:6X:66:_'
EQN 1A 10.1.142 (NGINV)	NUMBER OF UNITS blockSpaceCounters	M	1	Codeshare blockspace size and booking counter. Possible values for counter type nbOfUnitsQualifier are: - BLK: Blockspace size, integer - BKG: Booking counter, integer e.g blocksize of 8, and 0 bookings: EQN+8:BLK+0:BKG'
STX 1A 10.1.60 (NGINV)	STATUS DETAILS recommendationFlag	M	1	Indicate special information about the flight-date. Possible values for statusIndicator are: - OR : Pending recommendation indicator - FF : Frequent flyer rule applied Possible values for actionRequest are: - 1 : Yes - 0 : No e.g flight-date with frequent flyer rule and at least a pending recommendation: STX+OR:1+FF:1' In BIF, STX is hardcoded to STX+OR:0'.
TRA SS 01.2.11 (NGINV)	TRANSPORT IDENTIFIER managingAirline	C	1	Managing airline designator.
SDT 1A 07.1.47 (NGINV)	SELECTION DETAILS flightDateOptions	C	1	Network id (network/beam/subbeam).
DAT 1A 02.2.12 (NGINV)	DATE AND TIME INFORMATION currentDateAndTime	C	1	Date and time with seconds of the IFLIRR generation on Amadeus side. e.g message generated on 25 May 2007 at 14h26min23s: DAT+:250507:1426::0023'

3. List of segments

3.1. APD IA 02.2.6 (NGINV) - ADDITIONAL PRODUCT DETAILS

Function To convey additional information concerning an airline flight.
Status **Promoted**

Tag	Prom.	Name	St.	Rep.	Format	Comments
C314	Yes	ADDITIONAL PRODUCT DETAILS legDetails	M*	1		Details about a leg
8179	Yes	Type of means of transport identification	N/A	1	an..8	
9924	Yes	Number of stops	N/A	1	n..3	
9926	Yes	Leg duration	N/A	1	n..6	
5482	Yes	Percentage	N/A	1	n..8	
9928	Yes	Days of operation	N/A	1	an..7	
2380	Yes	Date/Time/Period	N/A	1	an..35	
9950	Yes	Complexing flight indicator	N/A	1	an1	
3225	Yes	Place/location identification locations	M*	2	a3	Board/Off points identification Codesets list : 3225*1
C348	Yes	STATION INFORMATION	N/A	1		Departure station information
9870	Yes	Gate description	N/A		an..6	
3223	Yes	Related place/location one identification	M*		an..25	Terminal Designator
3233	Yes	Related place/location two identification	N/A		an..25	
C348	Yes	STATION INFORMATION	N/A	1		Arrival station information
9870	Yes	Gate description	N/A		an..6	
3223	Yes	Related place/location one identification	M*		an..25	Terminal Designator
3233	Yes	Related place/location two identification	N/A		an..25	
C317	Yes	MILEAGE/TIME DETAILS	N/A	1		
6314	Yes	Measurement value	C		n..18	
6411	Yes	Measure unit qualifier	C		an..3	
9918	Yes	First time	C		n..4	
C318	Yes	TRAVELLER TIME DETAILS	N/A	1		
9918	Yes	First time	C		n..4	
9922	Yes	Second time	C		n..4	
9952	Yes	Check-in details	C		an..10	
C320	Yes	PRODUCT FACILITIES	N/A	10		
9932	Yes	Facility type, coded	C		an..3	
9934	Yes	Facility description, text	C		an..70	
9970	Yes	Product details qualifier	C		an..3	
7037	Yes	Characteristic identification	C		an..17	

3.2. ATC 1A 02.1.196 (NGINV) - CODED ATTRIBUTE

Function Used to have tag value without code list for tag
Status **Promoted**

Tag	Prom.	Name	St.	Rep.	Format	Comments
9017	Yes	Attribute function code qualifier	N/A	1	an..3	
A016	Yes	Coded Attribute Information attributeDetails	M	99		Provides details for the Attribute
950K	Yes	Attribute type identification, coded attributeType	M	1	an..3	Provides the attribute Type Codesets list : 950K*1
9018	Yes	Attribute description	N/A	1	an..256	
3453	Yes	Language, coded	N/A	1	an..3	
0133	Yes	Encoding	N/A	1	an..8	
9890	Yes	Source, coded	N/A	1	an..3	

3.3. ATC 1A 02.1.197 (NGINV) - CODED ATTRIBUTE

Function Used to have tag value without code list for tag
Status **Promoted**

Tag	Prom.	Name	St.	Rep.	Format	Comments
9017	Yes	Attribute function code qualifier	N/A	1	an..3	
A016	Yes	Coded Attribute Information attributeDetails	M	99		provides details for the Attribute
950K	Yes	Attribute type identification, coded attributeType	M	1	an..3	provides the attribute Type Codesets list : 950K*2
9018	Yes	Attribute description attributeDescription	C	1	an..256	provides a description for the attribute
3453	Yes	Language, coded	N/A	1	an..3	
0133	Yes	Encoding	N/A	1	an..8	
9890	Yes	Source, coded	N/A	1	an..3	

3.4. ATC 1A 02.1.198 (NGINV) - CODED ATTRIBUTE

Function Used to have tag value without code list for tag
Status **Promoted**

Tag	Prom.	Name	St.	Rep.	Format	Comments
9017	Yes	Attribute function code qualifier	N/A	1	an..3	
A016	Yes	Coded Attribute Information attributeDetails	M	99		Provides details for the Attribute
950K	Yes	Attribute type identification, coded attributeType	M	1	an..3	Provides the attribute Type Codesets list : 950K*3
9018	Yes	Attribute description attributeDescription	C	1	an..256	Provides a description for the attribute
3453	Yes	Language, coded	N/A	1	an..3	
0133	Yes	Encoding	N/A	1	an..8	
9890	Yes	Source, coded	N/A	1	an..3	

3.5. ATI IA 02.2.4 (NGINV) - TOUR INFORMATION

Function To convey information concerning a tour.
Status Promoted

Tag	Prom.	Name	St.	Rep.	Format	Comments
C993	Yes	TOUR DETAILS tourInformationDetails	M*	1		Tour name
9908	Yes	Product identification	N/A	1	an..35	
3036	Yes	Party name tourName	M*	1	an..15	Tour name Codesets list : 3036*1
6168	Yes	Length dimension	N/A	1	n..15	
9924	Yes	Number of stops	N/A	1	n..3	
9928	Yes	Days of operation	N/A	1	an..7	
6350	Yes	Number of units	N/A	1	n..15	
6060	Yes	Quantity	N/A	1	n..15	
C994	Yes	STOPOVER INFORMATION	N/A	99		
3225	Yes	Place/location identification	C		an..25	
6350	Yes	Number of units	C		n..15	

3.6. ATR 1A 02.1.47 (NGINV) - ATTRIBUTE

Function Used to have tag value without code list for tag
Justification Change requested :
The first data element has been set N/A from Mandatory.
Repetition has been extended for E003
Status Promoted

Tag	Prom.	Name	St.	Rep.	Format	Comments
9017	Yes	Attribute function code qualifier	N/A	1	an..3	Determines if the set of criteria corresponds to the message identification criteria or to normal criteria.
E003	Yes	ATTRIBUTE INFORMATION criteriaDetails	M	999		Details for the message criteria (name, value).
9021	Yes	Attribute type identification attributeType	M	1	an..25	
9018	Yes	Attribute description attributeDescription	C	1	an..256	

3.7. ATR 1A 02.1.48 (NGINV) - ATTRIBUTE

Function Used to have tag value without code list for tag
Justification Change requested :
The first data element has been set N/A from Mandatory.
Repetition has been extended for E003
Status Promoted

Tag	Prom.	Name	St.	Rep.	Format	Comments
9017	Yes	Attribute function code qualifier	N/A	1	an..3	Determines if the set of criteria corresponds to the message identification criteria or to normal criteria.
E003	Yes	ATTRIBUTE INFORMATION criteriaDetails	M	999		Details for the message criteria (name, value).
9021	Yes	Attribute type identification attributeType	M	1	an..25	
9018	Yes	Attribute description attributeDescription	C	1	an..256	

3.8. ATR 1A 02.1.49 (NGINV) - ATTRIBUTE

Function Used to have tag value without code list for tag
Justification Change requested :
The first data element has been set N/A from Mandatory.
Repetition has been extended for E003
Status Promoted

Tag	Prom.	Name	St.	Rep.	Format	Comments
9017	Yes	Attribute function code qualifier	N/A	1	an..3	Determines if the set of criteria corresponds to the message identification criteria or to normal criteria.
E003	Yes	ATTRIBUTE INFORMATION criteriaDetails	M	999		Details for the message criteria (name, value).
9021	Yes	Attribute type identification attributeType	M	1	an..25	
9018	Yes	Attribute description attributeDescription	C	1	an..256	

3.9. ATR 1A 02.1.50 (NGINV) - ATTRIBUTE

Function Used to have tag value without code list for tag
Justification Change requested :
The first data element has been set N/A from Mandatory.
Repetition has been extended for E003
Status Promoted

Tag	Prom.	Name	St.	Rep.	Format	Comments
9017	Yes	Attribute function code qualifier	N/A	1	an..3	Determines if the set of criteria corresponds to the message identification criteria or to normal criteria.
E003	Yes	ATTRIBUTE INFORMATION criteriaDetails	M	999		Details for the message criteria (name, value).
9021	Yes	Attribute type identification attributeType	M	1	an..25	
9018	Yes	Attribute description attributeDescription	C	1	an..256	

3.10. BPR 1A 02.1.66 (NGINV) - BIDPRICE OPTIMISER RECOMMENDATIONS

Function

Justification This segment displays the recommendations given by the optimiser for bidprices, i.e. optimiseBidPrice, lower and upper bounds, as well as seats lower and upper bounds.
Status **Promoted**

Tag	Prom.	Name	St.	Rep.	Format	Comments
1230	Yes	Allowance or charge number <i>optimiseBidPrice</i>	C	1	n..18	Optimise Bid Price For airlines using Revenue Buckets (INV_LEG_CONTROL_TYPE set to 'B') This is a decimal value.
1230	Yes	Allowance or charge number <i>optimiseBPLowerBound</i>	C	1	n..18	Optimise Bid Price Lower Bound For airlines using Revenue Buckets (INV_LEG_CONTROL_TYPE set to 'B') This is a decimal value.
1230	Yes	Allowance or charge number <i>optimiseBPUpperBound</i>	C	1	n..18	Optimise Bid Price Upper Bound For airlines using Revenue Buckets (INV_LEG_CONTROL_TYPE set to 'B') This is a decimal value.
6060	Yes	Quantity <i>optimiseBPSeatLowerBound</i>	C	1	n..15	Optimise BidPrice Seat Lower Bound For airlines using Revenue Buckets (INV_LEG_CONTROL_TYPE set to 'B') This is a decimal value.
6060	Yes	Quantity <i>optimiseBPSeatUpperBound</i>	C	1	n..15	Optimise BidPrice Seat Upper Bound For airlines using Revenue Buckets (INV_LEG_CONTROL_TYPE set to 'B') This is a decimal value.

3.11. BUC 1A 02.1.32 (NGINV) - REVENUE BUCKET

Function Leg-cabin revenue bucket
Justification This segment displays the parameters defining a revenue bucket, i.e. its yield range upper value, its deltaSeatsEquivalent, as well as availabilities (AV0, AV1..)
Status **Promoted**

Tag	Prom.	Name	St.	Rep.	Format	Comments
1230	Yes	Allowance or charge number <i>yieldRangeUpperValue</i>	M	1	n..18	Yield Range Upper (or Lower) Value Contains the Bid Price of BPV when BPV is used Contains the yield range lower bound when Greedy Revenue Bucket is used For airlines using BPV, Revenue Buckets or Greedy Revenue Buckets (INV_LEG_CONTROL_TYPE set to 'B', 'V' or 'G') This is a decimal value.
6060	Yes	Quantity <i>availabilityConstraint</i>	C	1	n..15	Availability Constraint or protection Contains availability constraint for airlines using revenue buckets (INV_LEG_CONTROL_TYPE set to 'B') Contains protection for airlines using greedy revenue buckets (INV_LEG_CONTROL_TYPE set to 'G') This is a decimal value.
6060	Yes	Quantity <i>deltaSeatsEquivalent</i>	C	1	n..15	Delta Seats Equivalent For airlines using Revenue Buckets (INV_LEG_CONTROL_TYPE set to 'B') This is a decimal value.
6060	Yes	Quantity <i>av1</i>	C	1	n..15	Bucket Availability AV1 For airlines using Revenue Buckets or Greedy Revenue Buckets (INV_LEG_CONTROL_TYPE set to 'B' or 'G') This is a decimal value.
6060	Yes	Quantity <i>av2</i>	C	1	n..15	Bucket Availability AV2 For airlines using Revenue Buckets or Greedy Revenue Buckets (INV_LEG_CONTROL_TYPE set to 'B' or 'G') This is a decimal value.
6060	Yes	Quantity <i>av3</i>	C	1	n..15	Bucket Availability AV3 For airlines using BPV, Revenue Buckets or Greedy Revenue Buckets (INV_LEG_CONTROL_TYPE set to 'V', 'B' or 'G') This is an integer value when airline parameter inv_leg_control_type='V' else this is a decimal value.
1230	Yes	Allowance or charge number <i>yieldRangeLowerValue</i>	C	1	n..18	Yield Range Lower Value For airlines using Revenue Buckets (INV_LEG_CONTROL_TYPE set to 'B') This is a decimal value.
110Z	Yes	Subclass <i>subclassId</i>	C	1	an..3	Identification of the subclass with a letter+number code ; Subclass used to construct the Transient Bucket For airlines using Revenue Buckets (INV_LEG_CONTROL_TYPE set to 'B')
6060	Yes	Quantity <i>numberOfSeatsTaken</i>	C	1	n..15	Number of Seats taken from this bucket For airlines using Revenue Buckets (INV_LEG_CONTROL_TYPE set to 'B') This is a decimal value.
6060	Yes	Quantity <i>seatIndex</i>	C	1	n..15	Seat index for bid price processing For airlines using Bid-Price Vector Buckets (INV_LEG_CONTROL_TYPE set to 'V') This is an integer value.

3.12. CAR 1A 02.1.11 (NGINV) - COMMERCIAL AGREEMENTS

Function To specify commercial agreements between two or more companies related to joint, shared, lease operations etc.
Status **Promoted**

Tag	Prom.	Name	St.	Rep.	Format	Comments
-----	-------	------	-----	------	--------	----------

C374		Yes	COMPANY ROLE IDENTIFICATION codeshareDetails	C	1		Conveys information about a partner airline or a partner flight.
	8051	Yes	Transport stage qualifier transportStageQualifier	N/A	1	an..3	Used to convey the marketing/operating characteristics of the partner airline or flight.
	9906	Yes	Company identification airlineDesignator	C	1	an..35	Airline code of the partner airline. <i>Codesets list : 9906*1</i>
	9908	Yes	Product identification flightNumber	C	1	an..35	Flight number of the partner flight if applicable.
	9914	Yes	Product identification characteristic operationalSuffix	C	1	an..3	Operational suffix of the partner flight if applicable.
	545Z	Yes	Codeshare Type	N/A	1	an2	To specify type of codeshare agreement between marketing and operating flights: Free Flow (FF), Capped Free Flow (CF), Blockspace (BS).
C374		Yes	COMPANY ROLE IDENTIFICATION otherCodeshareDetails	C	98		
	8051	Yes	Transport stage qualifier transportStageQualifier	N/A	1	an..3	Used to convey the marketing/operating characteristics of the partner airline or flight.
	9906	Yes	Company identification airlineDesignator	C	1	an..35	Airline code of the partner airline. <i>Codesets list : 9906*1</i>
	9908	Yes	Product identification flightNumber	C	1	an..35	Flight number of the partner flight if applicable.
	9914	Yes	Product identification characteristic operationalSuffix	C	1	an..3	Operational suffix of the partner flight if applicable.
	545Z	Yes	Codeshare Type	N/A	1	an2	To specify type of codeshare agreement between marketing and operating flights: Free Flow (FF), Capped Free Flow (CF), Blockspace (BS).

3.13. CAR 1A 02.1.12 (NGINV) - COMMERCIAL AGREEMENTS

Function To specify commercial agreements between two or more companies related to joint, shared, lease operations etc.

Status **Promoted**

Tag	Prom.	Name	St.	Rep.	Format	Comments	
C374		Yes	COMPANY ROLE IDENTIFICATION codeshareDetails	C	1		Conveys information about a partner airline or a partner flight.
	8051	Yes	Transport stage qualifier transportStageQualifier	C	1	an..3	Used to convey the marketing/operating characteristics of the partner airline or flight. <i>Codesets list : 8051*1</i>
	9906	Yes	Company identification airlineDesignator	C	1	an..35	Airline code of the partner airline. <i>Codesets list : 9906*1</i>
	9908	Yes	Product identification flightNumber	C	1	an..35	Flight number of the partner flight if applicable.
	9914	Yes	Product identification characteristic operationalSuffix	C	1	an..3	Operational suffix of the partner flight if applicable.
	545Z	Yes	Codeshare Type codeshareType	C	1	an2	To specify type of codeshare agreement between marketing and operating flights: Free Flow (FF), Capped Free Flow (CF), Blockspace (BS). <i>Codesets list : 545Z*1</i>
C374		Yes	COMPANY ROLE IDENTIFICATION otherCodeshareDetails	C	98		Additional information about a partner airline or a partner flight.
	8051	Yes	Transport stage qualifier transportStageQualifier	C	1	an..3	Used to convey the marketing/operating characteristics of the partner airline or flight. <i>Codesets list : 8051*2</i>
	9906	Yes	Company identification airlineDesignator	C	1	an..35	Airline code of the partner airline. <i>Codesets list : 9906*1</i>
	9908	Yes	Product identification flightNumber	C	1	an..35	Flight number of the partner flight if applicable.
	9914	Yes	Product identification characteristic operationalSuffix	C	1	an..3	Operational suffix of the partner flight if applicable.
	545Z	Yes	Codeshare Type codeshareType	C	1	an2	To specify type of codeshare agreement between marketing and operating flights: Free Flow (FF), Capped Free Flow (CF), Blockspace (BS). <i>Codesets list : 545Z*1</i>

3.14. CBA 1A 02.1.11 (NGINV) - LEG CABIN AVAILABILITIES

Function

Justification This segment displays parameters related to a leg-cabin availability, i.e. the cancellation profile (ACP), UPR, net and gross availabilities

Status **Promoted**

Status	Promoted						
Tag	Prom.	Name	St.	Rep.	Format	Comments	
6060		Yes	Quantity <i>upr</i>	M	1	n..15	Leg-Cabin Unsold PROtection 0 if no Unsold Protection This is an integer value when airline parameters use_hybrid_nesting='Y' and apply_overbooking_on_bookings='N' else this a decimal value.
6060		Yes	Quantity <i>bookingsCounter</i>	M	1	n..15	Leg-Cabin Bookings Counter 0 if no bookings This is an integer value.
6060		Yes	Quantity <i>netAvailability</i>	M	1	n..15	Net Availability (NAV) Represents the number of seats that would be left empty on a flight if all the passengers currently booked and those forecasted to book (ie. protected by UPRs), turned up at the airport. This does not include expected cancellations. This is an integer value when airline parameters use_hybrid_nesting='Y' and apply_overbooking_on_bookings='N' else this a decimal value.
6060		Yes	Quantity <i>grossAvailability</i>	M	1	n..15	Gross Availability (GAV) Represents the number of seats that would be left empty if the passengers currently booked and those remaining to book turn up as predicted by the overbooking factors on each class. This is an integer value when airline parameters use_hybrid_nesting='Y' and apply_overbooking_on_bookings='N' else this a decimal value.
5482		Yes	Percentage <i>acp</i>	C	1	n..7	Average Cancellation Profile (Leg-Cabin) Only for airlines using Profile Library This is a decimal value.
6060		Yes	Quantity <i>expectedToBoard</i>	C	1	n..15	Expected to board (ETB) This is an integer value when airline parameters inv_etb_cabin='SUM' and [inv_etb_class='RMS' or (inv_etb_class='BKG' and apply_overbooking_on_bookings='N' and inv_overbooking_factor='N')] else this is a decimal value.

6060		Yes	Quantity <i>staffStandbyCounter</i>	C	1	n..15	Staff Standby counter 0 if no staff stand-by bookings This is an integer value.
6060		Yes	Quantity <i>waitlistBookingsCounter</i>	C	1	n..15	Leg-Cabin Waitlisted Bookings Counter 0 if no waitlisted bookings This is an integer value.
6060		Yes	Quantity <i>groupBookingsCounter</i>	C	1	n..15	Leg-Cabin Group Bookings Counter 0 if no group bookings This is an integer value.

3.15. CBL 1A 02.1.15 (NGINV) - LEGCABIN

Function

Justification This segment displays parameters at leg-cabin level, i.e. adjustments (regrade, unbalanced and maxiregrade), maximum group proportion, notification level, blocked space...

Status **Promoted**

Tag	Prom.	Name	St.	Rep.	Format	Comments	
6060		Yes	Quantity <i>regradeAdjustment</i>	M	1	n..15	Leg-Cabin regrade Adjustment 0 if no adjustment When positive, it represents the number of supplementary seats made available from another cabin. When negative, it means that the seats are taken out from this cabin to be given to another one. This is an integer value.
6060		Yes	Quantity <i>maxiRegradeAdjustment</i>	M	1	n..15	Leg-Cabin maximum regrade Adjustment 0 if no adjustment The maximum number of seats which can be adjusted out of a cabin through a regrade adjustment. NB: This is a positive number which provides an upper limit on the negative value of the Balanced Adjustment. This is an integer value.
6060		Yes	Quantity <i>unbalancedAdjustment</i>	M	1	n..15	Leg-Cabin unbalanced Adjustment 0 if no adjustment The part of the adjustment which arises from 'speculation' - a process by which a Route Controller can release already committed space back into a cabin. This is an integer value.
1230		Yes	Allowance or charge number <i>groupsConstrainingYield</i>	C	1	n..18	Leg-Cabin groups constraining Yield A parameter set by the Airline Revenue Management System to constrain a 'special availability' groups. This is a decimal value.
9813		Yes	Confirmation indicator <i>avsFlag</i>	C	1	a1	Status at Leg/Cabin level. Contains 'Y' if at least one Subclass of a Segment/Cabin crossing the Leg/Cabin is not open (LN,LC,LL or LR). Else, if all Subclasses are open (neither LN,LC,LL nor LR) this value is 'N'. <i>Codesets list : 9813*1</i>
6060		Yes	Quantity <i>notificationLevel</i>	C	1	n..15	leg-cabin Notification Level GAV Lower notification level: when the GAV goes below that level, the flight date is put on a flight controller queue This is a decimal value.
6060		Yes	Quantity <i>avpoolOffset</i>	C	1	n..15	Leg-Cabin avpool offset Set by the Optimiser. This value is a revenue bucket constraint on the difference between availability (AV1) in the highest bucket and the AVPool. This is an integer value when airline parameters use_hybrid_nesting='Y' and apply_overbooking_on_bookings='N' else this a decimal value.
6060		Yes	Quantity <i>avpool</i>	C	1	n..15	Leg-Cabin avpool = Saleable Capacity - Non-commercial PNRs + Total Adjs - Committed Space This is an integer value when airline parameters use_hybrid_nesting='Y' and apply_overbooking_on_bookings='N' else this a decimal value.
6060		Yes	Quantity <i>maxiGroupProportion</i>	C	1	n..15	Leg-Cabin Maximum Group Proportion Maximum proportion of group bookings allowed for the leg cabin This is a decimal value.
6060		Yes	Quantity <i>regradeCounter</i>	C	1	n..15	Regrade Counter This counter will handle the upgrade, downgrade performed on the cabin This is an integer value.
A007		Yes	Blockspace <i>blockedSpaceDetails</i>	C	99		Details for each kind of BlockSpace
	9865	Yes	Seat occupation <i>blockSpaceType</i>	M	1	a1	Type of Block Space (M medical, D deadlock, S codeshare, Z other...) <i>Codesets list : 9865*1</i>
	1154	Yes	Reference number <i>marketingFlightDesignator</i>	C	1	an..35	Operating/Marketing Flight Designator : Concatenate airline code, flight number, and operational suffix. Example : 6X12A Mandatory if Block Space Type = S (Codeshare) Not encoded in the BIF
	6060	Yes	Quantity <i>numberSeatsBlocked</i>	M	1	n..15	Number of seats blocked for that kind of BlockSpace, for the leg-cabin Mandatory if block space type filled. This is an integer value.

3.16. CLA 1A 02.1.53 (NGINV) - BOOKINGCLASS COMPLETE DATA

Function

Justification

Status

This segment groups together all the parameters relative to a booking class (flags, received AVS status, and avs Rule Set Identifier)

Promoted

Tag	Prom.	Name	St.	Rep.	Format	Comments
102Z	Yes	AVS Status, coded receivedAvsStatus	M	1	an..2	BookingClass : received Availability Status <i>Codesets list : 102Z*1</i>
108Z	Yes	BookingClassDate Flags, coded	N/A	5	an..2	BookingClass Flags (<i>published, FirstPostingSent, useManualStatus</i>)

3.17. DAT IA 02.2.12 (NGINV) - DATE AND TIME INFORMATION

Function

Status

To provide date and time details relative to flight movements.

Promoted

Tag	Prom.	Name	St.	Rep.	Format	Comments
C688	Yes	DATE AND TIME DETAILS dateAndTimeDetails	C	99		Date and time details
	2005	Date/Time/Period qualifier qualifier	C	1	an..3	A qualifier describing the date and time to follow. <i>Codesets list : 2005*1</i>
	9916	First date date	C	1	n6	A date (ddmmyy)
	9918	First time time	C	1	n4	A time (hhmm)
	2005	Date/Time/Period qualifier	N/A	1	an..3	A qualifier describing a duration of time such as early/late.
	9918	First time timeOffset	C	1	n4	A duration of time (mmmm) ; also used to convey seconds.
	8335	Movement type, coded	N/A	1	an..3	A code describing the reason for delay, diversion or movement.
	3225	Place/location identification	N/A	1	a3	A 3 character city code describing the location of delay, diversion or movement.

3.18. DAT IA 02.2.16 (NGINV) - DATE AND TIME INFORMATION

Function

Status

To provide date and time details relative to flight movements.

Promoted

Tag	Prom.	Name	St.	Rep.	Format	Comments
C688	Yes	DATE AND TIME DETAILS dateAndTimeDetails	C	99		Date and time details
	2005	Date/Time/Period qualifier qualifier	C	1	an..3	A qualifier describing the date and time to follow. <i>Codesets list : 2005*2</i>
	9916	First date date	C	1	n6	A date (ddmmyy)
	9918	First time time	C	1	n4	A time (hhmm)
	2005	Date/Time/Period qualifier delayInformation	C	1	an..3	A qualifier describing a duration of time such as early/late. <i>Codesets list : 2005*3</i>
	9918	First time timeOffset	C	1	n4	A duration of time (mmmm) ; also used to convey seconds.
	8335	Movement type, coded delayReason	C	1	an..3	A code describing the reason for delay, diversion or movement. <i>Codesets list : 8335*1</i>
	3225	Place/location identification	N/A	1	a3	A 3 character city code describing the location of delay, diversion or movement.

3.19. DAT IA 02.2.17 (NGINV) - DATE AND TIME INFORMATION

Function

Status

To provide date and time details relative to flight movements.

Promoted

Tag	Prom.	Name	St.	Rep.	Format	Comments
C688	Yes	DATE AND TIME DETAILS dateAndTimeDetails	C	99		Date and time details
	2005	Date/Time/Period qualifier qualifier	C	1	an..3	A qualifier describing the date and time to follow. <i>Codesets list : 2005*1</i>
	9916	First date date	C	1	n6	A date (ddmmyy)
	9918	First time time	C	1	n4	A time (hhmm)
	2005	Date/Time/Period qualifier delayInformation	C	1	an..3	A qualifier describing a duration of time such as early/late. <i>Codesets list : 2005*1</i>
	9918	First time timeOffset	C	1	n4	A duration of time (mmmm) ; also used to convey seconds.
	8335	Movement type, coded delayReason	C	1	an..3	A code describing the reason for delay, diversion or movement. <i>Codesets list : 8335*2</i>
	3225	Place/location identification involvedLocation	C	1	a3	A 3 character city code describing the location of delay, diversion or movement. <i>Codesets list : 3225*2</i>

3.20. DAT IA 02.2.8 (NGINV) - DATE AND TIME INFORMATION

Function

Status

To provide date and time details relative to flight movements.

Promoted

Tag	Prom.	Name	St.	Rep.	Format	Comments
C688	Yes	DATE AND TIME DETAILS dateAndTimeDetails	C	99		Date and time details
	2005	Date/Time/Period qualifier qualifier	C	1	an..3	A qualifier describing the date and time to follow. <i>Codesets list : 2005*1</i>
	9916	First date date	C	1	n6	A date (ddmmyy)
	9918	First time time	C	1	n4	A time (hhmm)
	2005	Date/Time/Period qualifier	N/A	1	an..3	A qualifier describing a duration of time such as early/late.
	9918	First time timeOffset	C	1	n4	A duration of time (mmmm) ; also used to convey seconds.
	8335	Movement type, coded	N/A	1	an..3	A code describing the reason for delay, diversion or movement.
	3225	Place/location identification	N/A	1	a3	A 3 character city code describing the location of delay, diversion or movement.

3.21. EQD IA 06.1.9 (NGINV) - EQUIPMENT INFORMATION

Function To specify configuration details of an aircraft.
Status **Promoted**

Tag	Prom.	Name	St.	Rep.	Format	Comments	
C048		Yes	CONFIGURATION DETAILS	N/A	5		The configuration details : cabin codes and capacities.
	9854	Yes	Cabin class designator	M		a1	Designator to indicate cabin class and not an RBD.
	6800	Yes	Seats - number of seats	M*		n..3	Total number of seats in the cabin class. Can be set to 0 if the information is not pertinent.
	7037	Yes	Characteristic identification	C		an..17	Configuration Characteristic
7800		Yes	Equipment code configurationCode	C	1	an..3	The code of the saleable configuration. Codesets list : 7800*1
9866		Yes	Aircraft cabin version identification	N/A	1	an..12	Aircraft cabin version identification
4440		Yes	Free text configurationDescription	C	1	an..70	The description of the saleable configuration.

3.22. EQI 1A 02.1.22 (NGINV) - AIRCRAFT CONFIGURATION VERSION

Function To specify aircraft configuration version of an aircraft
Justification Changes done :
Possibility of changing status M to C used on 9854 and 6800.
Status **Promoted**

Tag	Prom.	Name	St.	Rep.	Format	Comments
C048		Yes	CONFIGURATION DETAILS	N/A	5	The details of the fitted configuration.
	9854	Yes	Cabin class designator	C		a1 Cabin class code designator To indicate cabin class and not an RBD.
	6060	Yes	Quantity	C		n..15 Number of seats in the cabin class. This is an integer value.
	7037	Yes	Characteristic identification	C		an1 Qualifier : S for Saleable Capacity A for Leg Cabin AU
8179		Yes	Type of means of transport identification	N/A	1	an..8 User own or ATA/IATA industry defined aircraft type code (See SSIM, Appendix A, IATA Airline Coding Directory, Chapter 8).
C361		Yes	ADDITIONAL EQUIPMENT INFORMATION acvDetails	C	1	Additional equipment information: Aircraft configuration version details
	9866	Yes	Aircraft cabin version identification	N/A	1	an..12
	9866	Yes	Aircraft cabin version identification	N/A	1	an..12
	9906	Yes	Company identification	N/A	1	an..3 Airline Organisation FOR Airline Owner
	8260	Yes	Equipment identification number acvCode	C	1	an..17 Aircraft configuration version code Airline internal version number. Codesets list : 8260*1
	9978	Yes	Cabin facilities characteristic	N/A	2	an..3
4440		Yes	Free text	N/A	1	an..100 Free text

3.23. EQI 1A 02.1.27 (NGINV) - AIRCRAFT CONFIGURATION VERSION

Function To specify aircraft configuration version of an aircraft
Justification Changes done :
Possibility of changing status M to C used on 9854 and 6800.
Status **Promoted**

Tag	Prom.	Name	St.	Rep.	Format	Comments	
C048		Yes	CONFIGURATION DETAILS <i>fittedConfiguration</i>	C	5		The details of the fitted configuration.
	9854	Yes	Cabin class designator <i>cabinCode</i>	C	1	a1	Cabin class code designator To indicate cabin class and not an RBD.
	6060	Yes	Quantity <i>cabinCapacity</i>	C	1	n..15	Number of seats in the cabin class. This is an integer value.
	7037	Yes	Characteristic identification <i>qualifier</i>	C	1	an1	Qualifier : S for Saleable Capacity A for Leg Cabin AU O for Operational capacity E for Effective capacity Codesets list : <i>7037*1</i>
8179		Yes	Type of means of transport identification	N/A	1	an..8	User own or ATA/IATA industry defined aircraft type code (See SSIM, Appendix A, IATA Airline Coding Directory, Chapter 8).
C361		Yes	ADDITIONAL EQUIPMENT INFORMATION	N/A	1		ADDITIONAL EQUIPMENT INFORMATION Aircraft configuration version details
	9866	Yes	Aircraft cabin version identification	N/A		an..12	
	9866	Yes	Aircraft cabin version identification	N/A		an..12	
	9906	Yes	Company identification	C		an..3	Airline Organisation FOR Airline Owner
	8260	Yes	Equipment identification number	C		an..17	Aircraft configuration version code Airline internal version number.
	9978	Yes	Cabin facilities characteristic	N/A		an..3	
4440		Yes	Free text	N/A	1	an..100	Free text

3.24. EQN 1A 10.1.141 (NGINV) - NUMBER OF UNITS

Function To specify the number of units required
Justification The number of repetition of the composite C523 has been increased to 20 for DCS FM
Status **Promoted**

Tag	Prom.	Name	St.	Rep.	Format	Comments	
C523		Yes	NUMBER OF UNIT DETAILS <i>numberOfUnitsDetails</i>	M	99		Number of Unit Details
	6350	Yes	Number of units <i>numberOfUnits</i>	M*	1	n..15	Number of Units
	6353	Yes	Number of units qualifier <i>numberOfUnitsQualifier</i>	C	1	an..3	Number of units qualifier <i>Codesets list : 6353*1</i>

3.25. EQN 1A 10.1.142 (NGINV) - NUMBER OF UNITS

Function To specify the number of units required
Justification The number of repetition of the composite C523 has been increased to 20 for DCS FM
Status **Promoted**

Tag	Prom.	Name	St.	Rep.	Format	Comments	
C523		Yes	NUMBER OF UNIT DETAILS <i>numberOfUnitsDetails</i>	M	99		Number of Unit Details
	6350	Yes	Number of units <i>numberOfUnits</i>	M*	1	n..15	Number of Units
	6353	Yes	Number of units qualifier <i>numberOfUnitsQualifier</i>	C	1	an..3	Number of units qualifier Codesets list : 6353*2

3.26. EQN 1A 10.1.144 (NGINV) - NUMBER OF UNITS

Function To specify the number of units required
Justification The number of repetition of the composite C523 has been increased to 20 for DCS FM
Status **Promoted**

Tag	Prom.	Name	St.	Rep.	Format	Comments	
C523		Yes	NUMBER OF UNIT DETAILS <i>quantityDetails</i>	M	99		Number of Unit Details
	6350	Yes	Number of units <i>numberOfUnit</i>	C	1	n..15	Value
	6353	Yes	Number of units qualifier <i>unitQualifier</i>	C	1	an..3	Key <i>Codesets list : 6353*3</i>

3.27. EQN 1A 10.1.145 (NGINV) - NUMBER OF UNITS

Function To specify the number of units required
Justification The number of repetition of the composite C523 has been increased to 20 for DCS FM
Status **Promoted**

Tag	Prom.	Name	St.	Rep.	Format	Comments	
C523		Yes	NUMBER OF UNIT DETAILS <i>quantityDetails</i>	M	99		Number of Unit Details
	6350	Yes	Number of units <i>numberOfUnit</i>	C	1	n..15	Number of Units
	6353	Yes	Number of units qualifier <i>unitQualifier</i>	C	1	an..3	Number of units qualifier <i>Codesets list : 6353*4</i>

3.28. EQN 1A 10.1.146 (NGINV) - NUMBER OF UNITS

Function To specify the number of units required
Justification The number of repetition of the composite C523 has been increased to 20 for DCS FM
Status **Promoted**

Tag	Prom.	Name	St.	Rep.	Format	Comments	
C523		Yes	NUMBER OF UNIT DETAILS <i>quantityDetails</i>	M	99		Number of Unit Details
	6350	Yes	Number of units <i>numberOfUnit</i>	C	1	n..15	Number of Units
	6353	Yes	Number of units qualifier <i>unitQualifier</i>	C	1	an..3	Number of units qualifier <i>Codesets list : 6353*5</i>

3.29. EQN 1A 10.1.156 (NGINV) - NUMBER OF UNITS

Function To specify the number of units required
Justification The number of repetition of the composite C523 has been increased to 20 for DCS FM
Status **Promoted**

Tag	Prom.	Name	St.	Rep.	Format	Comments	
C523		Yes	NUMBER OF UNIT DETAILS quantityDetails	M	2		Number of Unit Details
	6350	Yes	Number of units numberOfUnit	M*	1	n..15	Number of Units
	6353	Yes	Number of units qualifier unitQualifier	M*	1	an..3	Number of units qualifier <i>Codesets list : 6353*6</i>

3.30. EQN 1A 10.1.161 (NGINV) - NUMBER OF UNITS

Function To specify the number of units required
Justification The number of repetition of the composite C523 has been increased to 20 for DCS FM
Status **Promoted**

Tag	Prom.	Name	St.	Rep.	Format	Comments	
C523		Yes	NUMBER OF UNIT DETAILS <i>quantityDetails</i>	M	99		Number of Unit Details
	6350	Yes	Number of units <i>numberOfUnit</i>	C	1	n..15	Value
	6353	Yes	Number of units qualifier <i>unitQualifier</i>	C	1	an..3	Key <i>Codesets list : 6353*7</i>

3.31. EQN 1A 10.1.165 (NGINV) - NUMBER OF UNITS

Function To specify the number of units required
Justification The number of repetition of the composite C523 has been increased to 20 for DCS FM
Status Promoted

Tag	Prom.	Name	St.	Rep.	Format	Comments
C523	Yes	NUMBER OF UNIT DETAILS numberOfUnitsDetails	M	99		Number of Unit Details
6350	Yes	Number of units numberOfUnits	M*	1	n..15	Number of Units
6353	Yes	Number of units qualifier numberOfUnitsQualifier	C	1	an..3	Number of units qualifier <i>Codesets list : 6353*8</i>

3.32. EQN 1A 10.1.166 (NGINV) - NUMBER OF UNITS

Function To specify the number of units required
Justification The number of repetition of the composite C523 has been increased to 20 for DCS FM
Status Promoted

Tag	Prom.	Name	St.	Rep.	Format	Comments
C523	Yes	NUMBER OF UNIT DETAILS numberOfUnitsDetails	M	99		Number of Unit Details
6350	Yes	Number of units numberOfUnits	M*	1	n..15	Number of Units
6353	Yes	Number of units qualifier numberOfUnitsQualifier	C	1	an..3	Number of units qualifier <i>Codesets list : 6353*9</i>

3.33. EQN 1A 10.1.167 (NGINV) - NUMBER OF UNITS

Function To specify the number of units required
Justification The number of repetition of the composite C523 has been increased to 20 for DCS FM
Status Promoted

Tag	Prom.	Name	St.	Rep.	Format	Comments
C523	Yes	NUMBER OF UNIT DETAILS quantityDetails	M	99		Number of Unit Details
6350	Yes	Number of units numberOfUnit	C	1	n..15	
6353	Yes	Number of units qualifier unitQualifier	C	1	an..3	<i>Codesets list : 6353*10</i>

3.34. EQN 1A 10.1.177 (NGINV) - NUMBER OF UNITS

Function To specify the number of units required
Justification The number of repetition of the composite C523 has been increased to 20 for DCS FM
Status Promoted

Tag	Prom.	Name	St.	Rep.	Format	Comments
C523	Yes	NUMBER OF UNIT DETAILS numberOfUnitsDetails	M	99		Number of Unit Details
6350	Yes	Number of units numberOfUnits	M*	1	n..15	Number of Units
6353	Yes	Number of units qualifier numberOfUnitsQualifier	C	1	an..3	Number of units qualifier <i>Codesets list : 6353*1</i>

3.35. EQP SS 01.2.6 (NGINV) - EQUIPMENT INFORMATION

Function Specify information relating to the vehicle type.
Status Promoted

Tag	Prom.	Name	St.	Rep.	Format	Comments
E220	Yes	MODE OF TRANSPORT modeOfTransport	M*	1		Mode of transport
8067	Yes	Mode of transport, coded serviceType	M	1	an..3	Service type code. See SSIM appendix C for code set
8066	Yes	Mode of transport	N/A	1	an..17	
E360	Yes	EQUIPMENT IDENTIFICATION equipmentDetails	M*	1		Equipment Identification
8179	Yes	Type of means of transport identification aircraftType	M	1	an3	Aircraft Type. See SSIM appendix A for code set
7139	Yes	Product identification characteristic	N/A	1	an..3	<i>Aircraft type operational suffix. May be an airline internal code</i>
8212	Yes	Identification of the means of transport eqtRegistrationNumber	C	1	an..17	Aircraft registration number.
8260	Yes	Equipment identification number	N/A	1	an..17	<i>Aircraft type publication override</i>
E988	Yes	COMPANY IDENTIFICATION companyDetails	C	1		Company details
3036	Yes	Party name aircraftOwner	M	1	an..3	Aircraft owner. IATA 2-3 letter code. If more than 3 letters are used then it is assumed that the full company name is being specified.
3036	Yes	Party name	N/A	1	an..35	<i>Additional employers: first is cockpit crew employer, second is cabin crew employer</i>
3036	Yes	Party name	N/A	1	an..35	<i>Additional employers: first is cockpit crew employer, second is cabin crew employer</i>

3.36. ERC 1A 10.1.20 (NGINV) - APPLICATION ERROR INFORMATION

Function To identify the type of application error within a message.
Justification Change :
We use the data element 9321 Application Error, coded to store a code of canned message on five figures. As a consequence, we have changed the format of 9321 to an..5 instead of an..3. Besides we don't use a codelist.
Status Promoted

Tag	Prom.	Name	St.	Rep.	Format	Comments
C901	Yes	APPLICATION ERROR DETAIL applicationErrorDetail	M	1		Application error details.

	9321	Yes	Application error, coded applicationErrorCode	M	1	an..5	Code identifying the data validation error condition. <i>Codesets list : 9321*1</i>
	1131	Yes	Code list qualifier codeListQualifier	M*	1	an..3	Identification of a code list. <i>Codesets list : 1131*1</i>
	3055	Yes	Code list responsible agency, coded	N/A	1	an..3	Code identifying the agency responsible for a code list.

3.37. FDD 1A 02.1.4 (NGINV) - FLIGHTDATE LEVEL DATA

Function

Justification Business Need :
We have to store several information at flight level.
This segment gathers flight status and several flight characteristics that have not their equivalent in IATA.
Boolean flags are used for flight characteristics instead of a codelist to have an efficient and sure decoding of this information.

Status **Promoted**

Tag	Prom.	Name	St.	Rep.	Format	Comments
1245	Yes	Status indicator, coded flightStatus	C	1	an..3	At the moment only code SO (flight cancellation) is used. <i>Codesets list : 1245*1</i>
121Z	Yes	Flight characteristic, coded flightCharacteristics	C	5	an..3	Indicates the characteristics of the flight. <i>Codesets list : 121Z*1</i>

3.38. FDQ 1A 10.1.16 (NGINV) - FLIGHT DETAILS QUERY

Function To specify outbound and inbound flight information.

Justification C013 changed from M to C

Status **Promoted**

Tag	Prom.	Name	St.	Rep.	Format	Comments
C013	Yes	OUTBOUND CARRIER DETAILS airlineInformation	M*	1		provide information on the oncarriage flight carrier
	3127	Carrier identification airlineCode	M*	1	an2..3	Airline code
	3127	Carrier identification	N/A	1	an..17	
C014	Yes	OUTBOUND FLIGHT NUMBER DETAILS flightReference	M*	1		Reference of the flight for the airline
	3802	Flight number flightNumber	M	1	n..4	Flight number
	9801	Operational suffix to the carrier code operationalSuffix	C	1	a1	Operational suffix
2281	Yes	Departure date and time departureDate	M*	1	n6	To convey the Departure Date of the Flight.
3215	Yes	Place of departure, coded boardPoint	C	1	a..5	The port of departure code of the oncarriage flight
3259	Yes	Place of destination, coded offPoint	C	1	a..5	The port of destination code of the oncarriage flight
9856	Yes	Outbound flight continuation indicator	N/A	1	a1	
C015	Yes	INBOUND CARRIER DETAILS	N/A	1		To provide information on the incarriage flight carrier
	3127	Carrier identification	M		an..17	
	3127	Carrier identification	C		an..17	
C016	Yes	INBOUND FLIGHT NUMBER DETAILS	N/A	1		Reference of the incarriage flight
	3802	Flight number	M		n..4	
	9801	Operational suffix to the carrier code	C		a1	
2281	Yes	Departure date and time	N/A	1	n..10	
2107	Yes	Arrival date and time	N/A	1	n..10	
3215	Yes	Place of departure, coded	N/A	1	a..5	The port of departure of the incarriage flight
3259	Yes	Place of destination, coded	N/A	1	a..5	The port of destination of the incarriage flight
3803	Yes	Terminal of arrival	N/A	1	an..2	
9857	Yes	Inbound type of service indicator	N/A	1	a1	
C310	Yes	PRODUCT DATE/TIME	N/A	2		To convey the Departure and Arrival Dates
	9916	First date	C		an..35	
	9918	First time	C		n..4	
	9920	Second date	C		an..35	
	9922	Second time	C		n..4	
	9954	Date variation	C		n1	

3.39. FDR 1A 02.1.15 (NGINV) - FLIGHT DETAILS RESPONSE

Function To designate a flight for a given date in a reply.

Justification Changes proposed :
3215 and 3259 set from Mandatory to Conditional

Status **Promoted**

Tag	Prom.	Name	St.	Rep.	Format	Comments
C013	Yes	OUTBOUND CARRIER DETAILS airlineInformation	M	1		Provide information on the airline of the flight
	3127	Carrier identification airlineCode	M*	1	an2..3	Airline code
	3127	Carrier identification	N/A	1	an..17	
C014	Yes	OUTBOUND FLIGHT NUMBER DETAILS flightReference	M	1		Reference of the flight for the airline
	3802	Flight number flightNumber	M	1	n..4	Flight number
	9801	Operational suffix to the carrier code operationalSuffix	C	1	a1	Operational suffix
2281	Yes	Departure date and time departureDate	M	1	n6	Departure date ddmmyy. There are possibilities: - Local departure date of the flight (= of the first leg) - If Board Point / Off Point is filled, Segment departure date
3215	Yes	Place of departure, coded	N/A	1	a..5	Segment departure airport Can be omitted.
3259	Yes	Place of destination, coded	N/A	1	a..5	Segment arrival airport Can be omitted.
2107	Yes	Arrival date and time	N/A	1	n..10	
9856	Yes	Outbound flight continuation indicator	N/A	1	a1	

9857		Yes	Inbound type of service indicator	N/A	1	a1	
C041		Yes	COMPLEXING FLIGHT DETAILS	N/A	1		
	3802	Yes	Flight number	M		n..4	
	3215	Yes	Place of departure, coded	M		a..5	
	3259	Yes	Place of destination, coded	M		a..5	
	3127	Yes	Carrier identification	C		an..17	
	9801	Yes	Operational suffix to the carrier code	C		a1	
C310		Yes	PRODUCT DATE/TIME	N/A	2		
	9916	Yes	First date	C		an..35	
	9918	Yes	First time	C		n..4	
	9920	Yes	Second date	C		an..35	
	9922	Yes	Second time	C		n..4	
	9954	Yes	Date variation	C		n1	

3.40. IFD 1A 02.1.74 (NGINV) - INVENTORY PARAMETERS FOR FLIGHTDATE

Function
Justification This segment gathers the specific inventory information for a flight-date : type of control and review date&time.
Status **Promoted**

Tag	Prom.	Name	St.	Rep.	Format	Comments
9916		Yes First date reviewDate	C	1	n6	Review Date (relative date)
9918		Yes First time reviewTime	C	1	n4	Review Time
107Z		Yes FlightDate Control Type, coded controlType	C	1	an1	C= Class Control R= Revenue Control (when flight date has its revenue controls activated) <i>Codesets list : 107Z*1</i>
6345		Yes Currency identification code currencyCode	C	1	an..3	Currency, coded Conveyed in Edifact message but not displayed in GUI.
9813		Yes Confirmation indicator	N/A	1	a1	<i>flag : whether the RevenueControl Set is complete or not</i>
9813		Yes Confirmation indicator isUnderActiveRevControl	C	1	a1	Yes/No For airlines using revenue buckets: the value 'Y' is encoded if and only if the airline parameter REV_CONTROL_GLOBAL_SWITCH is set to 'Y' AND the flight-date has its revenue controls activated AND the flight-date has a complete set of revenue buckets (ie, all buckets for all leg-cabins + FLD yields on all subclasses). For airlines using Bid Price Vectors, the value 'Y' is encoded if and only if the airline parameter REV_CONTROL_GLOBAL_SWITCH is set to 'Y' AND the flight-date has its revenue controls activated. <i>Codesets list : 9813*1</i>

3.41. IMD IA 02.2.6 (NGINV) - ITEM DESCRIPTION

Function To describe an item in either an industry or free format.
Status **Promoted**

Tag	Prom.	Name	St.	Rep.	Format	Comments
7077		Yes Item description type, coded	N/A	1	an..3	
7081		Yes Item characteristic, coded itemCharacteristic	M*	1	an..3	Provides the Characteristic of the Item. <i>Codesets list : 7081*1</i>
C273		Yes ITEM DESCRIPTION	N/A	1		
	7009	Yes Item description identification	C		an..7	
	1131	Yes Code list qualifier	C		an..3	
	3055	Yes Code list responsible agency, coded	C		an..3	
	7008	Yes Item description	C		an..40	
	7008	Yes Item description	C		an..35	
	3453	Yes Language, coded	C		an..3	
7383		Yes Surface/layer indicator, coded	N/A	1	an..3	

3.42. LEG 1A 02.1.64 (NGINV) - LEG DATA

Function Cross cabin info
Justification Parameters for Cross-Cabin (configurations and controls)
Status **Promoted**

Tag	Prom.	Name	St.	Rep.	Format	Comments
A008		Yes Cross Cabin configurations crossCabinConfigInfo	M	1		Gather current cross cabin configuration and available ones.
	111Z	Yes CrossCabin Configuration Code crossCabinConfiguration	M	1	an..35	cross Cabin Configuration in the form Cabin-Capacity. For example F5J10Y105.
	111Z	Yes CrossCabin Configuration Code crossCabinConfigList	C	99	an..35	list of Cross Cabin Configuration in the form Cabin-Capacity. For example F5J10Y105.
109Z		Yes CrossCabinControls, coded crossCabinControls	M	3	an..3	Cross Cabin Controls (CrossCabinSharingLevel, ProtectForDowngrades flag, ProtectForExcessUpgrades flag) <i>Codesets list : 109Z*1</i>

3.43. LTS IA 02.2.7 (NGINV) - LONG TEXT STRING

Function To provide unlimited length free for information.
Status **Promoted**

Tag	Prom.	Name	St.	Rep.	Format	Comments
9990		Yes Text string details longTextString	M	1	an..2500	provides a long Text string

3.44. MON IA 08.1.4 (NGINV) - MONETARY INFORMATION

Function To convey monetary amounts, rates and percentages.
Justification Updated according to PADIS 08.1
Status **Promoted**

Tag	Prom.	Name	St.	Rep.	Format	Comments
C663	Yes	MONETARY INFORMATION <i>moneyInformation</i>	M	5		Money Information
	5025	Yes	Monetary amount type qualifier <i>amountTypeQualifier</i>	M	1	an..3 Yield type <i>Codesets list : 5025*1</i>
	1230	Yes	Allowance or charge number <i>valueAmount</i>	M*	1	n..18 Yield value This is a decimal value.
	6345	Yes	Currency, coded <i>valueCurrency</i>	M*	1	an..3 Currency, coded In airline's currency by default - To be picked up in system settings <i>Codesets list : 6345*1</i>
	3225	Yes	Place/location identification	N/A	2	an..25

3.45. ODI IA 02.2.38 (NGINV) - ORIGIN AND DESTINATION DETAILS

Function To convey the origin and destination of a journey.
Status **Promoted**

Tag	Prom.	Name	St.	Rep.	Format	Comments
3225	Yes	Place/location identification <i>departureCityCode</i>	M*	1	a..3	Departure's city code:3 character ATA/IATA airport/city code <i>Codesets list : 3225*2</i>
3225	Yes	Place/location identification <i>arrivalCityCode</i>	M*	1	a..3	Arrival's city code: 3 character ATA/IATA airport/city code <i>Codesets list : 3225*2</i>

3.46. ORG IA 02.2.10 (NGINV) - ORIGINATOR OF REQUEST DETAILS

Function To specify the point of sale details.
Status **Promoted**

Tag	Prom.	Name	St.	Rep.	Format	Comments
C336	Yes	SYSTEM DETAILS <i>deliveringSystem</i>	M*	1		Used to specify the originator System
	9906	Yes	Company identification <i>companyId</i>	M*	1	an..35 2-3 characters airline/CRS code, or bilaterally agreed code, of the system that originates the message when different from the originating system. <i>Codesets list : 9906*2</i>
	3225	Yes	Place/location identification <i>locationId</i>	C	1	an..25 3 characters ATA/IATA airport/city code of the originating system. <i>Codesets list : 3225*3</i>
	3224	Yes	Place/location <i>location</i>	C	1	an..17 Location of the originating system.
C300	Yes	ORIGINATOR IDENTIFICATION DETAILS <i>originIdentification</i>	M*	1		Originator Identification Details
	9900	Yes	Travel agent identification details <i>originatorId</i>	C	1	n..9 ATA/IATA Id number or pseudo IATA number or ERSP.
	9902	Yes	In-house identification <i>inHouseIdentification1</i>	C	1	an..9 First In-House Identifier. Office/Agency code assigned by the reservation system. Office Id in AMAdeus.
	9902	Yes	In-house identification <i>inHouseIdentification2</i>	C	1	an..9 Second In-House Identifier.
	9902	Yes	In-house identification <i>inHouseIdentification3</i>	C	1	an..9 Third in-house identifier
C328	Yes	LOCATION <i>locationDetails</i>	C	1		Details of the location
	3225	Yes	Place/location identification <i>trueLocationId</i>	C	1	an..25 A 3 character ATA/IATA airport/city code of the agent doing the request. True city code. <i>Codesets list : 3225*3</i>
	3224	Yes	Place/location <i>trueLocation</i>	C	1	an..17 True location of the agent doing the request.
C336	Yes	SYSTEM DETAILS <i>cascadingSystem</i>	C	1		System Details - Used when cascading
	9906	Yes	Company identification <i>companyId</i>	M*	1	an..35 2-3 characters airline/CRS code, or bilaterally agreed code, of the system that originates the message when different from the originating system. <i>Codesets list : 9906*2</i>
	3225	Yes	Place/location identification <i>locationId</i>	C	1	an..25 3 characters ATA/IATA airport/city code of the originating system. <i>Codesets list : 3225*3</i>
	3224	Yes	Place/location <i>location</i>	C	1	an..17 Location of the originating system.
9972	Yes	Originator type code <i>originatorTypeCode</i>	C	1	an1	Originator Type Code. A for airline agent. T for travel Agent. E for internet. <i>Codesets list : 9972*1</i>
C354	Yes	ORIGINATOR DETAILS <i>originDetails</i>	C	1		Details on the originator
	3207	Yes	Country, coded <i>codedCountry</i>	C	1	an..3 ISO country code of the agent. <i>Codesets list : 3207*1</i>
	6345	Yes	Currency, coded <i>codedCurrency</i>	C	1	an..3 ISO currency code. <i>Codesets list : 6345*2</i>
	3453	Yes	Language, coded <i>codedLanguage</i>	C	1	an..3 ISO code of language. <i>Codesets list : 3453*1</i>
9904	Yes	Originator's authority request code <i>originator</i>	C	1	an..9	Authority code of the requester (Area Code)+(Numeric Sine)+(Agent Initials)+(Duty Code) ex : B0001XVSU).
3148	Yes	Communication number <i>communicationNumber</i>	C	1	an..25	Identifier of the workstation (such as the>NNLNIATA)
3039	Yes	Party id identification <i>partyIdentification</i>	C	1	an..17	Group identification

3.47. PDI IA 02.2.17 (NGINV) - PRODUCT INFORMATION

Function To specify details related to availability status or cabin configuration for a product.
Status **Promoted**

Tag	Prom.	Name	St.	Rep.	Format	Comments
9970	Yes	Product details qualifier	N/A	1	an..3	
C304	Yes	PRODUCT DETAILS <i>bookingClassDetails</i>	M*	26		Booking class details
	7037	Yes	Characteristic identification <i>bookingClassDesignator</i>	M	1	a1 RBD (Reservation Booking Designator) <i>Codesets list : 7037*2</i>

	7011	Yes	Article availability, coded	N/A	1	an..3	indicate availability status . coded or numeric
	7161	Yes	Special service, coded	N/A	1	an..3	
	7009	Yes	Item description identification	N/A	3	an..7	

3.48. PDI IA 02.2.18 (NGINV) - PRODUCT INFORMATION

Function To specify details related to availability status or cabin configuration for a product.
 Status **Promoted**

Tag	Prom.	Name	St.	Rep.	Format	Comments	
9970		Yes	Product details qualifier	N/A	1	an..3	
C304		Yes	PRODUCT DETAILS bookingClassDetails	M*	26		Booking class details
	7037	Yes	Characteristic identification designator	M	1	a1	RBD (Reservation Booking Designator) Codesets list : 7037*3
	7011	Yes	Article availability, coded	N/A	1	an..3	Indicate availability status . coded or numeric
	7161	Yes	Special service, coded	N/A	1	an..3	
	7009	Yes	Item description identification	N/A	3	an..7	

3.49. RCI IA 02.2.7 (NGINV) - RESERVATION CONTROL INFORMATION

Function To specify a reference to a reservation.
 Status **Promoted**

Tag	Prom.	Name	St.	Rep.	Format	Comments	
C330		Yes	RESERVATION CONTROL INFORMATION <i>reservation</i>	M*	1		DBID
	9906	Yes	Company identification	N/A	1	an..35	
	9956	Yes	Reservation control number <i>controlNumber</i>	M*	1	an6	DBID
	9958	Yes	Reservation control type	N/A	1	an1	
	9916	Yes	First date	N/A	1	an..35	
	9994	Yes	Time	N/A	1	n..9	

3.50. REF IA 02.2.49 (NGINV) - REFERENCE INFORMATION

Function To provide specific reference identification for a traveller.
 Status **Promoted**

Tag	Prom.	Name	St.	Rep.	Format	Comments	
C653		Yes	REFERENCING DETAILS <i>referenceDetails</i>	C	6		Lock information
	1153	Yes	Reference qualifier <i>qualifier</i>	C	1	an..3	Lock qualifier <i>Codesets list : 1153*1</i>
	1154	Yes	Reference number <i>number</i>	C	1	an..35	Value

3.51. SBC 1A 14.1.3 (NGINV) - SUBCLASS DATA

Function
 Justification This segments groups together all the parameters associated with a subclass (control parameters such as MIN and MAX, associated overbooking/cancellation profile, boolean expression, effective and discontinue dates, bookings counters, availability counters, AVS status)
 Status **Promoted**

Tag	Prom.	Name	St.	Rep.	Format	Comments	
9908		Yes	Product identification <i>booleanExpressionID</i>	C	1	an..35	ID of the Boolean Expression associated to the subclass (MIB)
6060		Yes	Quantity	N/A	1	n..15	
9916		Yes	First date	N/A	1	an..35	Subclass Effective Date (ddmmyy)
9916		Yes	First date	N/A	1	an..35	Subclass Discontinue Date (ddmmyy)
A001		Yes	Subclass Date Flags	N/A	1		Subclass Date Flags
	101Z	Yes	SubclassDate Flags, coded	M		an..3	each of the subclass flags (accept group bkgs, allowWL, ...) Only allow waitlist and allow waitlist clearance flags are displayed in the GUI.
A004		Yes	Subclass Controls <i>controls</i>	C	1		Subclass Controls
	6060	Yes	Quantity	N/A	1	n..15	Subclass MIN control This is an integer value.
	103Z	Yes	Nest Type, coded	N/A	1	an1	Min Nest Type (stand-Alone, Primary, Secondary) For airlines using MIN/MAX method
	106Z	Yes	Nest Identification	N/A	1	an0..1	Min Nest Reference For airlines using MIN/MAX method
	6060	Yes	Quantity <i>max</i>	C	1	n..15	Subclass MAX control For airlines using MIN/MAX method This is the MAX. For airlines using hybrid nesting This is the AU. This is an integer value
	103Z	Yes	Nest Type, coded	N/A	1	an1	Max Nest Type (stand-Alone, Primary, Secondary) For airlines using MIN/MAX method
	106Z	Yes	Nest Identification	N/A	1	an0..1	Max Nest Reference For airlines using MIN/MAX method
	6060	Yes	Quantity <i>upr</i>	C	1	n..15	Subclass UPR This is an integer value when airline parameters use _hybrid_nesting='Y' and apply _overbooking_on_bookings='N' else this is a decimal value.
	6060	Yes	Quantity	N/A	1	n..15	Subclass Low Notification Level This is an integer value

	6060	Yes	Quantity	N/A	1	n..15	Subclass High Notification Level <i>This is an integer value</i>
	110Z	Yes	Subclass <i>parentSubclassId</i>	C	1	an..3	Identification of the subclass with a letter+number code For airlines using hybrid nesting
	6060	Yes	Quantity <i>nettedProtection</i>	C	1	n..15	Subclass Netted Protection For airlines using hybrid nesting <i>This is an integer value.</i>
	6060	Yes	Quantity	N/A	1	n..15	Waitlist Max <i>For airlines using hybrid nesting and waitlist at class level</i> <i>This is an integer value</i>
	6060	Yes	Quantity	N/A	1	n..15	Waitlist Max percentage of AU <i>For airlines using hybrid nesting and waitlist at class level</i> <i>This is an integer value</i>
A005		Yes	Subclass OverBooking Profile	N/A	1		Subclass Overbooking/Cancellation Profile
	104Z	Yes	Profile Type, coded	C		an..3	Either Cancellation or Overbooking profiles (AH, GO, OP, OV) <i>For airlines using profile library (airline parameter USE_OVERBOOKING_PROFILES set to 'Y')</i>
	105Z	Yes	Profile Name	C		an..3	Profile Name <i>For airlines using profile library (airline parameter USE_OVERBOOKING_PROFILES set to 'Y')</i>
	5482	Yes	Percentage	C		n..8	Subclass NoShow Percentage <i>This is an integer value</i>
	5482	Yes	Percentage	C		n..8	Subclass OverBooking Percentage <i>This is an integer value</i>
A002		Yes	Bookings Counters <i>bkgCounters</i>	C	1		Subclass Bookings Counters
	6060	Yes	Quantity <i>bookingsCounter</i>	M*	1	n..15	Bookings Counter 0 if no bookings <i>This is an integer value</i>
	6060	Yes	Quantity <i>groupBookingsCounter</i>	M*	1	n..15	Group Bookings Counter 0 if no group bookings <i>This is an integer value</i>
	6060	Yes	Quantity	N/A	1	n..15	Group Pending Counter <i>0 if no group pending bookings</i> <i>This is an integer value</i>
	6060	Yes	Quantity	N/A	1	n..15	Group Waitlist Counter <i>0 if no group waitlist bookings</i> <i>This is an integer value</i>
	6060	Yes	Quantity	N/A	1	n..15	Waitlist Counter <i>0 if no waitlist bookings</i> <i>This is an integer value</i>
	6060	Yes	Quantity	N/A	1	n..15	Forecasted number of bookings <i>This is an integer value when airline parameters inv_etb_class='RMS' or (inv_etb_class='BKG' and apply_overbooking_on_bookings='N' and inv_overbooking_factor='N') else this is a decimal value.</i>
	6060	Yes	Quantity	N/A	1	n..15	Total number of seats allotted to nego. (i.e. sum of all sizes of all block IDs per subclass) <i>Mandatory for airlines using negotiated space</i> <i>This is an integer value</i>
102Z		Yes	AVS Status, coded	N/A	1	an..2	AVS Status
A003		Yes	Availability Counters	N/A	3		Subclass Availability Counters <i>Repetition of 3 is used in Explain Availability to decompose the steps (AV1, AV2, A3)V</i>
	6060	Yes	Quantity	M		n..15	Net Class Availability <i>A seats equivalent availability calculated from the class controls only. This availability will be used to cap the sum of CumulativeUPR and NetRevenueAvailability in the calculation of SegmentAvailability under Revenue Controls for all subclasses with MAX controls. For flights under Class Control the NetClassAvailability will simply be a net version of SegmentAvailability.</i> <i>This is an integer value when airline parameters use_hybrid_nesting='Y' and apply_overbooking_on_bookings='N' else this is a decimal value.</i>
	6060	Yes	Quantity	M		n..15	Segment Availability <i>The normal availability figure for for all the POSs mapping into this sub-class. A gross availability figure which can be either positive or negative. This availability figure is displayed in AV column at subclass level</i> <i>This is an integer value when airline parameters use_hybrid_nesting='Y' and apply_overbooking_on_bookings='N' else this is a decimal value.</i>
	6060	Yes	Quantity	C		n..15	Net Revenue Availability <i>It is the minimum of the net bucket availabilities (SeatsAvailability, aka AV1/AV2/AV3) taken across all legs in this segment, based on the appropriate Leg Effective Yield, derived from the segment Yield.</i> <i>This is an integer value when airline parameters use_hybrid_nesting='Y' and apply_overbooking_on_bookings='N' else this is a decimal value.</i>
	6060	Yes	Quantity	C		n..15	<i>It corresponds to the Net Class Availability plus the constraints.</i> <i>This is an integer value when airline parameters use_hybrid_nesting='Y' and apply_overbooking_on_bookings='N' else this is a decimal value.</i>
	6060	Yes	Quantity	N/A		n..15	Segment Availability

3.52. SBC 1A 14.1.4 (NGINV) - SUBCLASS DATA

Function

Justification This segments groups together all the parameters associated with a subclass (control parameters such as MIN and MAX, associated overbooking/cancellation profile, boolean expression, effective and discontinue dates, bookings counters, availability counters, AVS status)

Status **Promoted**

Tag	Prom.	Name	St.	Rep.	Format	Comments
9908	Yes	Product identification booleanExpressionID	C	1	an..35	ID of the Boolean Expression associated to the subclass (MIB)
6060	Yes	Quantity Quantity	N/A	1	n..15	
9916	Yes	First date effectiveDate	C	1	an..35	Subclass Effective Date (ddmmyy) If applicable, it stands for effective date for standalone segment.
9916	Yes	First date discontinueDate	C	1	an..35	Subclass Discontinue Date (ddmmyy) If applicable, it stands for discontinue date for standalone segment.
A001	Yes	Subclass Date Flags allFlags	C	1		Subclass Date Flags
	101Z	Yes	SubclassDate Flags, coded flag	M	7	an..3 each of the subclass flags (accept group bkg, allowWL, ...) Only allow waitlist and allow waitlist clearance flags are displayed in the GUI. <i>Codesets list : 101Z*1</i>
A004	Yes	Subclass Controls controls	C	1		Subclass Controls
	6060	Yes	Quantity min	C	1	n..15 Subclass MIN control This is an integer value.
	103Z	Yes	Nest Type, coded minNestType	C	1	an1 Min Nest Type (stand-Alone, Primary, Secondary) For airlines using MIN/MAX method <i>Codesets list : 103Z*1</i>
	106Z	Yes	Nest Identification minNestReference	C	1	an0..1 Min Nest Reference For airlines using MIN/MAX method
	6060	Yes	Quantity max	C	1	n..15 Subclass MAX control For airlines using MIN/MAX method This is the MAX. For airlines using hybrid nesting This is the AU. This is an integer value
	103Z	Yes	Nest Type, coded maxNestType	C	1	an1 Max Nest Type (stand-Alone, Primary, Secondary) For airlines using MIN/MAX method <i>Codesets list : 103Z*1</i>
	106Z	Yes	Nest Identification maxNestReference	C	1	an0..1 Max Nest Reference For airlines using MIN/MAX method
	6060	Yes	Quantity upr	C	1	n..15 Subclass UPR This is an integer value when airline parameters use _hybrid_nesting='Y' and apply_overbooking_on_bookings='N' else this is a decimal value.
	6060	Yes	Quantity lowNotificationLevel	C	1	n..15 Subclass Low Notification Level This is an integer value
	6060	Yes	Quantity highNotificationLevel	C	1	n..15 Subclass High Notification Level This is an integer value
	110Z	Yes	Subclass parentSubclassId	C	1	an..3 Identification of the subclass with a letter+number code For airlines using hybrid nesting
	6060	Yes	Quantity nettedProtection	C	1	n..15 Subclass Netted Protection For airlines using hybrid nesting This is a integer value.
	6060	Yes	Quantity waitlistMax	C	1	n..15 Waitlist Max For airlines using hybrid nesting and waitlist at class level This is an integer value
	6060	Yes	Quantity waitlistMaxPercentageOfAU	C	1	n..15 Waitlist Max percentage of AU For airlines using hybrid nesting and waitlist at class level This is an integer value
A005	Yes	Subclass OverBooking Profile obCxProfile	C	1		Subclass Overbooking/Cancellation Profile
	104Z	Yes	Profile Type, coded profileType	C	1	an..3 Either Cancellation or Overbooking profiles (AH, GO, OP, OV) For airlines using profile library (airline parameter USE_OVERBOOKING_PROFILES set to 'Y') <i>Codesets list : 104Z*1</i>
	105Z	Yes	Profile Name profileName	C	1	an..3 Profile Name For airlines using profile library (airline parameter USE_OVERBOOKING_PROFILES set to 'Y')
	5482	Yes	Percentage noshowPercentage	C	1	n..8 Subclass NoShow Percentage This is an integer value
	5482	Yes	Percentage obPercentage	C	1	n..8 Subclass OverBooking Percentage This is an integer value
A002	Yes	Bookings Counters bkgCounters	C	1		Subclass Bookings Counters
	6060	Yes	Quantity bookingsCounter	M*	1	n..15 Bookings Counter 0 if no bookings This is an integer value
	6060	Yes	Quantity groupBookingsCounter	M*	1	n..15 Group Bookings Counter 0 if no group bookings

							This is an integer value
	6060	Yes	Quantity <i>groupPendingCounter</i>	M*	1	n..15	Group Pending Counter 0 if no group pending bookings This is an integer value
	6060	Yes	Quantity <i>groupWaitlistCounter</i>	M*	1	n..15	Group Waitlist Counter 0 if no group waitlist bookings This is an integer value
	6060	Yes	Quantity <i>waitlistCounter</i>	M*	1	n..15	Waitlist Counter 0 if no waitlist bookings This is an integer value
	6060	Yes	Quantity <i>expectedToBoard</i>	C	1	n..15	Forecasted number of bookings This is an integer value when airline parameters inv_etb_class='RMS' or (inv_etb_class='BKG' and apply_overbooking_on_bookings='N' and inv_overbooking_factor='N') else this is a decimal value.
	6060	Yes	Quantity <i>negoAllotedSpace</i>	C	1	n..15	Total number of seats allotted to nego. (i.e. sum of all sizes of all block IDs per subclass) Mandatory for airlines using negotiated space This is an integer value
102Z		Yes	AVS Status, coded <i>avsStatus</i>	C	1	an..2	AVS Status (LA, LL, LC, LN, LR, L0...9) <i>Codesets list : 102Z*2</i>
A003		Yes	Availability Counters <i>availCounters</i>	C	3		Subclass Availability Counters Repetition of 3 is used in Explain Availability to decompose the steps (AV1, AV2, A3V)
	6060	Yes	Quantity <i>netClassAvailability</i>	M	1	n..15	Net Class Availability A seats equivalent availability calculated from the class controls only. This availability will be used to cap the sum of CumulativeUPR and NetRevenueAvailability in the calculation of SegmentAvailability under Revenue Controls for all subclasses with MAX controls. For flights under Class Control the NetClassAvailability will simply be a net version of SegmentAvailability. This is an integer value when airline parameters use_hybrid_nesting='Y' and apply_overbooking_on_bookings='N' else this is a decimal value.
	6060	Yes	Quantity <i>segmentAvailability</i>	M	1	n..15	Segment Availability The normal availability figure for for all the POSs mapping into this sub-class. A gross availability figure which can be either positive or negative. This availability figure is displayed in AV column at subclass level This is an integer value when airline parameters use_hybrid_nesting='Y' and apply_overbooking_on_bookings='N' else this is a decimal value.
	6060	Yes	Quantity <i>netRevenueAvailability</i>	C	1	n..15	Net Revenue Availability It is the minimum of the net bucket availabilities (SeatsAvailability, aka AV1/AV2/AV3) taken across all legs in this segment, based on the appropriate Leg Effective Yield, derived from the segment Yield. This is an integer value when airline parameters use_hybrid_nesting='Y' and apply_overbooking_on_bookings='N' else this is a decimal value.
	6060	Yes	Quantity <i>classControlledAvailability</i>	C	1	n..15	It corresponds to the Net Class Availability plus the constraints. This is an integer value when airline parameters use_hybrid_nesting='Y' and apply_overbooking_on_bookings='N' else this is a decimal value.
	6060	Yes	Quantity	N/A	1	n..15	Segment Availability

3.53. SBI 1A 14.1.2 (NGINV) - SUBCLASS IDENTIFICATION

Function

Justification This segment only gives the identifier of a subclass (used in Profile Management and Yield Management)

Status **Promoted**

Tag	Prom.	Name	St.	Rep.	Format	Comments
110Z	Yes	Subclass <i>subclassId</i>	M	1	an..4	Identification of the subclass with a letter+number code

3.54. SBI 1A 14.1.3 (NGINV) - SUBCLASS IDENTIFICATION

Function

Justification This segment only gives the identifier of a subclass (used in Profile Management and Yield Management)

Status **Promoted**

Tag	Prom.	Name	St.	Rep.	Format	Comments
110Z	Yes	Subclass <i>subclassId</i>	M	1	an..4	Identification of the subclass with a letter+number code

3.55. SCI 1A 02.1.22 (NGINV) - SEGMENT CABIN IDENTIFICATION

Function To reference a segment cabin

Justification Business Need :
When providing data for flights, NGI specific information is needed at segment level.

Function :

SCI is used to designate cabin code at segment level with Maximum bookings in WaitList accepted for this cabin.

Status **Promoted**

Tag	Prom.	Name	St.	Rep.	Format	Comments
9854	Yes	Cabin class designator <i>cabinCode</i>	M	1	a1	Cabin class designator
6060	Yes	Quantity <i>waitListMax</i>	C	1	n..15	Segment-Cabin Waitlist max This is an integer value
6060	Yes	Quantity <i>upr</i>	C	1	n..15	Segment-Cabin UPR This is an integer value when airline parameters use_hybrid_nesting='Y' and apply_overbooking_on_bookings='N' else this is a decimal value.

6060		Yes	Quantity <i>bookingsCounter</i>	C	1	n..15	Segment-Cabin Bookings Counter This is an integer value
6060		Yes	Quantity <i>waitList</i>	C	1	n..15	Segment-Cabin Waitlist This is an integer value
6060		Yes	Quantity <i>expectedToBoard</i>	C	1	n..15	Expected to board (ETB) This is an integer value when airline parameters inv_etb_class='RMS' or (inv_etb_class='BKG' and apply_overbooking_on_bookings='N' and inv_overbooking_factor='N') else this is a decimal value.
6060		Yes	Quantity <i>staffStandbyCounter</i>	C	1	n..15	Staff Standby This is an integer value
6060		Yes	Quantity <i>staffStandbyMax</i>	C	1	n..15	Staff Standby max This is an integer value
6060		Yes	Quantity	N/A	1	n..15	
6060		Yes	Quantity	N/A	1	n..15	
6060		Yes	Quantity	N/A	1	n..15	

3.56. SDT 1A 07.1.47 (NGINV) - SELECTION DETAILS

Function To specify the details for making a selection.
Status **Promoted**

Tag	Prom.	Name	St.	Rep.	Format	Comments
E010	Yes	SELECTION DETAILS INFORMATION <i>selectionDetails</i>	M	99		Selection details
	4009	Yes Option code <i>optionCode</i>	M	1	an..3	Option code
	4018	Yes <i>Related information description</i>	N/A	1	an..3	Option criteria

3.57. SSQ 1A 15.1.1 (NGINV) - SPECIAL REQUIREMENTS QUOTA

Function To specify special requests or services quota information related to a flight.
Justification Segment for SSR Quota information.
Status **Promoted**

Tag	Prom.	Name	St.	Rep.	Format	Comments
C371	Yes	QUOTA RELATED INFORMATION <i>quotaInfo</i>	M	1		This composite enables user to convey quota-related information.
	9965	Yes Quota identification <i>quotaCounterName</i>	M*	1	an..6	Name of the quota counter, most of the time aligned with SSR type.
	6060	Yes Quantity <i>maxQuantity</i>	C	1	n..15	Maximum quantity that can be reached.
	6060	Yes Quantity <i>availability</i>	C	1	n..15	Quantity that is available.
	4405	Yes <i>Status, coded</i>	N/A	1	an..3	Status which should be replied when quota are reached, for example UN.
	9321	Yes <i>Application error, coded</i>	N/A	1	an..5	Number of the canned message to be sent.
	9321	Yes <i>Application error, coded</i>	N/A	1	an..5	Number of the canned message to be sent.
	6060	Yes Quantity <i>counter</i>	C	1	n..15	Count of the items already booked in the quota.
	7077	Yes Item description type, coded <i>quotaType</i>	M*	1	an3	SSR quota type is used to identify the use case: SSR or SIT Codesets list : 7077*1
	8631	Yes Item code <i>quotaGrade</i>	C	1	an..2	
C372	Yes	SPECIAL REQUIREMENTS QUOTA DETAILS <i>ssrQuotaInfo</i>	C	1		this composite allows to convey optional ssr quota details (cabin, nest)
	9854	Yes Cabin class designator <i>cabinCode</i>	C	1	a1	Reference of the leg cabin on which the quota applies. If no cabin , the quota applies on the whole Leg.
	106Z	Yes Nest Identification <i>nestReference</i>	C	1	an1	Reference of the nest family if any. This means availability is shared with other quota of the same family.

3.58. STX 1A 10.1.58 (NGINV) - STATUS DETAILS

Function To advise the requester system the status of the reply
Justification Slightly modified from IATA : codelist 1245 extended.
Ref IATA: RES 08/01/01 p331
Status **Promoted**

Tag	Prom.	Name	St.	Rep.	Format	Comments
C656	Yes	STATUS DETAILS <i>statusInformation</i>	M	99		Status Information provided by Departure Control System (DCS) about the leg.
	1245	Yes Status indicator, coded <i>statusIndicator</i>	M*	1	an..3	Status Indicator Codesets list : 1245*2
	1229	Yes Action request / notification, coded <i>actionRequest</i>	C	1	an..3	Action request Codesets list : 1229*1
	9015	Yes <i>Status type, coded</i>	N/A	1	an..3	
	4440	Yes <i>Free text</i>	N/A	1	an..70	

3.59. STX 1A 10.1.60 (NGINV) - STATUS DETAILS

Function To advise the requester system the status of the reply
Justification Slightly modified from IATA : codelist 1245 extended.
Ref IATA: RES 08/01/01 p331
Status **Promoted**

Tag	Prom.	Name	St.	Rep.	Format	Comments
C656	Yes	STATUS DETAILS <i>statusInformation</i>	M	99		STATUS DETAILS
	1245	Yes Status indicator, coded <i>statusIndicator</i>	M*	1	an..3	Status Indicator Codesets list : 1245*3
	1229	Yes Action request / notification, coded <i>actionRequest</i>	C	1	an..3	Action request Codesets list : 1229*2
	9015	Yes <i>Status type, coded</i>	N/A	1	an..3	
	4440	Yes <i>Free text</i>	N/A	1	an..70	

3.60. STX 1A 10.1.61 (NGINV) - STATUS DETAILS

Function To advise the requester system the status of the reply
Justification Slightly modified from IATA : codelist 1245 extended.
Ref IATA: RES 08/01/01 p331
Status Promoted

Tag	Prom.	Name	St.	Rep.	Format	Comments	
C656		Yes	STATUS DETAILS statusInformation	M	99		Status details
	1245	Yes	Status indicator, coded statusIndicator	M*	1	an..3	Status Indicator <i>Codesets list : 1245*4</i>
	1229	Yes	Action request / notification, coded actionRequest	C	1	an..3	Action request <i>Codesets list : 1229*1</i>
	9015	Yes	Status type, coded type	C	1	an..3	<i>Codesets list : 9015*1</i>
	4440	Yes	Free text	N/A	1	an..70	

3.61. STX 1A 10.1.64 (NGINV) - STATUS DETAILS

Function To advise the requester system the status of the reply
Justification Slightly modified from IATA : codelist 1245 extended.
Ref IATA: RES 08/01/01 p331
Status Promoted

Tag	Prom.	Name	St.	Rep.	Format	Comments	
C656		Yes	STATUS DETAILS <i>statusInformation</i>	M	99		STATUS DETAILS
	1245	Yes	Status indicator, coded <i>indicator</i>	M*	1	an..3	list of status/qualifiers Either His for Historical or Crt for Current <i>Codesets list : 1245*5</i>
	1229	Yes	Action request / notification, coded <i>action</i>	M*	1	an..3	<i>Codesets list : 1229*3</i>
	9015	Yes	Status type, coded	N/A	1	an..3	
	4440	Yes	Free text	N/A	1	an..70	

3.62. STX 1A 10.1.68 (NGINV) - STATUS DETAILS

Function To advise the requester system the status of the reply
Justification Slightly modified from IATA : codelist 1245 extended.
Ref IATA: RES 08/01/01 p331
Status Promoted

Tag	Prom.	Name	St.	Rep.	Format	Comments	
C656		Yes	STATUS DETAILS statusInformation	M	99		DCS flight-date status
	1245	Yes	Status indicator, coded statusIndicator	M*	1	an..3	Status Indicator <i>Codesets list : 1245*6</i>
	1229	Yes	Action request / notification, coded actionRequest	C	1	an..3	Action request <i>Codesets list : 1229*4</i>
	9015	Yes	Status type, coded	N/A	1	an..3	
	4440	Yes	Free text	N/A	1	an..70	

3.63. STX IA 07.1.6 (NGCOM) - STATUS DETAILS

Function To advise the requester system the status of the reply
Justification Slightly modified from IATA : codelist 1245 extended.
Ref IATA: RES 08/01/01 p331
Status Promoted

Tag	Prom.	Name	St.	Rep.	Format	Comments	
C656		Yes	STATUS COMPLETE DETAILS statusInformation	M	99		STATUS DETAILS
	1245	Yes	Status indicator, coded statusIndicator	M*	1	an..3	StatusIndicator <i>Codesets list : 1245*7</i>
	1229	Yes	Action request / notification, coded actionRequest	C	1	an..3	Action request <i>Codesets list : 1229*5</i>
	9015	Yes	Status type, coded type	C	1	an..3	<i>Codesets list : 9015*2</i>
	4440	Yes	Free text	N/A	1	an..70	

3.64. TBU 1A 02.1.66 (NGINV) - TRANSIENT BUCKET

Function
Justification It groups parameters linked to a transient bucket (at segment-cabin level), i.e. its optimiseBidPrice, as well as parameters of granularity (linkClass, linkSubclass and Depth) and the possibility of deleting this bucket.
Status Promoted

Tag	Prom.	Name	St.	Rep.	Format	Comments	
1230		Yes	Allowance or charge number <i>optimiseBidPrice</i>	C	1	n..18	Transient Bucket SegmentCabinOptimiseBidPrice This is a decimal value
7037		Yes	Characteristic identification <i>linkClass</i>	C	1	a1	for the transient bucket : linkClass
110Z		Yes	Subclass <i>linkSubclass</i>	C	1	an..2	transient bucket LinkSubclass
6060		Yes	Quantity <i>depth</i>	C	1	n..15	Transient Bucket Depth 0 is the default value This is a decimal value
9813		Yes	Confirmation indicator <i>deleteTransientBucket</i>	C	1	a1	whether or not the transient bucket has to be deleted <i>Codesets list : 9813*1</i>

1230		Yes	Allowance or charge number <i>minimumGroupYield</i>	C	1	n..18	Segment-Cabin Minimum Group Yield
7037		Yes	Characteristic identification <i>groupConstrainingClass</i>	C	1	an1	This is a decimal value Group Constraining Class

3.65. TRA SS 01.2.11 (NGINV) - TRANSPORT IDENTIFIER

Function To specify the transport service(s) which is /are to be updated or cancelled
Status **Promoted**

Tag	Prom.	Name	St.	Rep.	Format	Comments
E988	Yes	COMPANY IDENTIFICATION <i>airlineIdentification</i>	M	1		Details on the airline.
3036	Yes	Party name <i>airlineDesignator</i>	M	1	an2..3	Airline Designator. IATA 2-3 letter code. If more than 3 letters are used then it is assumed that the full company name is being specified.
3036	Yes	Party name	N/A	1	an..35	Additional employers: first is cockpit crew employer, second is cabin crew employer
3036	Yes	Party name	N/A	1	an..35	Additional employers: first is cockpit crew employer, second is cabin crew employer
E989	Yes	PRODUCT IDENTIFICATION DETAILS	N/A	9		
7135	Yes	Product identification	M		an..35	
7037	Yes	Characteristic identification	N/A		an..17	
7139	Yes	Product identification characteristic	C		an..3	
7009	Yes	Item Description Identification	N/A		an..7	

3.66. TRF SS 01.2.4 (NGINV) - TRAFFIC RESTRICTION INFORMATION

Function To provide information relating to traffic restrictions.
Status **Promoted**

Tag	Prom.	Name	St.	Rep.	Format	Comments
E007	Yes	TRAFFIC RESTRICTION INFO <i>trafficRestrictionDetails</i>	C	9		Traffic restriction information
8015	Yes	Traffic restriction, coded <i>trafficRestrictionCode</i>	C	1	an..3	See SSIM appendix G for code set
8017	Yes	Traffic restriction type, coded <i>trafficRestrictionDomain</i>	C	1	n1	Traffic restriction domain of application (passenger, cargo, mail) <i>Codesets list : 8017*1</i>
8035	Yes	Traffic restriction qualifier, coded <i>trafficRestrictionPoint</i>	C	1	n1	Traffic restriction application point (board/off point) <i>Codesets list : 8035*1</i>
4440	Yes	Free Text <i>trafficRestrictionText</i>	C	1	an..70	Free Text

3.67. TXF 1A 11.1.29 (NGINV) - Free Text information

Function Used to convey the free text and associated language, encoding.
Justification It is including the data element to convey the language, the source and the encoding information.
Status **Promoted**

Tag	Prom.	Name	St.	Rep.	Format	Comments
A040	Yes	Free text information <i>messageQualifier</i>	M	1		Free text qualification.
4451	Yes	Text subject qualifier <i>textQualifier</i>	M	1	an..3	Indicates whether the free text is coded or not coded. <i>Codesets list : 4451*1</i>
9980	Yes	Information type <i>messageType</i>	C	1	an..4	Coded text or specifies type of information. <i>Codesets list : 9980*1</i>
4405	Yes	Status, coded	N/A	1	an..3	
9906	Yes	Company identification	N/A	1	an..35	
3453	Yes	Language, coded <i>language</i>	C	1	an..3	ISO code for language of free text. <i>Codesets list : 3453*2</i>
9890	Yes	Source, coded <i>source</i>	M	1	an..3	Application source of this message. Default value is INV. <i>Codesets list : 9890*1</i>
0133	Yes	Encoding <i>encoding</i>	M	1	an..3	<i>Codesets list : 0133*1</i>
101C	Yes	Long Free Text <i>messageText</i>	M	99	an..70	Free text message.

4. Codesets lists

- 0133*1

7

Encoding

UTF-8
- 1012*1

NSI
RED
WL
STA
WLC
GR
NPR

SubclassDate Flags, coded

None Seat Index Indicator
accept Redemption Bookings
allow Waitlist
accept Staff Bookings
allow Waitlist Clearance
accept Group Bookings
not Protected Flag
- 1022*1

L0
LC
LA
LN
LL
L1
LR
L3
L2
L5
L4
L7
L6
L9
L8

AVS Status, coded

Class with an availability of 0
No space available, Waitlist closed
Class open for sale
Flight cancelled
No space available, Waitlist only
Class with an availability of 1
Space in this class must be requested
Class with an availability of 3
Class with an availability of 2
Class with an availability of 5
Class with an availability of 4
Class with an availability of 7
Class with an availability of 6
Class with an availability of 9
Class with an availability of 8
- 102Z*2

AVS Status, coded

LN	Flight cancelled
LR	Space in this class must be requested
LC	No space available, Waitlist closed
LL	No space available, Waitlist only
L9	Class with an availability of 9
LA	Class open for sale
L7	Class with an availability of 7
L8	Class with an availability of 8
L5	Class with an availability of 5
L6	Class with an availability of 6
L3	Class with an availability of 3
L4	Class with an availability of 4
L1	Class with an availability of 1
L2	Class with an availability of 2
L0	Class with an availability of 0
103Z*1	Nest Type, coded
A	Stand-alone Class
P	Primary Nest
H	Hybrid Nest
S	Secondary Nest
104Z*1	Profile Type, coded
GO	Global Overbooking profile
OP	Open Cancellation profile
OV	Override Cancellation profile
AH	Ad-Hoc Cancellation profile
107Z*1	FlightDate Control Type, coded
R	Revenue Controlled
C	Class Controlled
109Z*1	CrossCabinControls, coded
MOV	Moveable Curtain
DGR	Protect for Downgrades flag
CCA	ConfigurationChange allowed
OTH	Other
UGR	Protect for Excess Upgrades flag
NXC	No CrossCabin
NCC	No ConfigurationChange allowed
1131*1	Code list qualifier
WEC	Warning code
INF	Information code
EC	Error Codes
1153*1	Reference qualifier
LID	Lock Id for the flight
ELC	Emergency Lock Id for the flight
121Z*1	Flight characteristic, coded
DOM	Domestic
HID	Hidden
GRD	Ground Handling
PSD	Pseudo
INT	International
1229*1	Action request / notification, coded
1	Yes
0	No
1229*2	Action request / notification, coded
1	Yes
0	No
1229*3	Action request / notification, coded
1	Yes
0	No
1229*4	Action request / notification, coded
1	Yes
0	No
1229*5	Action request / notification, coded
2	Report
1245*1	Status indicator, coded
SO	Flight cancelled
BRB	Both inventory and seat rebuild
1245*2	Status indicator, coded
SL	Flight boarding
INA	Link broken between NGI and DCS
PNL	Passenger Name List Recieved
ACT	Flight active in DCS
FD	Flight departed
1245*3	Status indicator, coded
FF	Frequent Flyer Rule applied
OR	Pending Recommendations Indicator
1245*4	Status indicator, coded
ACT	Flight active in DCS
CBS	Codeshare Blockspace
MAN	Use Manual Status
CFF	Codeshare Free-Flow
CLS	Close indicator
CCF	Codeshare Capped Free-Flow
1245*5	Status indicator, coded
PHF	Protected Name Handling Flag
RHF	Release Handling Flag
1245*6	Status indicator, coded
ACT	Flight active in DCS
FIW	Flight Inhibit Waitlist
DCS	Flight sent to DCS
NRM	New RMS Flag
INA	Link broken between NGI and DCS
VMS	AutoVMS
1245*7	Status indicator, coded
GBL	Grab Lock
2005*1	Date/Time/Period qualifer

707	By arrival time
708	By departure time
2005*2	Date/Time/Period qualifier
707	By arrival time
708	By departure time
2005*3	Date/Time/Period qualifier
ZT	GMT time
3036*1	Party name
ZZZ	User defined
3207*1	Country, coded
001	unable ref to 3207 96.1 IA
3225*1	Place/location identification
ZZZ	ZZZ (used to designate all cities)
3225*2	Place/location identification
ZZZ	ZZZ (used to designate all cities)
3225*3	Place/location identification
ARNK	ARNK (for RTG use only)
ZZZ	ZZZ (used to designate all cities)
3453*1	Language, coded
ZZZ	Other
3453*2	Language, coded
EN	English
4451*1	Text subject qualifier
1	Coded free text
5025*1	Monetary amount type qualifier
FLD	FlightDate Segment Yield
SDR	Segment Yield (Segment Date Range)
GBL	Global Yield
545Z*1	Codeshare Type
FF	Free Flow
CF	Capped Free Flow
BS	Blockspace
6345*1	Currency, coded
USD	US Dollar
EUR	Euro
ZZZ	Mutually defined
777	Neutral Unit of Construction
6345*2	Currency, coded
777	Neutral Unit of Construction
6353*1	Number of units qualifier
SDI	Accepted Staff Standby Downgrade Into
VOL	Volunteers for Offload passengers
SDO	Accepted Staff Standby Downgrade Out Of
SUO	Accepted Staff Standby Upgrade Out Of
UGO	Upgrades out of
UGI	Upgrades into
OFF	Offloaded Passengers
SNB	Staff standby passengers Left at gate
SBO	Staff standby passengers Boarded
SUI	Accepted Staff Standby Upgrade Into
NOS	No-show passengers
NOR	No-rec
CNB	Commercial Standby passengers Left at gate
DGO	Downgrades out of
DGI	Downgrades into
DNB	Denied Boarding passengers
GBO	Group passengers Boarded
GOS	Go-show passengers
GNS	Group No-shows
BOA	Board passengers
CBO	Commercial Standby passengers Boarded
6353*2	Number of units qualifier
BLK	Blockspace Counter
BKG	Booking counter
6353*3	Number of units qualifier
ALO	Number of allotted seats
SLD	Number of sold seats in the allotment
6353*4	Number of units qualifier
MEL	Maximum at Equipment Level
6353*5	Number of units qualifier
BLB	Booking Lower Boundary
MLC	Maximum at legcabin level
COF	Cabin Overbooking Factor
BUB	Booking Upper Boundary
6353*6	Number of units qualifier
CSY	Accepted Stand-by
DAJ	DCS Adjustments
6353*7	Number of units qualifier
SLT	Subclass Limit Threshold
SLP	Subclass Limit Percentage
6353*8	Number of units qualifier
PGF	Prognosis Factor
DBD	Days before departure
CLF	Current Load Factor
EFC	Effective Capacity
HRD	High Revenue Demand Value
GLF	Group Load Factor
6353*9	Number of units qualifier
UGO	Upgrades out of
VOL	Volunteers for Offload passengers
CLF	Current Load Factor
CNB	Commercial Standby passengers Left at gate

DBD	Days Before Departure
DNB	Denied Boarding passengers
EFC	Effective Capacity
DGI	Downgrades into
DGO	Downgrades out of
GLF	Group Load Factor
GBO	Group passengers Boarded
HRD	High Revenue Demand Value
GOS	Go-show passengers
GNS	Group No-shows
NOR	No-rec
NOS	No-show passengers
OFF	Offloaded Passengers
PGF	Prognosis Factor
SBO	Staff standby passengers Boarded
SDI	Accepted Staff Standby Downgrade Into
SNB	Staff standby passengers Left at gate
SDO	Accepted Staff Standby Downgrade Out Of
SUO	Accepted Staff Standby Upgrade Out Of
SUI	Accepted Staff Standby Upgrade Into
UGI	Upgrades into
CBO	Commercial Standby passengers Boarded
BOA	Board passengers
6353*10	Number of units qualifier
MWL	Maximum Waitlist Thershold
IWL	Inhibit Waitlist
NEG	Total number of Nego Bookings
MWP	Maximum Waitlist Percentage
ETB	Expected To Board
IWC	Inhibited Waitlist Clearance
GAS	Assigned Names in Groups
GBC	Group Booking Cancellations Counter
BCA	Booking Cancellations Counter
AU	Authorization level
TOB	Optimise Total Overbooking Percentage
TKP	Ticketed Passengers
OWN	Own availability
NSL	For Airlines using Nested Segement Limits (only available in BIF)
PRO	Netted Protection
SLP	Subclass Limit Percentage
SLS	Segment Limit Stand-alone
SLC	Segment Limit Connecting
SLM	Segment limit
SLT	Subclass Limit Threshold
SLV	Segment Limit Value
7037*1	Characteristic identification
O	Operational Capacity
S	Saleable Capacity
A	Leg Cabin AU
E	Effective Capacity
7037*2	Characteristic identification
Z	Other
7037*3	Characteristic identification
Z	Other
7077*1	Item description type, coded
SIT	Seat Service Request
SSR	Special Service Request
7081*1	Item characteristic, coded
FD	FLIX-Disruption
FX	FLIX-FX
LX	FLIX-LX
7800*1	Equipment code
ZZZ	User defined
8017*1	Traffic restriction type, coded
3	Traffic restriction applicable to cargo only
2	Traffic restriction applicable to cargo/mail only
1	Traffic restriction applicable to passengers only
4	Traffic restriction applicable to mail only
8035*1	Traffic restriction qualifier, coded
1	Traffic restriction code qualifier at board point
2	Traffic restriction code qualifier at off point
8051*1	Transport stage qualifier
D	Marketing partner information
O	Operating partner information
8051*2	Transport stage qualifier
D	Duplicate flight number
O	Operational flight number
8260*1	Equipment identification number
ZZZ	Other
8335*1	Movement type, coded
1	Yes
0	No
8335*2	Movement type, coded
WX	Weather
ZZZ	Mutually agreed
7US	US - Within US
7WH	WH - Within Western Hemisphere (TC1)
7TB	TB - Trans border
7TS	TS - Between Eastern Hemisphere (TC2) and Eastern Hemisphere (TC3) via Siberia
7SA	SA - South America - So. East Asia direct or via Central Africa, southern Africa, Indian Ocean Islands
7SP	SP - Between Central & So. America and So. West Pacific (Australia/New Zealand/selected Pacific Is.) via South Pole
7AP	AP - Between Eastern Hemisphere (TC2) and Eastern Hemisphere (TC3) via Atlantic and Pacific
7AT	AT - Between Eastern Hemisphere (TC2 & 3) and Western Hemisphere (TC1) via Atlantic
7CA	CA - Domestic Canada
7CT	CT - Circle trip, origin and destination the same, may be within the same area or between areas, not applicable via Atlantic and Pacific
7EH	EH - Within Eastern Hemisphere (TC2 & 3), except for PO and TS
7FE	FE - Between Russia Federation (west of Urals), Ukraine and TC3 direct (not via Siberia)
7PA	PA - Between Eastern Hemisphere (TC2 & 3) and Western Hemisphere (TC1) via Pacific
7PE	PE - Africa - TC1 via TC3
7PN	PN - South America - S. W. Pacific via N. American and/or Pacific
7PO	PO - Between Eastern Hemisphere (TC2) and Eastern Hemisphere (TC3) via Polar

7RW RW - Round the world, origin and destination the same, via Atlantic and Pacific

9015*1 Status type, coded
OP Open segments
NO No action to be taken
NN Sell
LL Sell wait-list
LK Commit sell
KL Confirming from wait list
KK Confirming
KG Confirming group
PG Waitlist for group
PE Commit wait-list
OX Segment to cancel
XX Cancel confirmed
SS Segments confirmed this session
SG Sell group
TL Waitlisted, advise passenger of new scheduled times or details
TK Holds confirmed, advise passenger of new scheduled times or details
RG Request group
PL Passively waitlisted segments
SA Sell stand-by
XL Cancel wait-list
UX Cancel rejected due to marriage connection
UC Unable to accept request, waitlist or sale
TN Pending confirmation, advise passenger of new scheduled times or details
US Marketing codeshare failed, override AVS status
UN Unable, flight does not operate or special service not provided
AH Already Hold
FB Force booking
FF Frequent flyer
FG Forced group
FR Force request
FS Force sale
HK Segment confirmed in a previous session
HL Waitlisted segments
HN Segments pending confirmation
PK Passively confirmed segments
HX Cancelled
GI Sell group for party of 9 or less
GW Group wait list for party of 9 or less

9015*2 Status type, coded

9321*1 Application error, coded
425 Invalid Date
727 Internal Error
6732 Invalid Airline Code
13300 Unknown Airline
13105 Flight Rebuild In Progress Locked
13112 Flight Date Not Found
13353 You Are Not Authorized To Perform This Action

950K*1 Attribute type identification, coded
R Moveable curtain
V Standard
E Euroconcept

950K*2 Attribute type identification, coded
DDC Discontinue date for connecting segments
GRO Group Only
EDC Effective date for connecting segments
NCO Nego Only
SLC Segment Limits: Apply for Connecting Segment
SLS Segment Limits: Apply for Standalone Segment

950K*3 Attribute type identification, coded
SLC Segment Limits : Apply for Connecting Segment
SLS Segment Limits : Apply for Standalone Segment

9813*1 Confirmation indicator
Y Yes
N No

9865*1 Seat occupation
Z Seat blocked for other reasons
A Allotment
S Seat protected for code sharing
P Protected seat

9890*1 Source, coded
INV Inventory

9906*1 Company identification
7HH Industry Hotel Chains
7CC Industry Car Rental Companies

9906*2 Company identification
7YY Industry fares for all carriers

9972*1 Originator type code
W Wholesaler (Tour operator)
V Vendor (car, hotel, airline, travel supplier, etc.)
X Bogus subscribers, used for testing
P Pending IATA Agents
N Non IATA Agents
T Travel Agent
S Self service machine
E Electronic selling system (e.g. Minitel, Compuserve)
D Direct consumer
I Internal CRS locations (sales, development, etc.)
G General Sales Agent
A Airline
C Consolidator
B Business (Corporate) account

9980*1 Information type
ZZZ Mutually defined

5. Examples
