

# git - What and Why

- A "Source Control Management" system
  - or "Version Control" system (VCS)
- Tracks files and changes to files over time
- Replaces "MyDOC-V2-DRAFT-FINAL-FINAL.TXT"
- `git` is most common VCS
  - All employers/teams will use version control
- This course uses `git` like a job would

# **What is version control, really?**

It's like an "Undo" between versions of a file

- Except you declare the different "save points"
- And it handles changes from OTHER people too

# Terminology

You will need to understand certain words and labels

- These will come up again and again
- Programming is abstraction and communication
  - Names and labels are a REALLY big deal
  - Precision of language is vital

# A repository (repo)

## repo/repository

- A collection of files and folders in version control
- **monorepo** - multiple distinct projects in one repo
- Our repo is a bit unusual since it isn't just a software project, but also notes and lessons

# Commit

As a noun ("a **commit**", "this **commit**")

- A collection of changes
- Often changes to multiple files
- New files, Modified files, Deleted files

As a verb ("**commit** your changes")

- Telling the repo to save a collection of changes
- Creates ability to come back to this set of changes
- A **commit** can be exchanged with other repos

# Branch

A **branch** is a named collection of **commits**

- When you **switch branches**
  - Change the "current" files and folders
  - Files/folders might vanish/appear!
  - File changes might appear/go away!
  - The changes are in/not in the branch!
- **Branches are not folders**
  - Course often has similar names
  - Branches and folders are completely distinct

# Clone

As a verb ("clone that repo")

- To make a copy of a repo
- Creates a new, separate repo
- New repo has all the same files
- New repo has the history of the commits
- Cloned repos can exchange changes

As a noun ("A clone of that repo")

- A repo that was copied from another repo

# Github

**github** is a website that hosts repos

- Github.com has competitors (gitlab.com, etc)
  - Github is most popular, but is not unique
- Often acts as a common **centralized** repo
  - Allows many devs to coordinate
  - **git** isn't required to be centralized
    - But employers/teams often do



# Github Flow

`git` is a tool for software development

- Can be used many ways
  - Often contradictory options
- **Github flow** is *one* way of using it
  - A very common way, but not the only way
- Course and presentation assume the Github flow

# Running at the Command Line

- We will run **command line** commands
- Many students are unfamiliar
- Graphical tools exist
  - But most docs are for Command Line
    - Not just for `git`
  - Important to know how to use
    - And understand

# Being "in" a folder/directory

- **folder** is UI term
- **directory** is command line term
- Same thing either way
- Locates the operation in the file system
- **EACH terminal shell** is "in" a folder/directory
  - This is a CRITICAL concept
  - Course is difficult until you understand this
- This is the **current path** or **current directory**

# Current Directory Example

- Each Operating System is different
  - Each also has multiple Terminal Programs
  - And/Or multiple shell options
  - Basic concepts are the same
    - Syntax is different

# The Prompt

Your Shell may tell you what directory you are "in"

- Mac defaults to NOT giving the full route 🤨
- You can change this
  - google "show path in prompt"
- `pwd` or `cwd` should give the full current path

**Always know what directory you are "in"**

- Commands will behave differently!

# Navigating Directories: Basics

- `ls` will list files/directories in current path
  - `dir` in Windows (unless using gitbash)
- `cd SOMENAME` moves into the directory SOMENAME
  - (`cd` means `change directory`)
  - `/` shows a chain of directories
  - `.` means the current directory
  - `..` means the **parent** directory ("up a level")
  - `cd ..` goes up one level

See `readings/the-command-line` in your repo for more

# First Steps - Our Class repo

When you follow link, you will get a repo on Github


- \$SENPAI\_GITHUB\_LINK
- Should only do once
  - Afterwards, go to <https://github.com/>
  - Find your repo there

Next we will **clone** the repo to your computer

- You must have installed `git` on your computer
- <https://github.com/git-guides/install-git>
- Next step **assumes you have installed git**

# Finding the Repo URL to Clone it

Find this:

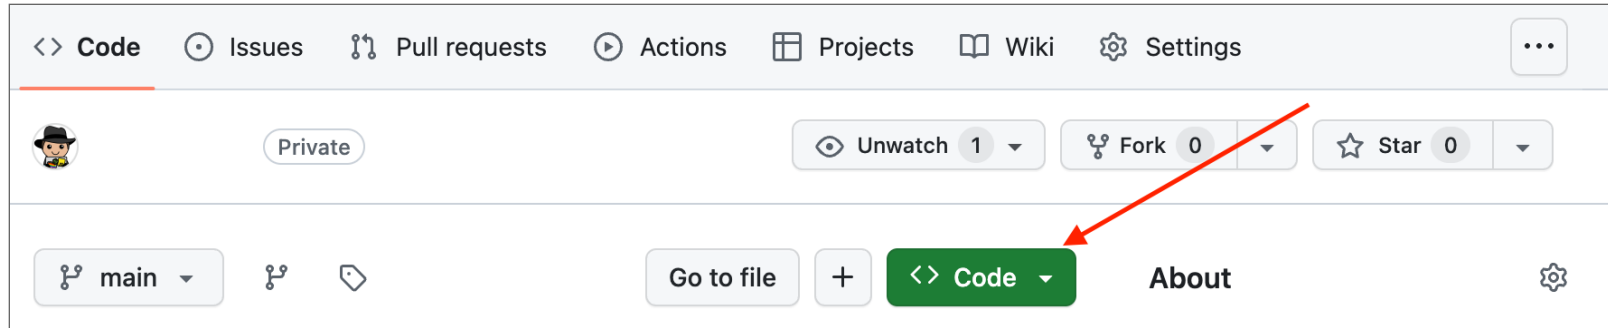



**Copy the Repo URL**

Go to file

+

<> Code ▾

Local

Codespaces

 Clone 

HTTPS

SSH

GitHub CLI

`https://github.com/XXXXXXXXXXXX.git`



Use Git or checkout with SVN using the web URL.

 Open with GitHub Desktop

 Download ZIP



# Clone at the command line

- Run this command
  - **in the folder that will hold your repo folder**
  - Ex: `/Users/GoodStudent/courses/`
- `git clone PASTE_REPO_URL_HERE`
  - Do NOT type "PASTE\_REPO\_URL\_HERE" 💡
- This creates a new folder
  - "in" the folder you ran command in
  - New folder is named for your repo

# You have a copy of the repo on your computer

- Your **local** copy of the repo
  - Github is a **remote** copy of the repo
  - Instructor will also have a **remote** copy
- You have all the folders and files from the repo
  - The **main branch**

# Command: `git status`

- run `git status` in the repo directory
- See where it tells you **current branch**
  - Ex: `On branch main`
  - VERY IMPORTANT to know!
  - Everything harder when in the wrong branch

# Command: `git checkout -b NEWBRANCH`

- Run: `git checkout -b testing`
- Run: `git status`

Two things happened

- Created a **new branch**
  - Based on the branch we were in (**main**)
- We switched into the new branch (**testing**)
  - `On branch testing` (No longer `main`)

We "**passed**" the new branch name (**testing**) to the command

# Branch names

- The name of a branch is "just" a name
  - No magical properties
  - `main` a common name
    - In past: `master`, may still see occasionally
- **Names are IMPORTANT**
  - **Programming is Communication**
  - You AND team need to understand, remember, and use
- But Name doesn't have any "magic"
- "`testing`" here is a name chosen for meaning
  - But not any special behavior



# What does the testing branch give us?

- Nothing is different yet
- **testing** branch contents same as the **main** branch it was created from
  - For now
- A **branch** tracks **commits**
  - **commits** are collections of changes
  - Changed from some **base** branch

Let's make a change in **testing**

# Making a change in testing branch

- Create a file named `changed-file.txt`
  - Use whatever editor you want
  - **Make sure the file exists IN repo folder!**
  - Contents: "Hello World"
- Run `git status`
  - On branch **testing** (not `main`)
  - `changed-file.txt` listed as **Untracked file**

# What is an Untracked File?

- Means the file isn't (yet) tracked by git!
  - Won't be saved or tracked
- We want to track this file
- But first lets see the impacts

# Command: `git checkout SOMEBRANCH`

- Run: `git checkout main`
- Run: `git status`
  - Now on branch `main` (not `testing`)
  - `changed-file.txt` still listed
    - Untracked files not part of a branch

`git checkout SOMEBRANCH` ( no `-b` )

- **switches** to an *existing* branch
- Does NOT create a new branch (that requires `-b`)

# Switch back to branch "testing"

- Run: `git checkout testing`
- Run: `git status`

Now on branch `testing`

If we were on `main` the commands we are about to run would be done on `main`

We never want to make random changes to `main`

- `main` is for our team to share
- Should always be a working, approved version

# Command: `git add SOMEFILE`

- Run: `git add changed-file.txt`
- Tip: Tab key can usually autocomplete filenames
  - Ex: `git add ch` then hit Tab to autocomplete
  - Programmers are Lazy, it's a Virtue for us
- Run: `git status`
  - On branch `testing`

`changed-file.txt` listed as "Changes to be committed"

- We call this **staged**
  - Not yet **committed**

# Command: `git commit -m "SUMMARY"`

Run: `git commit -m "Testing Git"` Run: `git status`

- On branch `testing`
- "nothing to commit, working tree clean"

# Command: `git log`

- Run: `git log`

Lots of info!

- But you can see your "Testing Git" at the top
- Every commit is listed
  - Over time, log gets long!



# Commit Messages

- You ran `git commit`
  - Passed a **commit message** (using `-m`)
- A **commit message** is a summary of the changes
  - Should be brief
  - Must be *helpful*
    - Actually describe *purpose* of changes
- Team will use commit messages to understand
- See real-world commit messages:
  - <https://github.com/facebook/react/commits/main/>

# I'm serious

Programming is largely about communication

- About organizing large, complex code collections

Your workplace WILL expect **quality commit messages**

- Important/Helpful to practice now
- Messages DON'T have to be INTERESTING
- Messages DO have to describe purpose

# Change is only in branch testing

- Run: `git status`
  - See: On branch `testing`
- Run: `ls` (or `dir` on some Windows)
  - See: `changed-file.txt`
- Run: `git checkout main`
- Run: `git status`
  - See: On branch `main`
- Run: `ls` (or `dir` on some Windows)
  - See: **No** `changed-file.txt`!

# Where did our file go?

We created `changed-file.txt`, where is it?

- It was there until we switched branches!
- Run: `git checkout testing`
- Run: `ls` (or `dir` on some Windows)
  - See: `changed-file.txt`

When you make, add, and commit changes to a branch

- Changes are only to THAT branch

# Notice: Branches are NOT directories

- Course Repo has directories (folders)
- Assignments will tell you to create specific branch names
  - These are often similar to directory names
  - But **branches are NOT directories!**
    - Common misunderstanding

"Switch to SOMEBRANCH"/"Checkout SOMEBRANCH"

vs

"Go into SOMEFOLDER"/"Are you in SOMEFOLDER"?

# How do we update main branch?

If we never make changes in our `main` branch

- `main` is supposed to be a shared, approved branch
- How do we get updates into `main`?

This is a process!

- Multiple approaches exist
- Course emulates most common model
- Most employers will do it this way

# Step 1: Feature Branches

All changes should be made in a branch

- A branch *specific* to that particular set of changes
- A **feature branch**

All of our assignments are **each in different branches**

- Will follow process to merge into `main`
- Same process as most workplaces
- You must manage repo over time
- This requires EFFORT (for you AND me)
  - But important skills for webdev

# Assignments as Feature Branches

This course has one repo/student

- Each Assignment is a feature branch

Most other courses will NOT do this

- It's a big pain to keep everyone in sync
- Instead they may have a repo for each assignment
  - If using `git` at all
- Those courses aren't about teaching `git`
  - Neither is this one
  - So this is all you get (all you `git` 🤪)



# Creating your Feature Branch

- A branch is **based** on another branch
  - Collects changes from that **base** branch
  - Changes since that "point in time"
- Often want those changes to be based off of `main`
  - Specifically, the latest version of `main`
  - Most up to date shared, approved version
  - For this course, not "Often". **Always**

# Basing Feature Branch off of main

The easiest way to keep things straight

- Change to `main`
- **Pull** any approved, merged updates from Github
  - More on this soon
- Create your feature branch
  - **Must be in `main` branch first!**
  - `git checkout -b NEWBRANCH`
- **Always be in branch before adding/committing**

# Adding/Committing Files

- `git` works like a powerful "Undo" system!
  - Lets you revert/see any previous **commit**
  - But that's only helpful IF you committed!
- When do you commit?
  - An advanced programming skill
  - This course doesn't care
    - Can commit just once when done
    - Can commit many times as you code
  - BUT:
    - Each commit message must be **quality**

# What about advice/best practice?

Best Advice:

- Commit when you have completed USEFUL work
- Generally code should RUN
  - Not necessarily complete
  - But it runs/renders
- If you can't make a good commit message
  - If changes don't complete a purpose
  - Bad time to commit

More info: **<https://jasonmccreary.me/articles/when-to-make-git-commit/>**

# Adding files to commit

- You can add files one-by-one
  - `git add filename`
- You can also add many files at once
  - `git commit *.html`
  - `git commit SOMEFOLDER`
    - adds all changed files in SOMEFOLDER
  - `git commit .`
    - adds all changes in current directory

# Adding many files

- use `git status` to verify files BEFORE commit

Seriously - Check **before** you accidentally commit hundreds/thousands of generated files

- It happens every semester
- It happens on the job
- Much easier to fix before commit
- If you fix before commit, coworkers never know

# Oh no! I added files I don't want!

Not a problem! `git status` says what to do:

- `git restore --staged FILENAME`
- `git restore --staged SOMEFOLDER`

Verify things fixed using `git status`

- Always confirm current branch!
- All needed files added!
- No unwanted files added!

Other issues, see [\*\*https://ohshitgit.com/\*\*](https://ohshitgit.com/)

# **Cleaning your commit history**

Some programmers have Thoughts and Feelings

- Including some Employers (ex: Amazon)
- They feel you should clean up your commits
- Your collection of commits
  - May not be what you want in the shared repo
- Others...simply don't share these concerns

Either way, that's a more advanced concept

- Way outside the scope of this course



# Ending Step 1: Ready to Push

Once you have:

- All changes made and working
- Files **added** to feature branch
  - Based off of `main` branch
- Changes **committed** to feature branch
  - Using **quality commit message**

We are ready to **push the feature branch**

- And **create a pull request** (PR)

# Side Note: Ignoring certain files

Often some files and directories we NEVER WANT

- Files created by our OS
  - `.DS_Store`
- Temporary Files
  - `*.tmp`
- Config files for personal editor
  - `.idea`
  - `.vscode`
- Files specific to installations
  - `node_modules/`

# **.gitignore file lists patterns to ignore**

`git` automatically "ignores" files based on `.gitignore`

- File impacts directory containing that `.gitignore`
  - And any directories "inside" that directory
    - "subdirectories"/"subfolders"
- Repo might contain many `.gitignore` files
  - Each affecting different subdirectory "trees"
- `.gitignore` file itself just a file tracked by git
  - Like any other file
  - Edit, add, commit it

# **.gitignore File Content**

- Each line is a "pattern" or a comment
  - Text to match file/directory names against
  - May include wildcard characters
- Read more: **<https://git-scm.com/docs/gitignore>**

Example contents:

```
# sample minimal .gitignore file
node_modules/
.DS_Store
```

## Step 2: Pushing Feature Branch

You **push** a branch from **local repo** to a **remote repo**

- We want to push to Github's remote repo
- For us, this remote repo is called **origin**
  - Because this repo was cloned from it
- `git push FEATUREBRANCH REMOTENAME`
  - Ex: `git push testing origin`

# Results of Pushing to Github

You should see some text that looks like:

```
remote: Resolving deltas: 100% (1/1), completed with 1 local object.  
remote:  
remote: Create a pull request for 'testing' on GitHub by visiting:  
remote:      https://github.com/SOME_ORG/YOUR_REPO/pull/new/testing
```

- This is what you want to see
- You will want to follow that link!

# Where we are so far

- You finished your work in a **feature branch**
  - on you **local repo**
- You **pushed** your **feature branch** to a **remote repo**
- Now Github has `main` AND `testing` branches
- Want to **merge** the changes in `testing` into `main`
- Before we do so, we want want **approval** to do so
  - A "**code review**"
  - Most employers will have this
  - EVERYONE has their changes reviewed

# We will create a "Pull Request" (PR)

- A **pull request** to **merge** a branch into another
  - Often merged to `main`
  - But could be `next-release`
  - Or a specific version
  - Varies by workplace
- This course: Always PR to merge to `main`
- Follow that link from when we pushed
  - Or go to Github on web
  - Will have a "Compare & pull request" button



# Before Creating the PR

- This web screen offers to create PR
  - We will, but FIRST....
- Review the changes (scroll down)
  - Any unexpected files?
  - Do changes look to be correct?
- Last chance to see issues before coworkers see!
- "Title" of PR autofilled by commit message
- Add "Reviewers"
  - Not "Assignees"
- "Unable to merge" because approval required
  - Expected, not a problem

# Create the Pull Request (PR)

- Not a "Draft", Create the actual PR
- Reviewers will be informed
  - They will need to Approve
  - They may comment
  - They may request changes before Approving
- For this course: Evaluating work quality
- For a job:
  - Less: "Will this work?"
  - More: "Do we want to maintain this?"

# Now you wait

Once the PR is in, there's nothing further you can do

You CAN work on other things

- Remember to switch away from feature branch!
- I recommend changing to `main` immediately
  - Even if you're not (yet) working on anything
- Can work on and switch between many branches
  - Be sure to add/commit to correct branch!

# Making Changes!

- Maybe reviewer requested changes
- Maybe you noticed something wrong

Update your local feature branch

- Same branch, not a new one!
- Add/commit changes
  - w/Good commit messages!
- Push the update branch to `origin` (Github)

# **PR will automatically reflect changes!**

- Because PR was to merge BRANCH
  - Not specific commits
- No need to Close PR and create a new one

# Approval! Now What?

Approval doesn't change any code

- Doesn't change repo
- Just ALLOWS a "**merge**"
- For Course: TA or myself will merge on approval
- For Job: YOU will have to merge
  - Go to Pull Request in Github and hit "Merge"

# The PR Merge Race

- Merging a PR can be a race
- Other people are merging too
  - They may have incompatible changes
    - Even if it requires only a small tweak
  - First merge wins
    - Others will need to update before merge
    - Which means a second race to merge
- No race if all changes are compatible
- No merge races for this course
  - But does happen on the job

# After the merge

- The merge updated `main` on Github
- Does not magically update your **local repo**
- You need to grab the latest `main`
- Run: `git pull origin main`
  - "pull any changes from origin `main` branch"
  - **Be sure to be in `main` branch**
  - Otherwise changes come to current branch!
    - Can be very confusing



# Understand the flow

- You have a `main` branch
  - A shared, approved version of the code
- You create a feature branch
  - Based on the current `main` branch
- You make changes in feature branch
  - Rest of team not impacted by your changes
  - They are relying on `main`
- You create a PR to merge your changes to `main`
  - Teammates review and approve
- You update `main` to include approved changes

# Why such a complicated process?

- Can revert to any previous approved version
- Can track changes over time from many people
- `main` only includes reviewed/approved changes
- Can work on many features in parallel
- Can share batches of incomplete features
  - Can push and pull from other branches
  - Approval needed only to alter `main` branch
    - Or whatever branch(es) your team uses

# Why such a complicated process for this course?

- Because you will need it on the job!
  - Not a lot of places to get this experience
- Not just web development
  - Almost all programming fields
  - Often including adjacent disciplines
    - Documentation
    - Design
    - Project Management

# Tips for Using Git

- Use tutorial links in `readings/`
- Make heavy use of `git status`
  - **Be sure which branch you are in!**
- Read error messages!
  - **If you get an error, STOP**
  - Do not just continue through more steps
  - Often end up changing wrong branch
- **Practice quality commit messages**
- Confirm PR contents before Creating Pull Request

# More Git Tips

- `git` \_\_IS\_\_ confusing
  - But better to work to understand it now
  - Otherwise you will struggle on the job
  - Is complex though: Don't let it depress you
- `git` is harder if you try to skip it
  - Hard to passively learn a little at a time
  - Like CSS and Regular Expressions

# Command line pays off

There are valuable GUI tools for working with `git`

- Including integration with most code editors

But for many commands, command line is best

- Most documentation will show command line
- Other web tools also expect command line