

Akademija tehničko-umetničkih strukovnih Studija  
Odsek Visoka ICT škola

# IIMBER

<http://imber.freecluster.eu>

# Sadržaj

Uvod .....	5
Korišćene tehnologije .....	5
Okruženja .....	5
Opis funkcionalnosti .....	5
Sign in – Sign up – Contact .....	5
Danimački meni .....	5
Footer .....	5
Home – Newsfeed .....	6
Messages .....	6
Profiles .....	6
Account settings .....	6
View Profile .....	6
Admin Panel .....	6
Organizacija .....	8
Organizaciona šema .....	8
Organizaciona šema baze .....	9
Mapa sajta .....	10
Opis i slike stranica .....	11
Welcome, Sign in – sign up – contact .....	11
Home .....	12
Messages .....	14
Profiles .....	14
Profile .....	16
Account Settings .....	17
Autor .....	18
Account Control .....	18
Role edit .....	19
Nav link edit .....	19
Logs .....	20
Struktura projekta .....	21
Kodovi .....	24
PHP .....	24
Routes/web.php .....	24

Controllers .....	26
BaseController .....	26
Post Controller .....	26
ProfilesController .....	29
MessagesController .....	32
SettingsController .....	34
AuthController .....	35
AjaxController .....	37
AdminController .....	38
AboutController .....	41
Middleware .....	41
AdminMiddleware .....	41
SignedInMiddleware .....	42
SignedOutMiddleware .....	42
Requests.....	43
ChangePasswordRequest .....	43
CreateProfileRequest.....	44
PostCreateRequest.....	44
Kernel.php .....	45
Mail .....	47
ContactAdministrator .....	47
Models .....	48
AdminModel.....	48
AuthModel.....	50
MenuModel .....	51
MessageModel .....	51
PostModel.....	52
ProfilesModel .....	54
Blade fajlovi .....	58
Admin-layout.....	58
Layout.....	58
Common/head .....	59
Common/header .....	60
Common/scritps.....	61
Common/signup.....	61

Client/about.....	62
Client/account-settings.....	63
Client/error .....	65
Client/footer .....	65
Client/messages .....	65
Client/news-feed .....	67
Client/profile .....	68
Client/profiles .....	69
Client/partials/account-settings/ .....	70
Client/partials/newsfeed-partials .....	74
Client/profile-partials .....	76
Client/profiles-partials.....	80
Client/sign-partials .....	82
Client/chat.....	84
Client/chatbox .....	86
Client/post.....	87
Admin/admin.....	89
Admin/footer .....	103
Admin/head.....	103
Admin/nav.....	104
Admin/nav-bar .....	105
Admin/scripts .....	106
Admin/partials .....	106
JavaScript .....	114
Ajax.....	114
Main.....	121

# Uvod

## Korišćene tehnologije

- HTML
- CSS
- JS
- BOOTSTRAP
- LARAVEL
- PHP

## Okruženja

Za izadu sajta korišten je PhpStorm.

## Opis funkcionalnosti

Sajt predstavlja mini društvenu mrežu, na kojoj korisnici mogu objavljivati sadržaj, komentarisati, lajkovati, pratiti druge korisnike i dopisivati se sa drugim korisnicima ali samo ako postoji uzajamno praćenje. Korisnici takođe mogu ostaviti neke osnovne podatke u opisu i ispisati kratku biografiju, mijenjati profilne slike kao i pozadinske slike na profilnoj stranici.

## Sign in – Sign up – Contact

Stranica na kojoj se nalaze tri tab-a sa formama za Sign in, Sign up i Contact administratora. Validacije formi se vrše na klijentskoj i serverskoj strani sa ispisom odgovarajućih poruka u slučaju greške. Poruka iz Contact forme se nakon validacije salje na mail [nikola.gutic@yandex.com](mailto:nikola.gutic@yandex.com).

## Danimački meni

Dimački meni prikazuje linkove u zavisnosti od uloge korisnika. U desnom ćošku se nalazi i user dropdown u kojem su izlistani linkovi za upravljanje nalogom.

## Footer

Pored osnovnih linkova sadrži i link ka autoru sajta na kojem se nalazi kratka biografija i dokumentacija. Footer se ne nalazi na stranicama koje ispisuju postove.

## Home – Newsfeed

Na ovoj stranici su u centralnom dijelu prikazani forma za objavljivanje sadržaja, objave svih korisnika koje ulogovani korisnik prati, kao i preporuke naloga koje bi korisnik mogao da zaprati.

Lijevo se nalazi dio sa profilnom fotografijom, brojem pratilaca i praćenja i link ka profilnoj stranici korisnika.

Desno su prikazane najsvežije vijesti Russia Today novina.

## Messages

Na ovoj stranici sa lijeve strane nalaze se chat-ovi, da bi chat bio vidljiv potrebno je da se korisnici uzajamno prate. Klikom na neki chat prikazuje se prepiska korisnika sa inputom za slanje poruke. Slanje je rađeno preko ajaxa.

## Profiles

Stranica sa svim registrovanim korisnicima. Implementirana je pretraga i paginacija, obje funkcije su usklađene i rađene su ajaxom. Pretraga se vrši po username-u korisnika.

## Account settings

Stranica sadrži tri taba za izmenu sifre, deaktivaciju naloga, dodavanje i izmenu profilne slike, informacija o korisniku i biografije. Sve forme imaju klijetsku i serversku validaciju.

## View Profile

Stranica prikazuje detaljne informacije o korisniku tj. njegove postove, info, pratioce i praćenja, galeriju i biografiju. Na svojoj profilnoj stranici korisnik može mijenjati cover fotografiju.

## Admin Panel

Link ka ovoj stranici se prikazuje samo ako je uloga korisnika "admin". Layout Admin Panela je jedinstven i razlikuje se od layout-a sajta. Stranica sadrži četiri linka u sidebaru na kojim se nalaze account control, role edit, navlink edit i logs.

Template za admin panel preuzet sa <https://www.bootstrapdash.com/bootstrap-admin-template/>

## Account Control

Stranica u okviru Admin Panela koja tabelarno ispisuje sve korisnike – username – email i dvije opcije za admina kojim se korisniku mogu dodeljivati uloge ili deaktivirati/aktivirati korisnika.

## Role edit

Stranica sa tabelom u kojoj su ispisane uloge koje se mogu brisati i editovati. Klikom na edit forma za edit se popunjava podacima kliknute uloge. Pored tabele sa ispisanim ulogama nalazi se forma za dodavanje uloga.

## Nav Link edit


Stranica sa tabelom u kojoj su ispisani linkovi koji se mogu brisati i editovati. Klikom na edit forma za edit se popunjava podacima kliknutog linka. Pored tabele sa ispisanim linkovima nalazi se forma za dodavanje navigacionih linkova.

## Logs

Stranica sa tabelarnim prikazom ključnih događaja – logovanje, registracija i odjavljivanje korisnika. Podaci se dohvataju iz laravel.log-a, implementirana je paginacija i pretraga po datumu ključnog događaja, radi se ajaxom i usklađena je.


# Organizacija

## Organizaciona šema

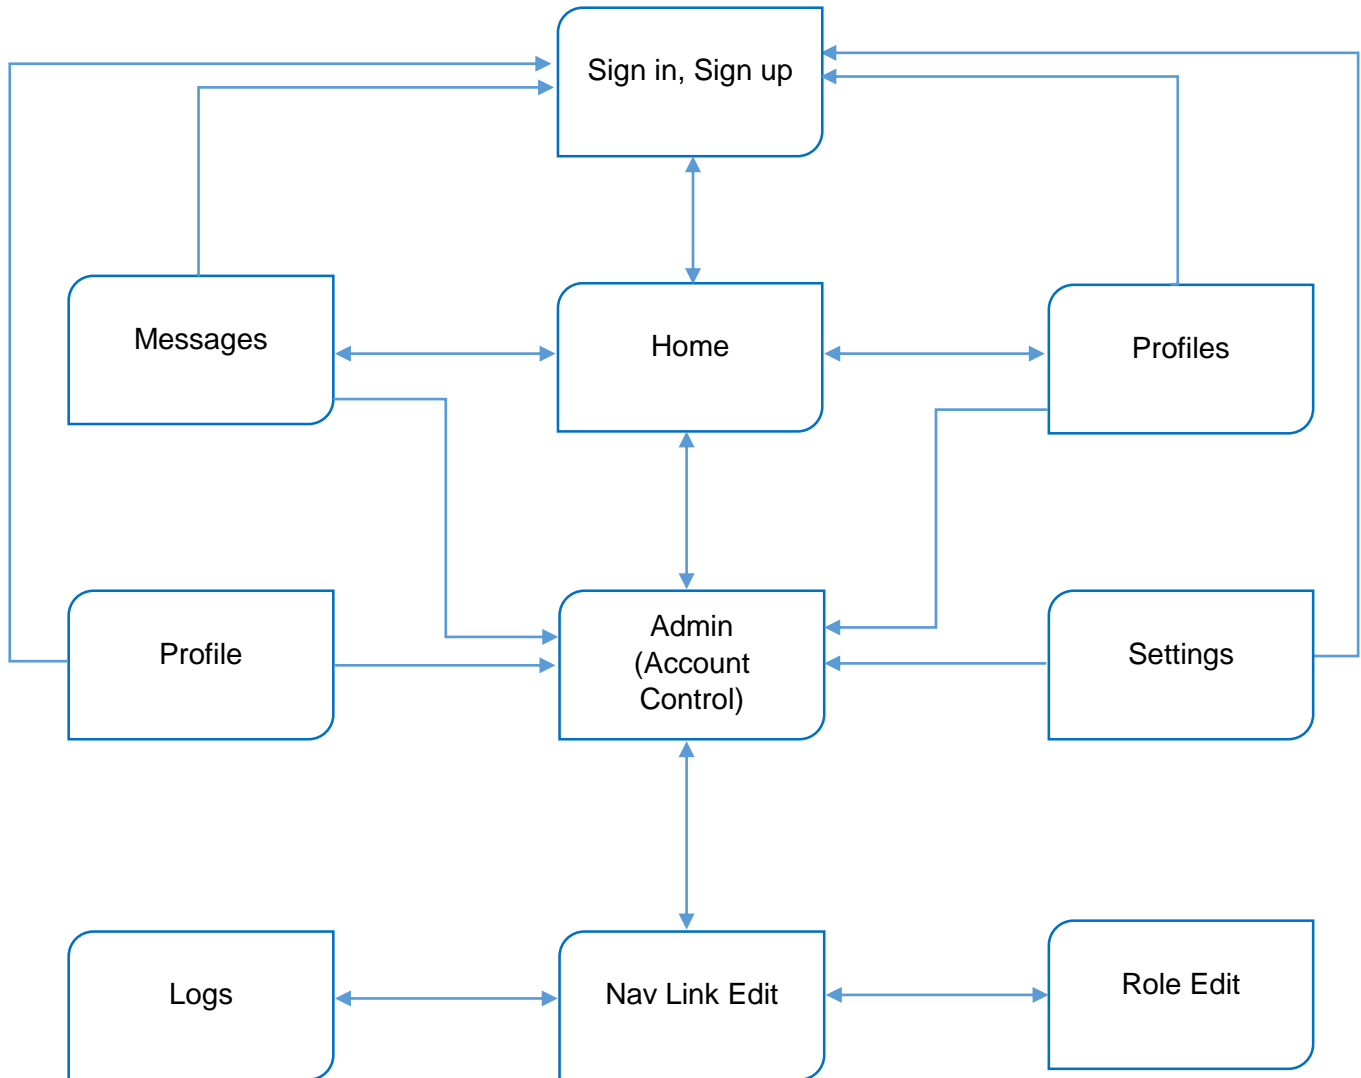



## Organizacija šema baze

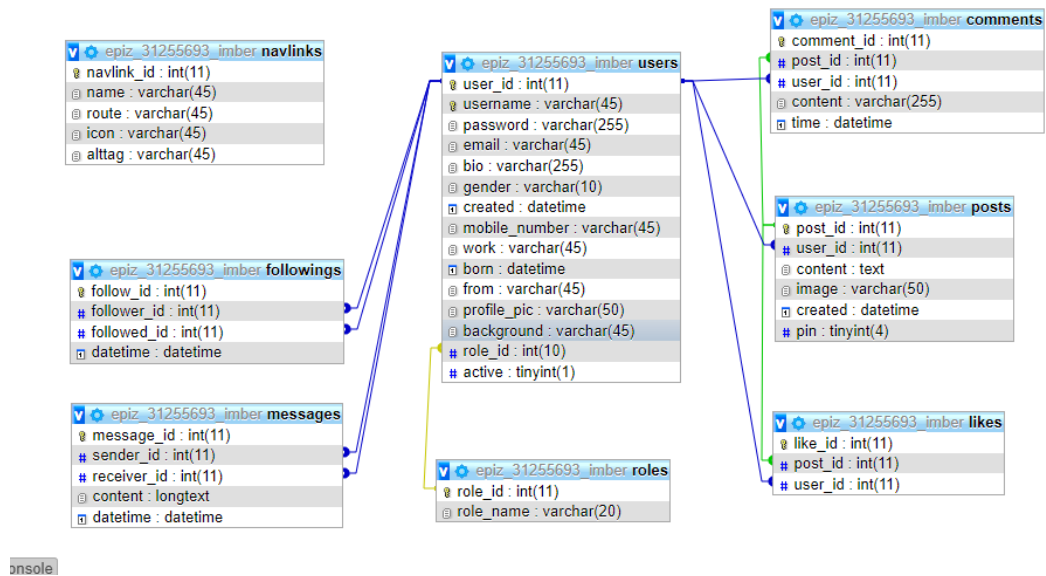

## Mapa sajta


```
<?xml version='1.0' encoding='UTF-8'?>
<urlset xmlns='http://www.sitemap.org/schemas/sitemap/0.9'>
  <url>
    <loc>http://imber.freecluster.eu/</loc>
    <lastmod>2022-03-10</lastmod>
    <changefreq>weekly</changefreq>
    <priority>0.9</priority>
  </url>
  <url>
    <loc>http://imber.freecluster.eu/home</loc>
    <lastmod>2022-03-11</lastmod>
    <changefreq>weekly</changefreq>
    <priority>0.9</priority>
  </url>
  <url>
    <loc>http://imber.freecluster.eu/messages</loc>
    <lastmod>2022-03-13</lastmod>
    <changefreq>hourly</changefreq>
    <priority>1</priority>
  </url>
  <url>
    <loc>http://imber.freecluster.eu/profiles</loc>
    <lastmod>2022-03-13</lastmod>
    <changefreq>daily</changefreq>
    <priority>0.9</priority>
  </url>
  <url>
    <loc>http://imber.freecluster.eu/admin</loc>
    <lastmod>2022-03-13</lastmod>
    <changefreq>daily</changefreq>
    <priority>0.9</priority>
  </url>
  <url>
    <loc>http://imber.freecluster.eu/logs</loc>
    <lastmod>2022-03-13</lastmod>
    <changefreq>hourly</changefreq>
    <priority>0.9</priority>
  </url>
  <url>
    <loc>http://imber.freecluster.eu/role-edit</loc>
    <lastmod>2022-03-13</lastmod>
    <changefreq>monthly</changefreq>
    <priority>0.7</priority>
  </url>
  <url>
    <loc>http://imber.freecluster.eu/nav-edit</loc>
    <lastmod>2022-03-13</lastmod>
    <changefreq>monthly</changefreq>
    <priority>0.7</priority>
  </url>
  <url>
    <loc>http://imber.freecluster.eu/about</loc>
    <lastmod>2022-03-13</lastmod>
    <changefreq>monthly</changefreq>
    <priority>0.7</priority>
  </url>
</urlset>
```

## Opis i slike stranica


### Welcome, Sign in – sign up – contact

The image displays three screenshots of a web application interface for Workwise, set against a red background with a geometric pattern. The top screenshot shows the 'Sign in' form, which includes a description of Workwise as a global freelancing platform and social networking site. Below the description is an illustration of various work-related items like a laptop, calculator, and documents. The 'Sign in' form has a navigation bar with 'Sign in', 'Sign up', and 'Contact' tabs. The 'Sign in' tab is active, and the form contains input fields for email (nikola.gutic@gmail.com) and password (masked with dots), followed by a 'Sign in' button. The bottom-left screenshot shows the 'Sign up' form, which has a navigation bar with 'Sign in', 'Sign up', and 'Contact' tabs. The 'Sign up' tab is active, and the form contains input fields for email (nikola.gutic@gmail.co), a note about email length (min: 10 characters), gender (Male), password, and repeat password, followed by a 'Sign up' button. The bottom-right screenshot shows the 'Contact' form, which has a navigation bar with 'Sign in', 'Sign up', and 'Contact' tabs. The 'Contact' tab is active, and the form contains an 'Email' input field and a 'Send' button.


Tri taba sa formama za logovanje, registraciju i kontaktiranje administrator. Sve tri forme imaju klijentsku i serversku validaciju. Prilikom uspešne registracije korisnik se vraća na sign in tab, uspešno logovanje vodi na home. Registraciona forma uspešnom validacijom sadržaj salje na mail administratora [nikola.gutic@yandex.com](mailto:nikola.gutic@yandex.com) u obliku :

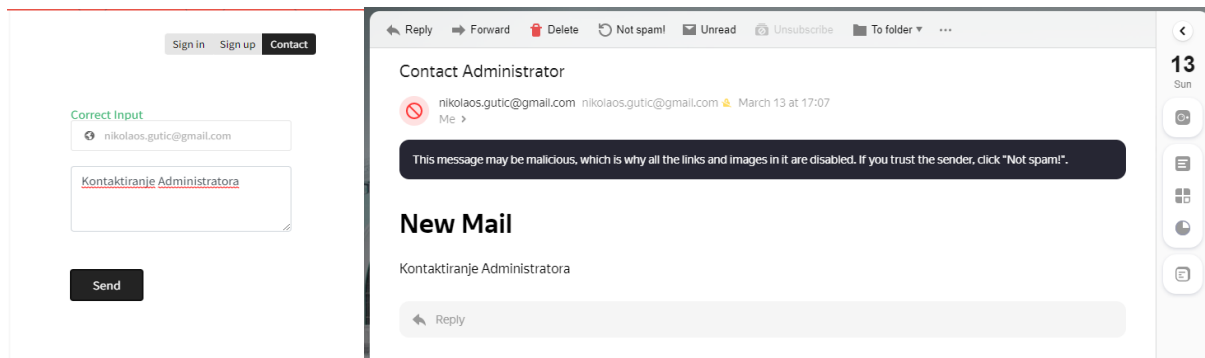


## Home

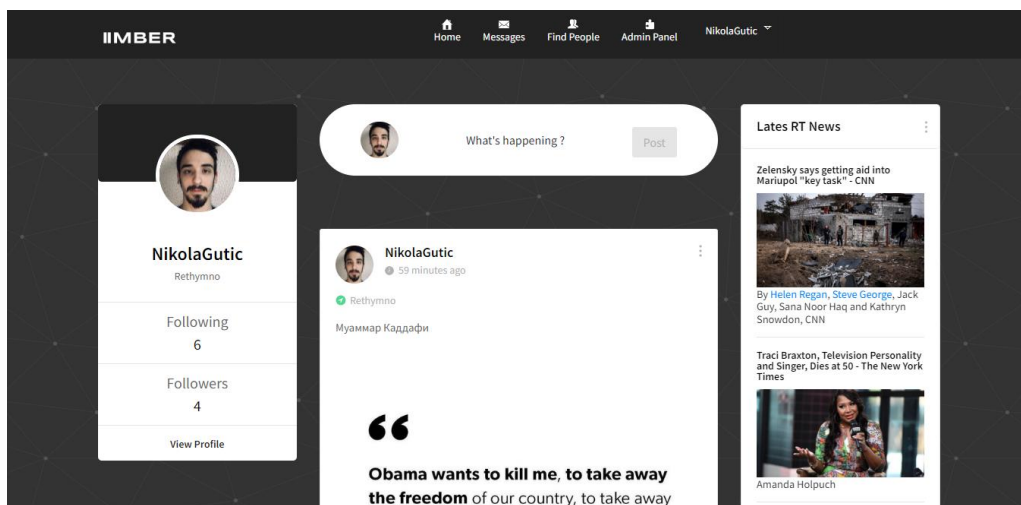

Home ili newsfeed prikazuje pratiocce i praćenja korisnika, postove svih korisnika koje prati ulogovani korisnik, najsvežije novosti RT novina. Na vrhu cjelije u kojoj se ispisuju postovi nalazi se forma za postovanje.

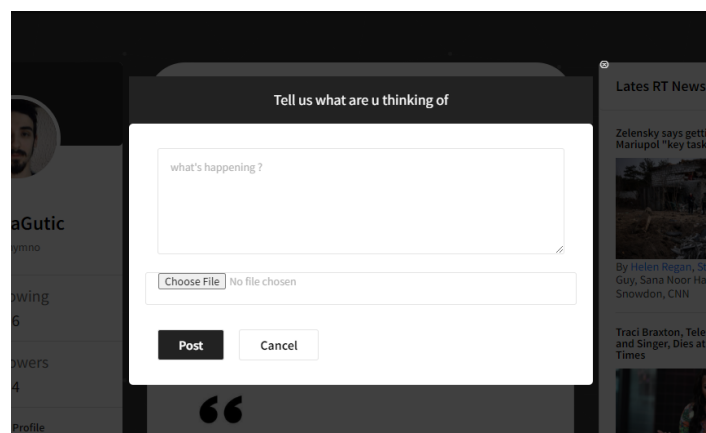


Kod postovanja mora se unijeti text, dok slika nije obavezna

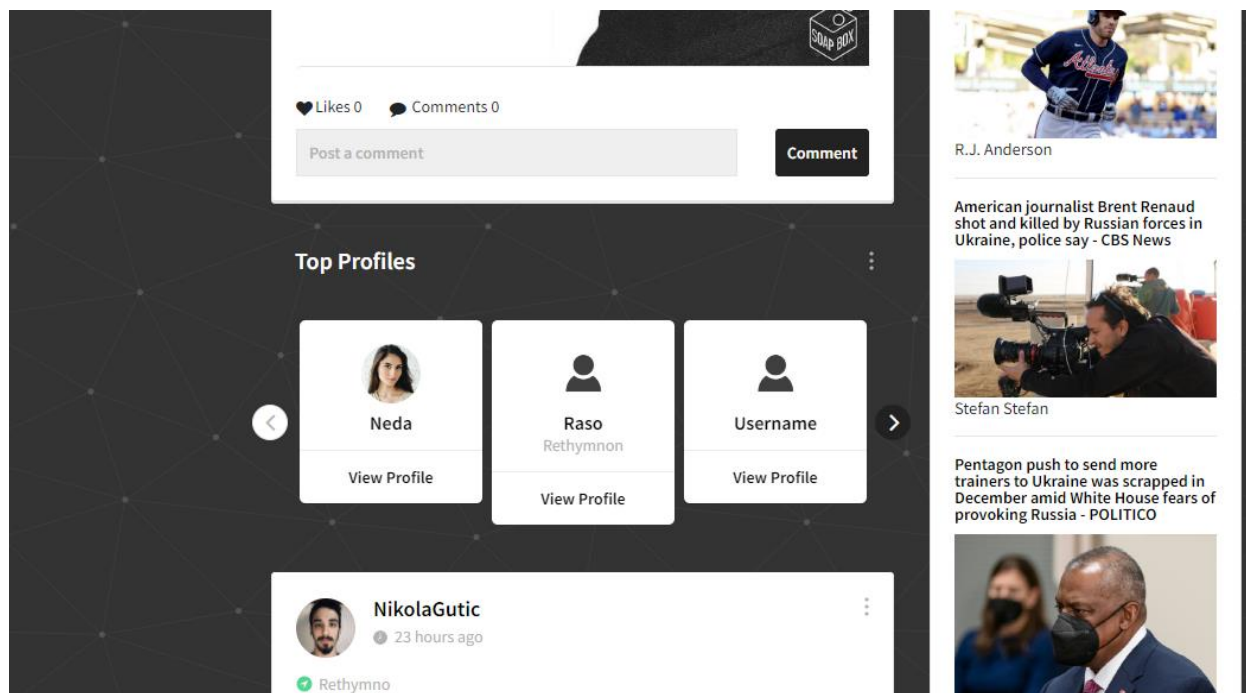


Dio u kojem se prikazuju preporučeni profile drugih korisnika.

## Messages


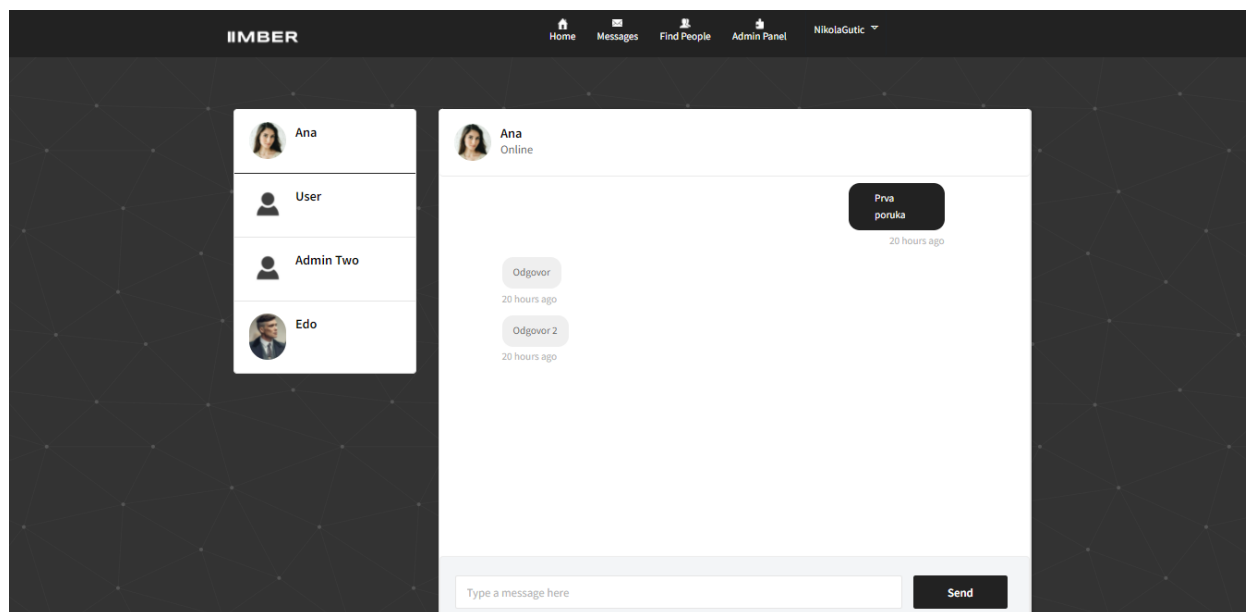


Sa lijeve strane nalaze se chatovi svih korisnika sa kojim se trenutni uzajamno prati. Klikom na neki od njih otvara se prepiska, na dnu prepiske se nalazi input za slanje poruka, slanje i ispis se vrše ajaxom zbog boljeg korisničkog iskustva.


## Profiles

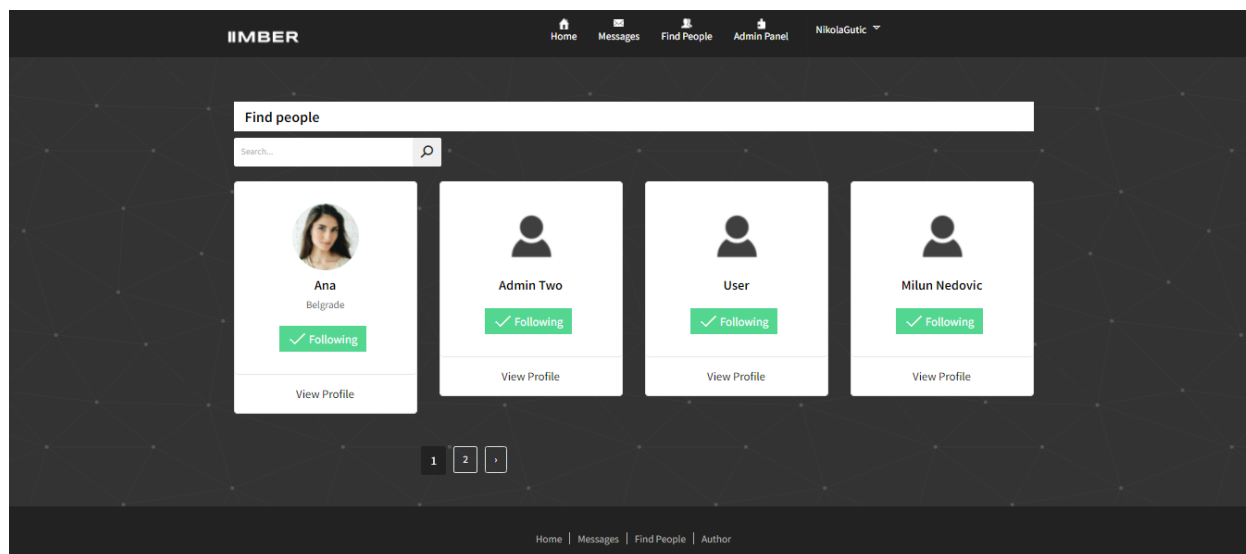

Profiles stranica prikazuje sve registrovane korisnike. Pretraga i paginacija su usklađene i rađene ajaxom. Pretražuje se po imenu korisnika, sa ove stranice se može zapratiti/otpratiti korisnik klikom na follow ili na following dugme, ta funkcionalnost je takođe realizovana ajax. Na dnu kartice koja prikazuje jednog korisnika nalazi se link koji vodi ka profilu kliknutog korisnika. Prikaz korisnika po stranici je podešen na 4 zbog malog broja korisnika.

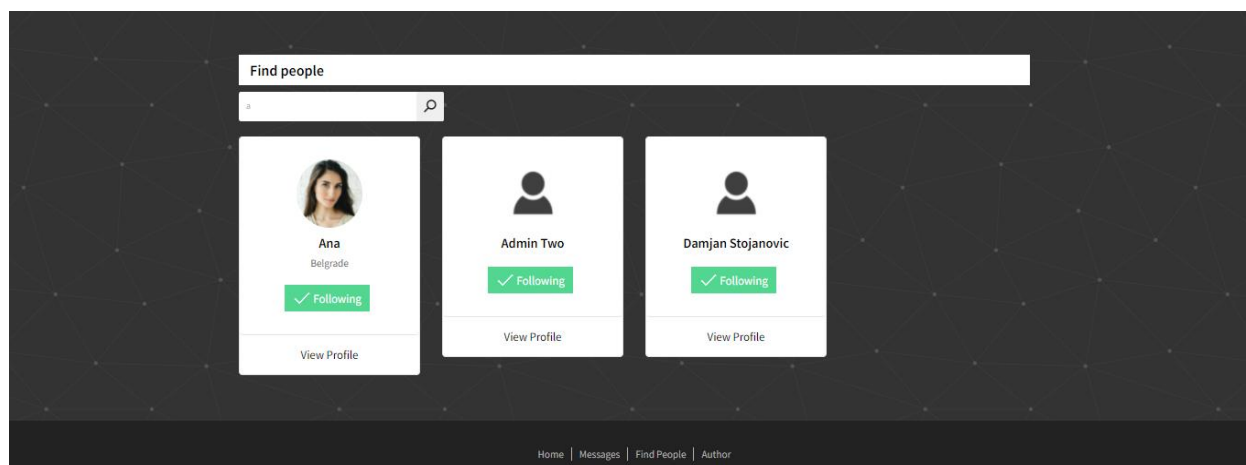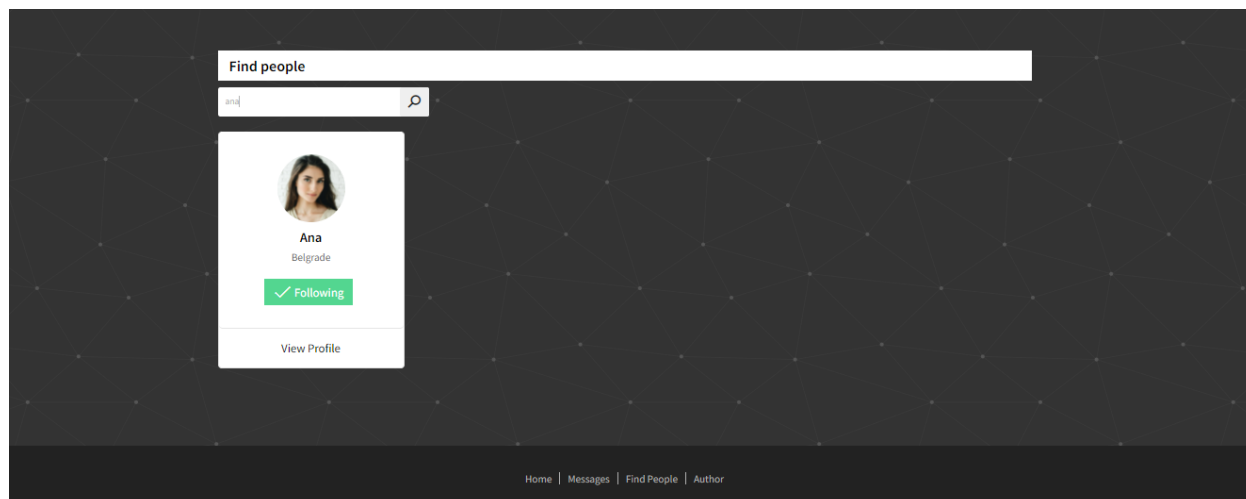


## Profile

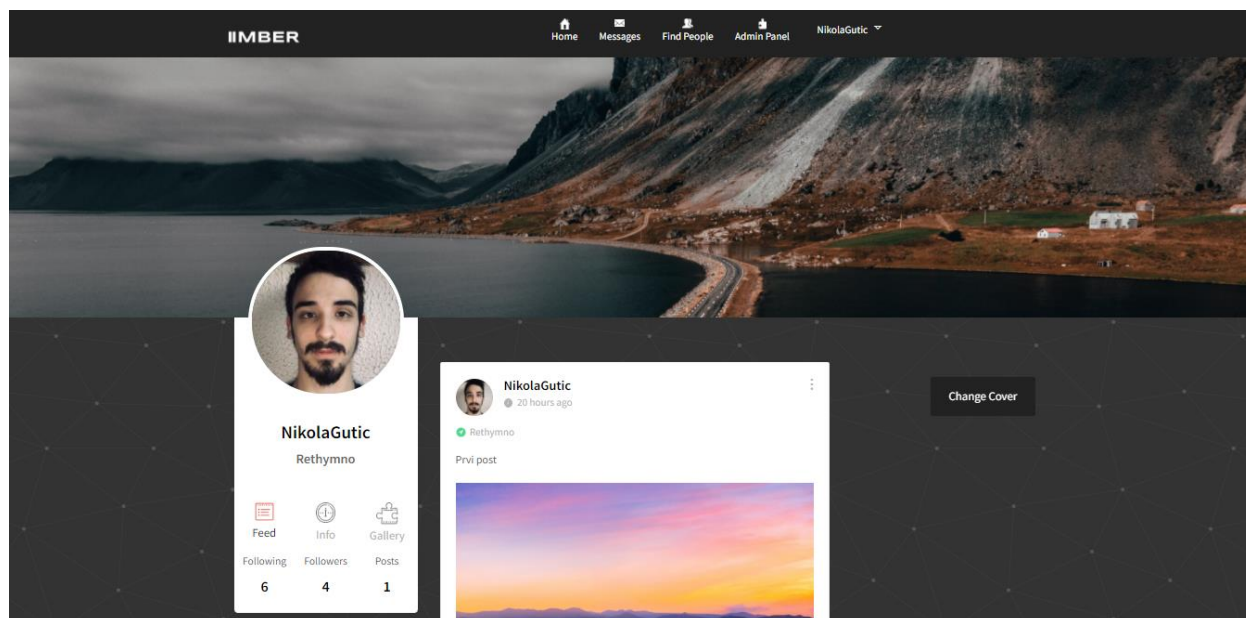

Profile stranica prikazuje profil korisnika, u zavisnosti da li korisnik pregleda svoj ili tuđ profil dostupna je opcija promene Cover fotografije.

Pored prikaza postova koje je dati korisnik objavio u lijevoj sekciji postoje kartice, klikom na njih prikazuju se informacije i biografija ili galerija. Ispod kartica prikazani su broj pratilaca, praćenja i postova.

Galeriju čine fotografije koje je korisnik objavio u postovima.

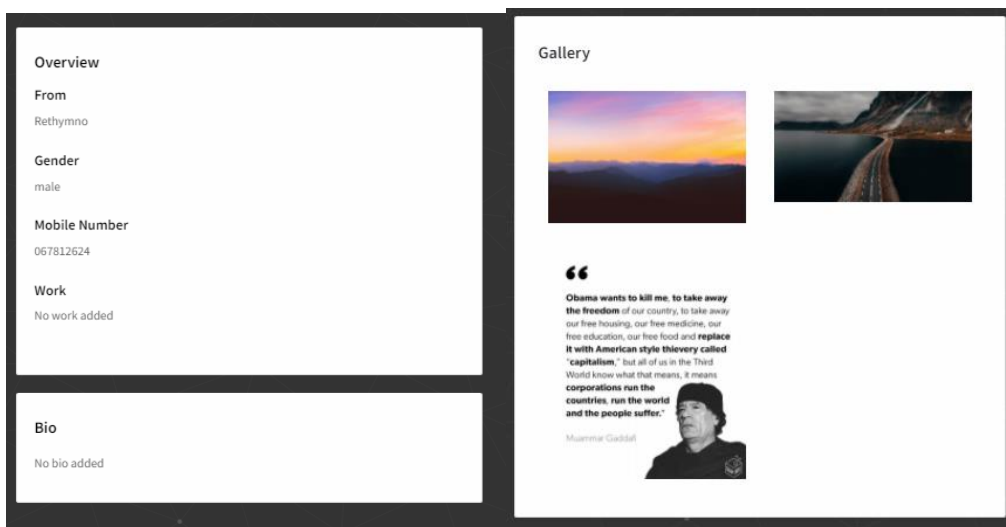



## Account Settings

IIMBER

Home Messages Find People Admin Panel NikolaGutic

Change Password

Account Support

Deactivate Account

Account Setting

Old Password

New Password

Repeat Password

Change

Home Messages Find People Author

IIMBER

Stranica na kojoj korisnik upravlja nalogom. Čine je tri kartice za promenu passworda, za deaktivaciju naloga i promenu profile, dodavanje ili editovanje informacija i biografije.

Deactivate Account

Password

Note: When you deactivate account you'll be automatically logged out

Deactivate

Privacy

Change your profile picture

Choose File No file chosen Upload


Make sure that picture has same width and height

Edit your basic information

Write your bio

Unutar Account Support kartice nalaze se dropdown tabovi u kojima su smeštene opisane funkcionalnosti. Klijentska i serverska validacija svih formi.


## Autor

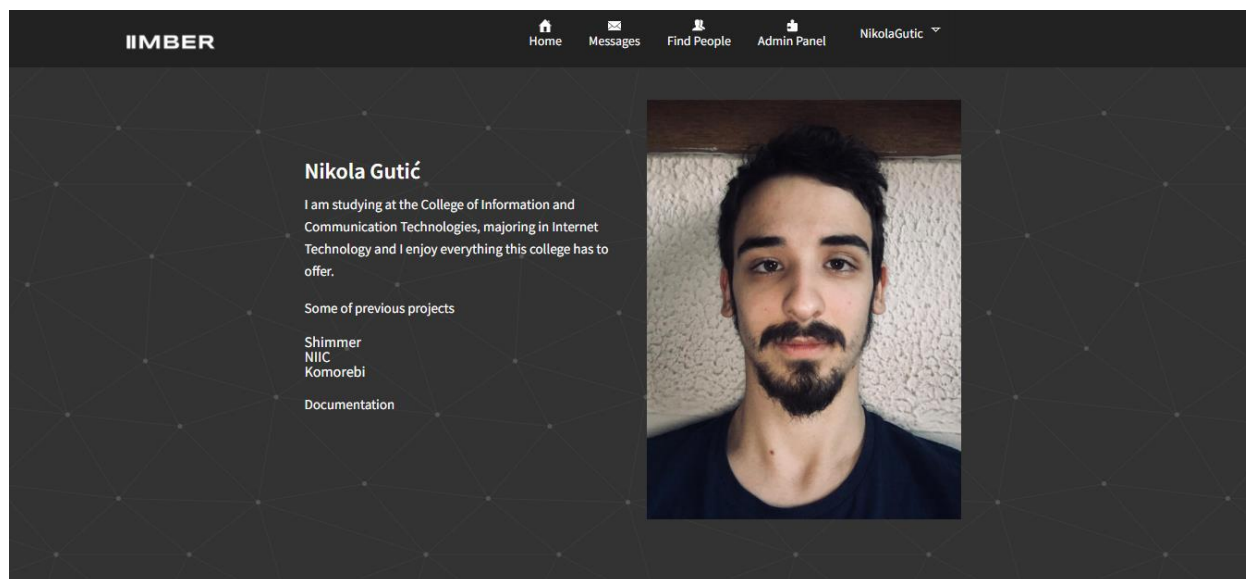

O autoru, prethodnim radovima i dokumentacija. Stranici se pristupa preko linka u footeru.

## Account Control

Ovoj i narednim stranicama pristup ima samo korisnik čija je uloga administrator.

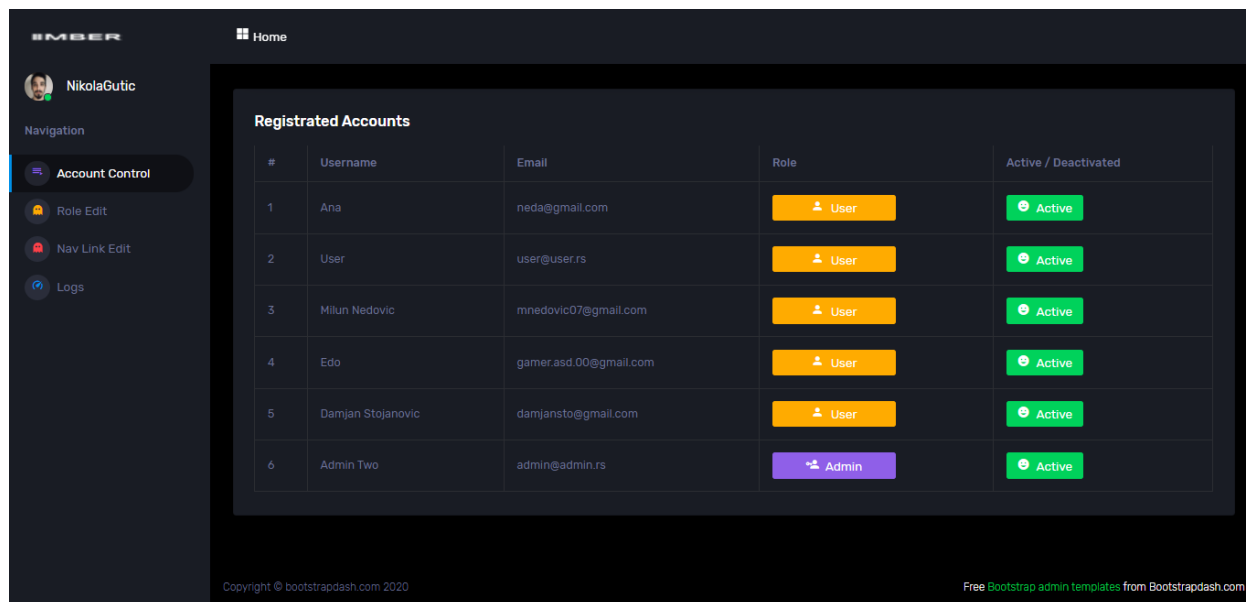

Tabelarno prikazani svi registrovani korisnici sa opcijama mijenjanja uloga i aktivacijom / deaktivacijom nagola.

## Role edit

The screenshot shows the 'Role Edit' interface. On the left is a sidebar with a user profile (NikolaGutic) and navigation links: Account Control, Role Edit (selected), Nav Link Edit, and Logs. The main content area is divided into three sections: 'Create New Role' with a 'Role Name' input and an 'Add' button; 'Roles' table; and 'Edit Role - Nova Uloga' with a 'Role Name' input and an 'Edit' button. The 'Roles' table lists three roles: 'user', 'admin', and 'Nova uloga'. Each role has an 'Edit' button (purple) and a 'Delete' button (orange). A red arrow points from the 'Edit' button for 'Nova uloga' to the 'Edit Role - Nova Uloga' form.

#	Role Name	Edit	Delete
1	user	<button>Edit</button>	<button>Delete</button>
2	admin	<button>Edit</button>	<button>Delete</button>
3	Nova uloga	<button>Edit</button>	<button>Delete</button>

Prva forma dodaje uloge. Tabela ispisuje sve i daje opcije za edit i delete. Klikom na edit ajaxom se dohvataju podaci kliknute uloge tako da je editovanje imena uloga spremno.

## Nav link edit

The screenshot shows the 'Nav Link Edit' interface. On the left is a sidebar with a user profile (NikolaGutic) and navigation links: Account Control, Role Edit, Nav Link Edit (selected), and Logs. The main content area is divided into three sections: 'Create New Role' with fields for 'Nav Name', 'Nav Link Name', 'Nav Route', 'Nav Link Route', 'Nav Alltag', and 'Nav Link Alltag', and an 'Add' button; 'Roles' table; and 'Edit Nav Link' with fields for 'Nav Name', 'Nav Link Name', 'Nav Route', 'Nav Link Route', 'Nav Alltag', and 'Nav Link Alltag', and an 'Update' button. The 'Roles' table lists four roles: 'Home', 'Messages', 'Find People', and 'Author'. Each role has an 'Edit' button (purple) and a 'Delete' button (orange).

#	Nav Link Name	Nav Link Route	Edit	Delete
1	Home	home.index	<button>Edit</button>	<button>Delete</button>
2	Messages	messages	<button>Edit</button>	<button>Delete</button>
3	Find People	profiles.index	<button>Edit</button>	<button>Delete</button>
4	Author	about	<button>Edit</button>	<button>Delete</button>

Iste funkcionalnosti primijenjene su i na stranici na kojoj se edituju i brišu navigacioni linkovi.

## Logs

Navigation

- Account Control
- Role Edit
- Nav Link Edit
- Logs**

Search by date

mm/dd/yyyy

**Logs**

Table displays Logins, Registrations and Deactivations

Type	Message	User	Email	Date	Time
Login	user-logged-in	Neda	neda@gmail.co	2022-03-18	01:28:29
Logout	user-logged-out	NikolaGutic	nikola.gutic@gmail.co	2022-03-18	01:23:53
Login	user-logged-in	NikolaGutic	nikola.gutic@gmail.co	2022-03-18	01:20:00
Logout	user-logged-out	Neda	neda@gmail.co	2022-03-18	01:19:56
Login	user-logged-in	Neda	neda@gmail.co	2022-03-18	01:17:30
Logout	user-logged-out	Neda	neda@gmail.co	2022-03-18	01:17:26
Login	user-logged-in	Neda	neda@gmail.co	2022-03-18	01:15:18
Register	new-user-registered	Neda	neda@gmail.co	2022-03-18	01:14:45
Logout	user-logged-out	NikolaGutic	nikola.gutic@gmail.co	2022-03-18	00:42:27
Login	user-logged-in	NikolaGutic	nikola.gutic@gmail.co	2022-03-18	00:40:10
Logout	user-logged-out	NikolaGutic	nikola.gutic@gmail.co	2022-03-18	00:40:10
Login	user-logged-in	NikolaGutic	nikola.gutic@gmail.co	2022-03-18	00:30:53
Logout	user-logged-out	NikolaGutic	nikola.gutic@gmail.co	2022-03-18	00:30:24

1 2 3 4

Na stranici logs prikazani su tabelarno svi ključni događaji. Popust logovanja, odjavljivanja i registracije. Podaci su dohvaćeni iz laravel.log fajla i formatirani za lakši pregled.

Navigation

- Account Control
- Role Edit
- Nav Link Edit
- Logs**

Search by date

03/12/2022

**Logs**


Table displays Logins, Registrations and Deactivations

Type	Message	User	Email	Date	Time
Logout	user-logged-out	Neda	neda@gmail.co	2022-03-12	01:17:26
Login	user-logged-in	Neda	neda@gmail.co	2022-03-12	01:17:30
Logout	user-logged-out	Neda	neda@gmail.co	2022-03-12	01:19:56
Login	user-logged-in	NikolaGutic	nikola.gutic@gmail.co	2022-03-12	01:20:00
Logout	user-logged-out	NikolaGutic	nikola.gutic@gmail.co	2022-03-12	01:23:53
Login	user-logged-in	Neda	neda@gmail.co	2022-03-12	01:23:59
Logout	user-logged-out	Neda	neda@gmail.co	2022-03-12	01:27:24
Login	user-logged-in	NikolaGutic	nikola.gutic@gmail.co	2022-03-12	01:29:32
Logout	user-logged-out	NikolaGutic	nikola.gutic@gmail.co	2022-03-12	01:29:43


Pretraga po datumu i paginacija su usklađeni i rađeni ajaxom.

## Struktura projekta


### Http

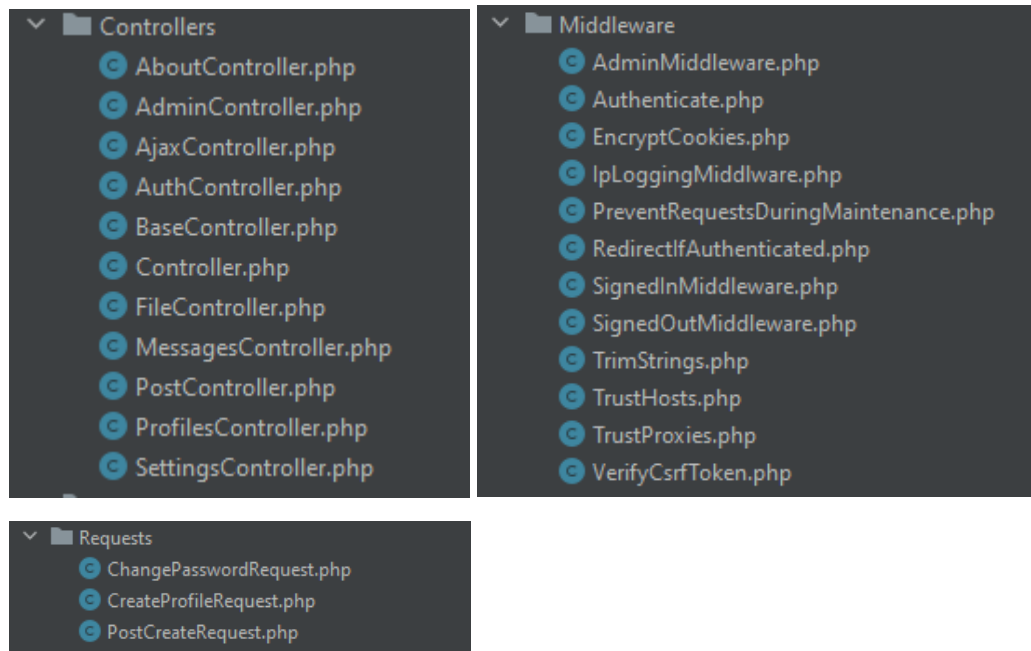


### Models and mail

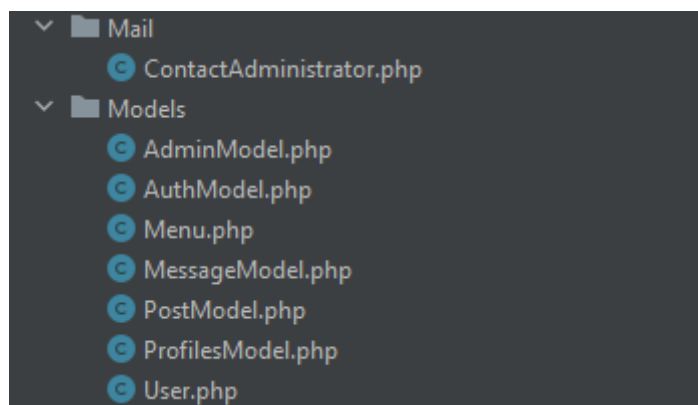


## Public

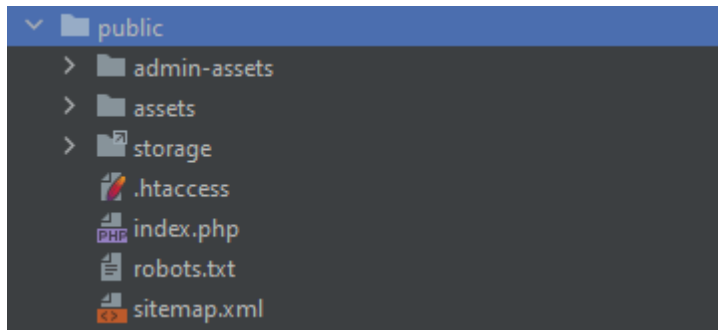


## Views – admin i admin partials

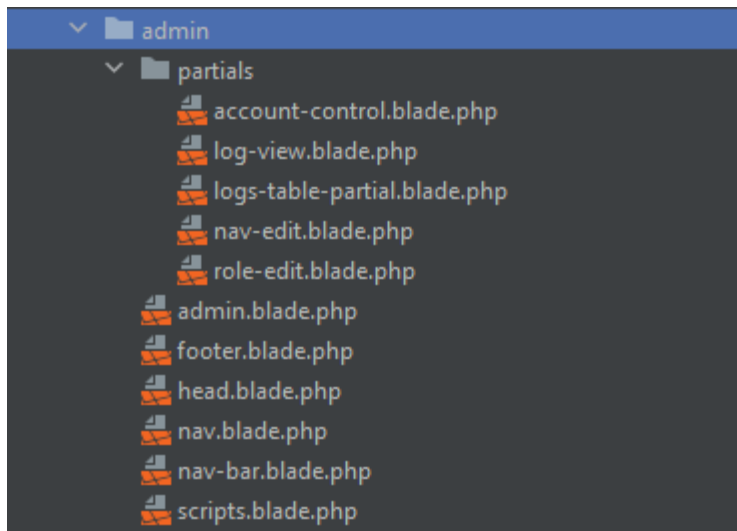

## Views – Client i client partials

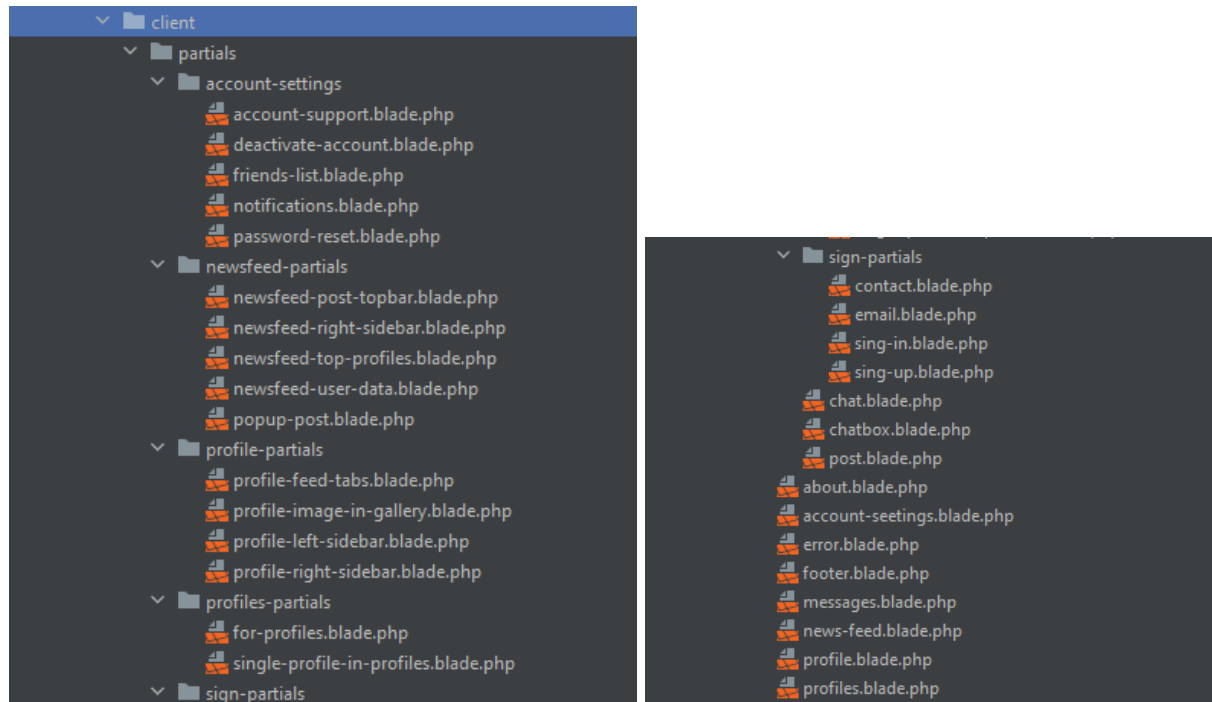

## Common i layouts

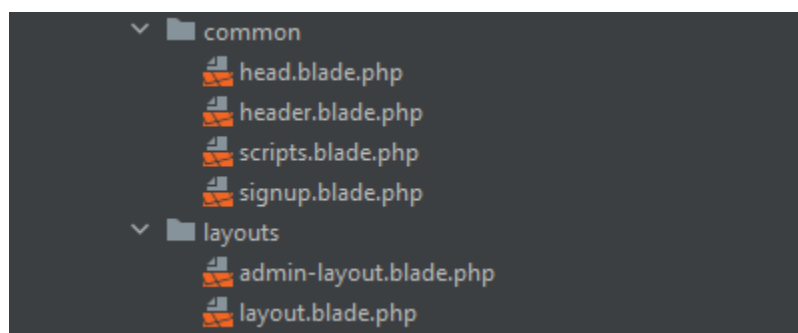

# Kodovi

## PHP

### Routes/web.php

```
<?php

use Illuminate\Support\Facades\Route;

/*
|-----
| Web Routes
|-----
|
| Here is where you can register web routes for your application. These
| routes are loaded by the RouteServiceProvider within a group which
| contains the "web" middleware group. Now create something great!
|
*/

Route::post('/signin', [\App\Http\Controllers\AuthController::class, 'signin'])->name('signin');
Route::post('/signup', [\App\Http\Controllers\AuthController::class, 'signup'])->name('signup');
Route::post('/contact', [\App\Http\Controllers\AuthController::class, 'contact'])->name('contact');

Route::middleware(['signedout'])->group(function () {
    Route::get('/', [\App\Http\Controllers\AuthController::class, 'index'])->name('welcome');
});

Route::middleware(['signedin'])->group(function () {
    // Resource Routes
    Route::resource('/home', \App\Http\Controllers\PostController::class);
    Route::resource('/profiles', \App\Http\Controllers\ProfilesController::class);
    // Get Routes
    Route::get('/signout', [\App\Http\Controllers\AuthController::class, 'signout'])->name('signout');
    Route::get('/error', [\App\Http\Controllers\AuthController::class, 'error'])->name('error');
    Route::get('/messages', [\App\Http\Controllers\MessagesController::class, 'index'])->name('messages');
    Route::get('/settings/{username}', [\App\Http\Controllers\SettingsController::class, 'index'])->name('settings');
    // Post Routes
    Route::post('/image-resize', [\App\Http\Controllers\FileController::class, 'imgResize'])->name('img-resize');

    Route::post('/comment', [\App\Http\Controllers\AjaxController::class, 'comments']);
    Route::post('/like', [\App\Http\Controllers\AjaxController::class, 'likes']);
    Route::post('/follow', [\App\Http\Controllers\AjaxController::class, 'follow']);

    Route::post('/change-password', [\App\Http\Controllers\SettingsController::class, 'changePassword'])->name('changePassword');
```



```

Route::post('/deactivate/{id}', [\App\Http\Controllers\SettingsController::class,
'deactivate'])->name('deactivate');
Route::post('/message', [\App\Http\Controllers\MessagesController::class,
'message']);
Route::get('/messagesFetch', [\App\Http\Controllers\MessagesController::class,
'messagesFetch']);

Route::get('/pagination', [\App\Http\Controllers\ProfilesController::class,
'fetchData']);
Route::get('/about', [\App\Http\Controllers\AboutController::class, 'index'])->name('about');
});

Route::middleware(['admin'])->group(function () {
    // Account Control
    Route::get('/admin', [\App\Http\Controllers\AdminController::class, 'index'])->name('accountCtrl');
    Route::post('/roleUpdate/{id}', [\App\Http\Controllers\AdminController::class, 'roleUpdate'])->name('roleUpdate');
    Route::post('/status/{id}', [\App\Http\Controllers\AdminController::class, 'status'])->name('status');
    // Roles
    Route::get('/role-edit', [\App\Http\Controllers\AdminController::class, 'roleEdit'])->name('roleEdit');
    Route::post('/role-add', [\App\Http\Controllers\AdminController::class, 'createRole'])->name('createRole');
    Route::post('/role-delete', [\App\Http\Controllers\AdminController::class, 'deleteRole'])->name('deleteRole');
    Route::get('/get-role', [\App\Http\Controllers\AjaxController::class, 'returnRole']);
    Route::post('/update-role', [\App\Http\Controllers\AdminController::class, 'updateRole'])->name('updateRole');
    // NavLinks
    Route::get('/nav-edit', [\App\Http\Controllers\AdminController::class, 'navEdit'])->name('navEdit');
    Route::post('/nav-add', [\App\Http\Controllers\AdminController::class, 'createNav'])->name('createNav');
    Route::post('/nav-delete', [\App\Http\Controllers\AdminController::class, 'deleteNav'])->name('deleteNav');
    Route::get('/get-nav', [\App\Http\Controllers\AjaxController::class, 'returnNav']);
    Route::post('/update-nav', [\App\Http\Controllers\AdminController::class, 'updateNav'])->name('updateNav');
    //Logs
    Route::get('/logs', [\App\Http\Controllers\AdminController::class, 'logs'])->name('logs');
    Route::get('/fetch-logs', [\App\Http\Controllers\AjaxController::class, 'fetchLogs']);
});

```

## Controllers

### BaseController

```
<?php

namespace App\Http\Controllers;

use App\Models\Menu;
use App\Models\User;
use App\Models\UserModel;
use Illuminate\Http\Request;

class BaseController extends Controller
{
    public $data;
    private $menuModel;

    public function __construct(){
        $this->menuModel = new Menu();
        $this->data['menu'] = $this->menuModel->get();
    }
}
```

### Post Controller

```
<?php

namespace App\Http\Controllers;

use App\Http\Requests\PostCreateRequest;
use App\Models\Menu;
use App\Models\PostModel;
use App\Models\ProfilesModel;
use Illuminate\Database\Eloquent\Model;
use Illuminate\Http\Request;
use Illuminate\Support\Facades\Log;

class PostController extends BaseController
{
    private $userModel;
    private $postModel;

    public function __construct()
    {
        $this->postModel = new PostModel();
        $this->userModel = new ProfilesModel();

        parent::__construct();
    }

    public function index(Request $request)
```

```

{
    $this->id = $request->session()->get('user')->user_id;

    // id of current user and ids of user that current user is following
    $followed = $this->userModel->getFollowed($this->id);
    array_push($followed, $this->id);

    $collection = [];
    $allPosts = [];
    // getting all posts for ids + all comments and likes for every post
    foreach ($followed as $key => $value) {
        $collection[$key] = $this->postModel->posts($value);
        foreach ($collection as $item) {
            foreach ($item as $value) {
                array_push($allPosts, $value);
                $value->comments = $this->postModel->comments($value->post_id);
                $value->likes = $this->postModel->likes($value->post_id);
            }
        }
    }

    // filtering arrays to unique
    $allPostsFiltered = array_unique($allPosts, SORT_REGULAR);

    //sorting by last created
    usort($allPostsFiltered, function ($a, $b) {
        return strtotime($b->created) - strtotime($a->created);
    });

    $this->data['post'] = $allPostsFiltered;
    $this->data['topProfiles'] = $this->userModel->topProfiles($this->id);
    $this->data['user'] = $this->userModel->user($request->session()->get('user')->username);
    $this->data['followings'] = $this->userModel->followings($this->id);
    return view('client.news-feed', $this->data);
}

public function create()
{
    // return view('client.partials.newsfeed-partials.popup-post');
}

public function store(PostCreateRequest $request)
{
    try {
        $post = $request->except(['_token']);
        if ($request->has('image')) {
            $image = $request->file('image');
            $unique = uniqid() . '_' . time() . '.' . $request->file('image')->extension();
            // $image->storeAs('public/gallery/', $unique);
            $image->move(public_path('/storage/gallery'), $unique);
        }
    } catch (\Exception $e) {
        //
    }
}

```

```

        $post['image'] = $unique;
    }
    $this->postModel->insert($post);

    return response()->redirectToRoute('home.index');
} catch (\Exception $e) {
    Log::error($e->getMessage());
    return response()->redirectToRoute('error');
}
}

/**
 * Display the specified resource.
 *
 * @param int $id
 * @return \Illuminate\Http\Response
 */
public function show($id)
{
    //
}

/**
 * Show the form for editing the specified resource.
 *
 * @param int $id
 * @return \Illuminate\Http\Response
 */
public function edit($id)
{
    //
}

/**
 * Update the specified resource in storage.
 *
 * @param \Illuminate\Http\Request $request
 * @param int $id
 * @return \Illuminate\Http\Response
 */
public function update(Request $request, $id)
{
    //
}

/**
 * Remove the specified resource from storage.
 *
 * @param int $id
 * @return \Illuminate\Http\Response
 */
public function destroy($id)
{
    try {
        $this->postModel->deletePost($id);
        return redirect()->back();
    } catch (\Exception $e) {

```

```

        Log::error($e->getMessage());
        dd($e->getMessage());
        return response()->redirectToRoute('error');
    }
}
}

```

## ProfilesController

```

<?php

namespace App\Http\Controllers;

use App\Http\Requests\CreateProfileRequest;
use App\Models\PostModel;
use App\Models\ProfilesModel;
use Illuminate\Database\Eloquent\Model;
use Illuminate\Http\Request;
use Illuminate\Support\Facades\Log;
use Nette\Utils\Image;

class ProfilesController extends BaseController
{
    private $profilesModel;
    private $postModel;

    public function __construct()
    {
        $this->postModel = new PostModel();
        $this->profilesModel = new ProfilesModel();

        parent::__construct();
    }

    public function index(Request $request)
    {
        $id = $request->session()->get('user')->user_id;

        $this->data['profiles'] = $this->profilesModel->getProfiles($id);

        foreach ($this->data['profiles'] as $profile) {
            $profile->followers = $this->profilesModel->getFollowers($profile->user_id);
        }

        return view('client.profiles', $this->data);
    }

    /**
     * Show the form for creating a new resource.
     *
     * @return \Illuminate\Http\Response
     */
    public function create()

```

```

{
    //
}

public function store(CreateProfileRequest $request)
{
}

public function show($username)
{
    $id = $this->profilesModel->getID($username)->user_id;

    $this->data['post'] = $this->postModel->posts($id);
    foreach ($this->data['post'] as $post) {
        $post->likes = $this->postModel->likes($post->post_id);
        $post->comments = $this->postModel->comments($post->post_id);
    }
    $this->data['user'] = $this->profilesModel->user($username);
    $this->data['followings'] = $this->profilesModel->followings($id);
    $this->data['followers'] = $this->profilesModel->getFollowers($id);

    return view('client.profile', $this->data);
}

/**
 * Show the form for editing the specified resource.
 *
 * @param int $id
 * @return \Illuminate\Http\Response
 */
public function edit($id)
{
    //
}

/**
 * Update the specified resource in storage.
 *
 * @param \Illuminate\Http\Request $request
 * @param int $id
 * @return \Illuminate\Http\Response
 */
public function update(Request $request, $id)
{
    try {
        $user = $request->except(['_token', '_method']);
        if ($request->has('coverImage')) {
            $image = $request->file('coverImage');
            $unique = uniqid() . '_' . time() . '.' . $request->file('coverImage')->extension();

            $image->storeAs('public/covers/', $unique);
            $user['coverImage'] = $unique;
            $user['user_id'] = $id;
        }
    }
}

```

```

        $this->profilesModel->updateCover($user);
    }

    if ($request->has('profile_pic')) {
        $image = $request->file('profile_pic');
        $unique = uniqid() . '_' . time() . '.' . $request-
>file('profile_pic')->extension();

        $image->storeAs('public/profileImages/', $unique);
        $user['profile_pic'] = $unique;
        $user['user_id'] = $id;

        $this->profilesModel->updateProfilePic($user);
    }

    if ($request->has('info')) {
        $this->profilesModel->infoUpdate($user, $id);
    }
    if ($request->has('bioX')) {
        $this->profilesModel->bioUpdate($user, $id);
    }

    return redirect()->back();
} catch (\Exception $e) {
    Log::error($e->getMessage());
    return response()->redirectToRoute('error');
}
}

/**
 * Remove the specified resource from storage.
 *
 * @param int $id
 * @return \Illuminate\Http\Response
 */
public function destroy($id)
{
    //
}

public function fetchData(Request $request)
{
    $id = $request->session()->get('user')->user_id;

    if ($request->ajax()) {
        if ($request['key']) {
            $this->data['profiles'] = $this->profilesModel-
>getProfiles($id, $request['key']);

            foreach ($this->data['profiles'] as $profile) {
                $profile->followers = $this->profilesModel-
>getFollowers($profile->user_id);
            }
        }
    } else {

```

```

        $this->data['profiles'] = $this->profilesModel->getProfiles($id);
        foreach ($this->data['profiles'] as $profile) {
            $profile->followers = $this->profilesModel->getFollowers($profile->user_id);
        }
    }
    return view('client.partials.profiles-partials.for-profiles',
$this->data)->render();
    }
}
}

```

## MessagesController

```

<?php

namespace App\Http\Controllers;

use App\Models\MessageModel;
use Illuminate\Http\Request;
use Psy\Util\Json;

class MessagesController extends BaseController
{
    private $messageModel;

    public function __construct()
    {
        $this->messageModel = new MessageModel();
        parent::__construct();
    }

    public function index(Request $request)
    {
        $this->data['chats'] = $this->messageModel->getChats($request->session()->get('user')->user_id);
        return view('client.messages', $this->data);
    }

    public function message(Request $request)
    {
        $data = $request->except(['_token']);
        $msg = $data['content'];
        // ENKRIPCIJA
        // $key = openssl_random_pseudo_bytes(16);
        $key = 'lkGTS9pSzhuYSC9';

        if (strlen($msg) != 0) {
            $ivlen = openssl_cipher_iv_length($cipher = "AES-128-CBC");
            $iv = openssl_random_pseudo_bytes($ivlen);
            $ciphertext_raw = openssl_encrypt($msg, $cipher, $key, $options = OPENSSL_RAW_DATA, $iv);

```



```

        $hmac = hash_hmac('sha256', $ciphertext_raw, $key, $as_binary =
true);
        $ciphertext = base64_encode($iv . $hmac . $ciphertext_raw);

        $data['content'] = $ciphertext;
        $this->messageModel->sendMsg($data);
    }

    $allMessages = $this->messageModel->fetchMessages($data);

    foreach ($allMessages as $msg) {
        $c = base64_decode($msg->content);
        $ivlen = openssl_cipher_iv_length($cipher = "AES-128-CBC");
        $iv = substr($c, 0, $ivlen);
        $hmac = substr($c, $ivlen, $sha2len = 32);
        $ciphertext_raw = substr($c, $ivlen + $sha2len);
        $original_plaintext = openssl_decrypt($ciphertext_raw, $cipher,
$key, $options = OPENSSL_RAW_DATA, $iv);
        //          $calcmac = hash_hmac('sha256', $ciphertext_raw, $key,
$as_binary = true);

        $msg->content = $original_plaintext;
        $msg->datetime = time_elapsed_string($msg->datetime);
    }

    return Json::encode($allMessages);
}

public function messageFetch(Request $request)
{
    $key = 'lkGTS9pSzhuJYSC9';

    $data = $request->all();
    $result = $this->messageModel->fetchMessages($data);

    foreach ($result as $e) {
        $c = base64_decode($e->content);
        $ivlen = openssl_cipher_iv_length($cipher = "AES-128-CBC");
        $iv = substr($c, 0, $ivlen);
        $hmac = substr($c, $ivlen, $sha2len = 32);
        $ciphertext_raw = substr($c, $ivlen + $sha2len);
        $original_plaintext = openssl_decrypt($ciphertext_raw, $cipher,
$key, $options = OPENSSL_RAW_DATA, $iv);
        //          $calcmac = hash_hmac('sha256', $ciphertext_raw, $key,
$as_binary = true);

        $e->content = $original_plaintext;
        $e->datetime = time_elapsed_string($e->datetime);
    }
    return Json::encode($result);
}
}

```

## SettingsController

```
<?php

namespace App\Http\Controllers;

use App\Http\Requests\ChangePasswordRequest;
use App\Models\ProfilesModel;
use Illuminate\Http\Request;
use Illuminate\Support\Facades\Log;
use Psy\Util\Json;

class SettingsController extends BaseController
{
    private $profileModel;

    public function __construct()
    {
        $this->profileModel = new ProfilesModel();
        parent::__construct();
    }

    public function index(Request $request)
    {
        $this->data['user'] = $this->profileModel->user(session()->get('user')->username);
        return view('client.account-seetings', $this->data);
    }

    public function changePassword(ChangePasswordRequest $request)
    {
        $data = $request->except(['_token']);
        if ($data['new-password'] == $data['repeat-password']) {
            $result = $this->profileModel->checkAndChangePassword($data);
            if ($result) {
                return redirect()->route('home.index');
            }
        }
    }

    public function deactivate(Request $request, $username)
    {
        $data = $request->except(['_token']);

        $user = $this->profileModel->user($username);
        $enc = md5($data['password']);

        if ($user->password == $enc) {
            $result = $this->profileModel->deactivate($enc);

            if ($result) {
                $user = $request->session()->get('user');
                Log::info('Deactivated: user-deactivated-account',
                ['username' => $user->username, 'email' => $user->email]);
                $request->session()->remove('user');
                return redirect()->route('welcome');
            }
        }
    }
}
```

```

    }
    return redirect()->route('settings', ['username' => $username]);
}
return redirect()->route('settings', ['username' => $username]);
}
}
}

```

## AuthController

```

<?php

namespace App\Http\Controllers;

use App\Http\Requests\CreateProfileRequest;
use App\Mail>ContactAdministrator;
use App\Models\AuthModel;
use Illuminate\Database\Eloquent\Model;
use Illuminate\Http\Request;
use Illuminate\Support\Facades\DB;
use Illuminate\Support\Facades\Log;
use Illuminate\Support\Facades\Mail;

class AuthController extends BaseController
{
    private $authModel;

    public function index(Request $request)
    {
        return view('common.signup');
    }

    public function signin(Request $request)
    {
        try {
            $email = $request->input('email');
            $password = md5($request->input('password'));

            $result = DB::table('users')
                ->where('email', '=', $email)
                ->where('password', '=', $password)
                ->first();

            if ($result) {
                if ($result->active == 0) {
                    $request->session()->put("user", $result);
                    $username = str_replace(' ', '', $result->username);
                    Log::info('Login: user-logged-in', ['username' =>
$username, 'email' => $result->email]);
                    return redirect()->route('home.index');
                }
                return redirect()->back();
            }
            return redirect()->back();
        }
    }
}

```

```

        } catch (\Exception $e) {
            Log::error($e->getMessage());
            $this->data['error'] = $e->getMessage();
        }
    }

    public function signout(Request $request)
    {
        $user = $request->session()->get('user');
        $username = str_replace(' ', '', $user->username);
        Log::info('Logout: user-logged-out', ['username' => $username,
'email' => $user->email]);
        $request->session()->remove('user');
        return redirect()->route('welcome');
    }

    public function signup(CreateProfileRequest $request)
    {
        try {
            $pass = md5($request['password']);
            $passx = md5($request['confPassword']);

            if ($pass == $passx) {
                $user = $request->except('_token', 'confPassword');
                $user['password'] = $pass;
                $this->authModel = new AuthModel();

                $this->authModel->signup($user);
                $username = str_replace(' ', '', $user['username']);
                Log::info('Register: new-user-registered', ['username' =>
$username, 'email' => $user['email']]);
                return redirect()->route('home.index');
            } else {
                return redirect()->route('welcome');
            }
        } catch (\Exception $e) {
            Log::error($e->getMessage());
            $this->data['error'] = $e->getMessage();
            return redirect()->route('welcome');
        }
    }

    public function contact(Request $request)
    {
        $data = $request->except(['_token']);
        $email = $data['email'];
        $msg = $data['message'];

        Mail::to('nikola.gutic@yandex.com')->send(new
ContactAdministrator($msg, $email));
        return redirect()->back();
    }

    public function error()
    {
        return view('client.error', $this->data);
    }

```

```
}  
}
```

## AjaxController

```
<?php  
  
namespace App\Http\Controllers;  
  
use App\Models\AdminModel;  
use App\Models\AjaxModel;  
use App\Models\PostModel;  
use App\Models\ProfilesModel;  
use Illuminate\Http\Request;  
use Psy\Util\Json;  
use function Symfony\Component\Translation\t;  
  
class AjaxController extends BaseController  
{  
    private $postModel;  
    private $profileModel;  
    private $adminModel;  
  
    public function __construct()  
    {  
        $this->postModel = new PostModel();  
        $this->profileModel = new ProfilesModel();  
        $this->adminModel = new AdminModel();  
  
        parent::__construct();  
    }  
  
    public function comments(Request $request)  
    {  
        $data = $request->except(['_token']);  
        if ($data['content'] != '') {  
            $result = $this->postModel->insertGetComments($data);  
            foreach ($result as $e) {  
                $e->elapsed = time_elapsed_string($e->time);  
            }  
            return Json::encode($result);  
        }  
    }  
  
    public function likes(Request $request)  
    {  
        $data = $request->except(['_token']);  
  
        $result = $this->postModel->insertGetLikes($data);  
        return Json::encode($result);  
    }  
  
    public function follow(Request $request)
```

```

    {
        $data = $request->except(['_token']);

        $result = $this->profileModel->insertGetFollow($data);

        return Json::encode($result);
    }

    public function returnRole(Request $request)
    {
        $data = $request->all();
        $role = $data['role_id'];
        $result = $this->adminModel->returnRole($role);

        return Json::encode($result);
    }

    public function returnNav(Request $request)
    {
        $data = $request->all();
        $nav = $data['navlink_id'];
        $result = $this->adminModel->returnNav($nav);

        return Json::encode($result);
    }

    public function fetchLogs(Request $request)
    {
        $data = $request->all();
        $page = $data['page'];
        $date = $data['date'];

        $logs = $this->adminModel->getDataFromLaravelLog($date);

        $this->data['logs'] = $this->adminModel->paginate($logs, 5, $page);
        return view('admin.partials.logs-table-partial', $this->data)-
>render();
    }
}

```

## AdminController

```

<?php

namespace App\Http\Controllers;

use App\Models\AdminModel;
use App\Models\ProfilesModel;
use Illuminate\Http\Request;

class AdminController extends BaseController
{
    private $profileModel;
}

```

```

private $adminModel;

public function __construct()
{
    parent::__construct();
    $this->profileModel = new ProfilesModel();
    $this->adminModel = new AdminModel();
}

public function index(Request $request)
{
    $id = $request->session()->get('user')->user_id;

    $this->data['accounts'] = $this->profileModel->displayAccounts($id);
    return view('admin.partials.account-control', $this->data);
}

public function roleUpdate(Request $request, $id)
{
    $data = $request->all();
    $role = $data['role_id'];
    $this->profileModel->updateRole($role, $id);
    return redirect()->back();
}

public function status(Request $request, $id)
{
    $data = $request->all();
    $status = $data['status'];

    $this->profileModel->updateStatus($status, $id);
    return redirect()->back();
}

public function roleEdit()
{
    $this->data['roles'] = $this->adminModel->getRoles();
    return view('admin.partials.role-edit', $this->data);
}

public function createRole(Request $request)
{
    $data = $request->except(['token']);
    $this->adminModel->createRole($data);

    return redirect()->back();
}

public function deleteRole(Request $request)
{
    $id = $request->except(['token']);
    $this->adminModel->deleteRole($id);

    return redirect()->back();
}

public function updateRole(Request $request)

```

```

{
    $data = $request->all();
    $this->adminModel->updateRole($data['role_id'], $data['role_name']);
    return redirect()->back();
}

public function navEdit()
{
    return view('admin.partials.nav-edit', $this->data);
}

public function createNav(Request $request)
{
    $data = $request->except(['_token']);
    $this->adminModel->createNav($data);

    return redirect()->back();
}

public function deleteNav(Request $request)
{
    $id = $request->except(['_token']);
    $this->adminModel->deleteNav($id);

    return redirect()->back();
}

public function updateNav(Request $request)
{
    $data = $request->all();

    $id = $data['navlink_id'];
    $name = $data['name'];
    $alt = $data['alttag'];
    $route = $data['route'];

    $this->adminModel->updateNav($id, $name, $route, $alt);
    return redirect()->back();
}

public function logs()
{
    $logs = $this->adminModel->getDataFromLaravelLog();

    $this->data['logs'] = $this->adminModel->paginate($logs);

    return view('admin.partials.log-view', $this->data);
}
}

```



## AboutController

```
<?php

namespace App\Http\Controllers;

use Illuminate\Http\Request;

class AboutController extends BaseController
{
    public function __construct()
    {
        parent::__construct();
    }

    public function index(Request $request)
    {
        return view('client.about', $this->data);
    }
}
```

## Middleware

### AdminMiddleware

```
<?php

namespace App\Http\Middleware;

use Closure;
use Illuminate\Http\Request;

class AdminMiddleware
{
    /**
     * Handle an incoming request.
     *
     * @param \Illuminate\Http\Request $request
     * @param \Closure(\Illuminate\Http\Request): (\Illuminate\Http\Response|\Illuminate\Http\RedirectResponse) $next
     * @return \Illuminate\Http\Response|\Illuminate\Http\RedirectResponse
     */
    public function handle(Request $request, Closure $next)
    {
        if ($request->session()->has('user')) {
            if ($request->session()->get('user')->role_id == 2) {
                return $next($request);
            }
            return redirect()->back();
        }
        return redirect()->route('welcome');
    }
}
```

```
}  
}
```

## SignedInMiddleware

```
<?php  
  
namespace App\Http\Middleware;  
  
use Closure;  
use Illuminate\Http\Request;  
  
class SignedInMiddleware  
{  
    /**  
     * Handle an incoming request.  
     *  
     * @param  \Illuminate\Http\Request  $request  
     * @param  \Closure(\Illuminate\Http\Request):  
     * (\Illuminate\Http\Response|\Illuminate\Http\RedirectResponse)  $next  
     * @return \Illuminate\Http\Response|\Illuminate\Http\RedirectResponse  
     */  
    public function handle(Request $request, Closure $next)  
    {  
        if($request->session()->has('user')) {  
            return $next($request);  
        }  
        return redirect()->route('welcome');  
    }  
}
```

## SignedOutMiddleware

```
<?php  
  
namespace App\Http\Middleware;  
  
use Closure;  
use Illuminate\Http\Request;  
  
class SignedOutMiddleware  
{  
    /**  
     * Handle an incoming request.  
     *  
     * @param  \Illuminate\Http\Request  $request  
     * @param  \Closure(\Illuminate\Http\Request):  
     * (\Illuminate\Http\Response|\Illuminate\Http\RedirectResponse)  $next  
     * @return \Illuminate\Http\Response|\Illuminate\Http\RedirectResponse  
     */  
    public function handle(Request $request, Closure $next)  
    {  
        if($request->session()->has('user')) {
```

```

        return redirect()->route('home.index', session()->get('user')->username);
    }
    return $next($request);
}
}

```

## Requests

### ChangePasswordRequest

```

<?php
namespace App\Http\Requests;

use Illuminate\Foundation\Http\FormRequest;

class ChangePasswordRequest extends FormRequest
{
    /**
     * Determine if the user is authorized to make this request.
     *
     * @return bool
     */
    public function authorize()
    {
        return true;
    }

    /**
     * Get the validation rules that apply to the request.
     *
     * @return array
     */
    public function rules()
    {
        return [
            'old-password' => 'bail|required|string',
            'new-password' => 'bail|required|string',
            'repeat-password' => 'bail|required|string'
        ];
    }
}

```

## CreateProfileRequest

```
<?php

namespace App\Http\Requests;

use Illuminate\Foundation\Http\FormRequest;

class CreateProfileRequest extends FormRequest
{
    /**
     * Determine if the user is authorized to make this request.
     *
     * @return bool
     */
    public function authorize()
    {
        return true;
    }

    /**
     * Get the validation rules that apply to the request.
     *
     * @return array
     */
    public function rules()
    {
        return [
            'username' => 'bail|required|string|min:3',
            'email' => 'bail|required|string|min:10',
            'password' => 'bail|required|string',
            'confPassword' => 'bail|required|string',
            'gender' => 'bail|required'
        ];
    }
}
```

## PostCreateRequest

```
<?php

namespace App\Http\Requests;

use Illuminate\Foundation\Http\FormRequest;

class PostCreateRequest extends FormRequest
{
    /**
     * Determine if the user is authorized to make this request.
     *
     * @return bool
     */
    public function authorize()
    {
```

```

        return true;
    }

    /**
     * Get the validation rules that apply to the request.
     *
     * @return array
     */
    public function rules()
    {
        return [
            "content" => 'bail|required|min:1',
            "image" => 'file|mimes:jpg,jpeg,png,svg,gif|max:2048'
        ];
    }
}

```

## Kernel.php

```

<?php

namespace App\Http;

use App\Http\Middleware\IpLoggingMiddleware;
use App\Http\Middleware\SignedInMiddleware;
use Illuminate\Foundation\Http\Kernel as HttpKernel;

class Kernel extends HttpKernel
{
    /**
     * The application's global HTTP middleware stack.
     *
     * These middleware are run during every request to your application.
     *
     * @var array<int, class-string|string>
     */
    protected $middleware = [
        // \App\Http\Middleware\TrustHosts::class,
        \App\Http\Middleware\TrustProxies::class,
        \Fruitcake\Cors\HandleCors::class,
        \App\Http\Middleware\PreventRequestsDuringMaintenance::class,
        \Illuminate\Foundation\Http\Middleware\ValidatePostSize::class,
        \App\Http\Middleware\TrimStrings::class,
        \Illuminate\Foundation\Http\Middleware\ConvertEmptyStringsToNull::class,
    ];

    /**
     * The application's route middleware groups.
     *
     * @var array<string, array<int, class-string|string>>
     */
    protected $middlewareGroups = [

```

```

        'web' => [
            \App\Http\Middleware\EncryptCookies::class,
            \Illuminate\Cookie\Middleware\AddQueuedCookiesToResponse::class,
            \Illuminate\Session\Middleware\StartSession::class,
            // \Illuminate\Session\Middleware\AuthenticateSession::class,
            \Illuminate\View\Middleware\ShareErrorsFromSession::class,
            \App\Http\Middleware\VerifyCsrfToken::class,
            \Illuminate\Routing\Middleware\SubstituteBindings::class,
            \App\Http\Middleware\IpLoggingMiddleware::class,
        ],

        'api' => [
            //
            \Laravel\Sanctum\Http\Middleware\EnsureFrontendRequestsAreStateful::class,
            'throttle:api',
            \Illuminate\Routing\Middleware\SubstituteBindings::class,
        ],
    ];

    /**
     * The application's route middleware.
     *
     * These middleware may be assigned to groups or used individually.
     *
     * @var array<string, class-string|string>
     */
    protected $routeMiddleware = [
        'auth' => \App\Http\Middleware\Authenticate::class,
        'auth.basic' =>
            \Illuminate\Auth\Middleware\AuthenticateWithBasicAuth::class,
        'cache.headers' =>
            \Illuminate\Http\Middleware\SetCacheHeaders::class,
        'can' => \Illuminate\Auth\Middleware\Authorize::class,
        'guest' => \App\Http\Middleware\RedirectIfAuthenticated::class,
        'password.confirm' =>
            \Illuminate\Auth\Middleware\RequirePassword::class,
        'signed' => \Illuminate\Routing\Middleware\ValidateSignature::class,
        'throttle' => \Illuminate\Routing\Middleware\ThrottleRequests::class,
        'verified' =>
            \Illuminate\Auth\Middleware\EnsureEmailIsVerified::class,
        'signedin' => \App\Http\Middleware\SignedInMiddleware::class,
        'signedout' => \App\Http\Middleware\SignedOutMiddleware::class,
        'admin' => \App\Http\Middleware\AdminMiddleware::class
    ];
}

```

## Mail

### ContactAdministrator

```
<?php

namespace App\Mail;

use Illuminate\Bus\Queueable;
use Illuminate\Contracts\Queue\ShouldQueue;
use Illuminate\Mail\Mailable;
use Illuminate\Queue\SerializesModels;

class ContactAdministrator extends Mailable
{
    use Queueable, SerializesModels;

    protected $message;
    protected $email;

    /**
     * Create a new message instance.
     *
     * @return void
     */
    public function __construct($msg, $email)
    {
        $this->message = $msg;
        $this->email = $email;
    }

    /**
     * Build the message.
     *
     * @return $this
     */
    public function build()
    {
        return $this
            ->from($this->email)
            ->view('client.partials.sign-partials.email')
            ->with(['msg' => $this->message]);
    }
}
```

## Models

### AdminModel

```
<?php

namespace App\Models;

use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;
use Illuminate\Pagination\LengthAwarePaginator;
use Illuminate\Pagination\Paginator;
use Illuminate\Support\Collection;
use Illuminate\Support\Facades\DB;
use Illuminate\Support\Facades\Log;
use mysql_xdevapi\Exception;

class AdminModel extends Model
{
    use HasFactory;

    public function getRoles()
    {
        return DB::table('roles')
            ->get();
    }

    public function createRole($role)
    {
        DB::table('roles')->insert($role);
    }

    public function deleteRole($id)
    {
        DB::table('roles')
            ->where('role_id', $id['role_id'])
            ->delete();
    }

    public function returnRole($id)
    {
        return DB::table('roles')
            ->where('role_id', $id)
            ->first();
    }

    public function updateRole($id, $name)
    {
        DB::table('roles')
            ->where('role_id', $id)
            ->update(['role_name' => $name]);
    }

    public function createNav($nav)
```



```

{
    DB::table('navlinks')->insert($nav);
}

public function deleteNav($id)
{
    DB::table('navlinks')
        ->where('navlink_id', $id['navlink_id'])
        ->delete();
}

public function returnNav($id)
{
    return DB::table('navlinks')
        ->where('navlink_id', $id)
        ->first();
}

public function updateNav($id, $name, $route, $alt)
{
    DB::table('navlinks')
        ->where('navlink_id', $id)
        ->update(['name' => $name, 'route' => $route, 'alttag' => $alt]);
}

public function getDataFromLaravelLog($date = '')
{
    $logs = [];
    foreach (file(storage_path() . '/logs/laravel.log') as $line) {
        if (str_contains($line, ".INFO")) {

            $string['date'] = substr(explode(' ', $line)[0], 1,
strlen(explode(' ', $line)[0]));
            $string['time'] = substr(explode(' ', $line)[1], 0, -1);
            $string['type'] = substr(explode(' ', $line)[3], 0, -1);
            $string['message'] = explode(' ', $line)[4];

            $user = explode(' ', $line)[5];
            $user = substr($user, 1, -2);
            $user = explode(',', $user);

            $name = substr(explode(':', substr($user[0], 1, -1))[1], 1,
strlen(explode(':', substr($user[0], 1, -1))[1]));
            $email = substr(explode(':', substr($user[1], 1, -1))[1], 1,
strlen(explode(':', substr($user[1], 1, -1))[1]));

            $string['user'] = $name;
            $string['email'] = $email;
            array_push($logs, $string);
        }
    }
    if ($date != '') {
        $logsFilter = [];
        try {
            $timex = strtotime($date);
            foreach ($logs as $e) {
                $time = strtotime($e['date']);
            }
        }
    }
}

```

```

        if ($time == $timex) {
            array_push($logsFilter, $e);
        }
    }
    return $logsFilter;
} catch (\Exception $exception) {
    Log::error($exception->getMessage());
    return $logs;
}
}
$logs = array_reverse($logs, true);
return $logs;
}

public function paginate($items, $perPage = 5, $page = null, $options =
[])
{
    $page = $page ?: (Paginator::resolveCurrentPage() ?: 1);
    $items = $items instanceof Collection ? $items :
Collection::make($items);
    return new LengthAwarePaginator($items->forPage($page, $perPage),
$items->count(), $perPage, $page, $options);
}
}

```

## AuthModel

```

<?php

namespace App\Models;

use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;
use Illuminate\Support\Facades\DB;

class AuthModel extends Model
{
    use HasFactory;

    public function signup($user){
        DB::table('users')->insert($user);
    }
}

```

## MenuModel

```
<?php

namespace App\Models;

use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;
use Illuminate\Support\Facades\DB;

class Menu extends Model
{
    use HasFactory;

    public function get(){
        return DB::table('navlinks')
            ->select('name', 'route', 'icon', 'alttag', 'navlink_id')
            ->get();
    }
}
```

## MessageModel

```
<?php

namespace App\Models;

use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;
use Illuminate\Support\Facades\DB;

class MessageModel extends Model
{
    use HasFactory;

    public function sendMsg($data)
    {
        DB::table('messages')->insert(['sender_id' => $data['idt'],
        'receiver_id' => $data['idx'], 'content' => $data['content']]);
    }

    public function getChats($id)
    {
        $niz = [];
        $idx = DB::table('followings')
            ->where('follower_id', $id)
            ->select('followed_id')
            ->distinct()
            ->get();

        $sidy = DB::table('followings')
            ->where('followed_id', $id)
            ->select('follower_id')
            ->distinct()
    }
}
```

```

        ->get();
        foreach ($idx as $id) {
            foreach ($idy as $x) {
                if ($x->follower_id == $id->followed_id) {
                    array_push($niz, $id->followed_id);
                }
            }
        }

        $users = [];

        foreach ($niz as $e) {
            $result = DB::table('users')
                ->where('user_id', $e)
                ->select('username', 'profile_pic', 'user_id')
                ->first();
            array_push($users, $result);
        }
        return $users;
    }

    public function fetchMessages($data)
    {
        return DB::table('messages')
            ->where(function ($query) use ($data) {
                $query->where('receiver_id', '=', $data['idx'])
                    ->orWhere('sender_id', '=', $data['idx']);
            })
            ->where(function ($query) use ($data) {
                $query->where('receiver_id', '=', $data['idt'])
                    ->orWhere('sender_id', '=', $data['idt']);
            })
            ->get();
    }
}

```

## PostModel

```

<?php

namespace App\Models;

use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;
use Illuminate\Http\Request;
use Illuminate\Support\Facades\DB;

class PostModel extends Model
{
    use HasFactory;

    public function posts($id)
    {

```

```

{
    return DB::table('posts as p')
        ->join('users as u', 'p.user_id', '=', 'u.user_id')
        ->where('p.user_id', $id)
        ->select('p.post_id', 'p.user_id', 'u.username', 'p.content',
'u.profile_pic', 'u.from', 'p.created', 'p.image')
        ->get();
}

public function comments($post_id)
{
    return DB::table('comments as c')
        ->join('users as u', 'c.user_id', '=', 'u.user_id')
        ->where('c.post_id', $post_id)
        ->orderBy('time')
        ->select('c.post_id', 'c.user_id', 'c.content', 'c.time',
'u.username', 'u.profile_pic')
        ->get();
}

public function likes($post_id)
{
    return DB::table('likes')
        ->where('post_id', $post_id)
        ->get();
}

public function insertGetComments($data)
{
    $id = $data['post_id'];
    DB::table('comments')->insert($data);
    return DB::table('users as u')
        ->join('comments as c', 'c.user_id', '=', 'u.user_id')
        ->where('c.post_id', $id)
        ->get();
}

public function insertGetLikes($data)
{
    $pid = $data['post_id'];
    $uid = $data['user_id'];

    $like = DB::table('likes')
        ->where('post_id', $pid)
        ->where('user_id', $uid)
        ->first();

    if ($like != null) {
        DB::table('likes')
            ->where('post_id', $pid)
            ->where('user_id', $uid)
            ->delete();
    } else {
        DB::table('likes')->insert($data);
    }
}

```

```

        return DB::table('likes')
            ->where('post_id', $pid)
            ->get();
    }

    public function insert($post)
    {
        DB::table('posts')->insert($post);
    }

    public function deletePost($id)
    {
        DB::table('posts')->where('post_id', $id)->delete();
    }

    public function novi($id)
    {
        return DB::table('comments')
            ->where('post_id', $id)
            ->get();
    }
}

```

## ProfilesModel

```

<?php

namespace App\Models;

use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;
use Illuminate\Support\Facades\DB;

class ProfilesModel extends Model
{
    use HasFactory;

    public function user($username)
    {
        return DB::table('users')
            ->where('username', $username)
            ->first();
    }

    public function getID($username)
    {
        return DB::table('users')
            ->where('username', $username)
            ->select('user_id')
            ->first();
    }

    public function followings($id)

```

```

{
    $following = DB::table('users as u')
        ->join('followings as f', 'f.follower_id', '=', 'u.user_id')
        ->where('f.follower_id', '=', $id)
        ->count('f.follower_id');

    $followers = DB::table('users as u')
        ->join('followings as f', 'f.follower_id', '=', 'u.user_id')
        ->where('f.followed_id', '=', $id)
        ->count('f.follower_id');

    //return number of following and followers
    return ['following' => $following, 'followers' => $followers];
}

public function getProfiles($id, $key = '')
{
    if ($key != '') {
        return DB::table('users')
            ->where('user_id', '!=', $id)
            ->where('username', 'LIKE', '%' . $key . '%')
            ->paginate(4);
    }
    return DB::table('users')
        ->where('user_id', '!=', $id)
        ->paginate(4);
}

public function getFollowers($id)
{
    return DB::table('followings')
        ->where('followed_id', $id)
        ->get();
}

public function getFollowed($id)
{
    $result = DB::table('followings')
        ->where('follower_id', $id)
        ->select('followed_id')
        ->distinct()
        ->get();
    $array = [];
    foreach ($result as $e) {
        array_push($array, $e->followed_id);
    }
    return $array;
}

public function topProfiles($id)
{
    return DB::table('users as u')
        ->join('followings as f', 'f.followed_id', '=', 'u.user_id')
        ->where('u.user_id', '!=', $id)
        ->select('u.username', 'u.profile_pic',
DB::raw('count("f.followed_id") as num'), 'from')
        ->groupBy('u.username', 'u.profile_pic', 'from')

```

```

        ->orderByDesc('num')
        ->get();
    }

    public function updateCover($user)
    {
        if ($user['coverImage']) {
            DB::table('users')->where('user_id', $user['user_id'])->
            update(['background' => $user['coverImage']]);
        } else {
            return false;
        }
    }

    public function updateProfilePic($user)
    {
        if ($user['profile_pic']) {
            DB::table('users')->where('user_id', $user['user_id'])->
            update(['profile_pic' => $user['profile_pic']]);
        } else {
            return false;
        }
    }

    public function insertGetFollow($data)
    {
        $ut = $data['follower_id'];
        $ux = $data['followed_id'];

        $exist = DB::table('followings')
            ->where('follower_id', $ut)
            ->where('followed_id', $ux)
            ->first();

        if ($exist != null) {
            DB::table('followings')
                ->where('follower_id', $ut)
                ->where('followed_id', $ux)
                ->delete();
            return 'Follow';
        } else {
            DB::table('followings')->insert($data);
            return 'Following';
        }
    }

    public function checkAndChangePassword($data)
    {
        $old = $data['old-password'];
        $old = md5($old);
        $new = $data['new-password'];
        $new = md5($new);

        $result = DB::table('users')
            ->where('user_id', $data['id'])
            ->first();
    }

```



```

        if ($result) {
            return DB::table('users')
                ->where('password', $old)
                ->update(['password' => $new]);
        }
        return false;
    }

    public function infoUpdate($user, $id)
    {
        DB::table('users')
            ->where('user_id', $id)
            ->update(['work' => $user['work'], 'mobile_number' =>
                $user['mobile_number'], 'from' => $user['from']]);
    }

    public function bioUpdate($user, $id)
    {
        DB::table('users')
            ->where('user_id', $id)
            ->update(['bio' => $user['bio']]);
    }

    public function deactivate($enc)
    {
        return DB::table('users')
            ->where('password', $enc)
            ->update(['active' => 1]);
    }

    public function displayAccounts($id)
    {
        return DB::table('users as u')
            ->join('roles as r', 'u.role_id', '=', 'r.role_id')
            ->where('user_id', '!=', $id)
            ->get();
    }

    public function updateRole($role, $id)
    {
        if ($role == 1) {
            DB::table('users')
                ->where('user_id', $id)
                ->update(['role_id' => 2]);
        } else {
            DB::table('users')
                ->where('user_id', $id)
                ->update(['role_id' => 1]);
        }
    }

    public function updateStatus($status, $id)
    {
        if ($status == 1) {
            DB::table('users')
                ->where('user_id', $id)
                ->update(['active' => 0]);
        }
    }

```

```

        } else {
            DB::table('users')
                ->where('user_id', $id)
                ->update(['active' => 1]);
        }
    }
}

```

## Blade fajlovi

### Admin-layout

```

<!DOCTYPE html>
<html lang="en">
<head>
    @include('admin.head')
</head>
<body>
<div class="container-scroller">
    @include('admin.nav')
    <!-- partial -->
    <div class="container-fluid page-body-wrapper">
        <!-- partial:partials/_navbar.html -->
        @include('admin.nav-bar')
        <!-- partial -->
        <div class="main-panel">
            <div class="content-wrapper">
                @yield('main')
            </div>
            <!-- content-wrapper ends -->
            <!-- partial:partials/_footer.html -->
            @include('admin.footer')
            <!-- partial -->
        </div>
        <!-- main-panel ends -->
    </div>
    <!-- page-body-wrapper ends -->
</div>
<!-- container-scroller -->
    @include('admin.scripts')
</body>
</html>

```

### Layout

```

<!DOCTYPE html>
<html>
<head>
    @include('common.head')
</head>

```

```

<body oncontextmenu="return false;">

<div class="wrapper">

    @include('common.header')

    @yield('content')
    @yield('footer')
</div>
@include('common.scripts')
</body>
</html>

```

## Common/head

```

<meta charset="UTF-8">

<title>IIMBER</title>

<meta name="viewport" content="width=device-width, initial-scale=1.0">
<meta name="description" content="">
<meta name="keywords" content="">

<link rel="icon" type="image/png"
href="{{asset('assets/images/logo.ico')}}" />
<link rel="stylesheet" type="text/css"
href="{{asset('assets/css/animate.css')}}">
<link rel="stylesheet" type="text/css"
href="{{asset('assets/css/bootstrap.min.css')}}">

<link rel="stylesheet" type="text/css" href="{{asset('assets/css/line-
awesome.css')}}">
{{--<link rel="stylesheet" type="text/css" href="{{asset('assets/css/line-
awesome-font-awesome.min.css')}}">--}}
{{--<link href="{{asset('assets/vendor/fontawesome-free/css/all.min.css')}}"
rel="stylesheet" type="text/css">--}}
<link rel="stylesheet" type="text/css" href="{{asset('assets/css/font-
awesome.min.css')}}">

@stack('css')

<link rel="stylesheet" type="text/css"
href="{{asset('assets/css/style.css')}}">
<link rel="stylesheet" type="text/css"
href="{{asset('assets/css/responsive.css')}}">

```

## Common/header

```
<header>
  <div class="container">
    <div class="header-data">
      <div class="logo">
        <a href="{{route($menu[0]->route)}}" title=""></a>
      </div><!--logo end-->
      <nav>
        <ul>
          @foreach($menu as $link)
            @if($link->name == 'Author')
              @continue
            @endif
            <li>
              <a href="{{route($link->route)}}" title="">
                <span>alttag }}"></span>
                {{ $link->name }}
              </a>
            </li>
            @endforeach
            @if(session()->get('user')->role_id == 2)
              <li>
                <a href="{{route('accountCtrl')}}" title="">
                  <span></span>
                  Admin Panel
                </a>
              </li>
            @endif
          </ul>
        </nav><!--nav end-->
        <div class="menu-btn">
          <a href="#" title=""><i class="fa fa-bars"></i></a>
        </div><!--menu-btn end-->
        <div class="user-account">
          <div class="user-info">
            <a href="#" title="">{{session()->get('user')->username}}
          </div>
          <div class="user-account-settingss" id="users">
            <ul class="us-links">
              <li>
                <a href="{{route('profiles.show', session()->get('user')->username)}}" title="">View
                Profile</a>
              </li>
              <li><a href="{{route('settings', session()->get('user')->username)}}" title="">Account
                Settings</a>
            </ul>
          </div>
        </div>
      </div>
    </div>
  </div>
```

```

                </li>
                <li>
                    <a href="{{route('signout')}}" title="">Sign
Out</a>
                </li>
            </ul>
        </div><!--user-account-settingss end-->
    </div>
</div><!--header-data end-->
</div>
</header><!--header end-->

```

## Common/scripts

```

<!-- JS Scripts -->
<script src="{{asset('assets/js/jquery.min.js')}}"></script>
<script src="{{asset('assets/js/popper.js')}}"></script>
<script src="{{asset('assets/js/bootstrap.min.js')}}"></script>

@stack('scripts')

<script src="{{asset('assets/js/script.js')}}"></script>
<script src="{{asset('assets/js/main.js')}}"></script>

```

## Common/signup

```

<!DOCTYPE html>
<html>
<head>
    @include('common.head')
</head>

<body class="sign-in" oncontextmenu="return false;">

<div class="wrapper">

    <div class="sign-in-page">
        <div class="signin-popup">
            <div class="signin-pop">
                <div class="row">
                    <div class="col-lg-6">
                        <div class="cmp-info">
                            <div class="cm-logo">
                                
                                <p>Workwise, is a global freelancing platform
and social networking where businesses and
                                independent professionals connect and
collaborate remotely</p>
                            </div><!--cm-logo end-->

```

```

                                
                                </div><!--cmp-info end-->
                                </div>
                                <div class="col-lg-6">
                                    <div class="login-sec">
                                        <ul class="sign-control">
                                            <li data-tab="tab-1" class="current"><a
href="#" title="">Sign in</a></li>
                                            <li data-tab="tab-2"><a href="#"
title="">Sign up</a></li>
                                            <li data-tab="tab-4"><a href="#"
title="">Contact</a></li>
                                        </ul>

                                        @include('client.partials.sign-partials.sing-in')

                                        @include('client.partials.sign-partials.sing-up')

                                        @include('client.partials.sign-partials.contact')
                                    </div><!--login-sec end-->
                                </div>
                            </div>
                        </div><!--signin-pop end-->
                    </div><!--signin-popup end-->
                </div><!--sign-in-page end-->
            </div><!--theme-layout end-->
            @include('common.scripts')
        </body>
    </html>

```

## Client/about

```

@extends('layouts.layout')
@push('scripts')
    <script src="{{asset('assets/js/jquery.mCustomScrollbar.js')}}"></script>
    <script src="{{asset('assets/lib/slick/slick.min.js')}}"></script>
    <script src="{{asset('assets/js/scrollbar.js')}}"></script>
@endpush
@push('css')
    <link rel="stylesheet" type="text/css"
href="{{asset('assets/lib/slick/slick.css')}}">
    <link rel="stylesheet" type="text/css"
href="{{asset('assets/lib/slick/slick-theme.css')}}">
    <link rel="stylesheet" type="text/css"
href="{{asset('assets/css/jquery.mCustomScrollbar.min.css')}}">
@endpush
@section('content')
    <section class="Company-overview">
        <div class="container">
            <div class="row flex">
                <div class="col-md-4 col-sm-12">
                    <h2 id="h">

```

```

        Nikola Gutić
    </h2>
    <p class="bio">
        I am studying at the College of Information and
Communication Technologies, majoring in Internet
        Technology and I enjoy everything this college has to
offer.
    </p>
    <br>
    <p class="bio">Some of previous projects</p>
    <br>
    <ul>
        <li><a target="_blank" class="bio"
href="https://nikola-wp2.netlify.app/">Shimmer</a></li>
        <li><a target="_blank" class="bio"
href="https://nikola-wp-1.netlify.app/">NIIC</a></li>
        <li><a target="_blank" class="bio"
href="https://nikola-gutic-ispit.netlify.app/">Komorebi</a></li>
    </ul>
    <br>
    <p><a target="_blank" class="bio"
href="">Documentation</a></p>
    </div>
    <div class="col-md-4 col-sm-6 author">
        
    </div>
    </div>
</div>
</section>
@endsection
@section('footer')
    @include('client.footer')
@endsection

```

## Client/account-settings

```

@extends('layouts.layout')
@push('scripts')
    <script src="{{asset('assets/js/jquery.mCustomScrollbar.js')}}"></script>
    <script src="{{asset('assets/lib/slick/slick.min.js')}}"></script>
@endpush
@push('css')
    <link rel="stylesheet" type="text/css"
href="{{asset('assets/lib/slick/slick.css')}}">
    <link rel="stylesheet" type="text/css"
href="{{asset('assets/lib/slick/slick-theme.css')}}">
    <link rel="stylesheet" type="text/css"
href="{{asset('assets/css/jquery.mCustomScrollbar.min.css')}}">
@endpush

@section('content')
    <section class="profile-account-setting">

```

```

        <div class="container">
            <div class="account-tabs-setting">
                <div class="row">
                    <div class="col-lg-3">
                        <div class="acc-leftbar">
                            <div class="nav nav-tabs" id="nav-tab"
role="tablist">
                                <a class="nav-item nav-link active" id="nav-
password-tab" data-toggle="tab"
                                    href="#nav-password" role="tab" aria-
controls="nav-password" aria-selected="false"><i
                                    class="fa fa-lock"></i>Change
Password</a>
                                <a class="nav-item nav-link" id="nav-privacy-
tab" data-toggle="tab" href="#privacy"
                                    role="tab" aria-controls="privacy" aria-
selected="false"><i class="fa fa-paw"></i>Account
Support</a>
                                <a class="nav-item nav-link" id="nav-
deactivate-tab" data-toggle="tab"
                                    href="#nav-deactivate" role="tab" aria-
controls="nav-deactivate"
                                    aria-selected="false"><i class="fa fa-
random"></i>Deactivate Account</a>
                            </div>
                        </div><!--acc-leftbar end-->
                    </div>
                    <div class="col-lg-9">
                        <div class="tab-content" id="nav-tabContent">
                            @component('client.partials.account-
settings.password-reset')
                            @endcomponent
                            @component('client.partials.account-
settings.account-support', [
                                'user'=>$user
                            ])
                            @endcomponent
                            @component('client.partials.account-
settings.deactivate-account')
                            @endcomponent
                        </div>
                    </div>
                </div>
            </div><!--account-tabs-setting end-->
        </div>
    </section>
@endsection
@section('footer')
    @include('client.footer')
@endsection

```



## Client/error

```
@extends('layouts.layout')

@section('content')
    <h1>There was Error proccessing your request</h1>
    {{--      <h2>{{ $error[0] }}</h2>--}}
@endsection
```

## Client/footer

```
<footer>
    <div class="footy-sec mn no-margin">
        <div class="container">
            <ul>
                @foreach($menu as $link)
                    <li><a href="{{route($link->route)}}" title="">{{ $link->name }}</a></li>
                @endforeach
            </ul>
        </div>
        <div id="xex">
            
        </div>
    </div>
</footer>
```

## Client/messages

```
@extends('layouts.layout')
@push('scripts')
    <script src="{{asset('assets/js/ajax.js')}}"></script>
    <script src="{{asset('assets/js/jquery.mCustomScrollbar.js')}}"></script>
    <script src="{{asset('assets/lib/slick/slick.min.js')}}"></script>
    <script src="{{asset('assets/js/scrollbar.js')}}"></script>
@endpush
@push('css')
    <link rel="stylesheet" type="text/css"
href="{{asset('assets/lib/slick/slick.css')}}">
    <link rel="stylesheet" type="text/css"
href="{{asset('assets/lib/slick/slick-theme.css')}}">
    <link rel="stylesheet" type="text/css"
href="{{asset('assets/css/jquery.mCustomScrollbar.min.css')}}">
@endpush
@section('content')
    <section class="profile-account-setting">
        <div class="container">
```

```

        <div class="account-tabs-setting">
            <div class="row">
                <div class="col-lg-3">
                    <div class="acc-leftbar">
                        <div class="nav nav-tabs" id="nav-tab"
role="tablist">
                            @foreach($chats as $chat)
                                <a class="nav-item nav-link msgBox"
id="nav-{{str_replace(' ', '', strtolower($chat->username))}}-tab"
                                data-toggle="tab"
                                href="#nav-{{str_replace(' ', '',
strtolower($chat->username))}}"
                                role="tab" aria-controls="nav-
{{str_replace(' ', '', strtolower($chat->username))}}" aria-selected="false"
                                data-idt="{{session()->get('user')->user_id}}" data-idx="{{ $chat->user_id }}">
                                    <li>
                                        <div class="usr-msg-details">
                                            <div class="usr-ms-img">
                                                
                                                alt="profile">
                                            </div>
                                            <div class="usr-mg-info">
                                                <h3>{{ $chat->
username}}</h3>
                                            </div><!--usr-mg-info end-->
                                        </div><!--usr-msg-details end-->
                                    </li>
                                </a>
                            @endforeach
                        </div>
                    </div><!--acc-leftbar end-->
                </div>
                <div class="col-lg-9" id="chatBox">
                    <div class="tab-content" id="nav-tabContent">
                        @foreach($chats as $chat)
                            @component('client.partials.chat', ['chat'=>
$chat, 'index'=>$loop->index])
                                @endcomponent
                            @endforeach
                        </div>
                    </div>
                </div><!--account-tabs-setting end-->
            </div>
        </section>
    @endsection
    @section('footer')
        @include('client.footer')
    @endsection

```

```

@extends('layouts.layout')
@push('scripts')
    <script src="{{asset('assets/js/jquery.mCustomScrollbar.js')}}"></script>
    <script src="{{asset('assets/lib/slick/slick.min.js')}}"></script>
    <script src="{{asset('assets/js/scrollbar.js')}}"></script>
    <script src="{{asset('assets/js/ajax.js')}}"></script>
@endpush
@push('css')
    <link rel="stylesheet" type="text/css"
href="{{asset('assets/lib/slick/slick.css')}}">
    <link rel="stylesheet" type="text/css"
href="{{asset('assets/lib/slick/slick-theme.css')}}">
    <link rel="stylesheet" type="text/css"
href="{{asset('assets/css/jquery.mCustomScrollbar.min.css')}}">
@endpush
@section('content')

    <main>
        <div class="main-section">
            <div class="container">
                <div class="main-section-data">
                    <div class="row">
                        <div class="col-lg-3 col-md-4 pd-left-none no-pd">
                            <div class="main-left-sidebar no-margin">

                                @include('client.partials.newsfeed-
partials.newsfeed-user-data')
                            </div><!--main-left-sidebar end-->
                        </div>
                        <div class="col-lg-6 col-md-8 no-pd">
                            @include('client.partials.newsfeed-
partials.newsfeed-post-topbar')
                            <div class="posts-section">
                                <div id="p-msg">
                                    @if(count($post) == 0)
                                        <h1 style="color: white">Follow
someone or post something</h1>
                                    @endif
                                </div>
                                @foreach($post as $p)
                                    @if($loop->index == 1)
                                        @component('client.partials.newsfeed-
partials.newsfeed-top-profiles',[
                                            "topProfiles"=>$topProfiles
                                        ])
                                            @endcomponent
                                    @endif
                                    @component('client.partials.post',[
                                        "post"=>$p
                                    ])
                                        @endcomponent
                                    @endforeach
                                </div><!--posts-section end-->
                            </div><!--main-ws-sec end-->
                        </div>
                    </div>
                </div>
            </div>
        </div>
    </main>

```

```

        <div class="col-lg-3 pd-right-none no-pd">
            @include('client.partials.newsfeed-
partials.newsfeed-right-sidebar')
        </div>
    </div>
</div><!-- main-section-data end-->
</div>
</main>

@include('client.partials.newsfeed-partials.popup-post')
</div><!--theme-layout end-->

@endsection

```

## Client/profile

```

@extends('layouts.layout')
@push('css')
    <link rel="stylesheet" type="text/css"
href="{{asset('assets/lib/slick/slick.css')}}">
    <link rel="stylesheet" type="text/css"
href="{{asset('assets/lib/slick/slick-theme.css')}}">
    <link rel="stylesheet"
href="https://cdnjs.cloudflare.com/ajax/libs/magnific-
popup.js/1.1.0/magnific-popup.css"/>
@endpush
@push('scripts')
    <script src="{{asset('assets/lib/slick/slick.min.js')}}"></script>
    <script src="{{asset('assets/js/ajax.js')}}"></script>
    <script
src="https://cdnjs.cloudflare.com/ajax/libs/jquery.isotope/3.0.6/isotope.pkgd
.js"></script>
    <script src="https://cdnjs.cloudflare.com/ajax/libs/magnific-
popup.js/1.1.0/jquery.magnific-popup.js"></script>
@endpush

@section('content')
    <section class="cover-sec"
        style='background-image: url("{{asset('storage/covers/' . $user-
>background)}}")'>
    </section>
    <main>
        <div class="main-section">
            <div class="container">
                <div class="main-section-data">
                    <div class="row">
                        <div class="col-lg-3">
                            @include('client.partials.profile-
partials.profile-left-sidebar')
                        </div>
                        <div class="col-lg-6">

```

```

                @include('client.partials.profile-
partials.profile-feed-tabs')
            </div>
            <div class="col-lg-3">
                @include('client.partials.profile-
partials.profile-right-sidebar')
            </div>
        </div>
    </div><!-- main-section-data end-->

</div>
</div>
</main>
@endsection

```

## Client/profiles

```

@extends('layouts.layout')
@push('scripts')
    <script src="{{asset('assets/lib/slick/slick.min.js')}}"></script>
    <script src="{{asset('assets/js/flatpickr.min.js')}}"></script>
    <script src="{{asset('assets/js/ajax.js')}}"></script>
@endpush
@push('css')
    <link rel="stylesheet" type="text/css"
href="{{asset('assets/css/flatpickr.min.css')}}">
    <link rel="stylesheet" type="text/css"
href="{{asset('assets/lib/slick/slick.css')}}">
    <link rel="stylesheet" type="text/css"
href="{{asset('assets/lib/slick/slick-theme.css')}}">
@endpush
@section('content')
    <section class="companies-info">
        <div class="container">
            <div class="company-title">
                <h3>Find people</h3>
                <div class="search-bar">
                    <form>
                        <input type="text" name="search"
placeholder="Search..." id="src">
                        <button><i class="la la-search"></i></button>
                    </form>
                </div><!--search-bar end-->
            </div><!--company-title end-->
            <div class="companies-list">
                <div class="row" id="profiles">
                    @include('client.partials.profiles-partials.for-
profiles')
                </div>
            </div><!--companies-list end-->
        </div>
    </section><!--companies-info end-->
@endsection

```

```
@section('footer')
  @include('client.footer')
@endsection
```

Client/partial/account-settings/

Account-support

```
<div class="tab-pane fade" id="privacy" role="tabpanel" aria-labelledby="nav-
privacy-tab">
  <div class="privac">
    <div class="row">
      <div class="col-12">
        <h3>Privacy</h3>
      </div>
    </div>
    <hr>
    <div class="row">
      <div class="col-12">
        <div class="dropdown privacydrop">
          <a href="#" class="dropdown-toggle" data-
toggle="dropdown">Change your profile picture</a>
          <div class="dropdown-menu">
            <div class="row">
              <div class="col-md-9 col-sm-12">
                <form
action="{{route('profiles.update',
['profile'=> session()->get('user')->user_id])}}"
method="POST"
id="cover-change"
enctype="multipart/form-data">
                  @method('put')
                  @csrf
                  <div class="custom-control">
                    <input type="file"
name="profile_pic">
                    <button type="submit" class="btn btn-
dark">Upload</button>
                  </div>
                  <h3>Make sure that picture has same
width and height</h3>
                </div>
              </form>
            </div>
          </div>
        </div>
      </div>
    </div>
    <hr>
    <div class="row">
      <div class="col-12">
        <div class="dropdown privacydrop">
          <a href="#" class="dropdown-toggle" data-
```

```

toggle="dropdown">Edit your basic information</a>
    <div class="dropdown-menu">
        <div class="row">
            <div class="col-md-9 col-sm-12">
                <form
                    action="{{route('profiles.update',
['profile'=>session()->get('user')->user_id])}}"
                    method="POST">
                    @method('put')
                    @csrf
                    <input type="text" name="info" hidden>
                    <div class="cp-field">
                        <h5>Where are you from ?</h5>
                        <div class="cpp-fiel">
                            <input type="text" name="from"
placeholder="Country - City"
                                value="{{ $user->from }}">
                        </div>
                    </div>
                    <div class="cp-field">
                        <h5>Mobile number ? Sure, no, maybe
?</h5>
                        <div class="cpp-fiel">
                            <input type="text"
name="mobile_number" placeholder="Write it down"
                                value="{{ $user->mobile_number }}">
                        </div>
                    </div>
                    <div class="cp-field">
                        <h5>Employee at ?</h5>
                        <div class="cpp-fiel">
                            <input type="text" name="work"
placeholder="Company"
                                value="{{ $user->work }}">
                        </div>
                    </div>
                    <button type="submit" class="btn btn-
dark">Save</button>
                </form>
            </div>
        </div>
    </div>
</div>
<hr>
<div class="row">
    <div class="col-12">
        <div class="dropdown privacydropd">
            <a href="#" class="dropdown-toggle" data-
toggle="dropdown">Write your bio</a>
            <div class="dropdown-menu">
                <div class="row">
                    <div class="col-md-9 col-sm-12">
                        <form
                            action="{{route('profiles.update',

```

```

['profile'=>session()->get('user')->user_id]]})}"
                                method="POST">
                                @method('put')
                                @csrf
                                <div class="cp-field">
                                    <h5>Bio</h5>
                                    <div class="cpp-fiel">
                                        <textarea type="text" name="bio"
more about you">{{$user->bio}}</textarea>
                                        placeholder="Tell us
                                    </div>
                                    <input type="text" name="bioX"
hidden>
                                </div>
                                <button type="submit" class="btn btn-
dark">Save</button>
                                </form>
                            </div>
                        </div>
                    </div>
                </div>
            </div>
        </div>
    </div>
</div>

```

## Deactivate-account

```

<div class="tab-pane fade" id="nav-deactivate" role="tabpanel"
    aria-labelledby="nav-deactivate-tab">
    <div class="acc-setting">
        <h3>Deactivate Account</h3>
        <form action="{{route('deactivate', ['id'=>session()->get('user')-
>username])}}" method="POST">
            @csrf
            <div class="cp-field">
                <h5>Password</h5>
                <div class="cpp-fiel">
                    <input type="password" name="password"
placeholder="Password">
                    <i class="fa fa-lock"></i>
                </div>
                <span> Note: When you deactivate account you'll be
automatically logged out</span>
            </div>
            <div class="save-stngs pd3">
                <ul>
                    <li>
                        <button type="submit">Deactivate</button>
                    </li>
                </ul>
            </div><!--save-stngs end-->
        </form>
    </div>

```



```

    </div><!--acc-setting end-->
</div>

```

## Password-reset

```

<div class="tab-pane fade show active" id="nav-password" role="tabpanel"
    aria-labelledby="nav-password-tab">
    <div class="acc-setting">
        <h3>Account Setting</h3>
        <form action="{{route('changePassword')}}" method="POST" id="reset">
            @csrf
            <div class="cp-field">
                <h5>Old Password</h5>
                <span id="oldHelp"></span>
                <div class="cpp-fiel">
                    <input type="password" name="old-password" id="oldPass"
placeholder="Old Password">
                    <i class="fa fa-lock"></i>
                </div>
            </div>
            <div class="cp-field">
                <h5>New Password</h5>
                <span id="passHelp"></span>
                <div class="cpp-fiel">
                    <input type="password" name="new-password" id='newPass'
placeholder="New Password">
                    <i class="fa fa-lock"></i>
                </div>
            </div>
            <div class="cp-field">
                <h5>Repeat Password</h5>
                <span id="passConfHelp"></span>
                <div class="cpp-fiel">
                    <input type="password" name="repeat-password"
id="passConf" placeholder="Repeat Password">
                    <i class="fa fa-lock"></i>
                </div>
            </div>
            <input type="text" value="{{session()->get('user')->user_id}}"
name="id" hidden>
            <div class="save-stngs pd2">
                <ul>
                    <li>
                        <button type="submit" id="resetPass">Change</button>
                    </li>
                </ul>
            </div><!--save-stngs end-->
        </form>
        @if ($errors->any())
            <div class="alert alert-danger">
                <ul>
                    @foreach ($errors->all() as $error)
                        <li>{{ $error }}</li>
                    @endforeach
                </ul>
            </div>
        @endif
    </div>

```

```

        @endforeach
    </ul>
</div>
@endif
</div><!--acc-setting end-->
</div>

```

## Client/partials/newsfeed-partials

### Newsfeed-post-topbar

```

<div class="post-topbar">
  <div class="user-picy">
    
  </div>
  <h3>What's happening ?</h3>
  <div class="post-st">
    <ul>
      <li><a class="post_project" href="#" title="">Post</a></li>
    </ul>
  </div><!--post-st end-->
</div><!--post-topbar end-->

```

### Newsfeed-right-sidebar

```

<div class="right-sidebar">
  <div class="widget widget-jobs">
    <div class="sd-title">
      <h3>Lates RT News</h3>
      <i class="la la-ellipsis-v"></i>
    </div>

    <div class="jobs-list" id="news">

    </div><!--jobs-list end-->
  </div><!--widget-jobs end-->
</div><!--right-sidebar end-->

```

### Newsfeed-top-profiles

```

<div class="top-profiles">
  <div class="pf-hd">
    <h3>Top Profiles</h3>

```

```

        <i class="la la-ellipsis-v"></i>
    </div>
    <div class="profiles-slider">
        @foreach($topProfiles as $profile)
            <div class="user-profy">
                
                <h3>{{ $profile->username }}</h3>
                <span>{{ $profile->from }}</span>
                <a href="{{route('profiles.show', $profile->username)}}"
title="">View Profile</a>
            </div><!--user-profy end-->
        @endforeach
    </div><!--profiles-slider end-->
</div><!--top-profiles end-->

```

## Newsfeed-user-data

```

<div class="user-data full-width">
    <div class="user-profile">
        <div class="username-dt">
            <div class="usr-pic">
                
            </div>
        </div><!--username-dt end-->
        <div class="user-specs" style="margin-top: 20px">
            <h3>{{session()->get('user')->username}}</h3>
            <span>{{session()->get('user')->from}}</span>
        </div>
    </div><!--user-profile-partials end-->
    <ul class="user-fw-status">
        <li>
            <h4>Following</h4>
            <span>{{ $followings["following"] }}</span>
        </li>
        <li>
            <h4>Followers</h4>
            <span>{{ $followings["followers"] }}</span>
        </li>
        <li>
            <a href="{{route('profiles.show', session()->get('user')->username)}}" title="">View Profile</a>
        </li>
    </ul>
</div><!--user-data end-->

```

## Popup-post

```
<div class="post-popup pst-pj">
  <div class="post-project">
    <h3>Tell us what are u thinking of</h3>
    <div class="post-project-fields">
      <form action="{{route('home.store')}}" method="POST"
enctype="multipart/form-data">
        @csrf
        <div class="row">
          <div class="col-lg-12">
            <textarea name="content" placeholder="what's
happening ?"></textarea>
          </div>
          <input type="text" name="user_id" value="{{session()-
>get('user')->user_id}}" hidden>
          <input type="file" name="image">
          <div class="col-lg-12">
            <ul>
              <li>
                <button class="active" type="submit"
value="post">Post</button>
              </li>
              <li><a href="#" class="exit"
title="">Cancel</a></li>
            </ul>
          </div>
        </div>
        @if ($errors->any())
          <div class="alert alert-danger">
            <ul>
              @foreach ($errors->all() as $error)
                <li>{{ $error }}</li>
              @endforeach
            </ul>
          </div>
        @endif
      </div>
    </form>
  </div><!--post-project-fields end-->
  <a href="#" title=""><i class="la la-times-circle-o"></i></a>
</div><!--post-project-popup end-->
```

## Client/profile-partials

### Profile-feed-tabs

```
<div class="main-ws-sec">
  <div class="product-feed-tab current" id="feed-dd">
    <div class="posts-section">
      @if($post->isEmpty())
        <h1 style="font-size: 2rem; color: white; display: flex;
```

```

justify-content: center;">No Posts</h1>
    @else
        @foreach($post as $p)
            @component('client.partials.post',[
                'post'=>$p
            ])
                @endcomponent
            @endforeach
        @endif
    <div class="process-comm">
        <div class="spinner">
            <div class="bounce1"></div>
            <div class="bounce2"></div>
            <div class="bounce3"></div>
        </div>
    </div><!--process-comm end-->
</div><!--posts-section end-->
</div><!--product-feed-tab end-->

<div class="product-feed-tab" id="info-dd">
    <div class="user-profile-ov st2">
        <h3>Overview</h3>
        <h4>From</h4>
        <p>{{ $user->from }}</p>
        <h4>Gender</h4>
        <p>{{ $user->gender }}</p>
        <h4>Mobile Number</h4>
        <p>
            @if($user->mobile_number == null)
                No mobile number added
            @else
                {{ $user->mobile_number }}
            @endif
        </p>
        <h4>Work</h4>
        <p>
            @if($user->work == null)
                No work added
            @else
                {{ $user->work }}
            @endif
        </p>
    </div><!--user-profile-partials-ov end-->
    <div class="user-profile-ov">
        <h3>Bio</h3>
        <p>
            @if($user->bio == null)
                No bio added
            @else
                {{ $user->bio }}
            @endif
        </p>
    </div><!--user-profile-partials-ov end-->

</div><!--product-feed-tab end-->
<div class="product-feed-tab" id="portfolio-dd">
    <div class="portfolio-gallery-sec">

```

```

        <h3>Gallery</h3>
        <div class="gallery_pf portfolio-item row">
            @foreach($post as $p)
                @if($p->image)
                    @component('client.partials.profile-partials.profile-
image-in-gallery', [
                        'image' => $p->image
                    ])
                @endcomponent
            @endif
        @endforeach
    </div><!--gallery_pf end-->
</div><!--portfolio-gallery-sec end-->
</div><!--product-feed-tab end-->
</div><!--main-ws-sec end-->

```

## Profile-image-in-gallery

```

<div class="item selfie col-lg-6 col-md-4 col-6 col-sm">
    <a href="{{asset('storage/gallery/' . $image)}}" class="fancy light popup-
btn" data-fancybox-group="light">
        
    </a>
</div>

```

## Profile-left-sidebar

```

<div class="main-left-sidebar">
    <meta name="csrf-token" content="{{ csrf_token() }}" />
    <div class="user_profile">
        <div class="user-pro-img">
            
        </div><!--user-pro-img end-->
        <div class="user-tab-sec">
            <h3>{{ $user->username }}</h3>
            <div class="star-descp">
                <span>{{ $user->from }}</span>
            </div><!--star-descp end-->
            <ul class="flw-hr">
                @if(! (session()->get('user')->username == $user->username))
                    @for($i = 0 ; $i<$followers->count(); $i++)
                        @if($followers[$i]->follower_id == session()-
>get('user')->user_id)
                            <li class="follow" data-ux="{{ $user->user_id }}"
                                data-ut="{{ session()->get('user')->

```

```

>user_id}}">
        <a href="#" title="" class="flww">
            <i class="la la-check"></i>
            Following
        </a>
    </li>
    @break
@endif
@if($i == $followers->count()-1)
    <li class="follow" data-ux="{{ $user->
>user_id}}">
        data-ut="{{ session()->get('user')->
>user_id}}">
        <a href="#" title="" class="flww">
            <i class="la la-plus"></i>
            Follow
        </a>
    </li>
@endif
@endfor
@if($followers->isEmpty())
    <li class="follow" data-ux="{{ $user->user_id}}">
        data-ut="{{ session()->get('user')->user_id}}">
        <a href="#" title="" class="flww">
            <i class="la la-plus"></i>
            Follow
        </a>
    </li>
@endif
@endif
</ul>
<div class="tab-feed">
    <ul>
        <li data-tab="feed-dd" class="active">
            <a href="#" title="">
                
                <span>Feed</span>
            </a>
        </li>
        <li data-tab="info-dd">
            <a href="#" title="">
                
                <span>Info</span>
            </a>
        </li>
        <li data-tab="portfolio-dd">
            <a href="#" title="">
                
                <span>Gallery</span>
            </a>
        </li>
    </ul>
</div><!-- tab-feed end-->
<div class="user_pro_status">

```

```

        <ul class="flw-status">
          <li>
            <span>Following</span>
            <b>{{ $followings['following'] }}</b>
          </li>
          <li>
            <span>Followers</span>
            <b>{{ $followings['followers'] }}</b>
          </li>
          <li>
            <span>Posts</span>
            <b>{{ $post->count() }}</b>
          </li>
        </ul>
      </div><!--user_pro_status end-->
    </div><!--user-tab-sec end-->
  </div><!--user_profile end-->
</div><!--main-left-sidebar end-->

```

## Profile-right-sidebar

```

<div class="right-sidebar">
  <div class="message-btn">
    @if(session()->get('user')->username == $user->username)
      <form action="{{ route('profiles.update', ['profile'=> session()->get('user')->user_id]) }}" method="POST"
        id="cover-change" enctype="multipart/form-data">
        @method('put')
        @csrf
        <a class="flww">
          <label class="custom-file-upload">
            <input type="file" id="update-cover"
name="coverImage"/>
          </label>
          Change Cover
        </a>
      </form>
    @endif
  </div>
</div><!--right-sidebar end-->

```

## Client/profiles-partials

### For-profiles

```

<div class="row">
  @foreach($profiles as $profile)
    @component('client.partials.profiles-partials.single-profile-in-
profiles', [
      "profile" => $profile
    ])
  @endcomponent
</div>

```



```

])
    @endcomponent
  @endforeach
</div>
<div class="row">
  {{ $profiles->withQueryString()->links('pagination::bootstrap-4') }}
</div>

```

## Single-profile-in-profiles

```

<div class="col-lg-3 col-md-4 col-sm-6 col-12" id="{{ $profile->user_id }}">
  <meta name="csrf-token" content="{{ csrf_token() }}" />
  <div class="company_profile_info">
    <div class="company-up-info">
      
      <h3>{{ $profile->username }}</h3>
      <h4>{{ $profile->from }}</h4>
      <ul>
        @if($profile->followers->count() == 0)
          <li class="follow" data-ux="{{ $profile->user_id }}"
            data-ut="{{ session()->get('user')->user_id }}">
            <a href="#" title="" class="flww">
              <i class="la la-plus"></i>
              Follow
            </a>
          </li>
        @endif
        @for($i = 0 ; $i<$profile->followers->count(); $i++)
          @if($profile->followers[$i]->follower_id == session()->get('user')->user_id)
            <li class="follow" data-ux="{{ $profile->user_id }}"
              data-ut="{{ session()->get('user')->user_id }}">
              <a href="#" title="" class="flww">
                <i class="la la-check"></i>
                Following
              </a>
            </li>
          @break
        @endif
        @if($i == $profile->followers->count()-1)
          <li class="follow" data-ux="{{ $profile->user_id }}"
            data-ut="{{ session()->get('user')->user_id }}">
            <a href="#" title="" class="flww">
              <i class="la la-plus"></i>
              Follow
            </a>
          </li>
        @endif
      @endfor
    </ul>
  </div>
  <a href="{{ route('profiles.show', $profile->username) }}" title=""
class="view-more-pro">View Profile</a>

```

```

    </div><!--company_profile_info end-->
</div>

```

## Client/sign-partials

### Contact

```

<div class="sign_in_sec" id="tab-4">
  <div class="dff-tab current" id="tab-5">
    <form action="{{route('contact')}}" method="POST" id="contact">
      @csrf
      <div class="row">
        <div class="col-lg-12 no-pdd">
          <span id="emailCHelp"></span>
          <div class="sn-field">
            <input type="email" name="email" id='emailContact'
placeholder="Email">
            <i class="la la-globe"></i>
          </div>
        </div>
        <div class="col-lg-12 no-pdd">
          <span id="msgHelp"></span>
          <div class="sn-field">
            <textarea class="form-control" id="msg"
name="message" rows="3"></textarea>
          </div>
        </div>
        <div class="col-lg-12 no-pdd">
          <button type="submit" value="submit"
id="submitContct">Send</button>
        </div>
      </div>
    </form>
  </div><!--dff-tab end-->
</div>

```

### Email

```

<h1>New Mail</h1>
<p>{{ $msg }}</p>

```

## Sign-in

```
<div class="sign_in_sec current" id="tab-1">
  <h3>Sign in</h3>
  <form action="{{route('signin')}}" method="POST" id="signin">
    @csrf
    <div class="row">
      <div class="col-lg-12 no-pdd">
        <span id="emailHelp"></span>
        <div class="sn-field">
          <input type="text" name="email" id="logEmail"
placeholder="Email">
          <i class="la la-user"></i>
        </div><!--sn-field end-->
      </div>
      <div class="col-lg-12 no-pdd">
        <span id="passHelp"></span>
        <div class="sn-field">
          <input type="password" name="password" id='logPassword'
placeholder="Password">
          <i class="la la-lock"></i>
        </div>
      </div>
      <div class="col-lg-12 no-pdd">
        <button type="submit" value="button" id="submitSignin">Sign
in</button>
      </div>
    </div>
  </form>
</div><!--sign in sec end-->
```

## Sign-up

```
<div class="sign_in_sec" id="tab-2">
  <div class="dff-tab current" id="tab-3">
    <form action="{{route('signup')}}" method="POST" id="register">
      @csrf
      <div class="row">
        <div class="col-lg-12 no-pdd">
          <span id="usernameHelp"></span>
          <div class="sn-field">
            <input type="text" name="username" id="username"
placeholder="Username">
            <i class="la la-user"></i>
          </div>
        </div>
        <div class="col-lg-12 no-pdd">
          <span id="emailRHelp"></span>
          <div class="sn-field">
            <input type="text" name="email" id='emailRegister'
placeholder="Email - min: 10 charactes">
          </div>
        </div>
      </div>
    </form>
  </div>
</div>
```

```

        <i class="la la-globe"></i>
    </div>
</div>
<div class="col-lg-12 no-pdd">
    <span id="genderHelp"></span>
    <div class="sn-field">
        <select id="gender" name="gender">
            <option value="Male">Male</option>
            <option value="Female">Female</option>
            <option value="Other">Other</option>
        </select>
        <i class="la la-dropbox"></i>
        <span><i class="fa fa-ellipsis-h"></i></span>
    </div>
</div>
<div class="col-lg-12 no-pdd">
    <span id="passRHelp"></span>
    <div class="sn-field">
        <input type="password" name="password"
id="passRegister" placeholder="Password">
        <i class="la la-lock"></i>
    </div>
</div>
<div class="col-lg-12 no-pdd">
    <span id="passCHelp"></span>
    <div class="sn-field">
        <input type="password" name="confPassword"
id="passRConf" placeholder="Repeat Password">
        <i class="la la-lock"></i>
    </div>
</div>
<div class="col-lg-12 no-pdd">
    <button type="submit" value="submit"
id="submitRegister">Sign up</button>
</div>
</div>
</form>
</div><!--dff-tab end-->
</div>

```

## Client/chat

```

<div class="tab-pane fade" id="nav-{{str_replace(' ', '', strtolower($chat-
>username))}}">
    role="tabpanel"
    aria-labelledby="nav-{{strtolower($chat->username)}}-tab">
    <div class="acc-setting">
        <meta name="csrf-token" content="{{ csrf_token() }}" />
        <div class="main-conversation-box">
            <div class="message-bar-head">
                <div class="usr-msg-details">
                    <div class="usr-ms-img">
                        

```

```

        </div>
        <div class="usr-mg-info">
            <h3>{{ $chat->username }}</h3>
            <p>Online</p>
        </div><!--usr-mg-info end-->
    </div>
</div><!--message-bar-head end-->
    <div class="messages-line mCustomScrollbar _mCS_1">
        <div id="mCSB_1" class="mCustomScrollBox mCS-light
mCSB_vertical mCSB_inside" style="max-height: none;"
        tabindex="0">
            <div id="mCSB_1_container" class="mCSB_container
myBox{{ $chat->user_id }}"
                style="position: relative; top: 0; left: 0;"
                dir="ltr">

                </div>
                <div id="mCSB_1_scrollbar_vertical"
                    class="mCSB_scrollTools mCSB_1_scrollbar mCS-light
mCSB_scrollTools_vertical"
                    style="display: block;">
                    <div class="mCSB_draggerContainer">
                        <div id="mCSB_1_dragger_vertical"
class="mCSB_dragger"
                            style="position: absolute; min-height: 30px;
display: block; height: 309px; max-height: 494px; top: 0px;">
                            <div class="mCSB_dragger_bar" style="line-
height: 30px;"></div>
                        </div>
                        <div class="mCSB_draggerRail"></div>
                    </div>
                </div>
            </div>
        </div>
        <div class="message-send-area">
            <form>
                <div class="mf-field">
                    <input type="text" name="message" id="msg"
placeholder="Type a message here">
                    <input type="text" name="sender" id="snd"
value="{{ session()->get('user')->user_id }}" hidden>
                    <input type="text" name="reciever" id="rcv"
value="{{ $chat->user_id }}" hidden>

                    <button type="button" class="send" data-
idt="{{ session()->get('user')->user_id }}"
                        data-idx="{{ $chat->user_id }}">Send
                    </button>
                </div>
            </form>
        </div><!--message-send-area end-->
    </div><!--main-conversation-box end-->
</div><!--acc-setting end-->
</div>

```

## Client/chatbox

```

<div class="chatbox">
  <div class="chat-mg">
    {{--      <a href="#" title=""></a>--}}
    <span>2</span>
  </div>
  <div class="conversation-box">
    <div class="con-title mg-3">
      <div class="chat-user-info">
        {{--      --}}
        <h3>John Doe <span class="status-info"></span></h3>
      </div>
      <div class="st-icons">
        <a href="#" title=""><i class="la la-cog"></i></a>
        <a href="#" title="" class="close-chat"><i class="la la-
minus-square"></i></a>
        <a href="#" title="" class="close-chat"><i class="la la-
close"></i></a>
      </div>
    </div>
    <div class="chat-hist mCustomScrollbar" data-mcs-theme="dark">
      <div class="chat-msg">
        <p>Lorem ipsum dolor sit amet, consectetur adipiscing elit.
Donec rutrum congue leo eget
        malesuada. Vivamus suscipit tortor eget felis
porttitor.</p>
        <span>Sat, Aug 23, 1:10 PM</span>
      </div>
      <div class="date-nd">
        <span>Sunday, August 24</span>
      </div>
      <div class="chat-msg st2">
        <p>Cras ultricies ligula.</p>
        <span>5 minutes ago</span>
      </div>
      <div class="chat-msg">
        <p>Lorem ipsum dolor sit amet, consectetur adipiscing elit.
Donec rutrum congue leo eget
        malesuada. Vivamus suscipit tortor eget felis
porttitor.</p>
        <span>Sat, Aug 23, 1:10 PM</span>
      </div>
    </div><!--chat-list end-->
    <div class="typing-msg">
      <form>
        <textarea placeholder="Type a message here"></textarea>
        <button type="submit"><i class="fa fa-send"></i></button>
      </form>
      <ul class="ft-options">
        <li><a href="#" title=""><i class="la la-smile-
o"></i></a></li>
        <li><a href="#" title=""><i class="la la-
camera"></i></a></li>
        <li><a href="#" title=""><i class="fa fa-

```

```

paperclip"></i></a></li>
    </ul>
</div><!--typing-msg end-->
</div><!--chat-history end-->
</div>

```

## Client/post

```

<div class="post-bar" id="post_{{ $post->post_id }}">
    <div class="post_topbar">
        <div class="usy-dt">
            
            <div class="usy-name">
                <h3>{{ $post->username }}</h3>
                <span>{{ time_elapsed_string($post->created) }}</span>
            </div>
        </div>
        <div class="ed-opts">
            <a href="#" title="" class="ed-opts-open">
                <i class="la la-ellipsis-v"></i></a>
                <ul class="ed-options">
                    <form action="{{ route('home.destroy', ['home'=>$post->post_id]) }}" method="POST">
                        @method('delete')
                        @csrf
                        <button class="btn btn-danger"
type="submit">Delete</button>
                    </form>
                </ul>
            </div>
        @endif
    </div>
    <div class="epi-sec">
        <ul class="descp">
            <li><span>{{ $post->from }}</span></li>
        </ul>
    </div>
    <div class="job_descp">
        <p>{{ $post->content }}</p>
    </div>
    <div class="img-post">
        
    </div>
    <div class="job-status-bar">
        <ul class="like-com">
            <li class="likes" data-pid="{{ $post->post_id }}" data-
uid="{{ session()->get('user')->user_id }}">

```

```

        <a id="likeCounter"><i class="fa fa-heart" aria-
hidden="true"></i>Likes {{ $post->likes->count() }}</a>
    </li>
    <li data-tab="comment-dd">
        <a id="comCounter"><i class="fa fa-comment" aria-
hidden="true"></i> Comments {{ $post->comments->count() }}
        </a>
    </li>
</ul>
</div>
<div id="comms">
    @foreach($post->comments as $com)
        <div class="comment-section" style="margin-top: 20px">
            <div class="comment-sec">
                <ul>
                    <li>
                        <div class="comment-list">
                            <div class="bg-img">
                                
                            </div>
                            <div class="comment">
                                <h3>{{ $com->username }}</h3>
                                <span>
                                {{ time_elapsed_string($com->time) }}</span>
                                <p>{{ $com->content }}</p>
                            </div>
                        </div><!--comment-list end-->
                    </li>
                </ul>
            </div><!--comment-sec end-->
        </div><!--comment-section end-->
    @endforeach
</div>
<div class="post-comment">
    <div class="comment_box">
        <form id="form_{{ $post->post_id }}">
            <meta name="csrf-token" content="{{ csrf_token() }}" />

            <input type="text" placeholder="Post a comment" id="com">
            <input type="text" id="user_id" value="{{ session()-
>get('user')->user_id }}" hidden>
            <input type="text" id="post_id" value="{{ $post->post_id }}"
hidden>

            <button type="button" data-id="{{ $post->post_id }}"
class="commenting">Comment</button>
        </form>
    </div>
</div><!--post-comment end-->
</div><!--post-bar end-->

```



## Admin/admin

```
@extends('layouts.admin-layout')

@section('main')

    <div class="row">
        <div class="col-xl-3 col-sm-6 grid-margin stretch-card">
            <div class="card">
                <div class="card-body">
                    <div class="row">
                        <div class="col-9">
                            <div class="d-flex align-items-center align-self-
start">
                                <h3 class="mb-0">$12.34</h3>
                                <p class="text-success ml-2 mb-0 font-weight-
medium">+3.5%</p>
                            </div>
                        </div>
                        <div class="col-3">
                            <div class="icon icon-box-success">
                                <span class="mdi mdi-arrow-top-right icon-
item"></span>
                            </div>
                        </div>
                    </div>
                    <h6 class="text-muted font-weight-normal">Potential
growth</h6>
                </div>
            </div>
        </div>
        <div class="col-xl-3 col-sm-6 grid-margin stretch-card">
            <div class="card">
                <div class="card-body">
                    <div class="row">
                        <div class="col-9">
                            <div class="d-flex align-items-center align-self-
start">
                                <h3 class="mb-0">$17.34</h3>
                                <p class="text-success ml-2 mb-0 font-weight-
medium">+11%</p>
                            </div>
                        </div>
                        <div class="col-3">
                            <div class="icon icon-box-success">
                                <span class="mdi mdi-arrow-top-right icon-
item"></span>
                            </div>
                        </div>
                    </div>
                    <h6 class="text-muted font-weight-normal">Revenue
current</h6>
                </div>
            </div>
        </div>
    </div>
    <div class="col-xl-3 col-sm-6 grid-margin stretch-card">
```

```

        <div class="card">
            <div class="card-body">
                <div class="row">
                    <div class="col-9">
                        <div class="d-flex align-items-center align-self-
start">
                            <h3 class="mb-0">$12.34</h3>
                            <p class="text-danger ml-2 mb-0 font-weight-
medium">-2.4%</p>
                        </div>
                    </div>
                    <div class="col-3">
                        <div class="icon icon-box-danger">
                            <span class="mdi mdi-arrow-bottom-left icon-
item"></span>
                        </div>
                    </div>
                </div>
                <h6 class="text-muted font-weight-normal">Daily
Income</h6>
            </div>
        </div>
    </div>
    <div class="col-xl-3 col-sm-6 grid-margin stretch-card">
        <div class="card">
            <div class="card-body">
                <div class="row">
                    <div class="col-9">
                        <div class="d-flex align-items-center align-self-
start">
                            <h3 class="mb-0">$31.53</h3>
                            <p class="text-success ml-2 mb-0 font-weight-
medium">+3.5%</p>
                        </div>
                    </div>
                    <div class="col-3">
                        <div class="icon icon-box-success">
                            <span class="mdi mdi-arrow-top-right icon-
item"></span>
                        </div>
                    </div>
                </div>
                <h6 class="text-muted font-weight-normal">Expense
current</h6>
            </div>
        </div>
    </div>
    </div>
    <div class="row">
        <div class="col-md-4 grid-margin stretch-card">
            <div class="card">
                <div class="card-body">
                    <h4 class="card-title">Transaction History</h4>
                    <canvas id="transaction-history" class="transaction-
chart"></canvas>
                </div>
            </div>
        </div>
    </div>

```

```

row py-3 px-4 px-md-3 px-xl-4 rounded mt-3">
    <div class="text-md-center text-xl-left">
        <h6 class="mb-1">Transfer to Paypal</h6>
        <p class="text-muted mb-0">07 Jan 2019,
09:12AM</p>
    </div>
    <div
        class="align-self-center flex-grow text-right
text-md-center text-xl-right py-md-2 py-xl-0">
        <h6 class="font-weight-bold mb-0">$236</h6>
    </div>
    </div>
    <div
        class="bg-gray-dark d-flex d-md-block d-xl-flex flex-
row py-3 px-4 px-md-3 px-xl-4 rounded mt-3">
        <div class="text-md-center text-xl-left">
            <h6 class="mb-1">Tranfer to Stripe</h6>
            <p class="text-muted mb-0">07 Jan 2019,
09:12AM</p>
        </div>
        <div
            class="align-self-center flex-grow text-right
text-md-center text-xl-right py-md-2 py-xl-0">
            <h6 class="font-weight-bold mb-0">$593</h6>
        </div>
        </div>
    </div>
</div>
<div class="col-md-8 grid-margin stretch-card">
    <div class="card">
        <div class="card-body">
            <div class="d-flex flex-row justify-content-between">
                <h4 class="card-title mb-1">Open Projects</h4>
                <p class="text-muted mb-1">Your data status</p>
            </div>
            <div class="row">
                <div class="col-12">
                    <div class="preview-list">
                        <div class="preview-item border-bottom">
                            <div class="preview-thumbnail">
                                <div class="preview-icon bg-primary">
                                    <i class="mdi mdi-file-
document"></i>
                                </div>
                                </div>
                                <div class="preview-item-content d-sm-
flex flex-grow">
                                    <div class="flex-grow">
                                        <h6 class="preview-subject">Admin
dashboard design</h6>
                                        <p class="text-muted mb-
0">Broadcast web app mockup</p>
                                    </div>
                                    <div class="mr-auto text-sm-right pt-
2 pt-sm-0">
                                        <p class="text-muted">15 minutes

```

```

ago</p>
tasks, 5 issues </p>
</div>
</div>
</div>
<div class="preview-item border-bottom">
  <div class="preview-thumbnail">
    <div class="preview-icon bg-success">
      <i class="mdi mdi-cloud-
download"></i>
    </div>
  </div>
  <div class="preview-item-content d-sm-
flex flex-grow">
    <div class="flex-grow">
      <h6 class="preview-
subject">Wordpress Development</h6>
      <p class="text-muted mb-0">Upload
new design</p>
      </div>
      <div class="mr-auto text-sm-right pt-
2 pt-sm-0">
        <p class="text-muted">1 hour
ago</p>
        <p class="text-muted mb-0">23
tasks, 5 issues </p>
      </div>
    </div>
  </div>
</div>
<div class="preview-item border-bottom">
  <div class="preview-thumbnail">
    <div class="preview-icon bg-info">
      <i class="mdi mdi-clock"></i>
    </div>
  </div>
  <div class="preview-item-content d-sm-
flex flex-grow">
    <div class="flex-grow">
      <h6 class="preview-
subject">Project meeting</h6>
      <p class="text-muted mb-0">New
project discussion</p>
      </div>
      <div class="mr-auto text-sm-right pt-
2 pt-sm-0">
        <p class="text-muted">35 minutes
ago</p>
        <p class="text-muted mb-0">15
tasks, 2 issues</p>
      </div>
    </div>
  </div>
</div>
<div class="preview-item border-bottom">
  <div class="preview-thumbnail">
    <div class="preview-icon bg-danger">
      <i class="mdi mdi-email-

```



```


$32123</h2>


$45850</h2>


$2039</h2>



94


```

```

<div class="col-4 col-sm-12 col-xl-4 text-center
text-xl-right">
    <i class="icon-lg mdi mdi-monitor text-success
ml-auto"></i>
    </div>
</div>
</div>
</div>
</div>
</div>
<div class="row ">
    <div class="col-12 grid-margin">
        <div class="card">
            <div class="card-body">
                <h4 class="card-title">Order Status</h4>
                <div class="table-responsive">
                    <table class="table">
                        <thead>
                            <tr>
                                <th>
                                    <div class="form-check form-check-muted
m-0">
                                        <label class="form-check-label">
                                            <input type="checkbox"
class="form-check-input">
                                        </label>
                                    </div>
                                </th>
                                <th> Client Name</th>
                                <th> Order No</th>
                                <th> Product Cost</th>
                                <th> Project</th>
                                <th> Payment Mode</th>
                                <th> Start Date</th>
                                <th> Payment Status</th>
                            </tr>
                        </thead>
                        <tbody>
                            <tr>
                                <td>
                                    <div class="form-check form-check-muted
m-0">
                                        <label class="form-check-label">
                                            <input type="checkbox"
class="form-check-input">
                                        </label>
                                    </div>
                                </td>
                                <td>
                                    
                                </td>
                                <td> <span class="pl-2">Henry Klein</span>
                                </td>
                                <td> 02312</td>
                                <td> $14,500</td>
                                <td> Dashboard</td>
                                <td> Credit card</td>
                            </tr>
                        </tbody>
                    </table>
                </div>
            </div>
        </div>
    </div>
</div>

```

```

                                <td> 04 Dec 2019</td>
                                <td>
                                    <div class="badge badge-outline-
success">Approved</div>
                                </td>
                            </tr>
                            <tr>
                                <td>
                                    <div class="form-check form-check-muted
m-0">
                                        <label class="form-check-label">
                                            <input type="checkbox"
class="form-check-input">
                                        </label>
                                    </div>
                                </td>
                                <td>
                                    
                                    <span class="pl-2">Estella Bryan</span>
                                </td>
                                <td> 02312</td>
                                <td> $14,500</td>
                                <td> Website</td>
                                <td> Cash on delivered</td>
                                <td> 04 Dec 2019</td>
                                <td>
                                    <div class="badge badge-outline-
warning">Pending</div>
                                </td>
                            </tr>
                            <tr>
                                <td>
                                    <div class="form-check form-check-muted
m-0">
                                        <label class="form-check-label">
                                            <input type="checkbox"
class="form-check-input">
                                        </label>
                                    </div>
                                </td>
                                <td>
                                    
                                    <span class="pl-2">Lucy Abbott</span>
                                </td>
                                <td> 02312</td>
                                <td> $14,500</td>
                                <td> App design</td>
                                <td> Credit card</td>
                                <td> 04 Dec 2019</td>
                                <td>
                                    <div class="badge badge-outline-
danger">Rejected</div>
                                </td>
                            </tr>
                            <tr>

```



```

        <td>
            <div class="form-check form-check-muted
m-0">
                <label class="form-check-label">
                    <input type="checkbox"
class="form-check-input">
                </label>
            </div>
        </td>
        <td>
            
            <span class="pl-2">Peter Gill</span>
        </td>
        <td> 02312</td>
        <td> $14,500</td>
        <td> Development</td>
        <td> Online Payment</td>
        <td> 04 Dec 2019</td>
        <td>
            <div class="badge badge-outline-
success">Approved</div>
        </td>
    </tr>
    <tr>
        <td>
            <div class="form-check form-check-muted
m-0">
                <label class="form-check-label">
                    <input type="checkbox"
class="form-check-input">
                </label>
            </div>
        </td>
        <td>
            
            <span class="pl-2">Sallie Reyes</span>
        </td>
        <td> 02312</td>
        <td> $14,500</td>
        <td> Website</td>
        <td> Credit card</td>
        <td> 04 Dec 2019</td>
        <td>
            <div class="badge badge-outline-
success">Approved</div>
        </td>
    </tr>
</tbody>
</table>
</div>
</div>
</div>
</div>
<div class="row">

```

```

<div class="col-md-6 col-xl-4 grid-margin stretch-card">
  <div class="card">
    <div class="card-body">
      <div class="d-flex flex-row justify-content-between">
        <h4 class="card-title">Messages</h4>
        <p class="text-muted mb-1 small">View all</p>
      </div>
      <div class="preview-list">
        <div class="preview-item border-bottom">
          <div class="preview-thumbnail">
            
          </div>
          <div class="preview-item-content d-flex flex-
grow">
            <div class="flex-grow">
              <div class="d-flex d-md-block d-xl-flex
justify-content-between">
                <h6 class="preview-
subject">Leonard</h6>
                <p class="text-muted text-small">5
minutes ago</p>
                </div>
                <p class="text-muted">Well, it seems to
be working now.</p>
              </div>
            </div>
          </div>
          <div class="preview-item border-bottom">
            <div class="preview-thumbnail">
              
            </div>
            <div class="preview-item-content d-flex flex-
grow">
              <div class="flex-grow">
                <div class="d-flex d-md-block d-xl-flex
justify-content-between">
                  <h6 class="preview-subject">Luella
Mills</h6>
                  <p class="text-muted text-small">10
Minutes Ago</p>
                  </div>
                  <p class="text-muted">Well, it seems to
be working now.</p>
                </div>
              </div>
            </div>
          </div>
          <div class="preview-item border-bottom">
            <div class="preview-thumbnail">
              
            </div>
            <div class="preview-item-content d-flex flex-

```

```

grow">
    <div class="flex-grow">
        <div class="d-flex d-md-block d-xl-flex
justify-content-between">
            <h6 class="preview-subject">Ethel
Kelly</h6>
            <p class="text-muted text-small">2
Hours Ago</p>
            </div>
            <p class="text-muted">Please review the
tickets</p>
        </div>
    </div>
</div>
<div class="preview-item border-bottom">
    <div class="preview-thumbnail">
        
    </div>
    <div class="preview-item-content d-flex flex-
grow">
        <div class="flex-grow">
            <div class="d-flex d-md-block d-xl-flex
justify-content-between">
                <h6 class="preview-subject">Herman
May</h6>
                <p class="text-muted text-small">4
Hours Ago</p>
            </div>
            <p class="text-muted">Thanks a lot. It
was easy to fix it .</p>
        </div>
    </div>
</div>
</div>
</div>
</div>
</div>
</div>
<div class="col-md-6 col-xl-4 grid-margin stretch-card">
    <div class="card">
        <div class="card-body">
            <h4 class="card-title">Portfolio Slide</h4>
            <div class="owl-carousel owl-theme full-width owl-
carousel-dash portfolio-carousel"
                id="owl-carousel-basic">
                <div class="item">
                    
                </div>
                <div class="item">
                    
                </div>
                <div class="item">
                    
                </div>
            </div>
        </div>
    </div>
</div>

```

```

        </div>
    </div>
    <div class="d-flex py-4">
        <div class="preview-list w-100">
            <div class="preview-item p-0">
                <div class="preview-thumbnail">
                    
                </div>
                <div class="preview-item-content d-flex flex-
grow">
                    <div class="flex-grow">
                        <div class="d-flex d-md-block d-xl-
flex justify-content-between">
                            <h6 class="preview-
subject">CeeCee Bass</h6>
                            <p class="text-muted text-
small">4 Hours Ago</p>
                        </div>
                        <p class="text-muted">Well, it seems
to be working now.</p>
                    </div>
                </div>
            </div>
        </div>
        <div class="text-muted">Well, it seems to be working now.
</p>
        <div class="progress progress-md portfolio-progress">
            <div class="progress-bar bg-success"
role="progressbar" style="width: 50%"
            aria-valuenow="25" aria-valuemin="0" aria-
valuemax="100"></div>
        </div>
    </div>
</div>
<div class="col-md-12 col-xl-4 grid-margin stretch-card">
    <div class="card">
        <div class="card-body">
            <h4 class="card-title">To do list</h4>
            <div class="add-items d-flex">
                <input type="text" class="form-control todo-list-
input" placeholder="enter task..">
                <button class="add btn btn-primary todo-list-add-
btn">Add</button>
            </div>
            <div class="list-wrapper">
                <ul class="d-flex flex-column-reverse text-white
todo-list todo-list-custom">
                    <li>
                        <div class="form-check form-check-primary">
                            <label class="form-check-label">
                                <input class="checkbox"
type="checkbox"> Create invoice </label>
                            </div>
                        <i class="remove mdi mdi-close-box"></i>
                    </li>
                </ul>
            </div>
        </div>
    </div>

```

```

        </li>
        <li>
            <div class="form-check form-check-primary">
                <label class="form-check-label">
                    <input class="checkbox"
type="checkbox"> Meeting with Alita </label>
                </div>
                <i class="remove mdi mdi-close-box"></i>
            </li>
            <li class="completed">
                <div class="form-check form-check-primary">
                    <label class="form-check-label">
                        <input class="checkbox"
type="checkbox" checked> Prepare for
                                presentation </label>
                    </div>
                    <i class="remove mdi mdi-close-box"></i>
                </li>
                <li>
                    <div class="form-check form-check-primary">
                        <label class="form-check-label">
                            <input class="checkbox"
type="checkbox"> Plan weekend outing
                                </label>
                        </div>
                        <i class="remove mdi mdi-close-box"></i>
                    </li>
                    <li>
                        <div class="form-check form-check-primary">
                            <label class="form-check-label">
                                <input class="checkbox"
type="checkbox"> Pick up kids from school
                                    </label>
                        </div>
                        <i class="remove mdi mdi-close-box"></i>
                    </li>
                </ul>
            </div>
        </div>
    </div>
</div>
<div class="row">
    <div class="col-12">
        <div class="card">
            <div class="card-body">
                <h4 class="card-title">Visitors by Countries</h4>
                <div class="row">
                    <div class="col-md-5">
                        <div class="table-responsive">
                            <table class="table">
                                <tbody>
                                    <tr>
                                        <td>
                                            <i class="flag-icon flag-icon-
us"></i>
                                        </td>

```

```

        <td>USA</td>
        <td class="text-right"> 1500</td>
        <td class="text-right font-weight-
medium"> 56.35%</td>
    </tr>
    <tr>
        <td>
            <i class="flag-icon flag-icon-
de"></i>
            <td>Germany</td>
            <td class="text-right"> 800</td>
            <td class="text-right font-weight-
medium"> 33.25%</td>
    </tr>
    <tr>
        <td>
            <i class="flag-icon flag-icon-
au"></i>
            <td>Australia</td>
            <td class="text-right"> 760</td>
            <td class="text-right font-weight-
medium"> 15.45%</td>
    </tr>
    <tr>
        <td>
            <i class="flag-icon flag-icon-
gb"></i>
            <td>United Kingdom</td>
            <td class="text-right"> 450</td>
            <td class="text-right font-weight-
medium"> 25.00%</td>
    </tr>
    <tr>
        <td>
            <i class="flag-icon flag-icon-
ro"></i>
            <td>Romania</td>
            <td class="text-right"> 620</td>
            <td class="text-right font-weight-
medium"> 10.25%</td>
    </tr>
    <tr>
        <td>
            <i class="flag-icon flag-icon-
br"></i>
            <td>Brasil</td>
            <td class="text-right"> 230</td>
            <td class="text-right font-weight-
medium"> 75.00%</td>
    </tr>
</tbody>
</table>

```



```
<link rel="icon" type="image/png"
href="{{asset('assets/images/logo.ico')}}" />
```

## Admin/nav

```
<!-- partial:partials/_sidebar.html -->
<nav class="sidebar sidebar-offcanvas" id="sidebar">
  <div class="sidebar-brand-wrapper d-none d-lg-flex align-items-center
justify-content-center fixed-top">
    <a class="sidebar-brand brand-logo"
href="{{route('home.index')}}"></a>
    <a class="sidebar-brand brand-logo-mini"></a>
  </div>
  <ul class="nav">
    <li class="nav-item profile">
      <div class="profile-desc">
        <div class="profile-pic">
          <div class="count-indicator">
            
            <span class="count bg-success"></span>
          </div>
          <div class="profile-name">
            <h5 class="mb-0 font-weight-normal">{{session()-
>get('user')->username}}</h5>
          </div>
        </div>
      </div>
    </li>
    <li class="nav-item nav-category">
      <span class="nav-link">Navigation</span>
    </li>
    <li class="nav-item menu-items">
      <a class="nav-link" href="{{route('accountCtrl')}}">
        <span class="menu-icon">
          <i class="mdi mdi-playlist-play"></i>
        </span>
        <span class="menu-title">Account Control</span>
      </a>
    </li>
    <li class="nav-item menu-items">
      <a class="nav-link" href="{{route('roleEdit')}}">
        <span class="menu-icon">
          <i class="mdi mdi-ghost"></i>
        </span>
        <span class="menu-title">Role Edit</span>
      </a>
    </li>
  </ul>
```



```

    </li>
    <li class="nav-item menu-items">
      <a class="nav-link" href="{{route('navEdit')}}">
        <span class="menu-icon">
          <i class="mdi mdi-ghost"></i>
        </span>
        <span class="menu-title">Nav Link Edit</span>
      </a>
    </li>
    <li class="nav-item menu-items">
      <a class="nav-link" href="{{route('logs')}}">
        <span class="menu-icon">
          <i class="mdi mdi-speedometer"></i>
        </span>
        <span class="menu-title">Logs</span>
      </a>
    </li>
  </ul>
</nav>

```

## Admin/nav-bar

```

<nav class="navbar p-0 fixed-top d-flex flex-row">
  <div class="navbar-brand-wrapper d-flex d-lg-none align-items-center justify-content-center">
    <a class="navbar-brand brand-logo-mini" href="{{route('home.index')}}"></a>
  </div>
  <div class="navbar-menu-wrapper flex-grow d-flex align-items-stretch">
    <ul class="navbar-nav w-100">
      <li class="nav-item w-50">
        <a class="nav-link" href="{{route('home.index')}}">
          <i class="mdi mdi-view-grid"></i>
          Home
        </a>
      </li>
    </ul>
    <button class="navbar-toggler navbar-toggler-right d-lg-none align-self-center" type="button"
      data-toggle="offcanvas">
      <span class="mdi mdi-format-line-spacing"></span>
    </button>
  </div>
</nav>

```

## Admin/scripts

```
<!-- plugins:js -->
<script src="{{asset('admin-
assets/vendors/js/vendor.bundle.base.js')}}"></script>
<!-- endinject -->
<!-- Plugin js for this page -->
<script src="{{asset('admin-
assets/vendors/chart.js/Chart.min.js')}}"></script>
<script src="{{asset('admin-
assets/vendors/progressbar.js/progressbar.min.js')}}"></script>
<script src="{{asset('admin-assets/vendors/jvectormap/jquery-
jvectormap.min.js')}}"></script>
<script src="{{asset('admin-assets/vendors/jvectormap/jquery-jvectormap-
world-mill-en.js')}}"></script>
<script src="{{asset('admin-assets/vendors/owl-carousel-
2/owl.carousel.min.js')}}"></script>
<!-- End plugin js for this page -->
<!-- inject:js -->
<script src="{{asset('admin-assets/js/off-canvas.js')}}"></script>
<script src="{{asset('admin-assets/js/hoverable-collapse.js')}}"></script>
<script src="{{asset('admin-assets/js/misc.js')}}"></script>
<script src="{{asset('admin-assets/js/settings.js')}}"></script>
<script src="{{asset('admin-assets/js/todolist.js')}}"></script>
<!-- endinject -->
<!-- Custom js for this page -->
<script src="{{asset('admin-assets/js/dashboard.js')}}"></script>
<script src="{{asset('assets/js/ajax.js')}}"></script>
<!-- End custom js for this page -->
```

## Admin/partials

### Account-control

```
@extends('layouts.admin-layout')
@section('main')

<div class="row">
  <div class="col-lg-12 grid-margin stretch-card">
    <div class="card">
      <div class="card-body">
        <h4 class="card-title">Registered Accounts</h4>
        <div class="table-responsive">
          <table class="table table-bordered">
            <thead>
              <tr>
                <th> #</th>
                <th> Username</th>
                <th> Email</th>
                <th> Role</th>
                <th> Active / Deactivated</th>
              </tr>
```

```

        </thead>
        <tbody>
        @foreach($accounts as $acc)
            <tr>
                <td> {{ $loop->index + 1 }}</td>
                <td> {{ $acc->username }}</td>
                <td>
                    {{ $acc->email }}
                </td>
                <td>
                    @if($acc->role_id == 2)
                        <form
action="{{route('roleUpdate', $acc->user_id)}}" method="POST">
                            @csrf
                            <input type="text"
name='role_id' value="{{ $acc->role_id }}" hidden>
                            <button type="submit"
class="btn btn-info btn-fw">
                                <i class="mdi mdi-
account-key"></i> Admin
                                </button>
                        </form>
                    @else
                        <form
action="{{route('roleUpdate', $acc->user_id)}}" method="POST">
                            @csrf
                            <input type="text"
name='role_id' value="{{ $acc->role_id }}" hidden>
                            <button type="submit"
class="btn btn-warning btn-fw">
                                <i class="mdi mdi-
account"></i> User
                                </button>
                        </form>
                    @endif
                </td>
                <td>
                    @if($acc->active == 0)
                        <form action="{{route('status', $acc-
>user_id)}}" method="POST">
                            @csrf
                            <input type="text" name='status'
value="{{ $acc->active }}" hidden>
                            <button type="submit" class="btn
btn-success btn-icon-text">
                                <i class="mdi mdi-
emoticon"></i> Active
                                </button>
                        </form>
                    @else
                        <form action="{{route('status',
$acc->user_id)}}" method="POST">
                            @csrf
                            <input type="text"
name='status' value="{{ $acc->active }}" hidden>
                            <button type="submit"
class="btn btn-danger btn-icon-text">

```

```

emoticon-neutral"></i> Deactivated
                                <i class="mdi mdi-
                                </button>
                                </form>
                                @endif
                                </td>
                                </tr>
                                @endforeach
                                </tbody>
                                </table>
                                </div>
                                </div>
                                </div>
                                </div>
                                </div>
                                </div>
                                @endsection

```

## Log-view

```

@extends('layouts.admin-layout')
@section('main')
    <div class="col-12 grid-margin stretch-card">
        <div class="card">
            <div class="card-body">
                <p class="card-description">Search by date</p>
                <input type="date" id="date" name="date">
                <button type="button" class="btn btn-info btn-rounded btn-fw"
id="filter">Filter</button>
            </div>
        </div>
    </div>
    <div id="logs-table">
        @include('admin.partials.logs-table-partial')
    </div>
@endsection

```

## Logs-table

```

<div class="col-lg-12 grid-margin stretch-card">
    <div class="card">
        <div class="card-body">
            <h4 class="card-title">Logs</h4>
            <p class="card-description"> Table displays Logins, Registrations
and Deactivations
            </p>
            <div class="table-responsive">
                <table class="table table-bordered">
                    <thead>
                        <tr>

```

```

        <th> Type</th>
        <th> Message</th>
        <th> User</th>
        <th> Email </th>
        <th> Date</th>
        <th> Time</th>
    </tr>
</thead>
<tbody>
    @foreach($logs as $log)
        <tr>
            <td> {{ $log['type'] }}</td>
            <td> {{ $log['message'] }}</td>
            <td>
                {{ $log['user'] }}
            </td>
            <td>
                {{ $log['email'] }}
            </td>
            <td>{{ $log['date'] }}</td>
            <td>{{ $log['time'] }}</td>
        </tr>
    @endforeach
</tbody>
</table>
</div>
</div>
</div>
{{ $logs->withQueryString()->links('pagination::bootstrap-4') }}

```

## Nav-edit

```

@extends('layouts.admin-layout')
@section('main')
    <div class="row">
        <div class="col-md-4 grid-margin stretch-card">
            <div class="card">
                <div class="card-body">
                    <h4 class="card-title">Create new role</h4>
                    <form class="forms-sample"
action="{{ route('createNav') }}" method="post">
                        @csrf
                        <div class="form-group">
                            <label for="exampleInputUsername2" class="col-sm-3 col-form-label">Nav Name</label>
                            <div class="col-sm-9">
                                <input type="text" class="form-control"
name="name"
                                placeholder="Nav Link Name">
                            </div>
                        </div>
                        <label for="exampleInputUsername2" class="col-sm-3 col-form-label">Nav Link Name</label>
                    </div>
                </div>
            </div>
        </div>
    </div>

```

```

3 col-form-label">Nav Route</label>
        <div class="col-sm-9">
            <input type="text" class="form-control"
name="route"
                placeholder="Nav Link Route">
            </div>
            <label for="exampleInputUsername2" class="col-sm-
3 col-form-label">Nav Alttag</label>
            <div class="col-sm-9">
                <input type="text" class="form-control"
name="alttag"
                    placeholder="Nav Link Alttag">
            </div>
        </div>
        <button type="submit" class="btn btn-info btn-rounded
btn-fw">Add</button>
    </form>
</div>
</div>
</div>

<div class="col-md-8 grid-margin stretch-card">
    <div class="card">
        <div class="card-body">
            <h4 class="card-title">Roles</h4>
            <div class="table-responsive">
                <table class="table table-bordered">
                    <thead>
                        <tr>
                            <th> #</th>
                            <th> Nav Link Name</th>
                            <th> Nav Link Route</th>
                            <th> Edit</th>
                            <th> Delete</th>
                        </tr>
                    </thead>
                    <tbody>
                        @foreach($menu as $link)
                            <tr>
                                <td> {{ $loop->index + 1 }}</td>
                                <td> {{ $link->name }}</td>
                                <td> {{ $link->route }}</td>
                                <td>
                                    <button type="submit" class="btn btn-
info btn-fw edit-nav"
                                        data-id="{{ $link->
>navlink_id }}">
                                    <i class="mdi mdi-account-
key"></i> Edit
                                </button>
                            </td>
                        </tr>
                    </tbody>
                </table>
                <form action="{{ route('deleteNav') }}"
method="POST">
                    @csrf
                    <input type="text"
name="navlink_id" value="{{ $link->navlink_id }}" hidden>

```

```

<button type="submit" class="btn
btn-warning btn-fw">
        <i class="mdi mdi-account-
key"></i> Delete
        </button>
    </form>
</td>
</tr>
</tbody>
</table>
</div>
</div>
</div>
</div>
</div>
<div class="row">
    <div class="col-md-4 grid-margin stretch-card">
        <div class="card">
            <div class="card-body">
                <h4 class="card-title" id="editing-nav">Edit Nav
Link</h4>
                <form class="forms-sample"
action="{{route('updateNav')}}" method="post">
                    @csrf
                    <div class="form-group">
                        <input type="text" value="" name="navlink_id"
id="updateMe" hidden>
                        <label for="exampleInputUsername2" class="col-sm-
3 col-form-label">Nav Name</label>
                        <div class="col-sm-9">
                            <input type="text" class="form-control"
name="name" id="nav-name"
                                placeholder="Nav Link Name" disabled>
                        </div>
                        <label for="exampleInputUsername2" class="col-sm-
3 col-form-label">Nav Route</label>
                        <div class="col-sm-9">
                            <input type="text" class="form-control"
name="route" id="nav-route"
                                placeholder="Nav Link Route" disabled>
                        </div>
                        <label for="exampleInputUsername2" class="col-sm-
3 col-form-label">Nav Alttag</label>
                        <div class="col-sm-9">
                            <input type="text" class="form-control"
name="alttag" id="nav-tag"
                                placeholder="Nav Link Alttag"
                                disabled>
                        </div>
                    </div>
                    <button type="submit" class="btn btn-info btn-rounded
btn-fw">Update</button>
                </form>
            </div>
        </div>
    </div>
</div>

```

```

    </div>
@endsection

```

## Role-edit

```

@extends('layouts.admin-layout')
@section('main')
    <div class="row">

        <div class="col-md-4 grid-margin stretch-card">
            <div class="card">
                <div class="card-body">
                    <h4 class="card-title">Create new role</h4>
                    <form class="forms-sample"
action="{{route('createRole')}}" method="post">
                        @csrf
                        <div class="form-group">
                            <label for="exampleInputUsername2" class="col-sm-
3 col-form-label">Role Name</label>
                            <div class="col-sm-9">
                                <input type="text" class="form-control"
name="role_name"
                                placeholder="Role Name">
                            </div>
                        </div>
                        <button type="submit" class="btn btn-info btn-rounded
btn-fw">Add</button>
                    </form>
                </div>
            </div>
        </div>

        <div class="col-md-8 grid-margin stretch-card">
            <div class="card">
                <div class="card-body">
                    <h4 class="card-title">Roles</h4>
                    <div class="table-responsive">
                        <table class="table table-bordered">
                            <thead>
                                <tr>
                                    <th> #</th>
                                    <th> Role Name</th>
                                    <th> Edit</th>
                                    <th> Delete</th>
                                </tr>
                            </thead>
                            <tbody>
                                @foreach($roles as $role)
                                    <tr>
                                        <td> {{ $loop->index + 1 }}</td>
                                        <td> {{$role->role_name}}</td>
                                        <td>
                                            <button type="submit" class="btn btn-
info btn-fw edit-role"
                                            data-id="{{$role->role_id}}">

```



```

key"></i> Edit
                                <i class="mdi mdi-account-
                                </button>
                                </td>
                                <td>
                                    <form
action="{{route('deleteRole')}}" method="POST">
                                @csrf
                                <input type="text" name="role_id"
value="{{ $role->role_id }}" hidden>
                                <button type="submit" class="btn
btn-warning btn-fw">
                                <i class="mdi mdi-account-
key"></i> Delete
                                </button>
                                </form>
                                </td>
                                </tr>
                                @endforeach
                                </tbody>
                                </table>
                                </div>
                                </div>
                                </div>
                                </div>
                                </div>
                                <div class="row">
                                <div class="col-md-4 grid-margin stretch-card">
                                <div class="card">
                                <div class="card-body">
                                <h4 class="card-title" id="editing-role">Edit Role</h4>
                                <form class="forms-sample"
action="{{route('updateRole')}}" method="post">
                                @csrf
                                <div class="form-group">
                                <input type="text" value="" name="role_id"
id="updateME" hidden>
                                <label for="exampleInputUsername2" class="col-sm-
3 col-form-label">Role Name</label>
                                <div class="col-sm-9">
                                <input type="text" class="form-control"
name="role_name"
                                placeholder="Role Name" id="role-
editor" disabled>
                                </div>
                                </div>
                                </div>
                                <button type="submit" class="btn btn-info btn-rounded
btn-fw">Edit</button>
                                </form>
                                </div>
                                </div>
                                </div>
                                </div>
                                </div>
                                @endsection

```

## JavaScript

### Ajax

```
$(document).ready(function () {

    // Comments
    let sendCom = document.querySelectorAll('.commenting');
    sendCom.forEach(e => {
        e.addEventListener('click', function (e) {
            e.preventDefault();

            var form = '#form_' + $(this).data('id');

            var CSRF_TOKEN = $('meta[name="csrf-token"]').attr('content');

            let com = $(form).children('#com').val();
            let post = $(form).children('#post_id').val();
            let user = $(form).children('#user_id').val();

            if (com != '') {
                $.ajax({
                    type: "POST",
                    url: "/comment",
                    data: {
                        'user_id': user,
                        'post_id': post,
                        'content': com,
                        '_token': CSRF_TOKEN
                    },
                    headers: {
                        'Accept': 'Application/json'
                    },
                    dataType: "json",
                    success: function (data) {
                        let html = '';
                        data.forEach(e => {
                            html += `
20px">
                <div class="comment-sec">
                    <ul>
                        <li>
                            <div class="comment-list">
                                <div class="bg-img">
                                    
                                </div>
                                <div class="comment">
                                    <h3>${e.username}</h3>
                                    <span>${e.elapsed}</span>
                                    <p>${e.content}</p>
                                </div>

```

```

        </div><!--comment-list end-->
    </li>
</ul>
</div><!--comment-sec end-->
</div><!--comment-section end-->`;
    })
    $('#post_' + post).children('#comms').html(html);
    $('#post_' + post).find('#comCounter').html('<i
class="fa fa-comment" aria-hidden="true"></i> Comments ' + data.length);
    $(form).children('#com').val('');
    },
    error: function (xhr) {
        console.error(xhr)
    }
    });
    }
    })
    })

//Likes
let like = document.querySelectorAll('.likes');
like.forEach(e => {
    e.addEventListener('click', function (e) {
        e.preventDefault();

        var CSRF_TOKEN = $('meta[name="csrf-token"]').attr('content');

        let post = this.dataset.pid;
        let user = this.dataset.uid;

        $.ajax({
            url: '/like',
            method: 'POST',
            dataType: 'json',
            data: {
                'post_id': post,
                'user_id': user,
                '_token': CSRF_TOKEN
            },
            headers: {
                'Accept': 'application/json'
            },
            success: function (data) {
                let element = '#post_' + post;
                $(element).find('#likeCounter').html('<i class="fa fa-
heart" aria-hidden="true"></i> Likes ' + data.length);
            },
            error: function (xhr) {
                console.error(xhr);
            }
        })
    })
})

//Follow
try {
    document.querySelector('body').addEventListener('click', e => {

```

```

        if (e.target.matches('.follow') || e.target.closest('.follow')) {

            var CSRF_TOKEN = $('meta[name="csrf-token"]').attr('content');

            let userx = e.path[1].dataset.ux;
            let usert = e.path[1].dataset.ut;

            let element = e.path[1];

            if (userx != null) {
                $.ajax({
                    url: '/follow',
                    method: 'post',
                    dataType: 'json',
                    data: {
                        'follower_id': usert,
                        'followed_id': userx,
                        '_token': CSRF_TOKEN
                    },
                    headers: {
                        'Accept': 'application/json'
                    },
                    success: function (data) {
                        let html = '';
                        if (data == 'Follow') {
                            html += `

```

```

let idt = this.dataset.idt;
let idx = this.dataset.idx;

var CSRF_TOKEN = $('meta[name="csrf-token"]').attr('content');

$.ajax({
  url: '/message',
  method: 'post',
  dataType: 'json',
  data: {
    'idt': sender,
    'idx': receiver,
    'content': content,
    '_token': CSRF_TOKEN
  },
  headers: {
    'Accept': 'Application/json'
  },
  success: function (data) {
    html = '';
    for (const msg of data) {
      if (msg.receiver_id == idx) {
        html +=
          `
          <div class="main-message-box ta-right">
            <div class="message-dt" style="float: right">
              <div class="message-inner-dt">
                <p>${msg.content}</p>
              </div><!--message-inner-dt end-->
              <span>${msg.datetime}</span>
            </div><!--message-dt end-->
          </div><!--main-message-box end-->
          `;
      } else {
        html +=
          `
          <div class="main-message-box st3">
            <div class="message-dt st3">
              <div class="message-inner-dt">
                <p>${msg.content}</p>
              </div><!--message-inner-dt end-->
              <span>${msg.datetime}</span>
            </div><!--message-dt end-->
          </div><!--main-message-box end-->
          `;
      }
    }
    $(''.myBox' + idx).html(html);
  },
  error: function (xhr) {
    console.error(xhr);
  }
})
$(this).parent().find('#msg').val('');
})
})

```

```

//MessageBox Dispaly
let box = document.querySelectorAll('.msgBox');
box.forEach(e => {
    e.addEventListener('click', function (e) {
        e.preventDefault();

        let idt = this.dataset.idt;
        let idx = this.dataset.idx;

        let data = {
            'idt': idt,
            'idx': idx
        }

        $.ajax({
            url: '/messagesFetch',
            method: 'get',
            dataType: 'json',
            data: data,
            headers: {
                'Accept': 'Application/json'
            },
            success: function (data) {
                html = '';
                for (const msg of data) {
                    if (msg.receiver_id == idx) {
                        html +=

                            <div class="main-message-box ta-right">
                                <div class="message-dt" style="float: right">
                                    <div class="message-inner-dt">
                                        <p>${msg.content}</p>
                                    </div><!--message-inner-dt end-->
                                    <span>${msg.datetime}</span>
                                </div><!--message-dt end-->
                            </div><!--main-message-box end-->
                        ;
                    } else {
                        html +=

                            <div class="main-message-box st3">
                                <div class="message-dt st3">
                                    <div class="message-inner-dt">
                                        <p>${msg.content}</p>
                                    </div><!--message-inner-dt end-->
                                    <span>${msg.datetime}</span>
                                </div><!--message-dt end-->
                            </div><!--main-message-box end-->
                        ;
                    }
                }
                $(''.myBox' + idx).html(html);
            },
            error: function (xhr) {
                console.error(xhr)
            }
        })
    })
})

```

```

    })
  })
})

// Search
try {
  let src = document.querySelector('#src');
  src.addEventListener('keyup', function (e) {
    e.preventDefault();
    let key = this.value;
    fetchData(1, key);
  })

  $(document).on('click', '.pagination a', function (event) {
    event.preventDefault();
    var page = $(this).attr('href').split('page=')[1];
    fetchData(page);
  });

  function fetchData(page = 1, key = "") {
    $.ajax({
      url: '/pagination?page=' + page + "&key=" + key,
      method: 'get',
      success: function (data) {
        $('#profiles').html(data);
      }
    })
  }
} catch (ex) {
}
try {
  let editRole = document.querySelectorAll('.edit-role');
  editRole.forEach(e => {
    e.addEventListener('click', function (event) {
      event.preventDefault();
      let role = this.dataset.id;
      $.ajax({
        url: '/get-role',
        method: 'get',
        dataType: 'json',
        data: {
          'role_id': role
        },
        headers: {
          'Accept': 'application/json'
        },
        success: function (data) {
          console.log(data);
          html = data.role_name;
          $('#role-editor').val(html);
          $('#role-editor').removeAttr('disabled');
          $('#editing-role').html('Edit Role - ' +
data.role_name);
          $('#updateME').val(data.role_id);
        },
        error: function (xhr) {
          console.error(xhr)

```

```

    }
  })
})

let editNav = document.querySelectorAll('.edit-nav');
editNav.forEach(e => {
  e.addEventListener('click', function (event) {
    event.preventDefault();
    let nav = this.dataset.id;
    $.ajax({
      url: '/get-nav',
      method: 'get',
      dataType: 'json',
      data: {
        'navlink_id': nav
      },
      headers: {
        'Accept': 'application/json'
      },
      success: function (data) {
        $('#nav-name').val(data.name);
        $('#nav-name').removeAttr('disabled');
        $('#nav-route').val(data.route);
        $('#nav-route').removeAttr('disabled');
        $('#nav-tag').val(data.alttag);
        $('#nav-tag').removeAttr('disabled');
        $('#editing-nav').html('Edit Nav Link - ' +
data.name);

        $('#updateMe').val(data.navlink_id);
      },
      error: function (xhr) {
        console.error(xhr)
      }
    })
  })
})

$(document).on('click', '.pagination a', function (event) {
  event.preventDefault();
  var page = $(this).attr('href').split('page=')[1];
  fetchLogs(page);
});

function fetchLogs(page = 1, date = '') {
  $.ajax({
    url: '/fetch-logs?page=' + page + '&date=' + date,
    method: 'get',
    success: function (data) {
      $('#logs-table').html(data);
    }
  })
}

let filter = document.querySelector('#filter');
filter.addEventListener('click', e => {
  e.preventDefault();

```



```

        let date = $('#date').val();
        fetchLogs(1, date);
    })
} catch (ex) {
}
});

```

## Main

```

//NEWS API
$(document).ready(function () {
    try {
        var url = 'https://newsapi.org/v2/top-headlines?' +
            'country=us&' +
            'sortBy=popularity&' +
            'apiKey=f369a0b2c00e4702939fdd2644ce1af0';
        var req = new Request(url);
        fetch(req)
            .then((response) => {
                return response.json()
            }).then((data) => {
                let html = '';
                let br = 0;
                for (const e of data.articles) {
                    br++;
                    html += `<div class="job-info">
                        <div class="job-details">
                            <a href="${e.url}" target="_blank" class="portal">
                                <h3>${e.title}</h3>
                                ${getImage(e.urlToImage)}
                            </a>
                            <div>
                                <span class="author">${getAuthor(e.author)}</span>
                            </div>
                        </div>
                    </div><!--job-info end-->
                    <hr>`;
                    if (br >= 10) {
                        break;
                    }
                }
                try {
                    document.querySelector('#news').innerHTML = html;
                } catch (e) {
                }

                function getImage(img) {
                    if (img === null) {
                        return '';
                    }
                    return '';
                }

                function getAuthor(auth) {

```

```

        if (auth === null) {
            return '';
        }
        return auth;
    }

    })
} catch (e) {
}

try {
    document.getElementById("update-cover").onchange = function () {
        document.getElementById("cover-change").submit();
    };

    $(document).ready(function () {
        var popup_btn = $('#popup-btn');
        popup_btn.magnificPopup({
            type: 'image',
            gallery: {
                enabled: true
            }
        });
    });
} catch (ex) {
}

// VALIDACIJE
// RegEx funkcija
function regEx(regEx, element, errMsg, help) {
    if (!regEx.test(element.value)) {
        document.querySelector(help).innerHTML = errMsg;
        $(help).removeClass('correct').addClass('false');
        return false;
    } else {
        document.querySelector(help).innerHTML = "Correct Input";
        $(help).removeClass('false').addClass('correct');
        return true;
    }
}

//Password potvrda
function confirm(value, value2, errMsg, help) {
    if (value != value2) {
        document.querySelector(help).innerHTML = errMsg;
        $(help).removeClass('correct').addClass('false');
        return false;
    } else if (value2.length < 8) {
        document.querySelector(help).innerHTML = 'Incorrect Input';
        $(help).removeClass('correct').addClass('false');
        return false;
    } else {
        document.querySelector(help).innerHTML = 'Password Confirmed';
        $(help).removeClass('false').addClass('correct');
        return true;
    }
}

```

```

}

//Log in & Sign up --email-- validacija
var emailLogin = document.querySelector('#logEmail');
var regExEmail = /^(([a-z0-9_ .-]+)@([\d a-z.-]+)([a-z.]{2,6}))$/;
var errMsgEmail = "Email example : example@example.ex";

//Log in --password-- validacija
var passwordLogin = document.querySelector('#logPassword');
var regExPass = /^(?=.*[d])(?=.*[A-Z])(?=.*[a-z])(?=.*[!@#$%^&*])[\w!@#$%^&*]{8,}$/;
var errMsgPass = 'At least 8 characters long\n' +
    'Include at least 1 lowercase letter\n' +
    '1 capital letter\n' +
    '1 number\n' +
    '1 special character => !@#$%^&*';

//Sign up validacija
var passwordRegister = document.querySelector('#passRegister');
var emailRegister = document.querySelector('#emailRegister');

//// Sign up --password-- potvrda
var passwordComf = document.querySelector('#passRConf');
var errMsgPassComf = 'Please confirm your password';

//// Register Username
var username = document.querySelector('#username');
var regExFirstLastName = /^[A-ZŠĐČĆŽ][a-zšđććž]{2,14}\s?)+$/;
var errMsgFirstLastName = "First and Last Name must start with capital letter and contain min 3 an max 15 letters"

try {
    let submitSignin = document.querySelector('#submitSignin');
    submitSignin.addEventListener('click', function (e) {
        e.preventDefault()

        let resultArr = [regEx(regExEmail, emailLogin, errMsgEmail,
            '#emailHelp'),
            regEx(regExPass, passwordLogin, errMsgPass, '#passHelp')];

        if (!resultArr.includes(false)) {
            let signin = document.querySelector('#signin');
            signin.submit();
        }
    })

    let submitRegister = document.querySelector('#submitRegister');
    submitRegister.addEventListener('click', function (e) {
        e.preventDefault()

        let resultArr = [
            regEx(regExEmail, emailRegister, errMsgEmail, '#emailRHelp'),
            regEx(regExPass, passwordRegister, errMsgPass, '#passRHelp'),
            confirm(passwordRegister.value, passwordComf.value,
                errMsgPassComf, '#passCHelp'),
            regEx(regExFirstLastName, username, errMsgFirstLastName,
                '#usernameHelp')

```

```

];

if (!resultArr.includes(false)) {
    let signup = document.querySelector('#register');
    signup.submit();
}

}))

let cont = document.querySelector('#emailContact')
let msg = document.querySelector('#msg');
console.log(msg.value)
let contact = document.querySelector('#submitContct');
contact.addEventListener('click', function (e) {
    e.preventDefault()
    console.log(msg)
    let resultArr = [
        regEx(regExEmail, cont, errMsgEmail, '#emailCHelp')
    ];
    if(msg.length <= 3){
        resultArr.push(false);
    }
    if (!resultArr.includes(false)) {
        let contact = document.querySelector('#contact');
        contact.submit();
    }
})
} catch (ex) {
}

try {
    let old = document.querySelector('#oldPass');
    let newPass = document.querySelector('#newPass');
    let conf = document.querySelector('#passConf');

    let resetPass = document.querySelector('#resetPass');
    resetPass.addEventListener('click', function (e) {
        e.preventDefault()

        let resultArr = [
            regEx(regExPass, old, errMsgPass, '#oldHelp'),
            regEx(regExPass, newPass, errMsgPass, '#passHelp'),
            confirm(newPass.value, conf.value, errMsgPassComf,
'#passConfHelp'),
        ];

        if (!resultArr.includes(false)) {
            let reset = document.querySelector('#reset');
            reset.submit();
        }
    })
} catch (ex) {
}

}))

```