



Copernicus Climate Change Service



Common Data Model for in situ observations

C3S311a Lot 2: Global Land and Marine Observations Database

Issued by: XXXX / YYYY

Date: DD/MM/YYYY

Ref: C3S_D311a_Lot2.2.1.1_201708_CDM_Definition_v1

Official reference number service contract: 201x/C3S_311a_Lot2_NUIM/SCx











This document has been produced in the context of the Copernicus Climate Change Service (C3S).

The activities leading to these results have been contracted by the European Centre for Medium-Range Weather Forecasts, operator of C3S on behalf of the European Union (Delegation Agreement signed on 11/11/2014). All information in this document is provided "as is" and no guarantee or warranty is given that the information is fit for any particular purpose. The user thereof uses the information at its sole risk and liability. For the avoidance of all doubts, the European Commission and the European Centre for Medium-Range Weather

Forecasts has no liability in respect of this document, which is merely representing the au-

thors view.

Copernicus Climate Change Service - 311a Lot 2 Defining a Common Data Model

David I. Berry National Oceanography Centre, UK

August 2, 2017

Summary

This document defines the initial version of the Common Data Model (CDM) developed within the Copernicus Climate Change Service (C3S) Access to Global Land and Marine Observations Database (C3S 311a Lot 2) service. This has been developed in consultation across the C3S 311a (Collection and Processing of In Situ Observations) Lots and ECMWF.

Tab separated versions of the code tables defining the data model can be found at:

https://github.com/glamod/common_data_model/tree/master/tables/tsv/

Revision number: v0.5-1-gf823ca4

Revision date: 2017-08-02



Contents

1	Introduction 1.1 Purpose of this document	7
2	Background and existing standards 2.1 Observational sources and requirements of the data model	9
3	3.4 Profile configuration3.5 Source configuration3.6 Sensor configuration3.7 Quality control flags	16 19 26
4	Common Data Model governance and future development	49
5	Acknowledgements	50
6	References	50
7		63



List of Tables

ı	Simplified example of records in ODB type data model, with observations from reports	
	1 and 2 spanning multiple records. For simplicity, the z coordinate has been omitted but	
	profile data would be represented with each layer / height as a separate record	
2	header_table	
3	observations_table	
4	station_configuration	
5	station_configuration_optional	. 2
6	station_configuration_fields	
7	station_configuration_codes	
8	profile_configuration	. 2
9	profile_configuration_optional	. 2
10	profile_configuration_fields	. 2
11	profile_configuration_codes	. 2
12	source_configuration	. (
13	source_configuration_optional	. (
14	source_configuration_fields	
15	source_configuration_codes	
16	sensor_configuration	. (
17	sensor_configuration_optional	. (
18	sensor_configuration_fields	. 4
19	sensor_configuration_codes	. 4
20	qc_table	. 4
21	uncertainty_table	. 4
22	observed_variable	Į
23	adjustment	
24	contact	. (
25	conversion_method	. (
26	organisation	
27	application_area (WIGOS 2-01)	. (
28	automation_status	. (
29	calibration_status (WIGOS 5-08)	. (
30	communication_method (Various sources (WMO47, WIGOS, BUFR))	. (
31	crs (BUFR 0 01 150)	
32	data_policy_licence (WIGOS 9-02)	. (
33	duplicate_status (Simplified version of duplicate status flags from IMMA (ICOADS))	
34	events_at_station (WIGOS 4-04)	. (
35	id_scheme	
36	instrument_exposure_quality (WIGOS 5-15)	
37	location_method (based on WIGOS 11-01 and BUFR 0 02 148)	
38	location_quality	
39	meaning_of_time_stamp (Based on simplified version of WIGOS 11-03)	
40	measuring_system_model	
41	method_of_estimating_uncertainty	
42	observation_code_table	
43	observation_value_significance (based on BUFR 0 08 023)	

Copernicus Climate Change Service



44	observing_frequency (WMO47 - 0602)	7
45	observing_method	7
46	observing_programme (WIGOS 2-02)	7
47	platform_sub_type (based on WMO47, ICOADS, BUFR 0 02 149)	
48	platform_type (IMMA (ICOADS) and BUFR 0 03 001 (0 - 31))	8
49	processing_code	8
50	processing_level (WIGOS 7-06)	
51	product_level	8
52	product_status	8
53	profile_type	8
54	quality_flag (BUFR 0 33 020)	8
55	region (WIGOS 3-01)	8
56	report_processing_codes	8
57	report_processing_level	8
58	report_type	8
59	sampling_strategy (WIGOS 6-03)	
60	sea_level_datum (BUFR 0 01 151)	8
61	secondary_variable	
62	source_format	8
63	spatial_representativeness (WIGOS 1-05)	
64	standard_time	
65	station_type (WIGOS 3-04)	Ç
66	sub_region	Ç
67	time_quality	Ç
68	time_reference (WIGOS: 7-10)	
69	traceability (WIGOS 8-05)	
70	units	Ç
71	update_frequency	
72	z_coordinate_method	
73	z_coordinate_type	ç



1 Introduction

1.1 Purpose of this document

This document defines the initial version of the Common Data Model (CDM)¹ developed within the Copernicus Climate Change Service (C3S) Access to Global Land and Marine Observations Database (C3S 311a Lot 2) service. This has been developed in consultation across the C3S 311a (Collection and Processing of In Situ Observations) Lots and ECMWF.

1.2 Scope

The defined common data model is intended for use with in situ land and marine observations. Instantaneous (or point) observations and temporal statistics (e.g. daily and monthly min / max temperatures, accumulation of precipitation etc.) are supported through the use of a significance qualifier. Similarly, profile data is supported through reporting the z-coordinate alongside the observed value.

Whilst initially intended for use with observations of Essential Climate Variables (ECVs; e.g. GCOS, 2010) the data model is not restricted to the ECVs. Following the ECMWF Observations DataBase (ODB) type data model, the measurand (or observed parameter) is parameterized, with both the variable being reported and it's value specified in the data model.

Comprehensive metadata is supported through the use of configuration tables, recording information on:

- Source level metadata: e.g. original source of data, source data centre, citation information etc.
- Station level metadata: e.g. location, operating institute, parameters reported etc.
- Profile level metadata: Additional information for profile data, e.g. unwinder type, type of balloon or XBT etc.
- Sensor level metadata: e.g. calibration history and status, sensor type / serial number etc.

Comprehensive quality control and uncertainty information can be recorded through the use of linked entity-attribute-value tables.

1.3 Structure of this document

Section 2 of this document provides background information on the data model and existing relevant data models and standards. Section 3 forms the core section of this document and defines the primary observations table and associated configuration, quality control and uncertainty budget tables. Recognising that the data model will change and evolve as the requirements of the users and the C3S Climate Data Store develop, Section 4 proposes a goverance model for the CDM and outlines future developments.

¹As noted in the ITT: A common data model is different from a file format, which defines how information is encoded in a file. The purpose of a data model is to provide a well-defined data structure that can be used to represent data records from a variety of sources, in such a way that the information contained in those records can be unambiguously accessed using a common set of tools. Development of a common data model for observations involves specification of data attributes and their symbolic names, including, for example, identifiers for different instruments, observed parameters, geolocation and timing, etc. A governance structure is required to manage such specifications, ensure consistency with standards where they exist, and to ensure a controlled evolution of the data model.



2 Background and existing standards

2.1 Observational sources and requirements of the data model

Across the C3S 311a service (Collection and Processing of In Situ Observations) access will be provided to observations from surface terrestrial and marine environments and upper air data in a common data model. The observations included in the service range from point observations made from moving platforms to daily and monthly statistics at fixed locations. The parameters reported include, inter alia: air temperature; humidity; wind speed; pressure; cloud cover information; present weather. The statistics include, inter alia: daily min, max and mean air temperature; accumulated precipitation over 3 or 24 hours; mean wind speed over the preceding 10 minutes. The full range of parameters and statistics to be reported will evolve as the service is developed. As new parameters are recovered from newly digitised sources and the reprocessed climate archives the list of parameters will need to expand.

Both surface level (terrestrial and marine) and upper air data will be initially included in the service. The surface level data include observations made at standard and non-standard heights. The upper air data will include multiple observations, starting at the surface and at increasing heights through the atmosphere, often as a function of pressure or geopotential height. As a result the data model needs to include the flexibility to record the height and the units used for reporting the height of measurement with every observation. Similarly, some reporting stations, and hence observations, will move in the horizontal plan, and the horizontal coordinates need to be reported with each observation. To avoid ambiguity, the CRS should be provided with each location reported.

The period covered by the service ranges from \sim 1850 to present. Over this period there have been many changes to the instruments and practices used to record the various parameters. The choice of instruments and practices will influence the quality of the observations and a change in instrumentation, or location, may introduce inhomogeneities into the record. To mitigate this risk, comprehensive observational metadata, where it exists, is required. Similarly, information on adjustments and conversions applied to the data need to be recorded. The full range of observational practices and instruments used is not currently known and developed data model will need to be expandable to accommodate new metadata as required.

The observations to be included will be sourced from a variety of existing datasets, such as the International Comprehensive Ocean and Atmosphere Data Set (ICOADS; e.g. Freeman et al., 2017), and newly digitised sources. In defining the data model the provenance and lineage of the data sources need to be preserved. Similarly, usage rights and citation information for those data sources need to be preserved and provided to the users alongside the observational data.

In order to meet the above requirements a data model based on the ECMWF Observations DataBase (ODB) model has been developed, with the use of linked tables providing information on the observational and provenance metadata. The ODB type model allows for expansion to new parameters through the use of a parameterized observation list (see next section). The linked tables will define a core set of parameters under 4 different categories (station, source, profile and sensor), flexibility will be provided through the specification of optional elements and associated decode tables.



2.2 ECMWF Observations DataBase (ODB)

The data model developed and used in the ECMWF Observations DataBase (ODB) software allows the representation of environmental data from many sources, including in situ observations and weather reports, satellite data and model output. As noted in Hersbach et al. (2015), in the ODB implementation a distinction is made between weather reports and observations and this same distinction is made within the CDM and this document. A weather report, such as a ship weather report or a radiosonde ascent, may contain multiple observations of one or more parameters. In the case of a ship weather report observations of the air temperature and humidity, sea level pressure, sea surface temperature, wind speed and direction are typically made and recorded in a single report. In the case of a radiosonde report observations of the temperature will be made at a range of levels from the surface to the burst point of the balloon. To enable flexibility and scalability with the ODB data model the different elements making up a weather report are split into header elements, recording information common across a weather report, and observational (or body) elements specific to a single observation.

In the original version of ODB, e.g. Saarinen (2004), these elements were split between a header table, containing the header elements, and a linked body table containing the observations or body elements. Within the body table the name of the parameter being observed, or its enumeration, is recorded in one column and the observed value within a second column. Other columns, recording information such as QC results, are permissible. This data model allows the efficient expansion of the data model to new variables, without the need to change the underlying structure, by the addition of the new variable to the enumerated list defining the reportable variables. Within the latest version of ODB (ODB-2; e.g. Hersbach et al., 2015) the header and body tables have been combined into a single flat table, with the header rows repeated, to enable efficient archival within the ECMWF MARS system. A simplified schematic of the ODB-2 structure is shown in Table 1.

Within the CDM defined in this document we have opted for the original ODB type data model, with the reports split into header and observational records stored within separate tables. These are described fully within Section 3 of this document. When these tables are stored in a relational database, or similar structure, performing a join on the tables should result in ODB-2 compatible records.

Table 1: Simplified example of records in ODB type data model, with observations from reports 1 and 2 spanning multiple records. For simplicity, the z coordinate has been omitted but profile data would be represented with each layer / height as a separate record

	head	der informatio	n	observatio	n inform	ation
drepo	rt obs	date	location	parameter	value	units
id	id					
1	1	2012-01-01	POINT(-40 40)	air temper-	300.0	K
		12:00+0.0		ature		
1	2	2012-01-01	POINT(-40 40)	sea level	1013.0	hPa
		12:00+0.0		pressure		
2	3	2012-01-01	POINT(-40.1	air temper-	300.3	K
		18:00+0.0	40.2)	ature		
	1 1	rdreport obs id id 1 1 1 2	dreport obs id id 1 2012-01-01 12:00+0.0 1 2 2012-01-01 12:00+0.0 2 3 2012-01-01	id id 1 1 2012-01-01 POINT(-40 40) 12:00+0.0 1 2 2012-01-01 POINT(-40 40) 12:00+0.0 2 3 2012-01-01 POINT(-40.1	dreport obs id date location parameter 1 1 2012-01-01 POINT(-40 40) air temperature 1 2 2012-01-01 POINT(-40 40) sea level pressure 2 3 2012-01-01 POINT(-40.1 air temperature	dreport obs id date location parameter value 1 1 2012-01-01 POINT(-40 40) air temperature 300.0 ature 1 2 2012-01-01 POINT(-40 40) sea level pressure 1013.0 pressure 2 3 2012-01-01 POINT(-40.1 air temper-300.3

Continued on next page



Table 1 adjustment (cont.)

head	ler info	rmatio	n		observation	n inform	ation
reco	rdrepo	rt obs	date	location	parameter	value	units
id	id	id					
4	2	4	2012-01-01	POINT(-40.1	sea level	1013.2	hPa
			18:00+0.0	40.2)	pressure		
					End of table		

2.3 BUFR and WIGOS Metadata Standard

There has been a large body of work and significant effort previously invested in defining data models and parameterising the data and metadata for encoding the data into those data models. Within the scope of the CDM and the C3S 311a service, the WMO Binary Universal Form for the Representation of meteorological data (BUFR) (WMO, 2015a) and the WMO Integrated Observing System Metadata Standard (WMDS) (WMO, 2015b) are key background material.

The BUFR format is a flexible and efficient table driven format for reporting weather observations on the WMO Global Telecommunications System (GTS) in binary. The tables defined as part of the BUFR format include many of the parameters that will be included in the CDM. For example, Common code table C6 (WMO 2015a) includes all the measurement units reportable in BUFR (and other WMO codes). Similarly, code tables are defined for reporting instrument types and methods, station types etc. Where possible, these code tables have been referenced and used in preference to defining new code tables. Tables from Version 27 of Master Table 0 have been used in this document.

In recognition of the increasing importance of observational metadata the WMDS is currently under development and undergoing a phased implementation (WMO, 2015b). The WMDS forms an extension of the ISO19115 metadata standard, with additional mandatory elements describing both the station level and discovery metadata as well as specific information on the instrumentation used and processing steps. As part of the process simplified versions of BUFR and other tables have been included in the standard. As with BUFR these tables have been referenced, where appropriate, in preference to defining new code tables.

3 Common Data Model

As noted above, the common data model has been developed based on the original ODB data model, with meteorological reports split into header and observational records stored in separate tables. In support of these two primary tables 4 auxiliary tables have been defined to enable the comprehensive reporting of metadata at different levels:

 Source level metadata (source_configuration table). This level contains detailed information on the source dataset, including: information on the product; whether any processing has been applied; the original data centre the data were sourced from; citation information; the data licence for the product; how to cite the data source etc.



- Station level metadata (*station_configuration* table). This level contains detailed information on the station reporting the data including: institute operating the station; the type of station; station / AWS model type; location; operating territory; reporting frequency etc.
- Profile level metadata (profile_configuration table). This level contains detailed metadata for atmospheric and oceanic profiles, including: profile type; type of launcher; direction of profile; balloon / XBT type etc.
- Instrument (or sensor) level metadata (sensor_configuration table). This level contains detailed information on the sensor used to make a particular observation, including: calibration status; sampling strategy; observing method; sensor housing and ventilation; instrument model and serial number etc.

These tables are defined in the following section and contain elements that are mandatory across all report types. Additional optional elements are provided through Entity-Attribute-Value based tables linked to the configuration tables. Two additional tables have been defined to include the reporting of comprehensive uncertainty estimates and quality control flags. A simplified schematic of the 12 tables forming the core of the CDM is shown in Figure 1 - a more complete schematic can be found at https://github.com/glamod/common_data_model/blob/master/cdm_short.pdf.

Within the tables in the following sections the following syntax has been:

numeric: Any numeric value (integer or floating point).

int: An integer value.

varchar: A variable length character string.

• timestamp: A timestamp, e.g. "2017-07-01 00:00:0.0+00".

byte: A single byte of data used to store e.g. a bit flag array.

• []: An array of the indicated type.

• (fk) The indicated value is also a foreign key linking to another table (e.g. decode table for encoded data).

• (pk) The indicated elements marked as (pk) within a table form the unique ID for the record.

Mandatory elements are indicated by a 1 (or 1+) in the occurrence column. Mandatory elements that are not available must be included but may be encoded as missing (.e.g NA, NULL or format specific equivalent). Optional elements are indicated by 0+. Whilst arrays have been indicated for the elements containing multiple values this does not preclude other implementations.



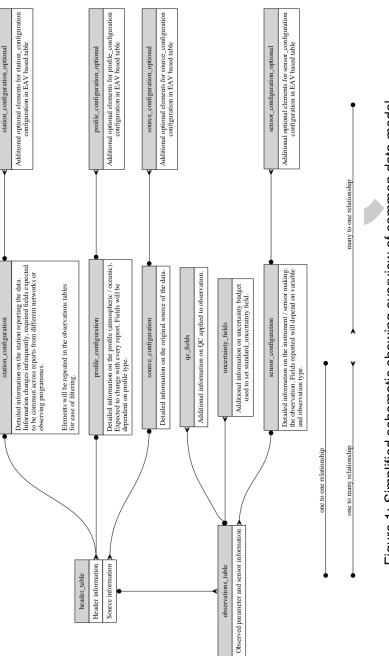


Figure 1: Simplified schematic showing overview of common data model



Header table

Table 2: header_table

element_name	occurrence	kind	external_table	description
report_id	-	varchar (pk)		Unique ID for report (unique ID given by combination of report.id and observation.id)
region	-	int (fk)	region	Region (WMO region / Ocean basin)
sub_region	-	int (fk)	sub_region	Country / regional sea
application_area	+	int[] (fk)	application_area	WMO application area(s)
observing_pro	+	int[] (fk)	observing_pro	Observing programme, e.g. VOS
gramme			gramme	
report_type	-	int (fk)	report_type	e.g. SYNOP, TEMP, CLIMAT, etc
station_name	-	varchar		e.g. GRUAN station name, ship
				name, site name etc
station_type	T-	int (fk)	station_type	Type of station, e.g. land sta-
platform_type	-	int (fk)	platform_type	Structure upon which sensor is mounted,
				e.g. ship, drifting buoy, tower etc
platform_sub_type	-	int (fk)	platform_sub_type	Sub-type for platform, e.g. 3m discuss buoy
primary_station_id	-	varchar (fk)	station_configuration	Primary station identifier, e.g. WIGOS ID
station_record	-	int (fk)	station_configuration	Together with primary_station_id this forms
_number				a link to the station configuration table.
primary_station_i	-	int (fk)	id_scheme	Scheme used for station ID
d_scheme				
secondary_station_id	+0	varchar []		Alternate (e.g. local) ID for station.
secondary_statio	+0	int[] (fk)	id_scheme	Alternate ID Scheme, e.g. Network ID.
longitude	•	nımeric		Longitude of station, -180 0 to 180 0
				(or other as defined by station_crs)
latitude	-	numeric		Latitude of station, -90 to 90 (or
				other as defined by station_crs)
location_accuracy	-	numeric		Accuracy to which station location
				recorded (radius in km)
				() () () () () () () () () ()



Table 2 header_table (cont.)

		1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		
element_name	occurrence	kind	external_table	description
location_method	-	int(fk)	location_method	Method by which location determined
location_quality	-	int (fk)	location_quality	Quality flag for station location
crs	-	int (fk)	crs	Coordinate reference scheme for station location
station_speed	-	numeric		Station speed over ground if mobile (m/s)
station_course	-	numeric		Station course over ground if mobile (degree true)
station_heading	-	numeric		Station heading if mobile
height_of_station_ab	-	numeric		Height of station above local ground (m)
ove_local_ground				
height_of_station_a	-	numeric		Height of station above mean sea level
bove_sea_level				(m), negative values for below sea level.
height_of_station	-	numeric		Accuracy to which height of
_above_sea_lev				station known (m)
el_accuracy				
sea_level_datum	-	int (fk)	sea_level_datum	Datum used for sea level
report_meaning_	-	int (fk)	meaning_of_ti	Report time - beginning, middle or
of_time_stamp			me_stamp	end of reporting period
report_timestamp	-	timestamp with		e.g. 1991-01-01 12:00:0.0+0
		timezone		
report_duration	-	int		Report duration (s), e.g. 86400 = daily obs, 3600 hourly etc
report_time_accuracy	-	numeric		Precision to which time was recorded (s)
report_time_quality	-	int (fk)	time_quality	Quality flag for report_timestamp
report_time_reference	-	int (fk)	time_reference	Reference Time (e.g. referenced to time
				server, atomic clock, radio clock etc)
profile_id	_	varchar (fk)	profile_configuration	Information on profile (atmospheric / oceano-
				graphic) configuration. Set to Record ID for profile data or missing (NULL) otherwise.
events_at_station	+0	int[] (fk)	events_at_station	e.g. ship hove to, crop burning etc.
report_quality	-	int (fk)	quality_flag	Overall quality of report
				Continued on next page



_
;
Ö
<u> </u>
풀
ta
er
ad
рĕ
<u>ر</u>
<u>0</u>
<u>a</u>
-

		` ` `	
occurrence	kind	external_table	description
-	int (fk)	duplicate_status	E.g. no duplicates, best duplicate, duplicate, not checked.
+0	varchar[] (fk)	observations_table	Array of report_id's for duplicates
-	timestamp with timezone		Timestamp of revision for this record
-	varchar		Sequence of processing steps. Free text with timestamp 1: history 1;
			timestamp 2: history 2 etc.
-	int (fk)	report_process ing_level	Level of processing applied to this report
+0	int[] (fk)	report_process ing_codes	Processing applied to this report
-	varchar (fk)	source_configuration	Original source of data, link to external table
-	varchar		Record ID in source data, e.g. ID of event from GRUAN meta database
			End of table
	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	int (fk) varchar[] (timestamp timescone varchar int (fk) int[] (fk) varchar (fk) varchar	int (fk) varchar[] (fk) timestamp with timezone varchar int (fk) int[] (fk) varchar (fk) varchar



2 Observations table

Table 3: observations_table

element_name	occurrence	kind	external_table	description
observation_id	-	varchar (pk)		unique ID for observation
report_id	-	varchar (fk)	header_table	Link to header information
data_policy_licence	-	int (fk)	data_policy_licence	WMOessential, WMOadditional, WMOother
date_time	-	timestamp with		timestamp for observation
		timezone		
date_time_meaning	-	int (fk)	meaning_of_ti	beginning, middle, end
			me_stamp	
observation_duration	-	int		Duration/period over which obser-
				vation was made (s)
longitude	-	numeric		Longitude of the observed value, -180 to 180
				(or other as defined by CRS). This may or
				may not be the same as the report location.
latitude	-	numeric		Latitude of the observed value, -90 to
				90 (or other as defined by CRS)
Crs	-	int (fk)	CrS	Coordinate reference scheme
				use to encode location
z_coordinate	1	numeric		z coordinate of observation
z_coordinate_type	-	int (fk)	z_coordinate_type	Type of z coordinate
observation_height_a	-	numeric		Height of sensor above local ground or
bove_station_surface				sea surface. Positive values for above
				surface (e.g. sondes), negative for below
				(e.g. xbt). For visual observations, height
				of the visual observing platform.
observed_variable	-	int (fk)	observed_variable	The variable being observed / measured
secondary_variable	0 or 1	int (fk)	secondary_variable	Secondary variable required to understand
				observation, e.g. chemical constituent
observation_value	-	numeric		The observed value
value_significance	-	int (fk)	observation_valu	e.g. min, max, mean, sum
			e_significance	
				Continued on next page

 $C3S_311a_Lot2_NUIM_2017~\{ref\}$



Table 3 observations_table (cont.)

element_name occurrence secondary_value 0 or 1 units 1 code_table 1 location_method 1 location_precision 1 z_coordinate_method 1 bbox_max_longitude 1 bbox_max_latitude 1 bbox_max_latitude 1 spatial_represen 1 tativeness 1	int (fk) int (fk) int (fk) int (fk) numeric numeric numeric	external_table secondary_variable units observation_c ode_table location_method z_coordinate_method	value for the secondary variable. Units for the observed variable Encode / decode table for variable (if encoded) Method of determining location, Precision to which location is reported (radius km) Method of determining z coordinate Bounding box for observation, valid range given by CRS Bounding box for observation, valid range given by CRS Bounding box for observation, valid
ndary_value table on_method on_precision on_precision on_precision rdinate_method min_longitude max_longitude min_latitude al_represen sness	int (fk) int (fk) int (fk) numeric numeric numeric	secondary_variable units observation_c ode_table location_method z_coordinate_method	value for the secondary variable. Units for the observed variable Encode / decode table for variable (if encoded) Method of determining location, Precision to which location is reported (radius km) Method of determining z coordinate Bounding box for observation, valid range given by CRS Bounding box for observation, valid range given by CRS Bounding box for observation, valid
units code_table location_method location_precision z_coordinate_method 1 bbox_min_longitude 1 bbox_max_longitude 1 bbox_max_latitude 1 spatial_represen 1 tativeness	int (fk) int (fk) numeric numeric numeric	units observation_c ode_table location_method z_coordinate_method	Units for the observed variable Encode / decode table for variable (if encoded) Method of determining location, Precision to which location is reported (radius km) Method of determining z coordinate Bounding box for observation, valid range given by CRS Bounding box for observation, valid Rounding box for observation, valid
code_table 1 location_method 1 location_precision 1 z_coordinate_method 1 bbox_min_longitude 1 bbox_max_longitude 1 bbox_max_longitude 1 bbox_max_latitude 1 bbox_max_latitude 1 tativeness 1 tativeness 1	int (fk) int (fk) numeric numeric numeric	observation_c ode_table location_method z_coordinate_method	Encode / decode table for variable (if encoded) Method of determining location, Precision to which location is reported (radius km) Method of determining z coordinate Bounding box for observation, valid range given by CRS Bounding box for observation, valid range given by CRS Bounding box for observation, valid
location_method 1 location_precision 1 Z_coordinate_method 1 bbox_min_longitude 1 bbox_max_longitude 1 bbox_max_latitude 1 bbox_max_latitude 1 bbox_max_latitude 1 tativeness 1 tativeness 1	int (fk) numeric numeric numeric	ode_table location_method z_coordinate_method	able (if encoded) Method of determining location, Precision to which location is reported (radius km) Method of determining z coordinate Bounding box for observation, valid range given by CRS Bounding box for observation, valid range given by CRS Bounding box for observation, valid
location_method 1 location_precision 1 z_coordinate_method 1 bbox_min_longitude 1 bbox_max_longitude 1 bbox_max_latitude 1 bbox_max_latitude 1 spatial_represen 1 tativeness 1	int (fk) numeric numeric numeric	location_method z_coordinate_method	Method of determining location, Precision to which location is reported (radius km) Method of determining z coordinate Bounding box for observation, valid range given by CRS Bounding box for observation, valid range given by CRS Bounding box for observation, valid
location_precision	int (fk) numeric numeric numeric	z_coordinate_method	Precision to which location is reported (radius km) Method of determining z coordinate Bounding box for observation, valid range given by CRS Bounding box for observation, valid range given by CRS Bounding box for observation, valid
z_coordinate_method 1 bbox_min_longitude 1 bbox_max_longitude 1 bbox_max_latitude 1 bbox_max_latitude 1 spatial_represen 1 tativeness 1	int (fk) numeric numeric	z_coordinate_method	ported (radius km) Method of determining z coordinate Bounding box for observation, valid range given by CRS Bounding box for observation, valid range given by CRS Bounding box for observation, valid
z_coordinate_method 1 bbox_min_longitude 1 bbox_max_longitude 1 bbox_max_latitude 1 bbox_max_latitude 1 spatial_represen 1 tativeness 1	int (fk) numeric numeric numeric	z_coordinate_method	Method of determining z coordinate Bounding box for observation, valid range given by CRS Bounding box for observation, valid range given by CRS Bounding box for observation, valid
bbox_min_longitude 1 bbox_max_longitude 1 bbox_min_latitude 1 bbox_max_latitude 1 spatial_represen 1 tativeness 1	numeric numeric numeric		Bounding box for observation, valid range given by CRS Bounding box for observation, valid range given by CRS Bounding box for observation, valid
bbox_max_longitude 1 bbox_min_latitude 1 bbox_max_latitude 1 spatial_represen 1 tativeness 1	numeric		range given by CRS Bounding box for observation, valid range given by CRS Bounding box for observation, valid
bbox_max_longitude 1 bbox_min_latitude 1 bbox_max_latitude 1 spatial_represen 1 tativeness 1	numeric		Bounding box for observation, valid range given by CRS Bounding box for observation, valid
bbox_max_latitude 1 bbox_max_latitude 1 spatial_represen 1 tativeness 1	numeric		range given by CRS Bounding box for observation, valid
bbox_min_latitude 1 bbox_max_latitude 1 spatial_represen 1 tativeness 1	numeric		Bounding box for observation, valid
bbox_max_latitude 1 spatial_represen 1 tativeness 1	nımeric		
bbox_max_latitude 1 spatial_represen 1 tativeness	nımeric		range given by CRS
spatial_represen 1 tativeness			Bounding box for observation, valid
spatial_represen 1 tativeness			range given by CRS
tativeness	int (fk)	spatial_represen	Spatial representativeness of observation
1 2015 Floor		tativeness	
quality-itag	int (fk)	quality_flag	Quality flag for observation
quality_bitmap 1	byte		TBD
numerical_precision 1	int		Reporting precision of observation
			in units given by 'units' variable.
			Equivalent to BUFR scale factor
standard_uncertainty 1	numeric		Standard uncertainty in reported value
method_of_estimating 1	int (fk)	method_of_estima	Method of estimating the stan-
_standard_uncertainty		ting_uncertainty	dard uncertainty
sensor_id 1	varchar (fk)	sensor_configuration	NA
sensor_automa 1	int (fk)	automation_status	Automated, manual, mixed or
tion_status			visual observation
exposure_of_sensor 1	int (fk)	instrument_expo sure_quality	Whether the exposure of the instrument will impact on the quality of the measurement
			Continued on next page



Table 3 observations_table (cont.)

		2000	ומסוכ ליחום ליחום בינמסוכ (ספווני)	
element_name	occurrence	kind	external_table	description
original_precision	-	int		Original reporting precision in units
orioinal units	-	int (fk)	stiuits	Original units
Origon Coriono	·	circ (i.e.)		Original value of reported or
Oligiilai_value	_			Criginal value as reported or recorded in log book.
conversion_method	-	int (fk)	conversion_method	Link to table describing conversion process
processing_code	+0	int[] (fk)	processing_code	e.g. TRC (temperature radiation
				corrections) etc. Encoded in table.
processing_level	-	int (fk)	processing_level	Level of processing applied to observation.
adjustment_id	-	int (fk)	adjustment	Adjustment applied to observation
				reported in observation value (observa-
				tion_value = original + adjustment)
traceability	-	int (fk)	traceability	Whether observation can be traced
				to international standards.
advanced_qc	-	flag	NA	Whether there are advanced qc data avail-
				able for this observation in qc_records table
advanced_uncertainty	-	flag	NA	Whether there are advanced uncer-
				tainty estimates for this observation
				in the uncertainty_budget table
				End of table



3 Station configuration

Table 4: station_configuration

	2222.2.2	iype	catellial_table	description
station_primary_id	1	varchar (pk)		Primary (e.g. WMO) ID for station
station_primary_i d_scheme	-	int (fk)	id_scheme	Scheme used for primary ID
station_record _number	-	int (pk)		Record number for this station entry
station_secondary_id	+0	varchar		Secondary (e.g. local) ID for station
station_seconda	+0	int (fk)	id_scheme	Scheme used for secondary ID
ry_id_scheme				
station_name	-	varchar		Name of station (e.g. Tateno)
station_abbreviation	-	varchar		Abbreviation of station name (e.g. TAT)
alternative_name	+0	varchar[]		NA
station_crs	-	int (fk)	ors	coordinate reference system used to report stations location
station longitude	-	numeric		Report position for station if stationary
				or NULL if mobile. If more than one
				estimate record best here and additional
				values using optional fields.
station_latitude	-	numeric		Report position for station if sta-
				tionary or NULL if mobile
local_gravity	-	numeric	NA	Local gravity at station location (units ms-2)
start_date	-	timestamp		Date that the station first started
				reporting in this configuration
end_date	•	timestamp		Last data the station reported
				in this configuration
station_type	-	int (fk)	station_type	Type of reporting station
platform_type	1	int (fk)	platform_type	Generic type of observing platform
platform_sub_type	1	int (fk)	platform_sub_type	Specific type of observing platform
operating_institute	-	int (fk)	organisation	Institute operating the station (e.g. National Oceanography Centre)



Table 4 station_configuration (cont.)

			(a)a	
element_name	occurrence	type	external_table	description
operating_territory	-	int (fk)	sub_region	Sub-region where station is located or
				country of registry for mobile station
city	-	varchar	NA	Nearest city / town to station location
contact	+	varchar[] (fk)	contact	Contact for station
role	+	int[] (fk)	role	Role of contact
observing_frequency	-	int (fk)	observing_frequency	Typical frequency of observations for
				tills station (reports per day)
telecommunicati	-	int (fk)	communicatio	Method used to report observations
on_method			n_method	
station_automation	-	int (fk)	automation_status	Whether station is automated,
				manual or mixed
measuring_sys	-	int (fk)	measuring_sys	Station / AWS model type
tem_model			tem_model	
measuring_system_id	-	varchar		ID or serial number of measuring system
observed_variables	+	int[] (fk)	observed_variable	array indicating which variables are
				observed by this station
comment	-	varchar		Any other comments / footnotes
	+0	NA		See station_configuration_fields for
				valid optional fields and types
				End of table

C3S_311a_Lot2_NUIM_2017 {ref}



Table 5: station_configuration_optional

element_name	kind	external_table	description
station_primary_id	varchar (fk)	station_confi	Link to station for which this
		guration	entry corresponds
record_number	int (fk)	station_confi	Link to station for which this
		guration	entry corresponds
kind	int (fk)	TBD	Enumerated data type (numeric, int, etc)
field	varchar (fk)	station₋configu	Field that this entry corresponds to
		ration_fields	
value			Kind depends on field and kind
comments	varchar	NA	Any additional comments.

Table 6: station_configuration_fields

field₋id	field_name	kind	description
0	AWS Entry and	int (fk)	NA
	Display Software		
1	AWS Entry and	int (fk)	NA
	Display Soft-		
	ware Version		
2	AWS Model	int (fk)	NA
3	AWS Model	int (fk)	NA
	Version	·	
4	AWS Software	int (fk)	NA
5	AWS Software	int (fk)	NA
	version		
6	Cargo height	numeric	NA
7	Distance of bridge	numeric	NA
	from bow		
8	Draught	numeric	NA
9	Drogue type	int (fk)	NA
10	Freeboard	numeric	NA
11	Lagrangian drifter	int (fk)	NA
	drogue status		
12	Length overall of	numeric	NA
	the ship, ignoring		
	bulbous bow		
13	LogBook software	int (fk)	NA
	and version		
14	Maximum oper-	numeric	NA
	ating speed on		
	normal service		
15	Moulded breadth	numeric	NA
		Continued	on next page



Table 6 station_configuration_fields (cont.)

			,
field_id	field_name	kind	description
16	Other instruments	int (fk)	NA
17	Station status	int (fk)	NA
18	Type of mete-	int (fk)	NA
	orological re-		
	porting ship		
19	Surface cover	int (fk)	NA
20	Surface cover	int (fk)	NA
	scheme		
21	Topography	int (fk)	NA
22	Topography	int (fk)	NA
	scheme		
23	Soil type	int (fk)	NA
24	Land use	int (fk)	NA
25	Alternate longitude	numeric	NA
26	Alternate latitude	numeric	NA





Table 7: station_configuration_codes

field id	field name	code value	abbreviation	description
5	2	25000		
0	AWS Entry and Dis-			TBD
	play Software			
-	AWS Entry and Dis-			TBD
	play Software Version			
2	AWS Model			TBD
က	AWS Model Version			TBD
4	AWS Software			TBD
2	AWS Software			TBD
	version			
6	Drogue type	NA		See BUFR code table 0 02 034
-	Lagrangian drifter	NA		See BUFR code table 0 22 060
	drogue status			
=	LogBook software			TBD
	and version			
16	Other instruments	0	BAT	Bathythermometer.
16	Other instruments	-	ВТ	Bathythermograph (towed).
16	Other instruments	2	FLM	Fluorometer.
16	Other instruments	က	LWR	Long wave radiation.
16	Other instruments	4	MAX	Maximum thermometer.
16	Other instruments	2	MIN	Minimum thermometer.
16	Other instruments	9	NTE	Nitrate sensor.
16	Other instruments	7	NTT	Nutrient sensor.
16	Other instruments	8	Ъ	Pilot balloon equipment.
16	Other instruments	6	CO2	pCO2 system.
16	Other instruments	10	PLK	Plankton recorder.
16	Other instruments	11	PRS	Photosynthetic radiation sensor.
16	Other instruments	12	PYG	Pyrogeometer.
16	Other instruments	13	æ	Radiosonde equipment.
16	Other instruments	14	RG	Rain gauge.
16	Other instruments	15	RSD	Radar storm and meteorological
				phenomena detection.
				Continued on next page



Table 7 station_configuration_codes (cont.)

		Table / station_collingulation_codes (colli.	oi iiigai ailoi i_cod	33 (collic.)
field id	field_name	code_value	abbreviation	description
	Other instruments	16	RT	Reversing thermometer.
	Other instruments	17	SKY	Sky camera.
	Other instruments	18	SLM	Solarimeter.
16	Other instruments	19	ST	Sea thermograph.
	Other instruments	20	SWR	Short wave radiation.
	Other instruments	21	TSD	Temperature/salinity/depth probe.
	Other instruments	22	TUR	Turbidity sensor.
	Other instruments	23	M	Radiowind or radarwind equipment.
	Other instruments	24	WR	Wave Recorder
	Other instruments	25	XBT	Expendable bathythermograph.
	Other instruments	26	10	Other (specify in footnote).
	Station status			Planned
	Station status	2		Pre-operational
	Station status	က		Operational / Reporting
	Station status	4		Partly reporting
	Station status	2		Temporarily suspended
	Station status	9		Closed
	Type of meteorolog-	0	20	Auxiliary ship
	ical reporting ship			
18	Type of meteorolog-	-	75	Auxiliary ship (AWS)
	ical reporting ship			
18	Type of meteorolog-	2	10	Selected
	ical reporting ship			
9	Type of meteorolog-	က	15	Selected (AWS)
	ical reporting ship			
18	Type of meteorolog-	4	40	Supplementary
	ical reporting ship			
8	Type of meteorolog-	2	45	Supplementary (AWS)
	ical reporting ship			
18	Type of meteorolog-	9	80	Third party
	ical reporting ship			
				Continued on next page



Table 7 station_configuration_codes (cont.)

	?			(m)
field_id	field_id field_name	code_value	code_value abbreviation description	description
18	Type of meteorological reporting ship	2	85	Third party (AWS)
18	Type of meteorological reporting ship	ω	66	Unknown
18	Type of meteorological reporting ship	o	30	VOSClim - VOS Climate
18	Type of meteorological reporting ship	10	35	VOSClim (AWS) - VOS Climate (AWS)
				End of table





Profile configuration

Table 8: profile_configuration

element_name	occurrence kind	kind	external_table description	description
profile_id	-	varchar	NA	Unique ID for this profile entry
profile_type	-	int (fk)	profile_type	Type of profile (e.g. atmospheric or oceanic)
standard_time	-	int (fk)	standard_time	e.g. Standard / scheduled time for launch
				or report, e.g. 00, 06, 12, 18 UTC
actual_time	-	timestamp		Actual report / launch time
profile_number	-	numeric		e.g. Balloon Number
comments	-	varchar		Any additional comments / footnotes
	+0	NA		See profile_configuration_fields for
				valid fields and types.
				داطرب بالم المنال





Table 9: profile_configuration_optional

element_name	kind	external_table	description
profile_id	varchar (fk)	profile_confi	Link to profile for which this
		guration	entry corresponds
kind	int (fk)	TBD	Enumerated data type (numeric, int, etc)
field	varchar (fk)	profile_configu ration_fields	Field that this entry corresponds to
value			Kind depends on field and kind
comments	varchar	NA	Any additional comments.

Table 10: profile_configuration_fields

field_id	field_name	type	description
0	include descent	int (fk)	NA
1	processing code	int (fk)	NA
2	unwinder type	varchar	NA
3	burstpoint altitude	numeric	NA
4	burstpoint pres-	numeric	NA
	sure		
5	filling weight	numeric	NA
6	gross weight	numeric	NA
7	payload	numeric	NA
8	unwinder length	numeric	NA
9	ascent rate	numeric	Rate of ascent / descent for profile (+ve
			values indicate ascent, -ve descent)(m/s)
B002016	radiosonde con-	int (fk)	NA
	figuration		
B002003	type of measuring	int (fk)	NA
	equipment used		
B002011	radiosonde sound-	int (fk)	NA
	ing system		
B002011	radiosonde type	int (fk)	NA
B002013	solar and in-	int (fk)	NA
	frared radiation		
	correction		
B002014	tracking technique	int (fk)	NA
B002015	radiosonde com-	int (fk)	NA
	pleteness		
B002017	humidity correc-	int (fk)	NA
	tion algorithm		
B002066	radiosonde ground	int (fk)	NA
	receiving system		
			Continued on post page

Continued on next page



Table 10 profile_configuration_fields (cont.)

	<u> </u>		
field_id	field_name	type	description
B002080	balloon man-	int (fk)	NA
	ufacturer		
B002081	balloon type	int (fk)	NA
B002083	type of bal-	int (fk)	NA
	loon shelter		
B002084	type of gas used	int (fk)	NA
	in balloon		
B002095	type of pres-	int (fk)	NA
	sure sensor		
B002191	geopotential	int (fk)	NA
	height calculation		
B003011	method of depth	int (fk)	NA
	calculation		
B022056	profile direction	int (fk)	NA
B022067	instrument type for	int (fk)	NA
	water temperature		
	salinity profile		
B022068	water temper-	int (fk)	NA
	ature profile		
	recorder type		
B022178	XBT launcher type	int (fk)	NA
B035035	reason for ter-	int (fk)	NA
	mination		5 1 (11)



Table 11: profile_configuration_codes

field_id	field_name	code_value	abbreviation	description	start_date	end_date
0	include de- scent	NA	NA	NA	NA	NA
-	processing code	0	20	Calibration correction (of humidity sensors)	Y	Y V
-	processing code	-	HRC	Humidity radiation correction	NA V	NA V
-	processing code	Ø	or	Outlier removal (remove temperature spikes)	Y Z	Y V
-	processing code	м	pGPS	Combination of pressure and GPS	NA	NA
-	processing code	4	1	Time-lag cor- rection	A N	NA
-	processing code	വ	TRC	Temperature radiation correction	AN	NA V
2 B002003	unwinder type type of measuring equipment used	0 - 15	NA NA	STRING See BUFR table 0 02 003	A N A	A N
B002011	radiosonde sounding system	0 - 255	Y Y	See BUFR table 0 02 011	NA	NA V
B002013	solar and in- frared radia- tion correction	0 - 15	۷ ۷	See BUFR table 0 02 013	NA	NA
					Continued on next page	next page



Table 11 profile_configuration_codes (cont.)

		тарте т рготп	able 11 profile_corniguration_codes (corn.)	codes (corn.)		
field_id	field_name	code_value	abbreviation	description	start_date	end_date
B002014	tracking tech-	0 - 127	AN	See BUFR	AN	NA
	nique			table 0 02 014		
B002015	radiosonde	0 - 15	ΑN	See BUFR	NA	N A
	completeness			table 0 02 015		
B002017	humidity cor-	0 - 31	NA	See BUFR	NA	NA
	rection al-			table 0 02 017		
	gorithm					
B002066	radiosonde	0 - 63	NA	See BUFR	NA	NA
	ground receiv-			table 0 02 066		
	ing system					
B002080	balloon man-	0 - 63	NA	See BUFR	NA	NA
	ufacturer			table 0 02 080		
B002081	balloon type	0-31	NA	See BUFR	NA	NA
				table 0 02 081		
B002083	type of bal-	NA	NA	See BUFR	NA	NA
	loon shelter			table 0 02 083		
B002084	type of gas	NA	NA	See BUFR	ΝΑ	NA
	used in bal-			table 0 02 084		
	loon				•	
B002095	type of pres-	0 - 31	NA	See BUFR	NA	NA
	sure sensor			table 0 02 095		
B002191	geopotential	0 - 15	NA	See BUFR	NA	NA
	height cal-			table 0 02 191		
	culation					
B003011	method of	0 - 3	NA	See BUFR	NA	ΝΑ
	depth cal-			table 0 03 011		
	culation					
B022056	profile di-	0 - 3	NA	See BUFR	NA	NA
	rection			table 0 22 056		
					Continued on next page	next page



Table 11 profile_configuration_codes (cont.)

		-	•	,		
field_id	field_id field_name	code_value	code_value abbreviation description	description	start_date end_date	end_date
B022067	B022067 instrument	0 - 1023	NA	See BUFR	ΑN	ΑN
	type for water			table 0 22 067		
	temperature					
	salinity profile					
B022068	B022068 water temper-	0 - 127	NA	See BUFR	NA	NA
	ature profile			table 0 22 068		
	recorder type					
B022178	B022178 XBT launcher 0 - 255	0 - 255	NA	See BUFR	NA	NA
	type			table 0 22 178		
B035035	B035035 reason for ter- 0 - 31	0 - 31	NA	See BUFR	NA	NA
	mination			table 0 35 035		
					Ш	End of table





3.5 Source configuration

Table 12: source_configuration

element_name	occurrence	type	external_table	description
source_id	-	varchar (pk)		Unique record ID for dataset
product_id	-	varchar		ID for product
product_name	-	varchar		Name of source, e.g. International
				Comprehensive Ocean Atmosphere Data Set, RS92 GRUAN Data Product
product_code	-	varchar		Abbreviations / product code, e.g. ICOADS, RS92-GDP
product_version	-	varchar		Version number for dataset,
				e.g. Release 3.0.0
product_level	-	int (fk)	product_level	Level of product
product_uri	-	varchar		URI for product, either to origi-
				nal source or to CDS
description	_	varchar		Description of dataset / comments
product_references	+	varchar[]		References describing the dataset
product_citation	+	varchar[]		Citation to use when using this product
product_status	-	int (fk)	product_status	Status of product, draft, pre-release, release
source_format	-	int (fk)	source_format	Original format for data
source_forma	-	varchar		Version of original data format
t_version				
source_file	-	varchar		Filename for data from source
source_file_checksum	-	varchar		Checksum of source datafile
data_centre	-	int (fk)	organisation	Data centre from which data sourced
data_centre_url	-	varchar		URL for data centre
data_policy_licence	-	int (fk)	data_policy_licence	Data policy / licence
contact	+	varchar[] (fk)	contact	contact for data source with role
				specified by role element
contact_role	+	int[] (fk)	role	role of contact
history	-	varchar		History of source
comments	-	varchar		Additional comments / footnotes
				aben tvan no barrintao



Table 12 source_configuration (cont.)

		Iable 12 sou	Iable 12 source_colliguration (collt.)	III.)
element_name	occurrence	type	external_table	description
timestamp	-	timestamp with		Date record created / created
		timezone		
maintenance_and_u	-	int (fk)	update_frequency	Frequency with which modifications
pdate_frequency				and deletions are made to the data
				after it is first produced
	+0			See source_configuration_fields for
				list of optional fields and types
				End of table



Table 13: source_configuration_optional

element_name	kind	external_table	description
source₋id	varchar (fk)	source₋confi	Link to source for which this
		guration	entry corresponds
kind	int (fk)	TBD	Enumerated data type (numeric, int, etc)
field	varchar (fk)	source_configu	Field that this entry corresponds to
		ration_fields	
value			Kind depends on field and kind
comments	varchar	NA	Any additional comments.

Table 14: source_configuration_fields

field_name	kind	description
delayed mode	int (fk)	NA
format		
metadata source	int (fk)	NA
metadata source	int (fk)	NA
format		
observation	int (fk)	NA
source type		
real time format	int (fk)	NA
source format	int (fk)	NA
source deck	int (fk)	NA
source id	int (fk)	NA
product original	numeric	NA
time resolution		
	delayed mode format metadata source metadata source format observation source type real time format source format source deck source id product original	delayed mode format metadata source int (fk) metadata source int (fk) metadata source int (fk) format observation int (fk) source type real time format int (fk) source format int (fk) source deck int (fk) source id int (fk) product original numeric

End of table



Table 15: source_configuration_codes

field_id	field_name	code_value	description	extended_description
0	delayed mode format	0	IMMT version just	₹Z
			prior to version num-	
			ber being included	
0	delayed mode format	-	IMMT-1 (in effect	NA
			from 2 Nov. 1994)	
0	delayed mode format	2	IMMT-2 (in effect	NA
			from Jan. 2003)	
0	delayed mode format	3	IMMT-3 (in effect	NA
			from Jan. 2007)	
0	delayed mode format	4	IMMT-4 (in effect	NA
			from Jan. 2011)	
0	delayed mode format	5	IMMT-5 (in effect	NA
			from June 2012)	
-	metadata source	0	COAPS	NA
-	metadata source	-	WMO Publication 47	NA
2	metadata source	-	Output from digi-	NA
	format		tisation project,	
			semi-colon delim-	
			ited format (1955)	
2	metadata source	2	Output from digi-	NA
	format		tisation project,	
			semi-colon delim-	
			ited format (1956)	
2	metadata source	ဇ	Output from digiti-	NA
	format		sation project, semi-	
			colon delimited format	
			(1957 - 1967)	
2	metadata source	4	Output from digiti-	NA
	format		sation project, semi-	
			colon delimited format	
			(1968 - 1969)	
				Continued on next page



Table 15 source_configuration_codes (cont.)

		lable 15 sol	lable 15 source_configuration_codes (cont.)	s (cont.)	
field_id	field_name	code_value	description	extended_description	
8	metadata source	വ	Fixed format (1970	NA	
0			- (cot)	4-4	
N	metadata source format	9	Semi-colon delimited format (1995 - 2001)	NA	
2	metadata source	7	Semi-colon delim-	NA	
	format		ited format (2002		
			- 2007 q1)		
2	metadata source	8	Semi-colon delimited	NA	
	format		format (2007 - 2008)		
2	metadata source	6	Semi-colon delimited	NA	
	format		format (2009 - 2014)		
က	observation	0	unknown	NA	
	source type				
က	observation	-	delayed mode -	NA	
	source type		logbook (paper)		
က	observation	2	real time - national	NA	
	source type		telecommunica-		
			tion channels		
က	observation	3	delayed mode - na-	NA	
	source type		tional publications		
က	observation	4	delayed mode - log-	NA	
	source type		book (electronic)		
က	observation	5	real time - global	NA	
	source type		telecommunication		
			system (GTS)		
က	observation	9	delayed mode - Inter-	NA	
	source type		national publications		
4	real time format	0	previous to FM24-V	NA	
4	real time format	-	FM 24-V	NA	
4	real time format	2	FM 24-VI Ext.	NA	
4	real time format	3	FM 13-VII	NA	
4	real time format	4	FM 13-VIII	NA	
				Continued on next page	eg:



Table 15 source_configuration_codes (cont.)

		0000	ייייים פספים ביייים שלייים מיייים	(collin)
field_id	field_name	code_value	description	extended_description
4	real time format	5	FM 13-VIII Ext.	NA
4	real time format	9	FM 12-IX	NA
4	real time format	7	FM 13-IX Ext.	NA
4	real time format	8	FM 13-X	NA
4	real time format	6	FM 13-XI	NA
4	real time format	10	FM 13-XII Ext.	NA
4	real time format	11	FM 13-XIII	NA
4	real time format	12	FM 13-XIV Ext.	NA
2	source format	0	IMMA - Version 0	NA
2	source format	-	IMMA - Version 1	NA
9	icoads source deck	NA	See ICOADS	NA
			Source Deck	
7	icoads source id	NA	See ICOADS	NA
			Source ID	
∞	product level	2	Data read from	NA
			original data file	
6	product status	-	Data approved	Data exist, read from chache, PTU +
				altitude columns available, all GC25 tests
				ok, all uncertainties as expected



Sensor configuration

Table 16: sensor_configuration

element_name	occurrence type	type	external_table	description
instrument_id	-	varchar (pk)		Unique ID for this instrument
observing_method	-	int (fk)	observing_method	observing_method Method (instrumental, estimated / visual,
				computed) by which observation made
sampling_strategy	-	int (fk)	sampling_strategy	Sampling strategy used by instrument
calibration_status	-	int (fk)	calibration_status	Whether the sensor is in / out of calibration
calibration_date	-	timestamp		Date of last calibration
comments	-	varchar		additional comments for sensor
	•			not reportable elsewhere
date_start	-	timestamp		start date for period of validity as-
				soiciated with this entry
date_end	-	timestamp		end date for period of validity as-
				soiciated with this entry
	+0			see sensor_configuration_fields for
				list of valid fields and types.
				End of table



Table 17: sensor_configuration_optional

element_name	kind	external_table	description
sensor₋id	varchar (fk)	sensor₋confi	Link to sensor for which this
		guration	entry corresponds
kind	int (fk)	TBD	Enumerated data type (numeric, int, etc)
field	varchar (fk)	sensor_configu ration_fields	Field that this entry corresponds to
value			Kind depends on field and kind
comments	varchar	NA	Any additional comments.





Table 18: sensor_configuration_fields

field_id	field_name	parameter	type	description
SACC	sensor accuracy	all	numeric	Reported accuracy (trueness) of sensor in units of measurement.
SPRE	sensor precision	all	numeric	Reported precision (repeatability) of sensor in units of measurement
B002033	sensor type - salinity	salinity	int (fk)	NA
B002038		water temperature	int (fk)	NA
	ter temperature			
B002051	sensor type -	air temperature	int (fk)	NA
	extremes			
B002096	sensor type - air	air temperature	int (fk)	NA
	temperature			
B002097	sensor type - humidity	humidity	int (fk)	NA
B002169	sensor type -	wind speed	int (fk)	NA
	wind speed			
B002185	sensor type -	evaporation	int (fk)	NA
	evaporation			
B003003	sensor housing - type	all	int (fk)	NA
B003004	sensor housing -	all	int (fk)	NA
	radiation shielding			
B003008	sensor housing	all	int (fk)	NA
	- ventilation		>	
B003020	sensor housing	all	int (fk)	NA
	- material			
B003021	sensor housing	all	int (fk)	NA
	- heating			
B003022	sensor owner	all	int (fk)	NA
B003023	sensor housing -	all	int (fk)	NA
	configuration			
BARG	sensor type -	pressure trend	int (fk)	NA
	barograph			
				Continued on next page



Table 18 sensor_configuration_fields (cont.)

		lable 18 sensor_configuration_fields (cont.)	guration_tields (cont.)
field_id	field_name	parameter	type	description
BARM	sensor type -	pressure	int (fk)	NA
	barometer			
CALINT	calibration interval	all	numeric	Maximum number of months recom-
				mended between calibrations.
CALMETH	calibration method	all	int (fk)	Method used to calibrate instrument
CALPRTY	calibration party	all	varchar	Who performed the calibration
CALRES	calibration result	all	varchar TBD	Result of the calibration
FREQ	sampling frequency	all	numeric	time period (s) between successive
				measurements from sensor
IBS	ice bulb status	humidity	int (fk)	NA
LDCL	sensor location - dis-	wind speed	numeric	NA
	tance from center line		4	
LDFB	sensor location -	wind speed	numeric	NA
	distance from bow			
LHAD	sensor location -	wind speed	numeric	NA
	height above deck			
MANU	manufacturer	all	int (fk)	NA
QCPROC	quality control	all	int (fk)	Procedure used to quality control the
	procedure			observation and set quality flag
SERIAL	serial number	all	varchar	NA
SHVR	sensor housing -	all	numeric	NA
	ventilation rate		>	
SLOC	sensor location - ship	all	int (fk)	NA
SMAX	sensor range - max	all	numeric	Maximum observable value with sensor
				in reported units of measurement
SMIN	sensor range - min	all	numeric	Minimum observable value with sensor
				in reported units of measurement
SMOD	sensor model	all	varchar	NA
SOFT	software_version	all	varchar	NA
SPROC	sampling procedure	all	int (fk)	how the sample was obtained
SRES	sensor resolution	all	numeric	NA
				Continued on next page



Table 18 sensor_configuration_fields (cont.)

		ומטוס פטווסטן בשנוטון בווסומש (סטווני)	1941 attol _1101d3	(OCIE.)
field_id	field_name	parameter	type	description
SRESP	sensor response time	all	numeric	Time (s) for sensor to chnage from
				previous state to current state
SRR	sensor type - pre-	precipitation	int (fk)	NA
	cipitation			
SSIDE	sensor side - ship	all	int (fk)	NA
STAB	sensor stability	all	numeric	Reported stability of sensor in reported
				units of measurement per year.
SWV	sensor type - waves	waves	int (fk)	NA
SWW	sensor type -	present weather	int (fk)	NA
	present weather			
STREAT	sample treatment	all	int (fk)	treatment of the sample prior to analysis
TSONDE	telemetry_sonde	sonde	int (fk)	NA
WGHT	weight	sonde	numeric	NA
STIME	sample times	all	timestamp	time of the samples used to
				calculate statistics



Table 19: sensor_configuration_codes

field_id	field_name	parameter	code_value abl	abbreviation	description
B002033	sensor type	salinity	2 - 0		See BUFR table 0 02 033
B002038	sensor type - wa-	water tem-	0 - 15		See BUFR table 0 02 038
B002038	sensor type - wa-	perature water tem-	16		Bait tanks thermometer.
B002038	sensor type - wa-	water tem-	17		electronic sensor
B002038	sensor type - wa- ter temperature	water tem-	18		limplied bucket [note: applicable to early ICOADS data]
B002038	sensor type - wa- ter temperature	water tem- perature	19		Radiation thermometer.
B002038	sensor type - wa- ter temperature	water tem- perature	20		Through Hull sensor.
B002038	sensor type - wa- ter temperature	water tem- perature	21		Trailing thermistor
B002038	sensor type - wa- ter temperature	water tem- perature	22		unknown or non-bucket
B002051	sensor type - extremes	air temperature	0 - 15		See BUFR table 0 02 051
B002096	sensor type - air temperature	air temperature	0		See BUFR table 0 02 096
B002097	sensor type - humidity	humidity	0 - 31		See BUFR table 0 02 097
B002169	sensor type - wind speed	wind speed	0 - 15		See BUFR table 0 02 169
B002169	sensor type - wind speed	wind speed	16		Anemograph.
B002169	sensor type - wind speed	wind speed	17		Anemometer - type unspecified
					Continued on next page



Table 19 sensor_configuration_codes (cont.)

				-comigaration-codes (cont.	lt.)
field_id	field_name	parameter	code_value	abbreviation	description
B002169	sensor type - wind speed	wind speed	18		Beaufort force
B002169	sensor type - wind speed	wind speed	19		Cup anemometer and wind vane (combined unit).
B002169	sensor type - wind speed	wind speed	20		Cup anemometer and wind vane (separate instruments).
B002169	sensor type - wind speed	wind speed	21		Handheld anemometer.
B002169	sensor type - wind speed	wind speed	22		Other (specify in footnote).
B002169	sensor type - wind speed	wind speed	23		Propeller vane.
B002185	sensor type - evaporation	evaporation	0 - 15		See BUFR table 0 02 185
B003003	sensor hous- ing - type	all	0 - 15		See BUFR table 0 03 003
B003004	sensor hous- ing - radiation shielding	all	0 - 15	2	See BUFR table 0 03 004
B003008	sensor housing - ventilation	all	2 - 0		See BUFR table 0 03 008
B003020	sensor hous- ing - material	all	2 - 0		See BUFR table 0 03 020
B003021	sensor hous- ing - heating	all	0 - 4		See BUFR table 0 03 021
B003022 B003023	sensor owner sensor housing - configuration	all all	7 - 0		See BUFR table 0 03 022 See BUFR table 0 03 023
BARG	sensor type - barograph	pressure trend	0		Open Scale barograph with 1 day clock.
BARG	sensor type - barograph	pressure trend	-		Open Scale barograph with 2 day clock.
					Continued on next page



Table 19 sensor_configuration_codes (cont.)

		lable 19 s	Table 19 serisor_corniguration_codes (corn.,	odes (con	(-)
field_id	field_name	parameter	code_value abbre	abbreviation	description
BARG	sensor type - barograph	pressure trend	2		Open Scale barograph with 3 day clock.
BARG	sensor type - barograph	pressure trend	က		Open Scale barograph with 4 day clock.
BARG	sensor type - barograph	pressure trend	4		Open Scale barograph with 5 day clock.
BARG	sensor type - barograph	pressure trend	D.		Open Scale barograph with 6 day clock.
BARG	sensor type - barograph	pressure trend	9		Open Scale barograph with 7 day clock.
BARG	sensor type - barograph	pressure trend	7		Open Scale barograph with 8 day clock.
BARG	sensor type - barograph	pressure trend	8		Open Scale barograph with 9 day clock.
BARG	sensor type - barograph	pressure trend	6		Open Scale barograph.
BARG	sensor type - barograph	pressure trend	10		Other (specify in footnote).
BARG	sensor type - barograph	pressure trend	±		Small Scale barograph.
BARG	sensor type - barograph	pressure trend	12		Tendency obtained from an electronic digital barometer.
BARM	sensor type - barometer	pressure	0		Aneroid barometer (issued by the PMO or a NMS).
BARM	sensor type - barometer	pressure	-		Digital aneroid barometer (aka Precision Aneroid Barometer).
BARM	sensor type - barometer	pressure	2		Electronic digital barometer (consisting of one or more pressure transducers).
BARM	sensor type - barometer	pressure	ဇ		Mercury barometer.
BARM	sensor type - barometer	pressure	4		Other
					Continued on next page



Table 19 sensor_configuration_codes (cont.)

		ומטופ ו	l a aeriadi -comigui andil-codea (comi.,	alloll-couces (co.	11.)
field_id	field_name	parameter	code_value	abbreviation	description
BARM	sensor type -	pressure	2		Ship's aneroid barometer.
	barometer				
IBS	ice bulb status	humidity	0		Ice bulb
IBS	ice bulb status	humidity	-		Wet bulb
MANU	manufacturer	all	0		Vaisala
SLOC	sensor loca-	all	0		Aft mast.
	tion - ship				
SLOC	sensor loca-	all			Bridge wing
	tion - ship				
SLOC	sensor loca-	all	2		Foremast yardarm
	tion - ship				
SLOC	sensor loca-	all	3		Foremast.
	tion - ship				
SLOC	sensor loca-	all	4	6	Handheld.
	tion - ship				
SLOC	sensor loca-	all	2		Main deck
	tion - ship				
SLOC	sensor loca-	all	9		Mainmast yardarm
	tion - ship				
SLOC	sensor loca-	all	7		Mainmast.
	tion - ship				
SLOC	sensor loca-	all	ω		Mast on wheelhouse top yardarm
	tion - ship				
SLOC	sensor loca-	all	6		Mast on wheelhouse top.
	tion - ship				
SLOC	sensor loca-	all	10		Meteorological mast.
	tion - ship				
SLOC	sensor loca-	all	11		Not fitted.
	tion - ship				
SLOC	sensor loca-	all	12		Other
	tion - ship				
					Continued on next page



Table 19 sensor_configuration_codes (cont.)

field_id SLOC	field name	noromotor.			
SLOC		parameter	code_value	abbreviation	description
	sensor loca-	all	13		Pressurised wheelhouse (closed and
	tion - ship				not vented to the outside).
SLOC	sensor loca- tion - ship	all	14		Wheelhouse
SLOC	sensor loca-	all	15		Wheelhouse, not pressurised
	tion - ship				(vented to the outside).
SRR	sensor type -	precipitation	AN		Place holder
	precipitation				
SSIDE	sensor side - ship	all	0		Center
SSIDE	sensor side - ship	all	-		Port
SSIDE	sensor side - ship	all	2		Starboard
SSIDE	sensor side - ship	all	3		Windward side
SWV	sensor type	waves	0		buoy
	- waves			•	
SWV	sensor type	waves	-		other
	- waves				
SWV	sensor type	waves	2		shipborne wave recorder
	- waves				
SWW	sensor type -	present weather	0		Automatic, included (using WMO
	present weather				Codes 4677 and 4561)
SWW	sensor type -	present weather	-		Automatic, included (using WMO
	present weather				codes 4680 amd 4531)
SWW	sensor type -	present weather	2		Automatic, omitted (no observa-
	present weather				tion, data not available)
SWW	sensor type -	present weather	က		Automatic, omitted (no significant
	present weather				phenomenon to report)
SWW	sensor type -	present weather	4		Manned, included
	present weather				
SWW	sensor type -	present weather	2		Manned, omitted (no observa-
	present weather				tion, data not available)
SWW	sensor type -	present weather	9		Manned, omitted (no significant
	present weather				phenomenon to report)
					Continued on next page



Table 19 sensor_configuration_codes (cont.)

								End of table
Offil.)	n description	TBD	TBD	TBD	TBD		TBD	
urallon-codes (c	e abbreviation							
Table 19 serisor_corniguration_codes (cont.)	code_value	TBD	TBD	TBD	TBD		TBD	
Iable	parameter	sonde	all	all	all		all	
	field_name	telemetry_sonde	sample treatment	sample pro- cedure	quality control	procedure	Calibration method	
	field_id	TSONDE	STREAT	SPROC	QCPROC		CALMETH	



3.7 Quality control flags

A single QC flag is provided in the observations table for the observed value. Additional flags can be provided using the qc_table and by setting the advanced_qc flag to true in the observations_table.

Table 20: qc_table

element_name	kind	external_table	description
report_id	varchar (fk)	observations_table	Link to report this entry is for
observation_id	varchar (fk)	observations_table	Link to observation this entry is for. Set to
			NULL / NA if entry for report level QC
qc_method	int (fk)	qc_method	Link to table describing QC method
			used to set this flag
qc₋flag	int (fk)	qc_flag	0 pass, 1 fail
			Final of table

End of table

3.8 Uncertainty budget

A single standard uncertainty value is provided for each observed value in the observations table. Additional values can be provided using the uncertainty_table and by setting the advanced_uncertainty to true in the observations_table.

Table 21: uncertainty_table

element_name	kind	external_table	description
report_id	int (fk)	observations_table	Link to report this entry is for
observation_id	int (fk)	observations_table	Link to observation this entry is for
uncertainty_type	int (fk)	uncertainty_type	The type of uncertainty de-
			scribed by this entry
uncertainty₋value	numeric	NA	Expected error standard deviation due
			to specified uncerainty source
uncertainty_units	int (fk)	units	The units used to report the un-
			certainty. This may be different to
			the reporting units (e.g. %)
			End of table

End of table

4 Common Data Model governance and future development

- Tables defining data model and decode tables stored in Git repository (https://github.com/glamod/common_data_model/).
- Whilst service in development data model updated / revised annually (modified / new elements in Tables 3 - 7).
- New entries to decode tables every 3 / 6 months (TBD).



- Changes made by consensus across Lots and with ECMWF.
- Mapping to WIGOS WMDS and INSPIRE / ISO 19139 (time permitting)
- User guide to CDM (time permitting)

5 Acknowledgements

- Participants from Lot 1
- Participants from Lot 2
- Participants from Lot 3
- External comments ...

6 References

Freeman et al., 2017 ... GCOS, 2010 ...

Hersbach, H., P. Poli and D. Dee, 2015: The observation feedback archive for ICOADS and ISPD datasets. ERA Report Series No. 18, ECMWF, Reading, UK, 31pp.

Saarinen, S., 2004: ODB User guide (draft 1st edition), ECMWF, Reading, UK, 289pp.

WMO, 2015a: Manual On Codes (WMO-No 306), Volume I.2, Part B - Binary Codes, WMO, Geneva.

WMO, 2015b: Manual on the WMO Integrated Global Observing System: Annex VIII to the Technical Regulations (WMO-No 1160), WMO, Geneva.

7 Appendix



Observed variable

Table 22: observed_variable

observed	paramete	domain	op ⁻ qns	abbrevi	name	units	description
variable	r_group		main	ation			
0	aerosols			aaod	aerosol ab-	Dimensionless NA	s NA
					sorption op-		
					tical depth		
-	aerosols			acb	aerosol col-	g m-2	NA
					umn burden		
2	aerosols			adc	aerosol dust	g kg-1	NA
					concen-		
					tration		
က	aerosols			aer	aerosol ef-	٤	NA
					fective ra-		
					dius		
4	aerosols			aec	aerosol ex-	m-1	NA
					tinction co-		
					efficient		
2	aerosols			ammr	aerosol	g kg-1	NA
					mass mix-		
					ing ratio		
9	aerosols			aod	aerosol op-	Dimensionless NA	s NA
					tical depth		
7	aerosols			asmf	aerosol	moles per	NA
					species	mole of	
					mole frac-	dry air	
					tion		
8	aerosols			astcb	aerosol	moles m-2	NA
					species to-		
					tal column		
					burden		
6	aerosols			at	aerosol type	papoo	NA
							Continued on next page



Continued on next page Genus of cloud (0 - Cirrus Height above surface of cloud seen (coded 0-9) the base of the lowest cloud base height (hb) 9 - Cumulo-Nimbus) description Ϋ́ ¥ Ϋ́ Ϋ́ ٨ ¥ ¥ Ϋ́ Ϋ́ Ϋ́ Okta or percent percent percent percent percent Coded g m-2 coded units g kg-' sr-1 sr-1 Ê È snow albedo clean glacier total column blue ice and blue ice bidicloud genus Table 22 observed_variable (cont.) rectional reaerosol volaerosol voldirty glacier face albedo rectional recloud cover cloud base cloud base ice albedo earth surice albedo snow bidicanic ash canic ash flectance flectance ductivity air conname lowest height abbrevi ation avat bsa cga dga ava esa sbr ac <u>=</u> qų _ ⊏ ပ upper-air upper-air upper-air upper-air op qns main atmospheric atmospheric atmospheric atmospheric domain paramete aerosols aerosols aerosols r_group albedo albedo albedo albedo albedo albedo cloud cloud cloud cloud observed variable 10 12 13 15 9 18 9 22 4 20 7



Table 22 observed_variable (cont.)

			2000	- 0000 T	ומטוט בב סססטו זכם ישוות (סטוווי)		
observed	paramete	domain	op qns	abbrevi	name	units	description
variable	r_group		main	ation			
23	cloud	atmospheric	upper-air	hs	clond genus	Coded or m	Height of base of cloud
					base height		whose genus is c
24	cloud	atmospheric	upper-air	ch	high cloud	papoo	type of high clouds (ch)
					type		
25	cloud	atmospheric	upper-air	ठ	low cloud	papoo	type of low clouds (cl)
					type		
26	cloud	atmospheric	upper-air	nh	lowest cloud	Okta	low or (if low clouds don't
					amont		exist) middle cloud amount
27	cloud	atmospheric	upper-air	cm	middle cloud	papoo	type of middle clouds (cm)
					type		
28	cloud	atmospheric	upper-air	tca	total cloud	Okta	total amount of clouds
					amount		
29	evaporation	atmospheric		999	evaporation	mm	NA
30	evaporation	atmospheric		ev	evaporation	kg m-2 s-1	NA
31	evaporation	atmospheric		pev	potential	mm day-1	NA
					evapotran-		
					spiration		
32	evaporation	atmospheric		rev	real evapo-	mm day-1	NA
					transpiration		
33	humidity	atmospheric		ah	absolute	g m-3	٧N
					humidity		
							Continued on next page



Continued on next page Dew point depression is also cooled at constant pressure cooled at constant pressure is the amount by which the NA usually abbreviated as mass. Specific humidity is called dew point deficit. It its dew point temperature. Dew point temperature is **JUU in WMO but I like rh** the mass fraction of water Dew point temperature is the temperature at which the temperature at which air temperature exceeds a parcel of air reaches a parcel of air reaches specific means per unit saturation upon being saturation upon being and specific humidity. and specific humidity. vapor in (moist) air. description ¥ percent g kg-1 units hPa O \checkmark vapour prestemperature temperature temperature Table 22 observed_variable (cont.) specific hurelative hudepression dew point dew point dew point ice bulb name midity midity water sure dep dew abbrevi ation t dew bţ 든 p σ Φ upper-air upper-air upper-air upper-air upper-air surface; op qns surface; surface; surface; surface; main atmospheric atmospheric atmospheric atmospheric atmospheric atmospheric atmospheric domain paramete humidity numidity r_group numidity humidity humidity numidity numidity observed variable 34 35 36 38 39 40 37



Table 22 observed_variable (cont.)

			I a DIC E	בישטעו עכעט ב	22 UDSEI VEU-VAITADIE (CUITL.)		
observed	paramete	domain	op ⁻ qns	abbrevi	name	units	description
variable	r_group		main	ation			
41	humidity	atmospheric	surface;	tp	wet bulb	၁	NA
			upper-air		temperature		
42	humidity	atmospheric	surface;	t wet	wet bulb	エ	NA
			upper-air		temperature		
43	ice			ppp	ice thick-	ш	NA
					ness		
44	precipitation	atmospheric		rr	accumulated	mm	accumulated precipitation
					precipitation		over specified period
45	precipitation	atmospheric		ls.	fresh snow	mm	NA
46	precipitation	atmospheric		ht	hydrometeor	Code table	NA
					type		
47	precipitation	atmospheric		rrls	precipitation	g m-2 s-1	Precipitation (liquid or solid)
48	precipitation	atmospheric		rril	precipitation	mm h-1	Precipitation intensity at
					instensity		surface (liquid or solid)
					liquid		
49	precipitation	atmospheric		rris	precipitation	mm h-1	Precipitation intensity
					intensity		at surface (solid)
					solid		
20	precipitation	atmospheric		rrt	precipitation	papoo	Liquid, snow, hail, fog
					type		
51	precipitation	atmospheric		nr	rainy days	Days	NA
52	precipitation	atmospheric		SC	snow cover	percent	NA
53	precipitation	atmospheric		ps	snow depth	cm	NA
54	precipitation	atmospheric		sst	snow status	papoo	Wet — dry
55	precipitation	atmospheric		SW	snow water	mm	Surface snow amount
					equivalent		
56	pressure	atmospheric	surface	atb	adjunct tem-	ပ	temperature of the adjunct
					perature		thermometer to the barometer
					barometer		to reduce pressure to 0C
22	pressure	atmospheric	surface	<u>α</u>	air pressure	Pa	٩Z
							Continued on next page



Continued on next page pressure at sea level is the sea level means mean sea level, which is close to the quantity often abbreviated geoid in sea areas. Air characteristic of pressure tendency (used as MSLP or PMSL. pressure tendency in synoptic maps) description Ϋ́ ¥ ¥ Ϋ́ W m-2 \overline{W} m-2 W m-2 W m-2 coded units Pa Pa air pressure Table 22 observed_variable (cont.) at sea level downward downward shortwave downward shortwave characterirradiance irradiance irradiance diffuse rapressure tendency longwave tendency pressure at earth surface at earth surface diation name istics abbrevi dswie ation dlwie dlsm dswit ddd ₽ ൯ op qns surface surface surface main atmospheric atmospheric atmospheric atmopsheric atmopsheric atmopsheric atmopsheric domain paramete oressure pressure oressure adiation radiation r_group radiation adiation observed variable 59 62 63 9 64 61



Continued on next page Meteorological optical range at surface description FAPAR ¥ Ϋ́ Ϋ́ ٨ ٨ Ϋ́ Ϋ́ Ϋ́ Ϋ́ percent percent W m-2 W m-2 percent percent W m-2 ш-2 photosyntheticaMym-2 W m-2 units ≥ meteorological m solar UV flux Table 22 observed_variable (cont.) rectional reface shortshortwave shortwave earth surwave bidiface emisfraction of longwave earth surlongwave active raflectance absorbed global racloud relectance radiation radiation gamma diation optical diation range name sivity solar par abbrevi ation fapar eswr SWCr mor <u>we</u> par suf sgf g S op qns main atmopsheric domain paramete radiation radiation radiation adiation adiation radiation radiation radiation radiation radiation radiation r_group observed variable 99 9 69 70 72 73 74 75 67 7



Table 22 observed_variable (cont.)

			I able 52	2000	05001 VOG-VOTIGES (50111.)		
observed	paramete	domain	op qns	abbrevi	name	nnits	description
variable	r_group		main	ation			
92	radiation	atmopsheric		svf	solar VIS	W m-2	NA
					flux		
77	radiation	atmopsheric		sxf	solar X	W m-2	NA
					ray flux		
78	radiation	atmopsheric		SS	sunshine	h	NA
					duration		
79	radiation	atmopsheric		ulwie	upward	W m-2	NA
					longwave		
					irradiance		
					at Earth		
					surface		
80	radiation	atmopsheric		ulwit	upward	W m-2	NA
					longwave		
					irradiance		
					at TOA		
81	radiation	atmopsheric		uswit	upward	W m-2	NA
					shortwave		
					irradiance		
					at TOA		
82	radiation	atmopsheric		usrt	upward	W m-2 nm-	NA
					spectral	1 sr-1	
					radiance		
					at TOA		
83	salinity	oceanic	surface;	sal	salinity	nsd	ocean salinity (PSU)
			sub-surface			>	
84	temperature	atmospheric	surface;	ta	air tem-	O	NA
			upper-air		perature		
85	temperature	atmospheric	surface;	t air	air tem-	¥	Air temperature is the bulk
			upper-air		perature		temperature of the air, not the
							surface (skill) terriperature.
							Continued on next page



Table 22 observed_variable (cont.)

-					(:
opserved	paramete	domain	op qns	abbrevi	name	units	description
variable	r_group		main	ation			
86	temperature	atmospheric		t max	daily max-	O	Lot 1 is using Tx -
					imum air		WMO abbrev.
					temperature		
87	temperature	atmospheric		t max sun	daily max-	O	Lot 1 is using Txs
					imum air		
					tempera-		
					ture with		
					direct sun		
					exposure		
88	temperature	atmospheric		t max g	daily maxi-	O	Lot 1 is using TGx - Grass
					mum grass		maximum thermometer is
					temperature		5 cm above ground
89	temperature	atmospheric		t min	daily min-	ပ	Lot 1 is using Tn -
					imum air		WMO abbrev.
					temperature		
06	temperature	atmospheric		t min sun	daily min-	S	Lot 1 is using Tns
					imum air		
					tempera-		
					ture with		
				,	direct sun		
					exposure		
91	temperature	atmospheric		t min g	daily mini-	O	Lot 1 is using TGn - Grass
					mum grass		minimum thermometer is
					temperature		5 cm above ground
92	temperature	atmospheric		days frost	days with	Days	NA
					ground frost		
93	temperature	atmospheric		t snow	snow tem-	O	NA
					perature		
94	temperature	atmospheric		t soil	soil tem-	O	Lot 1 is using Ts -
					perature		WMO abbrev.
							Continued on next page



Table 22 observed_variable (cont.)

			1900 54	, DOOD 10000 -	Iddio EE Obsol vod_varidato (collic.)		
observed	paramete	domain	op qns	abbrevi	name	units	description
variable	r_group		main	ation			
92	temperature	oceanic	surface;	t water	water tem-	エ	Water (sea, river, lake) tem-
			sub-surface		perature		perature at depth indicated
96	visibility	atmospheric	surface	^	horizontal	٤	The visibility is the distance at
					visibility		which something can be seen.
					in air		
97	weather			P	lightning de-	deg (lat, lon)	NA
					tection	and UTC	
86	weather			sl	lightning	s	NA
					duration		
66	weather			pyl	lightning	Km	NA
					horizontal		
					distance		
100	weather	atmospheric	surface	W1	past	papoo	past weather 1 - most
					weather 1		extreme phomenon (w)
101	weather	atmospheric	surface	w2	past	coded	past weather 2 - most
					weather 2		frequent phomenon (used
							in synoptic maps)
102	weather	atmospheric	surface	ww	present	pepoo	present weather (ww)
					weather		
103	weather			tld	Total light-	Dimensionless NA	NA
					ning density		
104	wind	atmospheric	surface;	ם	eastward	m s-1	Eastward indicates a vector
			upper-air		wind speed		component which is positive
							when directed eastward

name upward air velocity.)
Continued on next page

atmosphere has the standard

(negative westward). Wind is

(horizontal) air velocity vector,

with no vertical component.

(Vertical motion in the

defined as a two-dimensional



$\overline{}$
(cont.
(I)
ਰ
iab
_
×
ed_va
Š
pserve
Š
엉
Ñ
S
<u>•</u>
ğ
Ë

			ומטופ ע	Z UDSELVEU	Iable 22 observed_variable (cont.)		
observed	paramete	domain	op ⁻ qns	abbrevi	name	units	description
variable	r_group		main	ation			
105	wind	atmospheric	surface;	>	northward	m s-1	Northward indicates a vector
			upper-air		wind speed		component which is positive
							when directed northward
							(negative southward). Wind is
							defined as a two-dimensional
							(horizontal) air velocity vector,
							with no vertical component.
							(Vertical motion in the
							atmosphere has the standard
							name upward air velocity.)
106	wind	atmospheric	surface;	р	wind from	degree	direction from which the
			upper-air		direction		wind is blowing Lot 1 uses
							dd - WMO abbrev.
107	wind	atmospheric	surface;	W	wind speed	m s-1	Speed is the magnitude of
			upper-air				velocity. Wind is defined as a
							two-dimensional (horizontal)
							air velocity vector, with no
						\$	vertical component. (Vertical
							motion in the atmosphere
							has the standard name
					>		upward air velocity.) The
							wind speed is the magnitude
					>		of the wind velocity. Lot 1
							uses ff - WMO abbrev.



End of table velocity. Wind is defined as a Lot 1 uses fm - WMO abbrev. wind speed is the magnitude vertical component. (Vertical speed over specified period two-dimensional (horizontal) a cell methods of maximum of the wind velocity. A gust Speed is the magnitude of speed can be indicated by air velocity vector, with no wind speed, the gust wind an observed timeseries of motion in the atmosphere which has a parametrised upward air velocity.) The from the wind speed. Lot Maximum observed wind the gust wind speed may is a sudden brief period be separately diagnosed calculation of gustiness, has the standard name of high wind speed. In for the time-interval. In uses fx - WMO abbrev. an atmospheric model description J m-3 units m s-1 m s-1 Table 22 observed_variable (cont.) wind speed wind speed turbulence of gust name max abbrevi w gust w max ation turb op qns surface main atmospheric atmospheric domain paramete r_group wind observed variable 108 110 109



7.2 Other tables

Table 23: adjustment

adjustment	report_id	adjustment report id observation id value reason	value	reason	reference
NA	NA	NA	-0.123	Test value	-0.123 Test value DOI of paper / document describ-
					ing adjustment methodology
					End of table

Table 24: contact

element_name occurrence kind	occurrence	kind	external_table description	description
contact_id	-	varchar (pk) NA	NA	primary key
title	-	varchar	NA	Title of contact (e.g. Mr, Mrs, Dr. etc)
name	-	varchar	NA	Name of contact
organisation	-	varchar (fk)	varchar (fk) organisation	Link to organisation that con-
				tact is associated with
telephone	-	varchar	NA	telephone number for contacr
email	-	varchar	NA	email address for contact
url	-	varchar	NA	website for contact

Table 25: conversion_method

conversion_ method	conversion description method	implementation reference	reference
NA	Farenheit to de- T_Celsius = grees Celsius (T_Farenhei 32) / 1.8	T_Celsius = (T_Farenheit - 32) / 1.8	NA
			End of table



Table 26: organisation

element_name	occurrence kind	kind	external_table description	description
organisation_id	-	varchar (pk) NA	AN	unique ID for organisation
parent_organisation	-	varchar (fk)	organisation	Link to parent organisation (or NA/NULL or none)
name	-	varchar	NA	Name of organisation
abbreviation	-	varchar	ΝΑ	Abbreviated name (or NA/NULL)
address	-	varchar	NA	Road / building name
city	-	varchar	NA	City
admin_area	-	varchar	NA	County or admin region
region	-	int (fk)	region	WMO Region
country	-	int (fk)	sub_region	Country
postal_code	-	varchar	NA	Postal / zip code
telephone	-	varchar	NA	Primary telephone number of organisation
url	-	varchar	NA	Link to organisation website
email	1	varchar	NA	Primary email contact for website



7.3 Code tables

Table 27: application_area (WIGOS 2-01)

application_area	description	
1	Global numerical weather prediction (GNWP)	
2	High-resolution numerical weather	
	prediction (HRNWP)	
3	Nowcasting and very short range	
	forecasting (NVSRF)	
4	Seasonal and inter-annual forecasting (SIAF)	
5	General weather forecasting	
6	Aeronautical meteorology	
7	Ocean applications	
8	Agricultural meteorology	
9	Hydrology	
10	Climate monitoring (as undertaken	
	through the Global Climate Ob-	
	serving System, GCOS)	
11	Climate applications	
12	Space weather	
13	Cryosphere applications	
14	Energy sector	
15	Transportation sector	
16	Health sector	
17	Terrestrial ecology	
18	Operational air quality forecasting	
19	Atmospheric composition forecasting	
20	Atmospheric composition mon-	
	itoring and analysis	
21	Large urban complexes	
	End of table	

End of table

Table 28: automation_status

automation_status	description	
0	Automatic observation.	
1	Automatic, always supplemented	
	by manual input.	
2	Automatic, occasionally supple-	
	mented by manual input.	
3	Automatic, supplemented by	
	manual observations.	
4	Manual observation.	
	Continued on part page	



Table 28 automation_status (cont.)

automation_status	description	
5	Unknown.	
6	Visual observation.	

Table 29: calibration_status (WIGOS 5-08)

calibration_status	_status description	
0	No changes - in calibration.	
1	No changes - out of calibration.	
2	No changes - calibration unknown.	
3	Recalibrated - in calibration.	

End of table

Table 30: communication_method (Various sources (WMO47, WIGOS, BUFR))

communication mathed	decorintian		
communication_method	description		
0	Cellular (unspecified)		
1	Meteosat DCP		
2	Iridium (unspecified)		
3	GOES DCP		
4	VSAT (unspecified)		
5	Landline telephone		
6	Radio modem		
7	E-mail (unspecified)		
8	Voice (ship). The observation is		
	sent to a NMS through the telephone		
	network. The communication may use		
	Inmarsat, Iridium, Vsat, VHF		
9	Email (ship). The observation is sent		
	to a NMS through an email. The WMO		
	message is attached to this email.		
	The satellite communication provider		
	may be Inmarsat, Iridium, Vsat		
10	Web (ship). The observation is sent		
	through the Web (example: TurboWeb).		
	The satellite communication provider		
	may be Inmarsat, Iridium, Vsat		
	Continued on next page		



Table 30 communication_method (cont.)

	description
communication_method	description
11	Inmarsat-C (FM13, SAC41). Standard
	procedure used to report observations
	(FM13 messages) from conventional VOS
	for many years. Collect call system: the
	NMS which receives the observations
	pays the communication costs
12	Inmarsat-C (FM13, other SAC). FM13
	messages are sent to a dedicated SAC
	(other than SAC41) established at one, or
	more LES. In general, communications are
	paid by the country who recruited the ship
13	Inmarsat-C (EUHC). Text messages
	containing compressed data (E-SURFMAR
	format) are sent ashore through Inmarsat-
	C to a dedicated SAC and LES.
	Communications are paid by the
	country who recruited the ship
14	Inmarsat-C (SEAS). SEAS binary
	messages sent through Inmarsat-C Data
	Mode to a dedicated SAC and LES.
	Communications are paid by NOAA/NWS
15	Automated Identification System (di-
	rect or through satellite)
16	Argos system
17	Cellular (Dial-up). Dial-up commu-
	nication using terrestrial wireless
	networks (GSM, GPRS)
18	Cellular (SMS). SMS sent through terrestrial
	wireless networks (GSM, GPRS)
19	Globalstar communication system
20	GMS (DCP). Data Collecting Platform of
	Geostationary Meteorological Satellites
21	Iridium (SBD). Short Burst Data service
	of Iridium communication system
22	Iridium (Email). Email sent through
	Iridium (e.g. Easymail)
23	Iridium (Dial-up). Dial-up commu-
	nication using Iridium
24	Inmarsat-C (Data Mode). Data Mode
	service of Inmarsat-C used by S-AWS.
	See above for SEAS which also uses
	this service for conventional VOS
	Continued on next page



Table 30 communication_method (cont.)

communication_method description	
25	Inmarsat-C (Email). Email sent
	through Inmarsat-C
26	Orbcomm communication system
27	Vsat (Email). Email sent through Vsat
28	Vsat (Dial-up). Dial-up com-
	munication using Vsat
29	Delayed Mode only
30	Other (specify in footnote).

Table 31: crs (BUFR 0 01 150)

crs	description
0	WGS84
1	ETRS89
2	NAD83
3	DHDN
4	Ellipsoidal datum using International
	Reference Meridian maintained by
	the International Earth Rotation and
	Reference System Services (IERS)
	End of table

Table 32: data_policy_licence (WIGOS 9-02)

data_policy_licence	name	description
1	WMO essential	WMO Essential Data: free and un-
		restricted international exchange of
		basic data and products.
2	WMO additional	WMO Additional Data: free and unrestricted
		access to data and products exchanged
		under the auspices of WMO to the
		research and education communities
		for non-commercial activities. A more
		precise definition of the data policy may be
		additionally supplied within the metadata.
		In all cases it shall be the responsibility
		of the data consumer to ensure that they
		understand the data policy specified by
		the data provider which may necessitate
		dialogue with the data publisher for
		confirmation of terms and conditions.
		Continued on next page



Table 32 data_policy_licence (cont.)

data_policy_licence	name	description
3	WMO other	Data identified for global distribution via WMO infrastructure (GTS / WIS) that is not covered by WMO Resolution 25 neither WMO Resolution 40 e.g. aviation OPMET data. Data marked with WMOOther data policy shall be treated like WMOAdditional where a more precise definition of the data policy may be additionally supplied within the metadata. In all cases it shall be the responsibility of the data consumer to ensure that they understand the data policy specified by the data provider which may necessitate dialogue with the data publisher for confirmation of terms and conditions.
		End of table

Table 33: duplicate_status (Simplified version of duplicate status flags from IMMA (ICOADS))

duplicate_status	description	
0	Unique observation, no known duplicates	
1	Best duplicate	
2	Worst duplicate	
3	Unchecked	

Table 34: events_at_station (WIGOS 4-04)

events_at_station	description
1	Grass-cutting
2	Snow clearing
3	Tree removal
4	Construction activity
5	Road work
6	Biomass burning
7	Dust storm
8	Storm damage
9	Wind storm
10	Flood
11	Fire
12	Earthquake
13	Land slide
	Continued on next page



Table 34 events_at_station (cont.)

events_at_station	description
14	Storm surge or tsunami
15	Lightning
16	Vandalism

Table 35: id_scheme

id_scheme	description
0	WIGOS ID
1	GRUAN ID
2	IMO Number
3	National ID
4	WMO buoy / station number
5	Ship / platform callsign
6	Generic ID (e.g. SHIP, PLAT etc)
7	Station name
8	ICOADS other
9	ICOADS unknown
10	ICOADS composite
11	Oceangraphic platform / cruise number
12	Other buoy number (e.g. Argo)
	End of table

Table 36: instrument_exposure_quality (WIGOS 5-15)

instrument_exposure_quality	description
1	Class 1 - Exposure of instrument allows
	reference level measurements
2	Class 2 - Exposure of instrument has small
	or infrequent influence on measurement
3	Class 3 - Exposure of instrument
	leads to increased uncertainty or
	occasional invalid measurements
4	Class 4 - Exposure of instruemnt
	leads to high uncertainty or reg-
	ular invalid measurements
5	Class 5 - Exposure of instrument
	leads to invalid measurements



Table 37: location_method (based on WIGOS 11-01 and BUFR 0 02 148)

location_method	description
0	Argos
1	ARGOS DOPPLER
2	ARGOS Kalman
3	Argos-3
4	Argos-4
5	From map
6	GALILEO
7	GOES DCP
8	GPS
9	INMARSAT
10	Iridium
11	Iridium and GPS
12	IRIDIUM DOPPLER
13	LORAN
14	Meteosat DCP
15	Orbcomm
16	Surveyed

Table 38: location_quality

location quality	decorintion
location_quality	description
0	Good - location consistent with other
	reports from this station
1	Doubtful
2	Bad - Track check failed
3	Unchecked
	_ , ,, ,,

End of table

Table 39: meaning_of_time_stamp (Based on simplified version of WIGOS 11-03)

meaning_of_time_stamp	name	description
1	beginning	Date / time specified indicates the start of the
		period over which the observation was made.
2	end	Date / time specified indicates the end of the
		period over which the observation was made.
3	middle	Date / time specified indicates the
		middle of the period over which
		the observation was made.



Table 40: measuring_system_model

measuring_system_model	description
NA	BATOS 4.8 (example entry)
	End of table

Table 41: method_of_estimating_uncertainty

method_of_estimating_uncertainty	description
NA	Laboratory based calibration (example entry)
NA	Comparison to co-located instru-
	ment (example entry)





Table 42: observation_code_table

observation	aldet abox	bi aldet abox	code table	ailey	value description
code_table	scheme	ססס-ומסוס-וס	name	8	
0	BUFR	0 20 003	Present weather	NA	See BUFR 0 20 003
-	BUFR	0 20 004	Past weather	NA	See BUFR 0 20 004
2	BUFR	0 10 063	Characteristics	NA	See BUFR 0 10 063
			of pressure		
			tendancy		
					End of table
				<	



Table 43: observation_value_significance (based on BUFR 0 08 023)

channetian value significance	docarintian
observation_value_significance	description
0	Maximum value over indicated period
1	Minimum value over indicated period
2	Mean value over indicated period
3	Median value over indicated period
4	Modal value over indicated period
5	Mean absolute error over indicated period
6	Best estimate of standard deviation (N-1) of
	observed parameter over indicated period
7	Standard deviation (N) of observed
	parameter over indicated period
8	Harmonic mean of observed pa-
	rameter over indicated period
9	Root mean square vector error of observed
	parameter over indicated period
10	root mean square of observed pa-
	rameter over indicated period
11	Vector mean of observed param-
	eter over indicated period
12	Instantaneous value of observed parameter
13	Accumulation over specified period
14	Not applicable
	End of table

Table 44: observing_frequency (WMO47 - 0602)

observing_frequency	abbreviatione	description
0	opd	One observation per day (24 hour intervals).
1	tpd	Two observations per day (12 hour intervals).
2	fpd	Four observations per day (6 hour intervals).
3	epd	Eight observations per day (3 hour intervals).
4	hly	Hourly observations.
5	irr	Irregular observations.

End of table

Table 45: observing_method

observi	ng_method	description
0		Measured
1		Estimated
2		Computed
	Continued	on next page



Table 45 observing_method (cont.)

observing_method description

End of table

Table 46: observing_programme (WIGOS 2-02)

observing₋pr ogramme	abbreviation	description	sponsor
1	AMDAR	Global Aircraft Meteorological DAta Relay	WMO/GOS
2	EPA	Environmental Protection Agency	NA
3	EUMETNET	Grouping of European National Meteorological Services	WMO/GOS
4	WMO/GAW	World Meteoro- NA logical Organiza- tion/Global Atmo- spheric Watch	
5	GCOS	Global Climate Observing System	NA
6	GCW	Global Cryosphere Watch	NA
7	GOOS	Global Ocean Observing System	NA
8	IPA	International Permafrost Association	NA
9	JCOMM	Joint Techni- cal Commission for Oceanogra- phy and Marine Meteorology	WMO/GOS
10	WMO/GOS	World Meteoro- logical Organiza- tion/Global Ob- serving System	NA
11	GTOS	Global Terrestrial Observing System	NA
12	IAGOS	In-service Aircraft for a Global Ob- serving System	NA Continued on next page



Table 46 observing_programme (cont.)

observing_pr ogramme	abbreviation	description	sponsor
13	WHYCOS	World Hydrological	NA
10	WITICOS	Cycle Observ-	NA .
		ing System	
1.1	WMO/CLW	World Meteoro-	NA
14	VVIVIO/GEVV		NA
		logical Office/Cli-	
		mate and Water	
	ADMET	Department	
15	ADNET	Asian dust and	GALION ; WMO/GAW
		aerosol lidar ob-	A
		servation network	
16	Aeronet	AErosol RObotic	NASA?
		NETwork	
17	ANTON	Antarctic Observ-	WMO/GOS
		ing Network	
18	ASAP	Automated Ship-	WMO/GOS
		board Aerolog-	
		ical Program	
19	BSRN	Baseline Surface	WMO/GAW & GCOS
. •	20	Radiation Network	
20	CASTNET	Clean Air Sta-	(National - USA)
20	ONOTHER	tus and Trends	(National Cort)
		Network	
21	CIS-LiNet	Lidar network for	GALION; WMO/GAW
21	CI3-LINE		GALION, WWO/GAW
		monitoring at-	
		mosphere over	
00	OLN	CIS regions	0.41.10.11.14/4.40.40.40.41
22	CLN	CREST Lidar	GALION ; WMO/GAW
		Network	
23	DART	Deep-ocean As-	NOAA Centre for Tsunamis Research
		sessment and	
		Reporting of	
		Tsunamis	
24	E-AMDAR	European - Aircraft	EUMETNET ; WMO/GOS
		Meteorological	
		DAta Relay	
25	E-ASAP	European - Au-	EUMETNET ; WMO/GOS
		tomated Ship-	
		board Aerolog-	
		ical Program	
26	E-GVAP	European - GNSS	EUMETNET; WMO/GOS
	_ •	water vapour	
		programme	
		P. 08. a	Continued on next page



Table 46 observing_programme (cont.)

observing₋pr ogramme	abbreviation	description	sponsor
27	E-PROFILE	European - wind	EUMETNET; WMO/GOS
		profiles from radar	,
28	E-SURFMAR	European - Sur-	EUMETNET; WMO/GOS
		face Marine Op-	,
		erational Service	
29	EARLINET	European Aerosol	GALION ; WMO/GAW
		Research Li-	
		dar Network	
30	GALION	GAW Aerosol	WMO/GAW
		Lidar Observa-	
		tion Network	
31	GAW-PFR	GAW-Precision	WMO/GAW
		Filter Radiometers	
32	German AOD	German Aerosol	WMO/GAW
	Network	Optical Depth	
		Network	
33	GLOSS	Global Sea Level	JCOMM; WMO/GOS
		Observing System	
34	GRUAN	GCOS Reference	GCOS
		Upper Air Network	
35	GSN	GCOS Surface	GCOS
		Network	
36	GTN-G	Global Terrestrial	GCOS
		Network - Glaciers	
37	GTN-H	Global Terres-	WMO/CLW; GCOS; GTOS
		trial Network -	,
		Hydrology	
38	GTN-P	Global Terres-	IPA ; GCOS ; GTOS
		trial Network -	
		Permafrost	
39	GUAN	GCOS Upper	GCOS
		Air Network	
40	IAGOS-MOZAIC	Measurement of	IAGOS
		Ozone and Water	
		Vapour on Airbus	
		in-service Aircraft	
41	LALINET	Latin America	GALION; WMO/GAW
		Lidar Network	
42	MPLNET	Micro Pulse Li-	GALION; WMO/GAW
		dar Network	•



Table 46 observing_programme (cont.)

observing ₋ pr ogramme	abbreviation	description	sponsor
43	NDACC	Network for the Detection of At- mospheric Com- position Change	GALION; WMO/GAW
44	OPERA	European Weather Radar Project	EUMETNET; (WMO/GOS)
45	PIRATA	Prediction and Research Moored Array in the Atlantic	GOOS; WMO/GOS
46	PolarAOD	Polar Aerosol Optical Depth Measurement Network Project	WMO/GAW
47	RAMA	Research Moored Array for African- Asian-Australian Monsoon Analysis and Prediction	NOAA
48	RBCN	Regional Ba- sic Climatolog- ical Network	WMO/GOS
49	RBON	Regional Ba- sic Observing Network	WMO/GOS
50	RBSN	Regional Basic Synoptic Network	WMO/GOS
51	TAO	Tropical Atmo- sphere and Ocean Array	NOAA; GCOS
52	SKYNET	Aerosol -cloud- WMO/GAW radiation interac- tion in the atmo- sphere project	
53	SibRad	NA	WMO/GAW
54	SOOP	Ship of Op- portunity	JCOMM; WMO/GOS
55	U.S. IOOS	United States In- tegrated Ocean Observing System	(National - USA)
56	VOS	Voluntary Ob- serving Fleet	JCOMM; WMO/GOS



Table 46 observing_programme (cont.)

observing_pr ogramme	abbreviation	description	sponsor
57	VOSCLIM	Voluntary Observ- ing Fleet (VOS) Climate Project	JCOMM; WMO/GOS
58	WRAP	Worldwide Recur- ring ASAP Project	JCOMM; WMO/GOS

Table 47: platform_sub_type (based on WMO47, ICOADS, BUFR 0 02 149)

platform_su b_type	platform_type	abbreviation	description
0	Ship	BA	Barge
1	Ship	BC	Bulk Carrier
2	Ship	CA	Cable ship
3	Ship	CG	Coast Guard Ship
4	Ship	CS	Container Ship
5	Ship	DR	Dredger
6	Ship	FE	Passenger ferries
7	Ship	FP	Floating production and storage units
8	Ship	FV	Other Fishing Vessel
9	Ship	GC	General Cargo
10	Ship	GT	Gas Tanker
11	Ship	IC	Icebreaking vessel
12	Ship	IF	Inshore Fishing Vessel
13	Ship	LC	Livestock carrier
14	Ship	LT	Liquid Tanker
15	Ship	LV	Light Vessel
16	Ship	MI	Mobile installation including mobile
			offshore drill ships, jack-up rigs
			and semi-submersibles
17	Ship	MS	Military Ship
18	Ship	OT	Other
19	Ship	MW	Ocean Weather Ship
20	Ship	PI	Pipe layer
21	Ship	PS	Passenger ships and cruise liners
22	Ship	RF	Ro/Ro Ferry
23	Ship	RR	Ro/Ro Cargo
24	Ship	RS	Refrigerated cargo ships in-
			cluding banana ships
25	Ship	RV	Research Vessel
			Continued an acut accus



Table 47 platform_sub_type (cont.)

platform_su b_type	platform_type	abbreviation	description
26	Ship	SA	Large sailing vessels
27	Ship	SV	Support Vessel
28	Ship	TR	Trawler
29	Ship	TU	Tug
30	Ship	VC	Vehicle carriers
31	Ship	YA	Yacht / Pleasure Craft
32	Ship	BA	Barges, including crane barges and tank barges.
33	Ship	ВС	Bulk Carriers, including Ore/Bulk/Oil (OBO) carriers and Ore/Oil carriers.
34	Ship	CA	Cable ships.
35	Ship	CG	Coastguard cutters, patrol ships and launches.
36	Ship	CS	Container ships, including open and closed container ships and refrigerated container ships.
37	Ship	DR	Dredgers including bucket, hopper, grab and suction dredgers.
38	Ship	FE	Passenger ferries (carrying passengers only).
39	Ship	FP	Floating Production and Storage Units.
40	Ship	FV	Fishing Vessels including purse seiners, long liners etc., but excluding trawlers.
41	Ship	GC	General Cargo ships with one or more holds.
42	Ship	GT	Liquefied gas carriers/tankers includ- ing LNG and LPG carriers.
43	Ship	IC	Icebreaking vessels (dedicated vessel). If the vessel fits in another category and is ice strengthened
44	Ship	LC	Livestock Carrier (dedicated ship for the carriage of livestock).
45	Ship	LT	Liquid tankers including oil product tankers, chemical tankers and crude oil tankers (including VLCC's and ULCC's).
46	Ship	LV	Light vessels.
47	Ship	MI	Mobile installations, including mobile offshore drill ships, jack-up rigs, semi-submersibles.
10	Ship	MS	Military ships.
48		OW	Ocean Weather Ships (dedi-
49	Ship	OW	cated weather ship).
	Ship Ship	PI	. ,



Table 47 platform_sub_type (cont.)

platform_su b₋type	platform_type	abbreviation	description
52	Ship	RF	Ro Ro ferries (carrying passen-
			gers and laden vehicles).
53	Ship	RR	Ro Ro cargo ships for carriage of
	·		road and/or rail vehicles and cargo,
			including containerised cargo.
54	Ship	RS	Refrigerated cargo ships in-
	·		cluding banana ships.
55	Ship	RV	Research Vessels, including oceanographic,
			meteorological and hydrographic research
			ships and seismographic research ships.
56	Ship	SA	Large sailing vessels, includ-
	•		ing sail training vessels.
57	Ship	SV	Support vessels including offshore support
	•		vessels, offshore supply vessels, stand-by
			vessels, pipe carriers, anchor handling
			vessels, buoy tenders (including coastguard
			vessels engaged solely on buoy tending
			duties), diving support vessels, etc.
58	Ship	TR	Trawler fishing vessels.
59	Ship	TU	Tugs, including fire-fighting tugs, salvage
			tugs, pusher tugs, pilot vessels, tenders etc.
60	Ship	VC	Vehicle Carriers: dedicated multi deck ships
			for the carriage of new unladen road vehicles.
61	Ship	YA	Yachts and pleasure craft.
62	Ship	OT	Other (specify in footnote).
63	Land station		Synoptic network
64	Land station		Local Network
65	Ship		Ocean Weather Ship (on station)
66	Ship		Ocean Weather Ship (off station)
67	Coastal / Island		Other
68	Coastal / Island		Coastal-Marine Automated Network
			(C-MAN) (NDBC operated)
69	Drifting buoy		Unspecified drifting buoy
70	Drifting buoy		Standard Lagrangian drifter (Global
			Drifter Programme)
71	Drifting buoy		Standard FGGE type drifting buoy (non-
	Č ,		Lagrangian meteorological drifting buoy)
72	Drifting buoy		Wind measuring FGGE type drift-
	0 ,		ing buoy (non-Lagrangian mete-
			orological drifting buoy)
73	Ice buoy		Ice drifter
74	Drifting buoy		SVPG Standard Lagrangian drifter with GPS
			Continued on next page



Table 47 platform_sub_type (cont.)

platform_su	platform_type	abbreviation	description
b _type			
75	Drifting buoy		SVP-HR drifter with high-resolution
			temperature or thermistor string
76	Subsurface float		Unspecified subsurface float
77	Profiling float		SOFAR
78	Profiling float		ALACE
79	Profiling float		MARVOR
80	Profiling float		RAFOS
81	Profiling float		PROVOR
82	Profiling float		SOLO
83	Profiling float		APEX
84	Moored buoy		Unspecified moored buoy
85	Moored buoy		Nomad
86	Moored buoy		3-metre discus
87	Moored buoy		10-12-metre discus
88	Moored buoy		ODAS 30 series
89	Moored buoy		ATLAS (e.g. TAO area)
90	Moored buoy		TRITON buoy
91	Moored buoy		FLEX mooring (e.g. TIP area)
92	Moored buoy		Omnidirectional waverider
93	Moored buoy		Directional waverider
94	Profiling float		Subsurface ARGO float
95	Profiling float		PALACE
96	Profiling float		NEMO
97	Profiling float		NINJA
98	Ice buoy		Ice buoy/float (POPS or ITP)
99	Moored buoy		Mooring oceanographic
100	Moored buoy		Mooring meteorological
101	Moored buoy		Mooring multidisciplinary (OceanSITES)
102	Moored buoy		Mooring tide gauge or tsunami buoy
103	Ice buoy		Ice beacon
104	Ice buoy		Ice mass balance buoy

Table 48: platform_type (IMMA (ICOADS) and BUFR 0 03 001 (0 - 31))

platform_type	description
0	Land station (synoptic network)
1	Shallow water station (fixed to sea / lake floor)
2	Ship
3	Rig / platform



Table 48 platform_type (cont.)

platform_type	description
4	Moored buoy
5	Drifting buoy (of drifter)
6	Ice buoy
7	Land station (local network)
8	Land vehicle
9	Autonomous marine vehicle
32	Ice station
33	Lightship
34	Mechanical / digital / micro bathythermograph (MBT)
35	Oceanographic station data (bottle and low resolution CTD / XCTD data)
36	Profiling float
37	Subsurface float (moving)
38	Tide gauge
39	Underwater platform
40	Undulating oceanographic recorder
41	Aircraft
42	Autonomous pinneped bathythermograph
43	Coastal / Island
44	Expendable bathythermograph (XBT)
45	Glider
46	High-resolution Conductivity-Temperature-Depth
	(CTD) / Expendable CTD(XCTD)

Table 49: processing_code

index	processing_code	abbreviation	description
TBD	TBD	TBD	TBD
			End of table

Table 50: processing_level (WIGOS 7-06)

processing_level	name	description
0	Unknown	NA
1	Raw	NA
2	Level 0	Analogue/digital electric signals



Table 50 processing_level (cont.)

Table 50 processing_level (cont.)		
processing_level	name	description
3	Level I	Level I data (Primary Data): in general, are instrument readings expressed in appropriate physical units, and referred to Earth geographical coordinates. They require conversion to the normal meteorological variables (identified in Part I, Chapter 1). Level I data themselves are in many cases obtained from the processing of electrical signals such as voltages, referred to as raw data. Examples of these data are satellite radiances and water-vapour pressure, positions of constant-level balloons, etc. but not raw telemetry signals. Level I data still require conversion to the meteorological parameters specified in the data requirements.
5	Level III	Level II Data (Meteorological parameters). They may be obtained directly from many kinds of simple instruments, or derived from Level I data. For example, a sensor cannot measure visibility, which is a Level II quantity; instead, sensors measure the extinction coefficient, which is a Level I quantity. Level III (Initial state parameters) are internally consistent data sets, generally in gridpoint form obtained from level II data by applying established initialization
6	Level IV	procedures. NOTE: Data exchanged internationally are level II or level III data.

Table 51: product_level

product_level	description
NA	TBD (e.g. Data read from original data file)
	End of table



Table 52: product_status

product_status	description	extended_description
1	Data approved	Data exist, read from cache, PTU + altitude columns available, all GC25 tests
		ok, all uncertainties as expected
		End of table

Table 53: profile_type

profile_type	description
0	Atmospheric
1	Oceanographic
2	Soil
3	Snow
	End of table

Table 54: quality_flag (BUFR 0 33 020)

quality_flag	description
0	Good
1	Inconsistent
2	Doubtful
3	Wrong
4	Not checked
5	Has been changed
6	Estimated
7	Missing value
	End of table

Table 55: region (WIGOS 3-01)

region	WMO _region	description
0	NA	Reserved
1	1	Africa
2	2	Asia
3	3	South America
4	4	North America, Central America, Caribbean
5	5	South-West Pacific
6	6	Europe
7	7	Antarctica



Table 56: report_processing_codes

report_processing_codes	description
0	date / times quality controlled
1	location quality controlled
2	observation quality controlled
3	adjustment applied to observed value
	End of table

Table 57: report_processing_level

report_processing_level	description
0	Raw - data as originally reported
	in source data set
1	Partial - subset of reported values (location,
	date / time, measurand etc) processed
2	Full - all elements of report processed
	End of table

Table 58: report_type

report_type	abbreviation	description
0	SYNOP	NA
1	TEMP	NA
2	CLIMAT	NA
		End of table

Table 59: sampling_strategy (WIGOS 6-03)

sampling_strategy	name	description
1	Continuous	Sampling is done continuously, but not
		necessarily at regular time intervals.
		Sampling is integrating, i.e., none of
		the medium escapes observations.
2	Discrete	Sampling is done at regular time intervals
		for certain sampling periods that are
		smaller than the time interval. Sampling
		is not integrating, i.e., parts of the
		medium escape observation.
3	Event	Sampling is done at irregular time intervals.
		End of table

C3S_311a_Lot2_NUIM_2017 {ref}



Table 60: sea_level_datum (BUFR 0 01 151)

sea_level_datum	description
0	Earth Gravitational Model 1996
1	Baltic height system 1977
	End of table

Table 61: secondary_variable

secondary	variable_	code₋value	symbol	description
_variable [*]	name		-	•
0	atmospheric constituent	0	BrO	Bromine monoxide
0	atmospheric constituent	1	C10H16	3-Carene
0	atmospheric constituent	2	C10H16	Alpha pinene
0	atmospheric constituent	3	C10H16	Beta pinene
0	atmospheric constituent	4	C10H16	Limonene
0	atmospheric constituent	5	C2H2	Ethyne (Acetylene)
0	atmospheric constituent	6	С2Н5ОН	Ethanol
0	atmospheric constituent	7	C2H6	Propene
0	atmospheric constituent	8	C2H6S	Ethanethiol
0	atmospheric constituent	9	C3H6O	Acetone
0	atmospheric constituent	10	C4H10	Methylpropane
0	atmospheric constituent	11	C4H10	n-butane
0	atmospheric constituent	12	C5H12	2-Methylbutane
0	atmospheric constituent	13	C5H12	n-Pentane
0	atmospheric constituent	14	C5H8	Isoprene
0	atmospheric constituent	15	C6H6	Benzene
0	atmospheric constituent	16	C7H8	Toluene
<u> </u>				Continued on next page



Table 61 secondary_variable (cont.)

17 8 19 20	CFC-11 CFC-12 CH3CN CH3OH	CFC-11 CFC-12 Acetonitrile Methanol
9	CFC-12 CH3CN CH3OH	CFC-12 Acetonitrile
9	CH3CN CH3OH	Acetonitrile
9	CH3CN CH3OH	Acetonitrile
20	СНЗОН	
20	СНЗОН	
		Methanol
		Methanol
21	0114	
21		
	CH4	Methane
22	CIO	Chlorine monoxide
23	CIONO2	Chlorine nitrate
24	CO	Carbon monoxide
_		
25	CO2	Carbon dioxide
26	COS	Carbonyl sulfide
27	H2O	Water vapour
	110110	
28	нсно	Formaldehyde
20	110110	Farmanda harda (Tabal Oalaman)
29	нсно	Formaldehyde (Total Column)
20	1101	The does not be left and a
30	HCI	Hydrogen chloride
) 4	LIDO	222
31	HDO	???
20	LINIO2	Nitrio gold
32	HNO3	Nitric acid
20	NIOO	Nitrous oxide
53	N2O	Nitrous oxide
D /	NIOOE	Dinitrogen pentovide
J -T	INZUU	Dinitrogen pentoxide
25	NO	Nitrogen monoxide
,,	INO	MILOGETT HOHOXIGE
26	NO2	Nitrogen dioxide
,0	1102	Miliogen dioxide
	NO2	Nitrogen dioxide (To-
, ,	1102	tal column)
		Continued on next page
	22 23 24 25 26 27 28 29 30 31 32 33 34 35 36	23 CIONO2 24 CO 25 CO2 26 COS 27 H2O 28 HCHO 29 HCHO 30 HCI 31 HDO 32 HNO3 33 N2O 34 N2O5 35 NO



Table 61 secondary_variable (cont.)

secondary	variable_	code_value	symbol	description
_variable ´	name			•
0	atmospheric	38	O3	Ozone
	constituent			
0	atmospheric	39	O3	Ozone (Total column)
	constituent			
0	atmospheric	40	ОН	???
	constituent			
0	atmospheric	41	PAN	???
	constituent			
0	atmospheric	42	PSC occur-	???
	constituent		rence	
0	atmospheric	43	SF6	Sulphur hexaflouride
	constituent			
0	atmospheric	44	SO2	Sulphur dioxide
	constituent			
0	atmospheric	45	SO2	Sulphur dioxide (To-
	constituent			tal column)

Table 62: source_format

source_forma	t description
0	IMMA
1	NetCDF (GRUAN)
2	NetCDF (Other)
3	CSV
	0

End of table

Table 63: spatial_representativeness (WIGOS 1-05)

spatial_represen tativeness	description
0	Nil reason - None of the codes in the table is applicable in the context
	of the observed quantity or unknown, or not available information.
1	Microscale - An area or volume less than 100 m hor-
	izontal extent (for example, evaporation)
2	Toposcale, local scale - An area or volume of 100 m to 3 km
	horizontal extent (for example, air pollution, tornadoes)
3	Mesoscale - An area or volume of 3 km to 100 km horizontal extent
	(for example, thunderstorms, sea and mountain breezes)
4	Large scale- An area or volume of 100 km to 3000 km horizontal
	extent (for example, fronts, various cyclones, cloud clusters)
	Continued on post page



Table 63 spatial_representativeness (cont.)

spatial_represen tativeness	description
5	Planetary scale - An area or volume of more than 3000 km horizontal extent (for example, long upper tropospheric waves)
6	Drainage area - An area (also known as catchment) having a common outlet for its surface runoff, in km2

Table 64: standard_time

standard_time	description
0	00 UTC
1	06 UTC
2	12 UTC
3	18 UTC
	End of table

Table 65: station_type (WIGOS 3-04)

station_type	description
1	Land station
2	Sea station
3	Aircraft
4	Satellite
5	Underwater platform
	End of table

Table 66: sub_region

sub_region	type	code	name
0	country	AD	ANDORRA
1	country	AE	UNITED ARAB EMIRATES
2	country	AF	AFGHANISTAN
3	country	AG	ANTIGUA AND BARBUDA
4	country	Al	ANGUILLA
5	country	AL	ALBANIA
6	country	AM	ARMENIA
7	country	AN	NETHERLANDS ANTILLES
8	country	AO	ANGOLA
9	country	AQ	ANTARCTICA
10	country	AR	ARGENTINA
11	country	AS	AMERICAN SAMOA



Table 66 sub_region (cont.)

sub_region	type	code	name
12	country	AT	AUSTRIA
13	country	AU	AUSTRALIA
14	country	AW	ARUBA
15	country	AX	ALAND ISLANDS
16	country	AZ	AZERBAIJAN
17	country	BA	BOSNIA AND HERZEGOVINA
18	country	BB	BARBADOS
19	country	BD	BANGLADESH
20	country	BE	BELGIUM
21	country	BF	BURKINA FASO
22	country	BG	BULGARIA
23	country	ВН	BAHRAIN
24	country	BI	BURUNDI
25	country	BJ	BENIN
26	country	BL	SAINT BARTHLEMY
27	country	BM	BERMUDA
28	country	BN	BRUNEI DARUSSALAM
29	country	ВО	BOLIVIA
30	country	BR	BRAZIL
31	country	BS 🔼	BAHAMAS
32	country	BT	BHUTAN
33	country	BV	BOUVET ISLAND
34	country	BW	BOTSWANA
35	country	BY	BELARUS
36	country	BZ	BELIZE
37	country	CA	CANADA
38	country	CC	COCOS (KEELING) ISLANDS
39	country	CD	CONGO, THE DEMOCRATIC
			REPUBLIC OF THE
40	country	CF	CENTRAL AFRICAN REPUBLIC
41	country	CG	CONGO
42	country	СН	SWITZERLAND
43	country	CI	COTE D'IVOIRE
44	country	CK	COOK ISLANDS
45	country	CL	CHILE
46	country	CM	CAMEROON
47	country	CN	CHINA
48	country	CO	COLOMBIA
49	country	CR	COSTA RICA
50	country	CU	CUBA
51	country	CV	CAPE VERDE
52	country	CX	CHRISTMAS ISLAND
53	country	CY	CYPRUS
			Continued on next page



Table 66 sub_region (cont.)

Table 00 Sub_legion (cont.)			
sub_region	type	code	name
54	country	CZ	CZECH REPUBLIC
55	country	DD	GERMAN DEMOCRATIC REPUBLIC
56	country	DE	GERMANY
57	country	DJ	DJIBOUTI
58	country	DK	DENMARK
59	country	DM	DOMINICA
60	country	DO	DOMINICAN REPUBLIC
61	country	DZ	ALGERIA
62	country	EC	ECUADOR
63	country	EE	ESTONIA
64	country	EG	EGYPT
65	country	EH	WESTERN SAHARA
66	country	ER	ERITREA
67	country	ES	SPAIN
68	country	ET	ETHIOPIA
69	country	FI	FINLAND
70	country	FJ	FIJI
71	country	FK	FALKLAND (SLANDS (MALVINAS)
72	country	FM	MICRONESIA, FEDERATED STATES OF
73	country	FO	FAROE ISLANDS
74	country	FR	FRANCE
75	country	GA	GABON
76	country	GB	UNITED KINGDOM
77	country	GD	GRENADA
78	country	GE	GEORGIA
79	country	GF	FRENCH GUIANA
80	country	GG	GUERNSEY
81	country	GH	GHANA
82	country	GI	GIBRALTAR
83	country	GL	GREENLAND
84	country	GM	GAMBIA
85	country	GN	GUINEA
86	country	GP	GUADELOUPE
87	country	GQ	EQUATORIAL GUINEA
88	country	GR	GREECE
89	country	GS	SOUTH GEORGIA AND THE SOUTH
			SANDWICH ISLANDS
90	country	GT	GUATEMALA
91	country	GU	GUAM
92	country	GW	GUINEA-BISSAU
93	country	GY	GUYANA
94	country	HK	HONG KONG
			Continued on next page



Table 66 sub_region (cont.)

sub region type and name			
sub_region	type	code	name
95	country	НМ	HEARD ISLAND AND MC-
			DONALD ISLANDS
96	country	HN	HONDURAS
97	country	HR	CROATIA
98	country	HT	HAITI
99	country	HU	HUNGARY
100	country	ID	INDONESIA
101	country	IE	IRELAND
102	country	IL	ISRAEL
103	country	IM	ISLE OF MAN
104	country	IN	INDIA
105	country	Ю	BRITISH INDIAN OCEAN TERRITORY
106	country	IQ	IRAQ
107	country	IR	IRAN, ISLAMIC REPUBLIC OF
108	country	IS	ICELAND
109	country	IT	ITALY
110	country	JE	JERSEY
111	country	JM	JAMAICA
112	country	JO	JORDAN
113	country	JP 🔼	JAPAN
114	country	KE	KENYA
115	country	KG	KYRGYZSTAN
116	country	KH	CAMBODIA
117	country	KI	KIRIBATI
118	country	KM	COMOROS
119	country	KN	SAINT KITTS AND NEVIS
120	country	KP	KOREA, DEMOCRATIC PEO-
			PLE'S REPUBLIC OF
121	country	KR	KOREA, REPUBLIC OF
122	country	KW	KUWAIT
123	country	KY	CAYMAN ISLANDS
124	country	KZ	KAZAKHSTAN
125	country	LA	LAO PEOPLE'S DEMOCRATIC REPUBLIC
126	country	LB	LEBANON
127	country	LC	SAINT LUCIA
128	country	LI	LIECHTENSTEIN
129	country	LK	SRI LANKA
130	country	LR	LIBERIA
131	country	LS	LESOTHO
132	country	LT	LITHUANIA
133	country	LU	LUXEMBOURG
134	country	LV	LATVIA
135	country	LY	LIBYAN ARAB JAMAHIRIYA
	2241.117		Continued on next page



Table 66 sub_region (cont.)

sub_region	type	code	name
136	country	MA	MOROCCO
137	country	MC	MONACO
138	country	MD	MOLDOVA, REPUBLIC OF
139	country	ME	MONTENEGRO
140	country	MF	SAINT MARTIN
141	country	MG	MADAGASCAR
142	country	MH	MARSHALL ISLANDS
143	country	MK	MACEDONIA, THE FORMER YU-
			GOSLAV REPUBLIC OF
144	country	ML	MALI
145	country	MM	MYANMAR
146	country	MN	MONGOLIA
147	country	МО	MACAO
148	country	MP	NORTHERN MARIANA ISLANDS
149	country	MQ	MARTINIQUE
150	country	MR	MAURITANIA
151	country	MS	MONTSERRAT
152	country	MT	MALTA
153	country	MU	MAURITIUS
154	country	MV	MALDIVES
155	country	MW	MALAWI
156	country	MX	MEXICO
157	country	MY	MALAYSIA
158	country	MZ	MOZAMBIQUE
159	country	NA	NAMIBIA
160	country	NC	NEW CALEDONIA
161	country	NE	NIGER
162	country	NF	NORFOLK ISLAND
163	country	NG	NIGERIA
164	country	NI	NICARAGUA
165	country	NL	NETHERLANDS
166	country	NO	NORWAY
167	country	NP	NEPAL
168	country	NR	NAURU
169	country	NU	NIUE
170	country	NZ	NEW ZEALAND
171	country	OM	OMAN
172	country	PA	PANAMA
173	country	PE	PERU
174	country	PF	FRENCH POLYNESIA
175	country	PG	PAPUA NEW GUINEA
176	country	PH	PHILIPPINES
177	country	PK	PAKISTAN
			Continued on next page



Table 66 sub_region (cont.)

sub_region	type	code	name
178		PL	POLAND
179	country	PM	SAINT PIERRE AND MIQUELON
180	country	PN	PITCAIRN
181		PR	PUERTO RICO
182	country	PS	PALESTINIAN TERRITORY, OCCUPIED
183	country	PT	PORTUGAL
184	country	PW	PALAU
185		PY	PARAGUAY
	country	QA	QATAR
186	country		
187	country	RE	REUNION ROMANIA
188	country	RO	
189	country	RS	SERBIA PLICE AND FEDERATION
190	country	RU	RUSSIAN FEDERATION
191	country	RW	RWANDA
192	country	SA	SAUDI ARABIA
193	country	SB	SOLOMON ISLANDS
194	country	SC	SEYCHELLES
195	country	SD	SUDAN
196	country	SE	SWEDEN
197	country	SG	SINGAPORE
198	country	SH	SAINT HELENA
199	country	SI	SLOVENIA
200	country	SJ	SVALBARD AND JAN MAYEN
201	country	SK	SLOVAKIA
202	country	SL	SIERRA LEONE
203	country	SM	SAN MARINO
204	country	SN	SENEGAL
205	country	SO	SOMALIA
206	country	SR	SURINAME
207	country	ST	SAO TOME AND PRINCIPE
208	country	SU	USSR
209	country	SV	EL SALVADOR
210	country	SY	SYRIAN ARAB REPUBLIC
211	country	SZ	SWAZILAND
212	country	TC	TURKS AND CAICOS ISLANDS
213	country	TD	CHAD
214	country	TF	FRENCH SOUTHERN TERRITORIES
215	country	TG	TOGO
216	country	TH	THAILAND
217	country	TJ	TAJIKISTAN
218	country	TK	TOKELAU
219	country	TL	TIMOR-LESTE
220	country	TM	TURKMENISTAN
			Continued on next page



Table 66 sub_region (cont.)

Table to sub_legion (cont.)			
sub_region	type	code	name
221	country	TN	TUNISIA
222	country	TO	TONGA
223	country	TR	TURKEY
224	country	TT	TRINIDAD AND TOBAGO
225	country	TV	TUVALU
226	country	TW	TAIWAN, PROVINCE OF CHINA
227	country	TZ	TANZANIA, UNITED REPUBLIC OF
228	country	UA	UKRAINE
229	country	UG	UGANDA
230	country	UM	UNITED STATES MINOR OUT-
			LYING ISLANDS
231	country	US	UNITED STATES
232	country	UY	URUGUAY
233	country	UZ	UZBEKISTAN
234	country	VA	HOLY SEE (VATICAN CITY STATE)
235	country	VC	SAINT VINCENT AND THE GRENADINES
236	country	VE	VENEZUELA
237	country	VG	VIRGIN ISLANDS, BRITISH
238	country	VI	VIRGIN ISLANDS, U.S.
239	country	VN	VIET NAM
240	country	VU	VANUATU
241	country	WF	WALLIS AND FUTUNA
242	country	WS	SAMOA
243	country	YE	YEMEN
244	country	YT	MAYOTTE
245	country	YU	YUGOSLAVIA
246	country	ZA	SOUTH AFRICA
247	country	ZM	ZAMBIA
248	country	ZW	ZIMBABWE
249	country	ZZ	THIRD PARTY SUPPORT SHIPS
			End of table

Table 67: time_quality

time_quality	description
0	Timestamp valid, time reported
	to nearest second
1	Timestamp valid, time reported
	to nearest minute
2	Timestamp valid, time reported
	to nearest hour
	Continued on next page



Table 67 time_quality (cont.)

time_quality	description
3	Time missing, date valid. Report set to local midday
4	Day missing
5	Invalid date / time

Table 68: time_reference (WIGOS: 7-10)

time_reference	description
0	Unknown
1	Time server
2	Radio clock
3	Manual comparison
	End of table

Table 69: traceability (WIGOS 8-05)

traceability	description
0	Unknown
1	Traceable to international standards
2	Traceable to other standards
	End of table

Table 70: units

units	name
1 - 1024	See BUFR Common Code Table C-6
	End of table

Table 71: update_frequency

update_frequency	description
0	Irregular
1	Daily
2	Weekly
3	Monthly
4	Annual
	End of table



Table 72: z_coordinate_method

z_coordinate_method	description
0	Value from chart
	End of table

Table 73: z_coordinate_type

z_coordinate_type	description
0	height (m) above sea level
	End of table

