


MONGODB → BIGQUERY • JOBS SERVING DATA MODEL

MONGODB • job_crawler

Operational source • embedded documents • camelCase

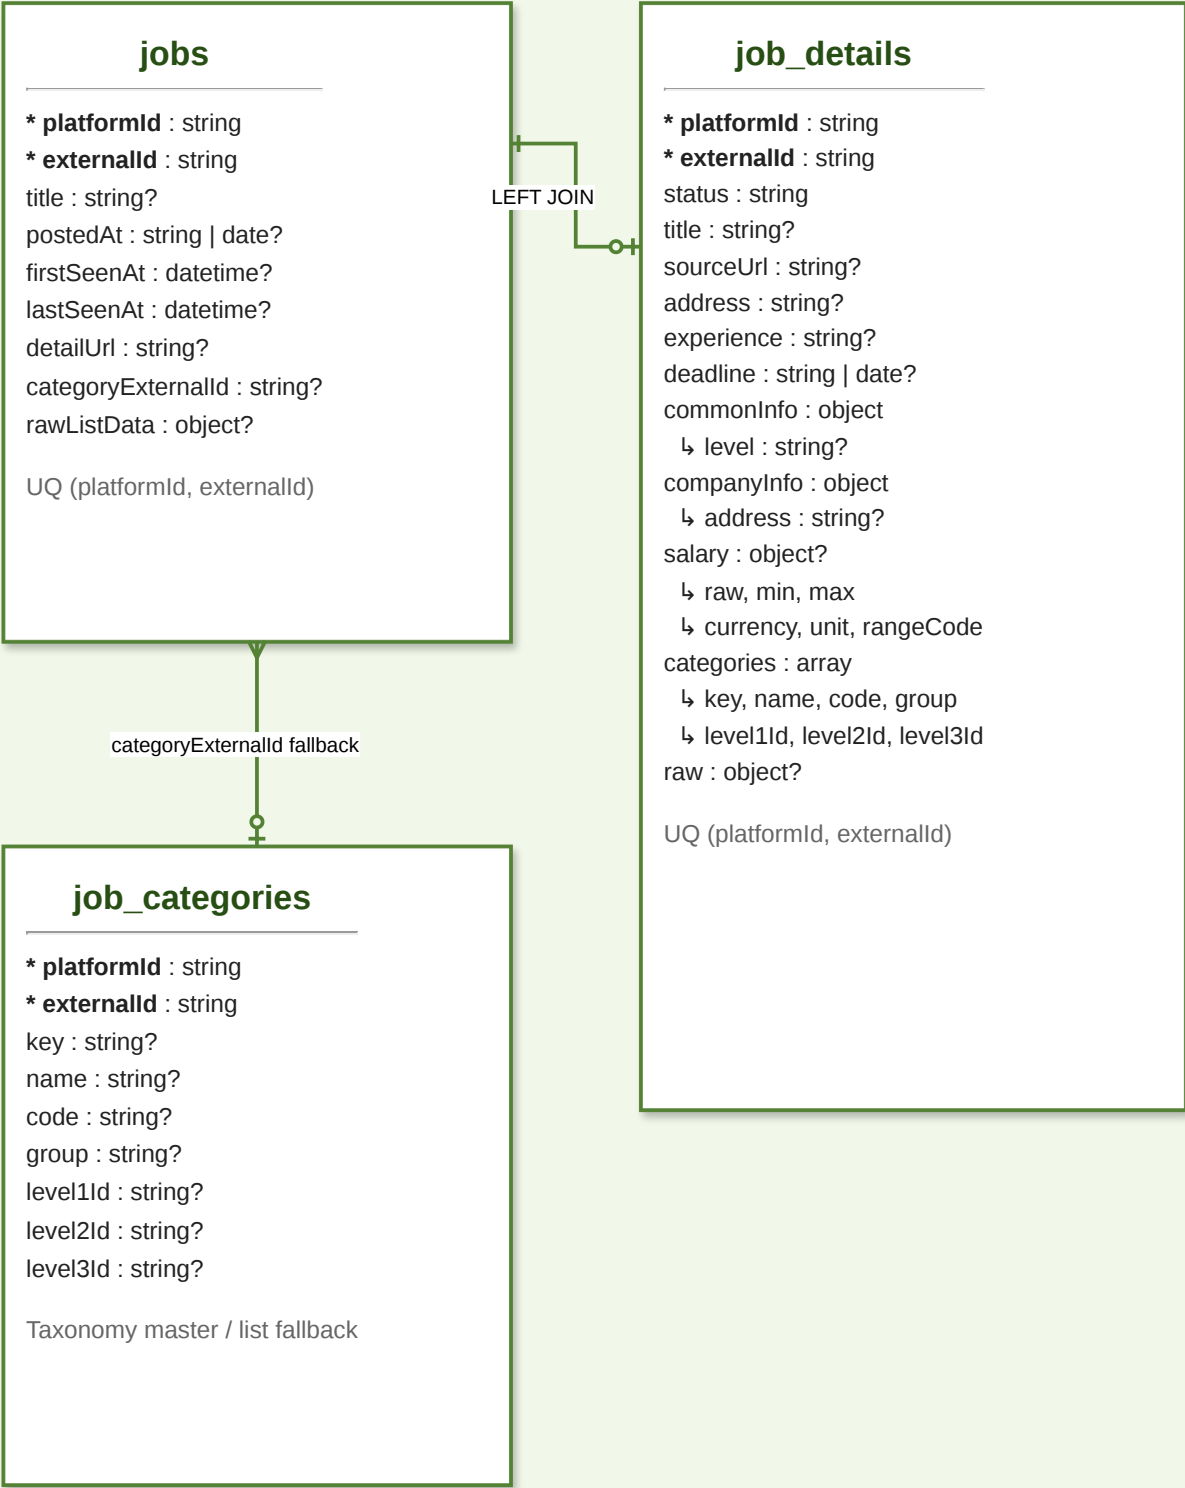


Mongo extraction contract

- Scope: platformId ∈ {topdev, vietnamworks}
- jobs LEFT JOIN job_details on (platformId, externalId)
- job_categories is fallback when detail.categories is empty
- raw payload stays in MongoDB; it is not exposed by the serving API

BIGQUERY • jobs_staging / jobs_prod

Analytical warehouse • snake_case • immutable published batches

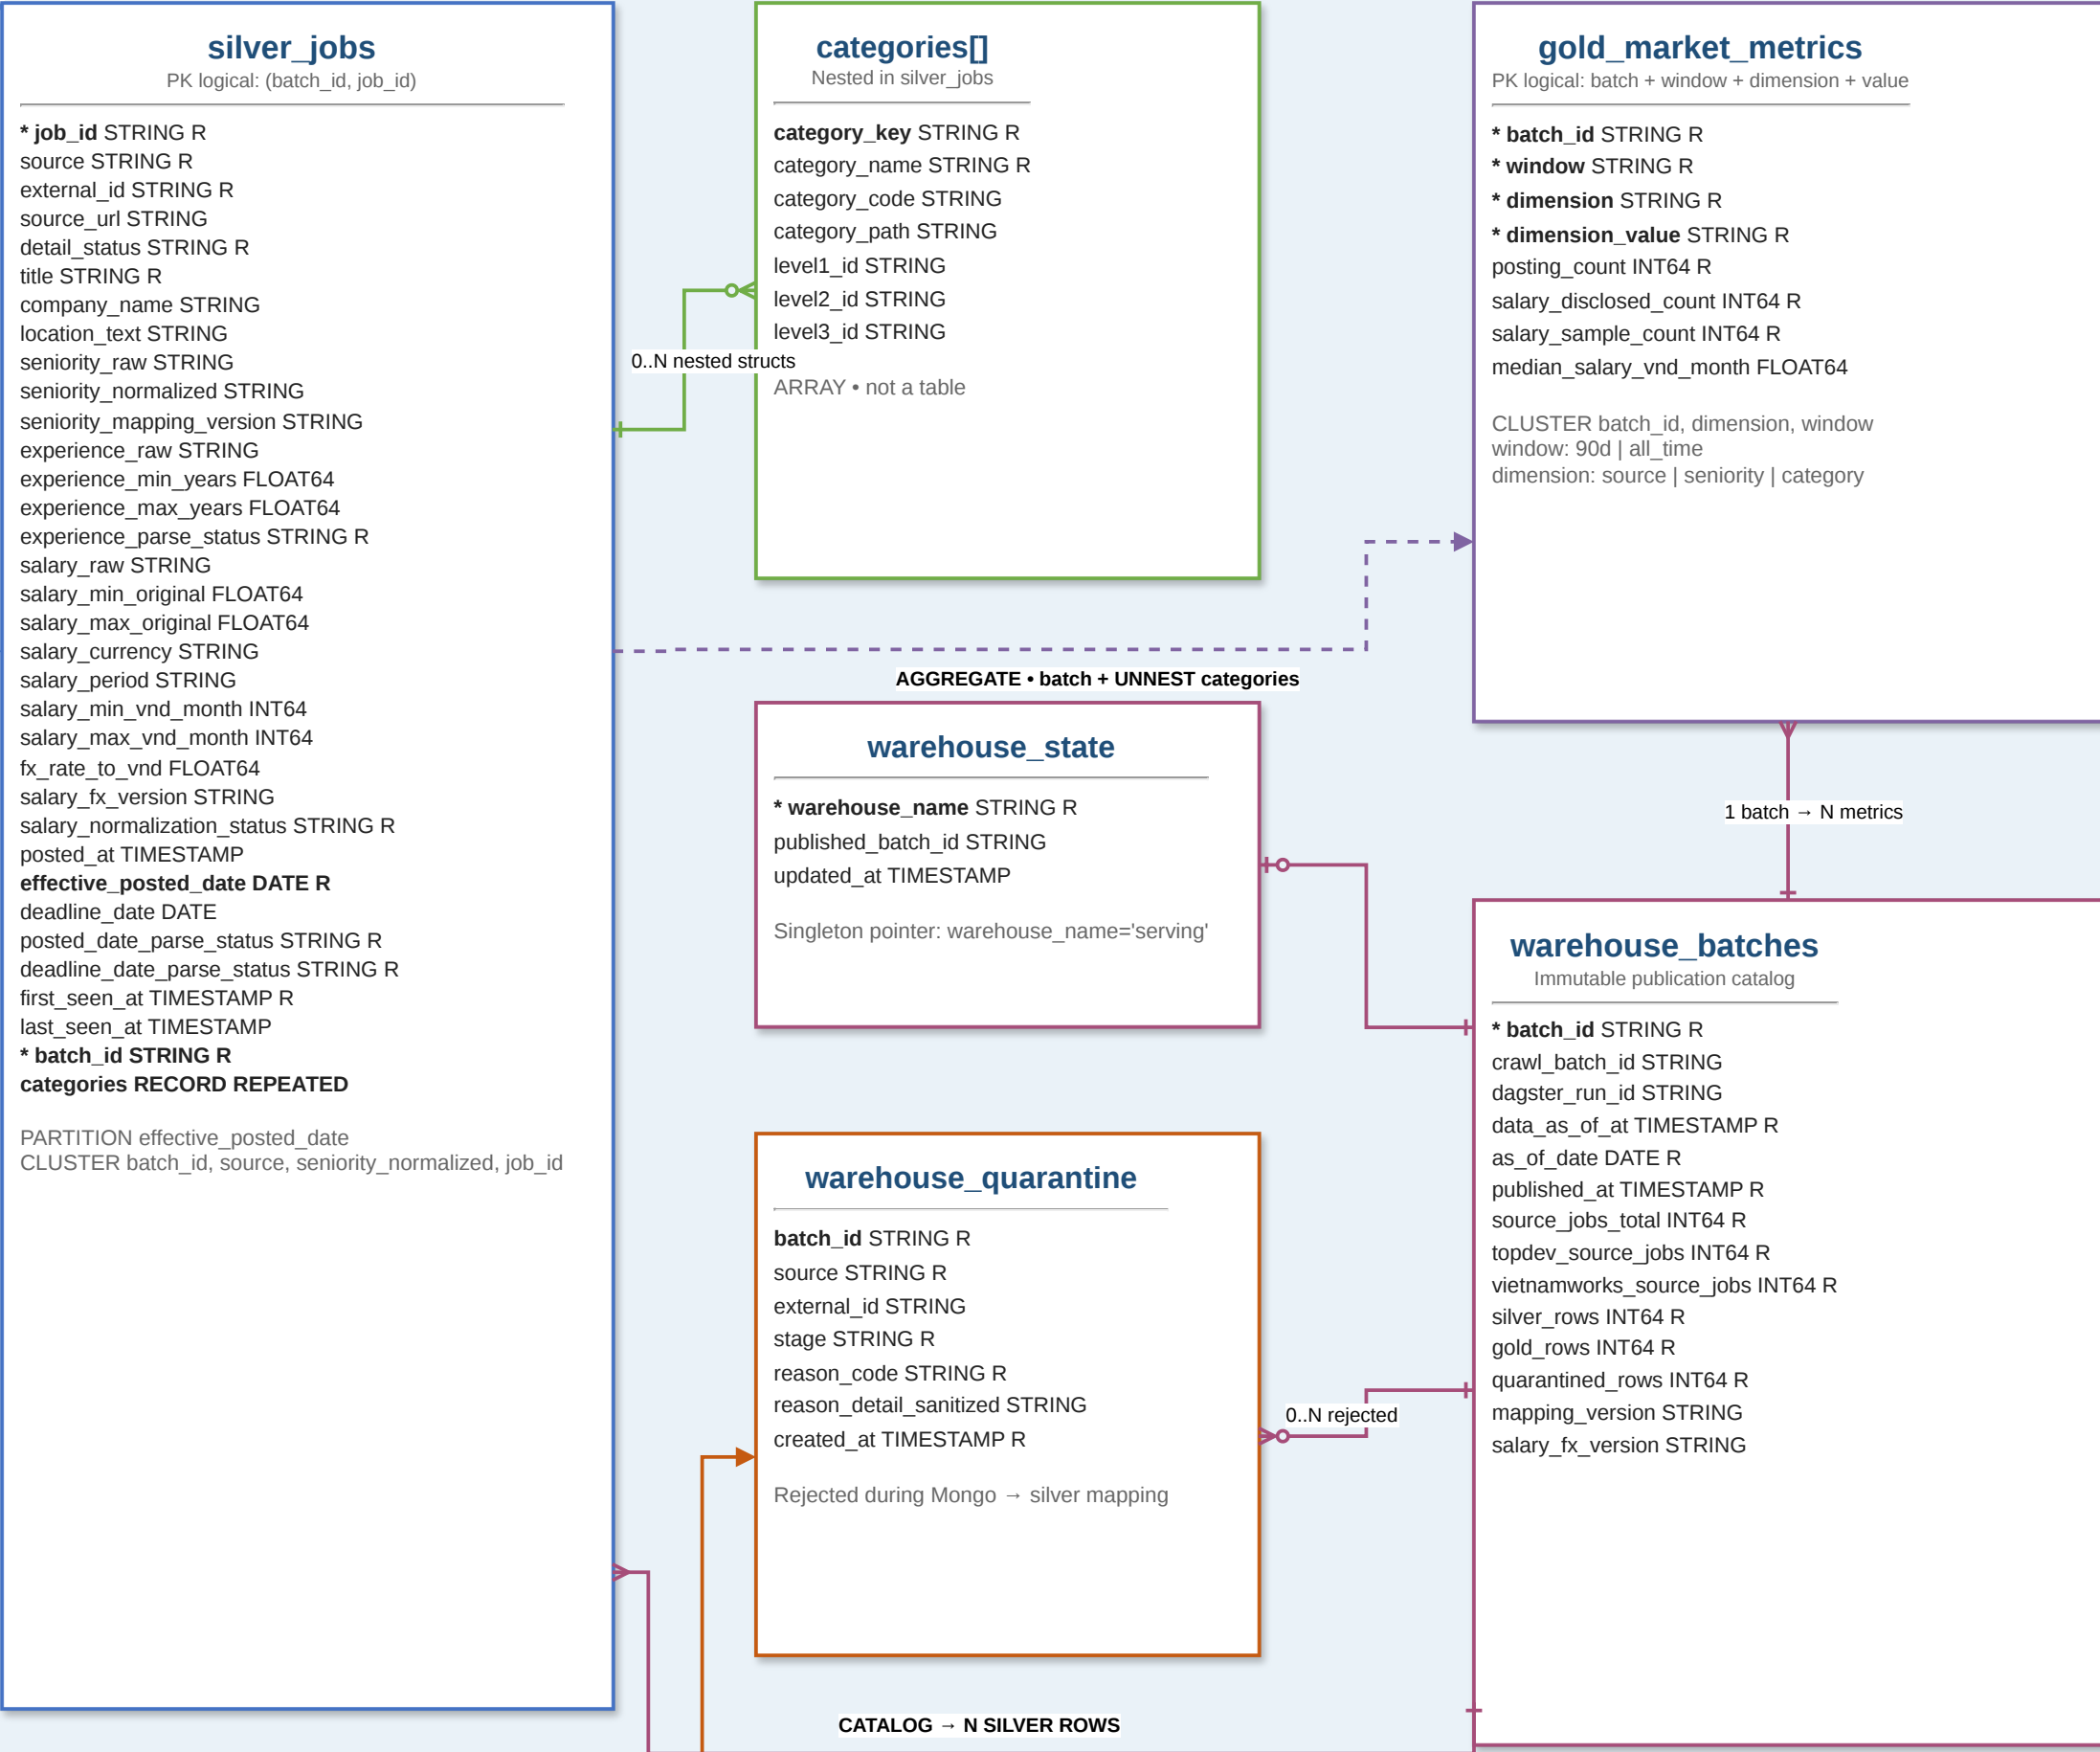

REJECTED → QUARANTINE

Legend / operational notes

- * = logical key field • R = REQUIRED • ? = optional in Mongo
- Solid connectors = join/reference • dashed = derived lineage
- Candidate work tables ("*_candidate_*...") are transient and intentionally omitted.
- BigQuery relationships are logical; the code does not declare physical foreign keys.