


[Edit/View](#)
[Simulate / Replay](#)
[Verification](#)
[Swarm Run](#)
[Help](#)
[Save Session](#)
[Restore Session](#)
[Quit](#)

Mode	A Full Channel	Output Filtering (reg. exps.)	(Re)Run
☐ Random, with seed: 123	☒ blocks new messages	process ids:	Stop Rewind Step Forward Step Backward
☐ Interactive (for resolution of all nondeterminism)	☐ loses new messages	queue ids:	
☒ Guided, with trail: test.pml.trail browse	☐ MSC+stmtnt	var names:	
initial steps skipped: 0	MSC max text width 20	tracked variable:	
maximum number of steps: 10000	MSC update delay 25	track scaling:	
☒ Track Data Values (this can be slow)			

```

1  #define MAX 10
2  mtype = { ack, nak, err, next, accept }
3
4  proctype transfer( chan inx, out, chin, chout )
5  {
6    byte o,i;
7    inx?next(o);
8    do
9      :: chin?nak(i) -> out!accept(i); chout!ack(o)
10     :: chin?ack(i) -> out!accept(i); inx?next(o);
11     chout!ack(o)
12     :: chin?err(i) -> chout!nak(o)
13   od
14 }
15
16 proctype application( chan inx, out )
17 {
18   int i=0, j=0, last_i=0;
19   do
20     :: inx?accept(i) ->
21       assert( i==last_i );
22   od

```

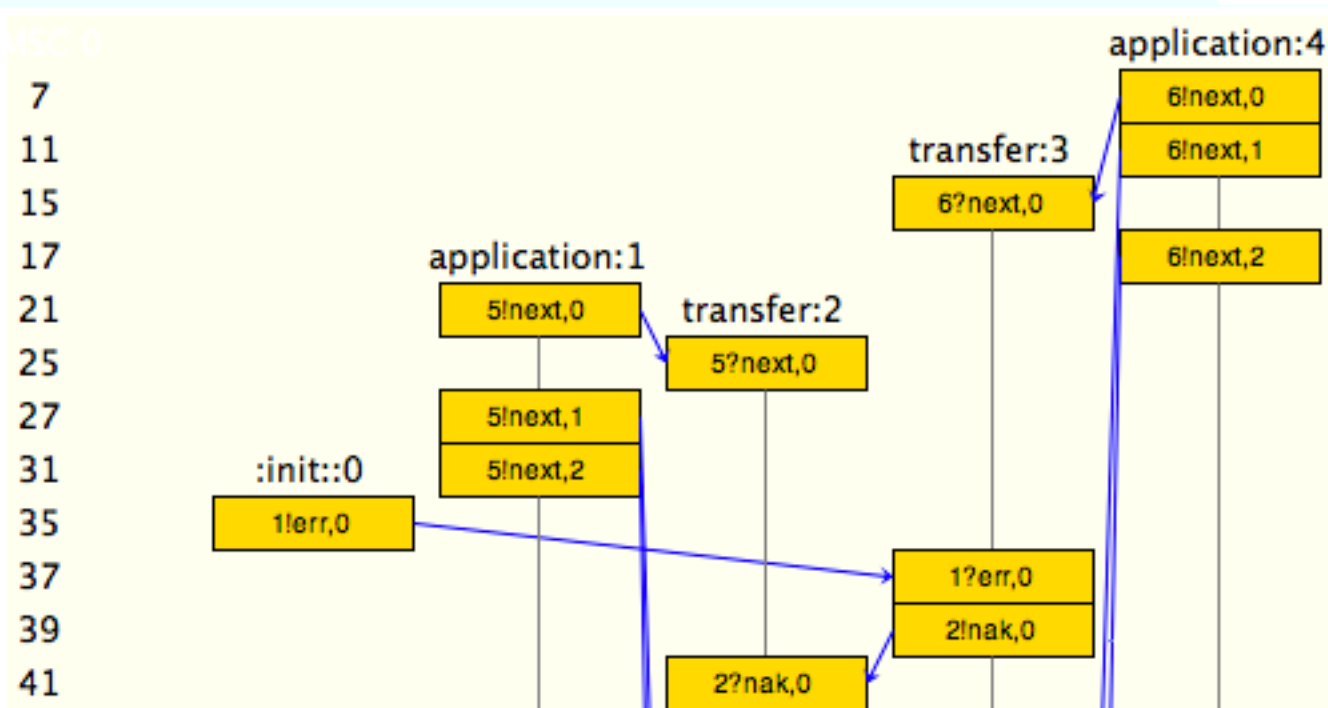

[variable values, step 409]

0 = transfer
 1 = application
 2 = :init:

```

409: proc 0 (transfer) test.pml:10 (state 0) [out!accept,i]
spin: trail ends after 409 steps
#processes: 5
409: proc 4 (application) test.pml:21 (state 2)
409: proc 3 (transfer) test.pml:10 (state 7)
409: proc 2 (transfer) test.pml:8 (state 11)
409: proc 1 (application) test.pml:19 (state 14)

```

[queues, step 409]

q 1 :: (transfer(3):ch
 in):
 q 2 :: (transfer(2):ch
 in):