

# psiTurk: An open-source framework for conducting replicable behavioral experiments online

Todd M. Gureckis<sup>1</sup> · Jay Martin<sup>1,2</sup> · John McDonnell<sup>3</sup> · Alexander S. Rich<sup>1</sup> · Doug Markant<sup>4</sup> · Anna Coenen<sup>1</sup> · Jessica B. Hamrick<sup>5</sup> · Patricia Chan<sup>1</sup>

Received: date / Accepted: date

**Abstract** Insert your abstract here.

**Keywords** Online experiments · open science

## 1 Introduction

The ability to collect behavioral data from a large group of individuals anonymously over the Internet has transformed the behavioral and social sciences. In addition to large scale experiments such as those conducted by websites such as Facebook or Twitter (e.g., Chen and Sakamoto, 2013; Kramer et al, 2014; Wu et al, 2011), many researchers use online data collection to deploy “traditional” experimental psychology tasks. The benefit of the online versions of traditional behavioral experiments include faster data collection and access to a potentially more diverse pool of participants. At the same time, conducting experiments online introduces a number of new technical and scientific challenges that must be addressed.

<sup>1</sup>Department of Psychology, New York University

<sup>2</sup>Stitch Fix, Inc.

<sup>3</sup>Square, Inc.

<sup>4</sup>Center for Adaptive Rationality, Max Planck Institute for Human Development

<sup>5</sup>Department of Psychology, University of California at Berkeley

psiTurk was primarily written by the listed authors at the time the first draft of this paper was constructed (version 2.0.0). However, many people continually contribute to psiTurk’s evolving code base and documentation via github.

Please address correspondence concerning this paper to:

Todd M. Gureckis  
New York University  
Department of Psychology  
E-mail: authors@psiturk.org

The project described in this paper, psiTurk, is an open-source framework of software and services that aims to address many of the technical challenges involved in deploying experimental psychology experiments online. It facilitates the creation, deployment, sharing, and replication of web-based experiments. Study participants can be recruited via a number of methods including Amazon Mechanical Turk (AMT), which is currently the most popular platform for running paid human experiments online.

To briefly summarize, psiTurk provides features for serving an experiment on the web, saving experimental data to a database, and restricting the participant pool according to the experimenter’s needs (e.g., to prevent non-naive participants from contaminating a study). It also provides an interface with AMT to create and test new projects as well as to manage and pay participants. Finally, in the spirit of the recent “open science” movement (Open Science Collaboration, 2012), it provides an open-source *experiment exchange* for sharing experiments that can be easily replicated and extended by other researchers. The code for psiTurk is open source, hosted publicly at <http://github.com/NYUCCL/psiTurk> and interested researchers can easily contribute to improvements and bug fixes (see Figure 1).

The principal goal of this framework is to handle common technical challenges so that researchers can focus on the development and replication of online experiments. In this paper we present a high-level overview of the psiTurk framework and its advantages for running web-based experiments. In supplement to this overview, psiTurk provides a large and continually evolving set of documentation hosted online (<https://psiturk.org/docs>). We begin with an overview of the issues involved in online behavioral research, the AMT platform, and the specific challenges that psiTurk



**Fig. 1** The `psiTurk` project is hosted on Github (<http://github.com/NYUCCL/psiTurk>) and at its main webpage (<http://psiturk.org>). The commissioned logo reflects the community-built orientation of the project. A core philosophy is that better scientific software developed can be developed with more diverse input from many programmers (Raymond, 1999)

is designed to address. We then step through the core functionality of `psiTurk` and describe its role in both an experimenter’s and participant’s workflow. Finally, we consider some future directions for `psiTurk` and online experimentation in general.

## 2 The challenges of web-based experimental behavioral research

It is easy to see why online experiments are an attractive option for behavioral scientists. Compared to traditional methods of experimentation in the laboratory they allow researchers to collect large data sets in a fraction of the time and at much lower cost (in terms of time, employment of research assistants, and typical compensation costs for participants). Designing experiments for the web allows researchers to leverage the large set of software libraries developed to assist in the design of commercial web applications such as Node.js, JQuery, d3.js, and Bootstrap. Such libraries can be used to design the look and flow of an experiment in ways that far exceed the capabilities of traditional experiment software developed in academia. Additionally, such tools enable a much wider range of experiments, including more complicated interactive interfaces, or even multi-player games.

Still, there are a number of technical challenges to running experiments online. For example, unlike in a laboratory setting, researchers have to deal with setting up a web server, recording data in a robust and secure way, and compensating participants over the Internet. Prior to the release of `psiTurk` version 2.0.0 (early 2014), we conducted an informal survey of behavioral researchers regarding their attitudes, concerns, and needs regarding online experimentation. To help introduce some of the core features and goals of `psiTurk`

we quickly summarize some of the findings from this survey.


### 2.1 Informal survey of the challenges researchers face conducting online experiments

We collected responses from 201 researchers in psychology (58%), linguistics (16%), marketing (7%), neuroscience (6%), and economics (4%), most of whom had some experience collecting behavioral data online in their labs (85%). Respondents were recruited via mailing lists devoted to behavioral science and psychology as well as blogs and social media.

The survey questions asked respondents about their attitudes and opinions towards online data collection as well as the features they would look for in a software package that helps with online data collection. In the interest of brevity we highlight some of the most important questions and answer.

Survey respondents showed a clear interest in online data collection. Nearly all listed fast data collection and large sample sizes as benefits of online data collection, with most interested in the potential for lower costs and a more diverse population (Figure 2). Of researchers who had reviewed a paper which included data collected online, 59% treated the data identically to data collected in the lab.

Respondents also felt that online data collected presented a set of unique challenges (Figure 2). Some felt that the data collected online was unreliable, or the population unrepresentative. Many expressed that the experiment designs they were interested in did not work well online, or that web technology is too complex. Researchers based outside the US reported difficulty using services like Amazon Mechanical Turk.

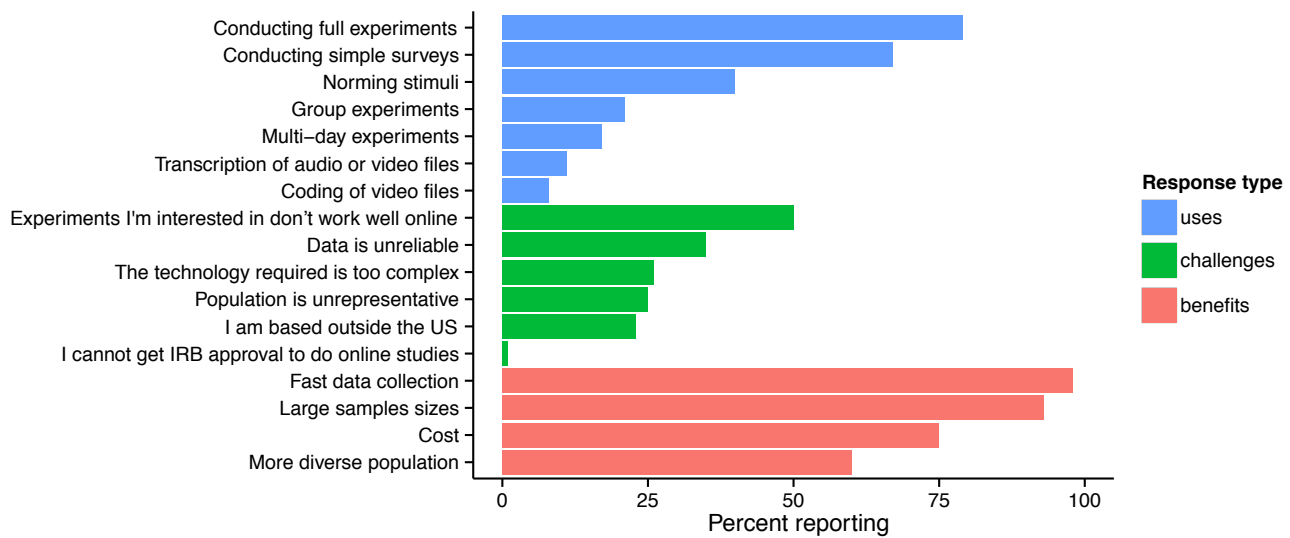

**Fig. 2** Reported uses, challenges, and benefits of online data collection as surveyed by 201 behavioral researchers.

**Table 1** Features the surveyed researchers desire in a software system for online data collection.

feature	% interested	psiTurk
Ability to block participants from doing the same experiment twice	90	✓
Ability to automatically pay people	69	✓
Availability of example code that I can use to jump-start my own experiment	64	✓
Ability to design experiment in the browser without programming (e.g., no Javascript or Flash needed)...	64	✗
No need to have a separate server/webserver installed and maintained	61	✓
Ability to record information about browser (e.g. when people switch windows during task)	60	✓
Ability to see if a online participant has done a similar study to yours in the past	60	✗
A graphical user interface for managing my online experiments (e.g., paying participants, viewing data)	60	✗
Open-source software I can read/edit myself if needed	60	✓
Ability to automatically assign bonuses based on performance	58	✓
Ability to run multi-day experiments where people come back for multiple sessions	57	●
Ability to easily coordinate the running of multiple experiments at the same time	55	✓
Ability to save data from experiment incrementally (in case browser or network crash can get partial data)	53	✓
Automatically fill in conditions randomly and evenly	52	✓
Ability to store data from my experiments in the cloud and have them automatically backed up	50	●
Ability to obtain geographic and visualize geographic information about where participants are connecting from	50	✗
Ability to run group experiments (i.e., multiple people interacting)	49	●
Tools to help document payments for reimbursement from University or Business (i.e., accounting issues)	48	✗
Other	10	

✓ = provided by psiTurk, ✗ = not currently provided, ● = possible with psiTurk, requires significant effort

While about half of respondents (56%) listed Qualtrics, a service for conducting online surveys, as the tool they were *currently* most likely to use, most respondents (79%) expressed interest in being able to run full experiments that included multiple trials, fixation crosses, etc. (Figure 2). The vast majority (94%) reported interest in new tools that simplified online data collection. A full list of the features researchers

are looking for in a online data-collection system are shown in Table 1, along with a checklist showing which are currently handled by psiTurk. Importantly, psiTurk successfully meets many of the major challenges that researchers identified.

### 3 psiTurk and Amazon Mechanical Turk

psiTurk was primarily designed to facilitate online data collection using the Amazon Mechanical Turk (AMT) crowdsourcing platform (though, it can also be used to run experiments in a traditional lab setting). Mason and Suri (2012) provide a general overview of AMT features of interest to academic researchers. A key feature of AMT is that it provides a way for researchers to easily recruit and compensate individuals for online experiments. People who complete tasks (called Human Intelligence Tasks or *HITs*), are called *workers*, and people who post tasks are called *requesters*. Beyond providing a platform to connect requesters and workers, AMT places few restrictions on the type of work that can be requested and the amount paid per HIT. Workers are paid a fixed amount for each HIT they complete; this amount is determined by the requester and can be supplemented with bonus payments for good performance.

From a worker's perspective, the AMT website provides an up-to-date listing of HITs that are available, with a title, brief description, and payment amount. A worker can click on a HIT to see its full *advertisement* (an embedded webpage that is either hosted by Amazon or the requester) and decide to accept the HIT. Once the HIT has been accepted, the worker must complete it within a timeframe specified by the requester, or "return" the HIT so that it may be completed by a different worker. The HIT may be completed either on a requester's own hosted service (i.e., a webpage external to the AMT site), or on the AMT website itself through the use of customized templates. Upon completion, the worker "submits" the HIT, after which point the completed work must be approved by the requester before they are compensated. In addition, some HITs offer bonus payments that are determined by the requester based on a worker's performance.

From a requester's perspective, AMT provides a web-based interface for creating/managing HITs and approving work that has been submitted. In addition, they offer a "sandbox" version of the platform in which HITs can be tested without paying live participants. For basic tasks like surveys and open text fields, AMT offers a range of built-in templates that can be used to create experiments within the AMT website. However, the degree of customization is limited for these templates. In particular, they do not support advanced experimental logic that is common to many psychology experiments (e.g., adapting the presentation of stimuli based on performance, or counterbalancing across a number of experimental variables). In addition, they are limited to relatively simple forms of interaction and stimulus presentation.

For more complex tasks, a requester can provide a link to their own hosted web page or web application which runs the experiment, saves the data, and only interfaces with AMT at the beginning of the task (receiving basic information about the worker) and at the end of the task (sending confirmation that the task has been completed). Thus, these "external HITs" enable a much wider range of experiments at the cost of additional technical requirements. psiTurk is designed to handle many of the complex requirements associated with "external HITs" so that researchers can more efficiently run these types of tasks.

### 4 What technical challenges is psiTurk designed to solve?

The psiTurk platform is design to mitigate several of the technical complexities involved in online experimentation, particularly using AMT.

#### 4.0.1 Web server and database management

To collect experimental data on the web, or specifically to run an external HIT on AMT, researchers minimally need a web server and database. The role of a web server is to respond to requests from participant's Internet browser for the experiment content. The role of the database is to save the data provided by the participant. Although less common in laboratory experiments, databases are necessary for online studies because it is impossible to save data to a participant's computer using a web page or web application: data must be stored on the server, rather than the client. In addition, multiple participants often complete an experiment concurrently which can result in file corruption if two people try to write to the same file at the same time. Databases are specifically designed to mitigate this issue by managing concurrent reading and writing.

Setting up a webserver and database can be complex. Some university Information Technology departments provide these types of services, but the technical infrastructure at other institutions is lacking. psiTurk includes a custom webserver and database as a basic feature of the software tool which can be run from any computer including a standard office computer or laptop. This allows data collection from anywhere without the need for a dedicated server computer. In addition, psiTurk can be easily installed on free hosting services such as Amazon Web Services or RedHat's OpenShift. Data collected with psiTurk is stored at a location chosen by the experimenter and never visible to the psi-turk.org cloud services or Amazon, protecting the privacy of participants and helping with IRB compliance.

An additional complication is that contemporary web browsers are increasingly security focused. In particular, certain browsers will not load content that is not properly signed with a SSL certificate and accessed with a `https://` request. This is often difficult to obtain from universities and can be costly from online hosting companies. **psiTurk** solves this problem on behalf of researchers by using a cloud-based “ad server” which presents securely signed content for users. One way to think of the ad server is as a digital version of a “bulletin board” which is used to advertise particular studies within a university. **psiTurk** posts the text of an ad using a unique URL, and securely routes requests to this URL back to the worker’s browser. If the worker decides to accept the HIT after seeing the ad, they are forwarded to the researcher’s local computer to complete the task; it is up to the experimenter if this later content is encrypted or not. Thus, the **psiTurk** ad server acts as a bridge between AMT and a researcher’s local computer (see Section 7.3 for further information about the ad server).

#### 4.0.2 Communicating with AMT

When using AMT to recruit and compensate participants, experimenters typically use the AMT website. This often involves a lot of manual, error-prone clicking. **psiTurk** has scripted many of the common tasks that researchers have to do on AMT’s website, including: paying all participants, assigning bonus, checking the current account balance, and monitoring the progress of an experiment. This is accomplished via an interactive UNIX-based command line tool (see below). The goal of this tool is to help prevent errors in payments and to save researchers considerable time.

#### 4.0.3 Programming an experiment

**psiTurk** provides a number of features which help researchers implement experiments. These include a JavaScript library (*psiturk.js*), basic HTML templates for commonly used components (e.g., consent forms and instruction screens), and an user-contributed “experiment exchange” where researchers can share the code for their **psiTurk**-compatible projects (<http://psiturk.org/ee>).

The *psiturk.js* JavaScript library provides basic functions for recording data and sending it back to the **psiTurk** server, preloading pages and images, as well as some basic functions for looping through instructions screens and providing (and recording) informed consent. However, the **psiTurk** framework is *not* designed

as a generic programming interface for building experiments (e.g., it does not provide code for widgets such as sliders or buttons) and assume researchers will use some basic JavaScript, HTML, and CSS to design their experiment. Instead, **psiTurk**’s philosophy is that general purpose JavaScript libraries available online for creating dynamic content (e.g., jquery or Twitter’s Bootstrap library) provide the most powerful and well-documented set of features. Instead, **psiTurk** aims to help share code and propagate “best practices” among the research community. This later goal is supported by the online “experiment exchange”. The source code for projects in the exchange can be downloaded and modified for a new use, replicated directly, or can simply provide example of code implementing a particular feature. In addition to the exchange, **psiTurk** also includes a complete working example experiment that can be used as a template for new projects.


#### 4.0.4 Recruiting, filtering, and instructing participants

Finally, **psiTurk** has a number of features for controlling the recruitment of participants which can contribute to higher quality control. For example, **psiTurk** offers basic capabilities for assigning workers to different experimental conditions and counterbalancing different aspects of the experiment. In addition, it allows experimenters to filter workers in particular ways. For example, through **psiTurk**, is it possible to exclude participation by workers using certain devices (such as phones or tablets) or browsers which are known to have compatibility issues with the experimenter’s design (for example, Firefox or Internet Explorer). **psiTurk** also allows researchers to prevent a AMT worker from participating in the same experiment more than once (which might otherwise be tempting when large financial rewards are offered). Future versions of **psiTurk** may also allow researchers to block AMT workers who have completed certain **psiTurk** experiments in the past, such as any similar experiment with a similar task (see Chandler et al, 2014, for a discussion about non-naivety amongst AMT workers).

With these general features in mind, we now turn to a more detailed overview of the **psiTurk** platform.

## 5 Key components of the **psiTurk** platform

The overall structure of the **psiTurk** platform is shown in Figure 3 and can be conceptualized as involving three components. First, there are a collection of software tools which run locally on a user’s local computer or server. These local components include a command line tool and a web application server (which provides both

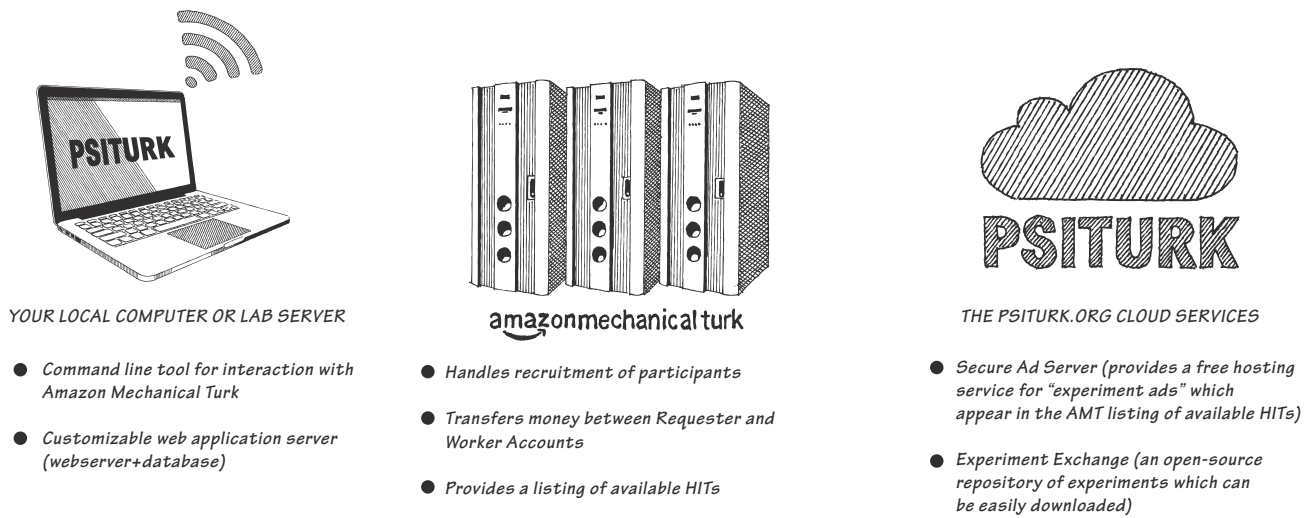

**Fig. 3** The three core components of the **psiTurk** system.

a customizable webserver and database solution). Next, **psiTurk** relies currently on Amazon Mechanical Turk to handle the recruitment and compensation of participants. Finally, the **psiturk.org** cloud based component includes a hosted “ad server” and the experiment exchange. In the following sections we highlight the important functions of each component.

## 5.1 Local computer or server

### 5.1.1 Command line tool

When using **psiTurk**, the researcher runs the **psiTurk** interactive UNIX-based command line tool on a local computer, such as a laptop or lab computer. This tool is used to issue commands, and to interact with the Amazon Mechanical Turk system and with the **psiTurk** cloud. Example uses of the command line tool include checking the user’s Amazon Mechanical Turk account balance, paying participants, and creating new HITs. In addition, the command line has the capability to give automated bonus payments to participants based on a function designed by the experimenter. This feature is particularly helpful since the AMT website requires bonuses to be entered by hand for each participant individually.

There are several advantages to designing **psiTurk** as a simple CLI beyond its efficiency of use. This design makes the user interface code clear and easy to read and write, allowing newcomers to quickly understand and contribute to the open-source project. Integrating a new feature into the interface is as simple as describing the syntax and functioning of a new command; in con-

trast to a graphical user interface (GUI), extending the CLI does not require designing time-consuming GUI elements. The CLI also ensures that **psiTurk** is easy to interact with not just on a laptop or desktop, but also on a remote server or in the cloud, where users may only have terminal access.

### 5.1.2 Web application server (webserver + database)

The command line tool is also used to interact with the web application server. The web application server handles the logic determining which pages to show to a participant at different stages of the experiment. **psiTurk** comes with a default web application which implements many important features commonly needed by experiments (e.g., checking that a user hasn’t already done the experiment, recording and saving data to a centralized database). In addition, the web application itself server can be heavily customized to support functions that are difficult to code in JavaScript, or easily exploitable by savvy participants. Such customizations might be as simple as changing the way that bonuses are assigned to participants, but they can also allow for much more complex experimental designs. For example, **psiTurk** allowed us to create an experiment where a cognitive model is fit to participant’s data in real time and used to determine the sequence of future trials in the experiment.

## 5.2 Amazon Mechanical Turk and Amazon Web Services

Amazon Mechanical Turk’s servers handle the recruitment of participants via its crowdsourced labor force. It also handles the transfers of money between Requesters and Workers. Finally, it provides a listing of available HITs which workers can browse through. Amazon Mechanical Turk is one part of a larger collection of cloud-based services provided by Amazon via the Amazon Web Services. For example, by using the `psiTurk` command line tool, users can create a database server running on Amazon’s cloud with a few short commands. This database can then be used instead of a local database solution.

## 5.3 psiturk.org cloud services

In addition to the command-line tool and the web application server, `psiTurk` provides a few web services that are continuously running on a separate web server. Most important of these is the `psiTurk` Secure Ad Server. When a user creates a new HIT and wishes to post it to AMT, typically one advertises the study to potential participants (explaining how long the task will take and how much it will pay). As mentioned earlier, these “ads” will not correctly display in worker’s browsers unless they are encrypted using SSL. The `psiturk.org` ad server allows users of the `psiTurk` system to host ads on the <https://psiturk.org> website which are encrypted. These ads are what appear in the browsable listing on the Amazon Mechanical Turk website. As mentioned earlier, the `psiTurk` Experiment Exchange provides a open-source repository of `psiTurk`-compatible experiments which can be easily downloaded. The coordination of these downloads is handled by the `psiturk.org` cloud.

## 6 Requirements and initial setup - (AC)

This section describes the requirements and installation steps that are required to successfully setup `psiTurk` and run HITs on Mechanical Turk. Note that details of these steps may change over time and will be updated at <http://psiturk.readthedocs.org>.

### 6.1 System requirements

`psiTurk` is designed to run on UNIX systems (including Mac OS X, BSD, and Linux) that satisfy the following requirements:

1. A working Python installation of version 2.7 (Python 3 is not currently supported)
2. The `pip` package manager
3. A command line tool (like *Terminal* in Mac OS X)
4. A web browser (ideally one that provides web developer tools, like Firefox, Safari, or Chrome)

To satisfy the Python requirements, we recommend using an existing distribution like *Enthought* or *Anaconda*. These are free Python distributions that ship with a range of useful packages, including the `pip` package manager.

### 6.2 AWS credentials

An Amazon Web Services (AWS) account is required to use AMT as a requester. A new account can be created at <http://aws.amazon.com/mturk/>. To set up an account, note that requesters must provide a U.S. billing address, so this may bar researchers out of the U.S. from create an account.

After setting up an account, `psiTurk` users must retrieve their AWS credentials, which include an *access key id* and a *secret access key*. These can be retrieved and (re-)generated at <https://console.aws.amazon.com>. Eventually, these credentials will be entered in the `.psiturkconfig` file, as explained below.

### 6.3 psiTurk credentials

Additionally, a `psiTurk` account must be created at <https://psiturk.org/register>, which allows users to post ads on `psiTurk`’s ad server. A new user must then obtain a set of `psiTurk` credentials which can be found in the “API Keys” menu item in the drop-down at the top right hand of the page. These credentials will also be placed in `.psiturkconfig` (see below).

### 6.4 Installation

`psiTurk` is installed using the python package manager `pip`. In a terminal window, type (excluding the dollar sign): <sup>1</sup>

```
$ pip install psiturk
```

Alternatively, `psiTurk` can be installed directly from GitHub, which holds the latest stable release in the `master` branch, and the latest development version in

<sup>1</sup> Depending on the user’s permissions, this command may have to be prefaced with `sudo`.



the `dev` branch. To install from `master`, for example, type:

```
$ pip install
git+git://github.com/NYUCCL/psiTurk.git@master
```

The `psiTurk` installation automatically creates a global config file, `.psiturkconfig`, in a user's home directory. This file must then be edited to include the AWS and `psiTurk` credentials of the specific user.

### 6.5 Optional: Adding SQL database

By default, `psiTurk` includes a basic database solution called *SQLite*. This solution will work well for HITs that only require light traffic, but it does not handle multiple concurrent queries well: there is a real danger of data loss when a *SQLite* database is accessed at the same time by different users. It is therefore recommended to set up a more robust database solution, like a *MySQL* database, especially if a researcher wants to run many participants simultaneously. JBH: earlier it was mentioned this could be done from the `psiturk` command line – maybe we should briefly mention specifics of how to do that here?

## 7 Getting started with `psiTurk`

The following section provides a basic overview of how to use `psiTurk`, explaining the various steps required of new users of the system along with some details about how the various components described above interact.

### 7.1 Configuration and project structure - (AR)

A new `psiTurk` project can be initialized in the current directory using (without the dollar sign):

```
$ psiturk-setup-example
```

This creates a new directory containing an example experiment, which can be used as a template for more sophisticated designs. The project directory typically includes the following files (though some are only created after the experiment is run for the first time):

- `config.txt`: a text file containing settings for the current experiment, including:
  - Metadata about the experiment that is displayed to workers on the AMT website (title, description, etc.)

- Restrictions on which workers can accept the HIT, including geographic location (e.g., limiting to US workers only), AMT-specific qualifications (e.g., a worker's proportion of past work that has been approved), and web browsers that are permitted.
- Database information (*SQLite*, by default)
- Server parameters (URL, port number)
- Task parameters (e.g., number of conditions)
- `custom.py`: a Python file containing user-created “routes”, so that new server-side functionality can be added to the `psiTurk` web server. JBH: I think there needs to be an explanation of what routes are
- `participants.db`: the *SQLite* database (if *SQLite* is being used)
- `server.log`: a log of any messages from the experiment server (*not* from the actual experiment code)
- `static/` a directory containing experiment files, including JavaScript, CSS, and images.
- `templates/` a directory containing HTML files associated with the experiment

Setting up a new experiment thus entails 1) editing the settings in `config.txt`, and 2) modifying the contents of the `static` and `templates` directories to reflect your experimental design (note that programming the experiment requires at least some basic web programming skills, including HTML, CSS, and JavaScript).

The remaining files are only necessary in order to debug server errors (`server.log`), add new server-side functionality (`custom.py`), or to access saved data (`participants.db`).

### 7.2 Command line interface: Managing HITs and serving the experiment - (AR)

As described in Section 5.1.1, `psiTurk` runs as a command line interface (CLI) within a standard terminal window and can be used to perform a wide variety of tasks—from creating HITs and paying workers, to launching Amazon Web Services database instances, to opening an experiment in a browser for debugging—that would otherwise be spread across a number of websites and programs. In most cases, a user of the `psiTurk` CLI will never have to log into the MTurk website except to add money to their MTurk requester account.

Entering `psiturk` at the command line in any directory containing a `psiTurk` project launches the `psiTurk` CLI, which features a colorized prompt that provides important information at a glance, including whether the server is running, the current mode (“live” or “sandbox”), and the number of HITs currently running on AMT in the same mode:



```
[psiTurk server:off mode:sdbx #HITs:0]$
```

In some examples below, this prompt is truncated as `[psiTurk]$` to indicate commands that occur within the psiTurk CLI, while commands that are entered at the user's standard command line are preceded simply by `$`.

### 7.2.1 Example CLI usage

Commands are organized into groups based on their function, following a general “**command subcommand arguments**” format. For example, one can create a HIT by typing:

```
[psiTurk]$ hit create
```

which launches an interactive prompt for number of assignments, payment per HIT, and HIT duration. The sandbox mode is active by default, which means that calling `hit create` will submit a HIT to the AMT sandbox website.

After creating one or more HITs, one can list any active HITs with:

```
[psiTurk]$ hit list --active
```

The experiment server is launched using:

```
[psiTurk]$ server on
```

which opens the port specified in the project configuration file. The experiment server will then respond to incoming requests, assuming that the port is publicly accessible. This requires a static IP to prevent the experiment's URL from changing. Users without a static IP address can use a dynamic DNS service to forward requests to their dynamic IP. If the system running psiTurk is behind a router, the router must be configured to forward requests on the same port.

During the development of an experiment, the current code can be tested using:

```
[psiTurk]$ debug
```

which will open a new browser window in which the current experiment can be tested. The experimenter can then test the experiment from the perspective of a worker before making it publicly available. Once the experiment is ready for real workers, the `mode` command can be used to switch to “live” mode, after which newly created HITs will be submitted to the main AMT site.

Help on any of the commands is easily accessible through the `help` command. Using `help` on its own will print all available commands, and using `help command` will print out detailed help on the given command.


## 7.3 The Secure Ad Server

As described briefly in Section 4.0.1, the psiturk.org cloud service provides a “Secure Ad Server.” The term “ad” in this context refers to a small HTML page which describes the details and requirements of a given experiment. The ad is the first interaction that an experimenter has with a potential subject and is thus the gateway to subject recruitment. Ads are in many ways analogous to hanging a poster or flyer around a university building in order to recruit participants. It's easy to overlook the importance of a good ad, and making that ad visible to as many participants as possible.

An overview of the flow of running an experiment using psiTurk and the Secure Ad Server is illustrated in Figure 4. When a researcher using psiTurk runs the `hit create` command, the current contents of the local `templates/ad.html` file are uploaded to the psiturk.org cloud (see the right panel of Figure 4). This will create a unique custom URL for the experiment (an example might be <https://ad.psiturk.org/view/90812390123091823>) which allows anyone on the internet to view the contents of the uploaded `ad.html` file. Critically, the ad URL is encrypted and securely signed with an appropriate SSL certificate ensuring that all web browsers will successfully display the webpage<sup>2</sup>. A different URL is created each time `hit create` is run and there is no limit to the number of ads that can be created. A private listing of all ads created by a particular user is available on the psiturk.org dashboard (<http://psiturk.org/dashboard>).

The custom ad URL is automatically passed on to AMT by the `hit create` command as the “location” of the selected HIT. As is visible in Figure 4, when an AMT worker views a HIT on the AMT website, it loads the ad from the psiturk.org cloud server (left panel of Figure 4). If the worker accepts the hit, a link is provided to the worker which pops open a new browser window. This URL points directly at the location of the *requester's* local computer or server (right panel). After this hand off occurs, all data is transmitted directly between the worker and the requester: the psiturk.org cloud server does not ever process or see the user's ex-

<sup>2</sup> SSL certification has recently become a requirement for hosting content within an `iframe` on `mturk.com`.

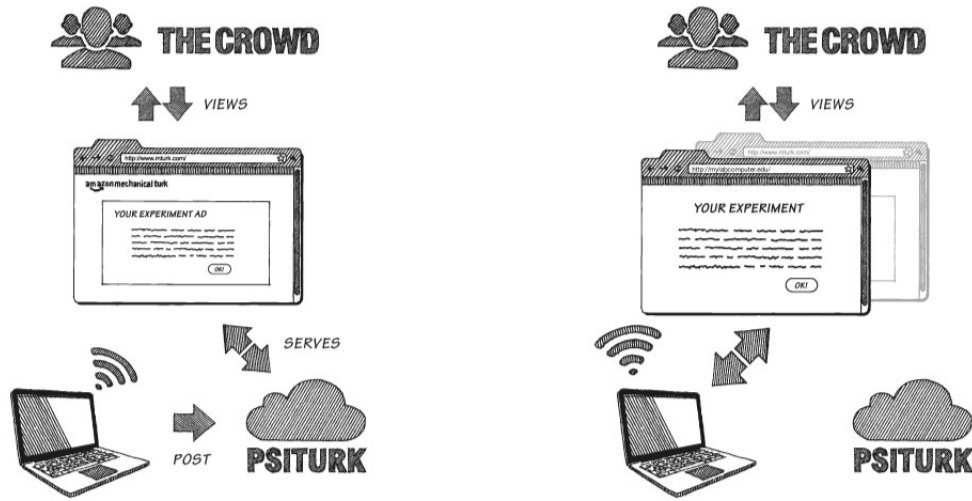

**Fig. 4** How the Secure Ad Server works.

perimental data. This is important for many IRBs, particular if an experiment involves sensitive materials.

Besides the convenience of the Secure Ad Server in terms of providing SSL signed URLs, the Secure Ad Server tracks statistics about the number of workers who viewed the ad but decided to not accept it, the number who accepted it, and the number who actually completed the task. These statistics are made available on the `psiturk.org` dashboard and can be an additional source of information for experimenters.

#### 7.4 JavaScript library *psiturk.js*

The JavaScript library *psiturk.js* enables interaction with the server from the client-side (JavaScript) experiment code. The goal of the library is to handle the most common functionality of `psiTurk`-based web experiments, without imposing any additional requirements on the structure or design of the experiments themselves. Researchers can use any third-party JavaScript libraries to design their experiment, while relying on *psiturk.js* for common functions, including saving data and notifying the server of changes in a participant's status.

Listing 1 shows a condensed version of the JavaScript code from the Stroop example experiment. This is used in the following sections to illustrate how experiment code uses functions from *psiturk.js* in order to interact with the `psiTurk` server. For the full, functional version, see the file `static/js/task.js` in the example experiment directory.

##### 7.4.1 Initialization

When the experiment files are requested from the `psiTurk` server, the following global variables are also set (see `templates/exp.html`):

- `uniqueId`: a unique identifier for the participant
- `adServerLoc`: the experiment-specific URL on the Ad Server
- `mode`: the current mode (debug, sandbox, or live)
- `condition`: experimental condition
- `counterbalance`: counterbalancing code, used to vary design elements that are not related to main manipulation

A `psiTurk` object must be initialized based on these global variables (line 2). These variables can also be used to change the experimental logic. For example, a common requirement is to change the stimulus set or design based on the condition or counterbalance codes that have been assigned by the `psiTurk` server (lines 4-5).

Following instantiation, the `psiTurk` object can be used to preload a list of HTML pages that reside in the `templates` directory of the experiment (lines 8-9). This allows a new page to be displayed using a single command (line 34), which replaces the body of the window with the content in the specified HTML file. The `psiTurk` object also has functions for preloading images (in order to avoid server requests in the middle of the experiment when an image is displayed) and a basic structure for presenting a series of HTML pages (e.g., for an instructional phase).

#### 7.4.2 Tracking a participant's progress in an experiment

psiTurk records changes in a participant's status as they move through an experiment. Some of these status changes are automatic, e.g., when a participant is assigned to a condition or if they quit an experiment early. Two additional status changes are initiated by the client-side experiment code using *psiturk.js* functions. First, since experiments typically begin with an instructional phase, calling the function `psiTurk.finishInstructions()` upon completion of this phase will save the participant's status as having begun the main experiment. If the participant attempts to quit the experiment after that point, they will receive a warning that they will not be able to restart the experiment and may forgo payment. Second, successful completion of the experiment is signaled by calling `psiTurk.completeHIT()`, which closes the experiment and redirects the participant to the AMT page to submit their HIT.

#### 7.4.3 Saving experimental data

The experimenter can save data in two formats. `psiTurk.recordTrialData` takes any JSON object as input and appends it to a list of "trial" data. This data structure is meant for sequential data that may be collected over the course of multiple trials or blocks, where each line corresponds to a new measurement. However, the format of each entry is defined by the experimenter and is saved in the database as a single JSON object (see line 20). Each new entry is automatically time-stamped at the time that `psiTurk.recordTrialData` is called.

In contrast, `psiTurk.recordUnstructuredData` is used to record (*key, value*) pairs, where the key is uniquely defined within the experiment (see line 43). This format is useful for survey questions, randomly generated experiment parameters, or other one-time measurements, e.g., (*Age*: 24).

Importantly, both functions above simply record the data in the appropriate format on the client-side (i.e., within the `psiTurk` JavaScript object). When the experimenter wishes to save the data to the server they call `psiTurk.saveData()`, at which point both sets of data are sent to the server to be recorded in the database. `psiTurk.saveData()` can also be called with functions that will be executed upon either success or failure of the server request. For example, if the final save request is successful, the experiment can be terminated with `psiTurk.completeHIT()` passed as a callback (see lines 56-63).

#### 7.4.4 Automatic recording of browser interactions

One general limitation of web experiments is greater uncertainty about a participant's testing environment and engagement with the experiment. Unlike lab computers where most undesired behaviors can be prevented, a web participant is always able to close a web browser, switch to different applications, or change other aspects of their experience. However, standard methods exist for recording a user's interaction with a web browser, and this data can be useful for 1) tracking how an experiment was actually displayed, and 2) the level of a participant's engagement.

For example, although it is possible to control the initial size of a browser window, a web participant can change the dimensions of the window, potentially obscuring or altering the displayed elements. *psiturk.js* automatically records these changes in the size of the window. Similarly, the participant can choose to switch focus away from the experiment window (e.g., to another browser window or a different application). *psiturk.js* automatically records every time that the experiment window loses and gains the participant's focus. This "event data" is saved to the database whenever `psiTurk.saveData` is invoked, without any additional action on the part of the experimenter.

### 7.5 Experiment exchange

A significant advantage of web-based experiments is the potential for low-friction replication and extension. The *Experiment Exchange* (<http://psiturk.org/ee>) facilitates the sharing of experiments that have been built to run using psiTurk, acting as an "app store" for psiTurk-compatible designs. Once an experiment has been completed, a researcher can submit the following information to register their experiment on the exchange:

1. A Github repository containing the project code
2. Metadata about the experiment, including a title, description, and keywords
3. The DOI for the paper describing the results of the experiment (if any)
4. The version of psiTurk that was used to run the experiment

Metadata associated with an experiment allows other researchers to discover it through the psiTurk website. A publicly available experiment can then be downloaded using the following command in the terminal:

```
$ psiturk-install <experiment-specific-id>
```

**Listing 1** Condensed version of JavaScript code for Stroop experiment

```

1 // Initialize psiturk object with parameters passed from server (see templates/exp.html)
2 var psiTurk = new PsiTurk(uniqueId, adServerLoc, mode);
3
4 var mycondition = condition; // these two variables are passed by the psiturk server process
5 var mycounterbalance = counterbalance; // they tell you which condition you have been assigned to
6
7 // All HTML snippets to be loaded from templates directory
8 var pages = ["instructions/instruct-1.html", ...];
9 psiTurk.preloadPages(pages);
10
11 var StroopExperiment = function() {
12     ...
13     var response_handler = function(e) {
14         ...
15         if (response.length>0) {
16             listening = false;
17             var hit = response == stim[1];
18             var rt = new Date().getTime() - wordon;
19
20             psiTurk.recordTrialData({'phase':"TEST",
21                                     'word':stim[0],
22                                     'color':stim[1],
23                                     'relation':stim[2],
24                                     'response':response,
25                                     'hit':hit,
26                                     'rt':rt}
27                                     );
28             remove_word();
29             next();
30         }
31     };
32     ...
33     // Load the stage.html snippet into the body of the page
34     psiTurk.showPage('stage.html');
35     ...
36 };
37
38 var Questionnaire = function() {
39     ...
40     record_responses = function() {
41         psiTurk.recordTrialData({'phase':'postquestionnaire', 'status':'submit'});
42         $('textarea').each( function(i, val) {
43             psiTurk.recordUnstructuredData(this.id, this.value);
44         });
45         $('select').each( function(i, val) {
46             psiTurk.recordUnstructuredData(this.id, this.value);
47         });
48     };
49     ...
50     // Load the questionnaire snippet
51     psiTurk.showPage('postquestionnaire.html');
52     psiTurk.recordTrialData({'phase':'postquestionnaire', 'status':'begin'});
53
54     $("#next").click(function () {
55         record_responses();
56         psiTurk.saveData({
57             success: function(){
58                 psiTurk.computeBonus('compute_bonus', function() {
59                     psiTurk.completeHIT(); // when finished computing bonus, quit
60                 });
61             },
62             error: prompt_resubmit});
63     });
64 };

```

with the experiment-specific identifier found on the exchange page. If psiTurk is already configured on the user's system, the downloaded experiment will run without further changes, and can then act as a starting point for direct replication or extensions. Modified versions can then be re-run using the same population via AMT, thereby minimizing the potential for experimenter-specific biases.

Other initiatives (e.g., the Open Science Framework, <https://osf.io>) also aim to improve the transparency, reproducibility, and efficiency of research through centralized services, but are less focused on the specific technology stack used to run online experiments. In contrast, the psiTurk experiment exchange links together experiments that can be run within a common framework. As a result, existing experiments can serve as examples to help new researchers learn to code for the web; they shorten the development time necessary (especially for popular experimental paradigms); and the exchange facilitates communication between researchers with similar interests.

## 8 Limitations and future directions (TMG)

As mentioned above, psiTurk faces some challenges inherent to all online data collection and may not be the right choice for researchers that require a very controlled experimental setup. But what are the limitations of psiTurk specifically?

One restriction is that it's currently designed to only work with Amazon Mechanical Turk. A common worry with AMT is the unrepresentativeness of its subject pool (in terms of demographics and geography), as well as the fact that certain experimental protocols are now too well-known to workers to guarantee naive participants (Chandler et al, 2014). These concerns are often not relevant for basic psychology research, but some experimenters may nevertheless look for alternatives to AMT. Many psiTurk features (i.e. the web server, data base, and *psiturk.js*) are general enough to facilitate running experiments on other platforms, too, but it would require some customization of certain AMT-specific functionality. Researchers who decide to use psiTurk on another platform could contribute such changes to the github repository (<https://github.com/NYUCCL/psiTurk>) to make them available to the community.

Another limitation is that psiTurk only runs on UNIX systems, like Linux and Mac OS, and can thus not be used on Windows computers. To meet this challenge, one option for Windows users is to use a cloud-based computing service to run psiTurk and host experiments. There exist

multiple free or low-cost options, such as Amazon Web Services (<http://aws.amazon.com>), or OpenShift (<https://www.openshift.com>). The installation steps and setup may diverge slightly from the standard procedure but the psiTurk documentation already contains additional installation instructions for OpenShift. In the future, we hope to extend support and documentation to a wider range of cloud computing options.

Another future direction is to extend the counterbalancing capabilities of psiTurk. Currently, the built-in counterbalancing algorithm simply aims to assign participants equally to different cells. However, this equal assignment method can be problematic if, for instance, one group has a higher drop-out rate than the others (a problem rarely encountered in the lab). In that case the high drop-out group will need to receive more participants to equalize the difference and thus assignment probabilities will no longer be equal across groups. We are currently working on alternative counterbalancing algorithms that keep assignment probabilities equal (which may then lead to unequal number of participants) to avoid this problem. **Not quite sure what the current status is here. May need updating and maybe mention PlanOut if that's still relevant.**

One exciting prospect of running online experiments is to let multiple participants interact to study coordination or group behavior. Currently psiTurk does not offer its own tool to facilitate such multi-person experiments, but we would like to add support for it in the future, using web-sockets or other protocols that enable communication between users.

**Some small features not mentioned yet:**

**Automate catch trials? How far did the worker get?**

**Do we count them in the N?**

**Limiting/throttling number of people doing the experiment at once**

**Video support**

### 8.1 Remaining challenges

Some of the concerns raised by survey respondents are inherent to online data collection or the AMT platform and therefore psiTurk does not address them. It is worth pointing out, however, that the common concern about data reliability may be somewhat exaggerated based on recent studies that have successfully replicated a wide range of classic cognitive psychology findings using AMT data (Crump et al, 2013). Interestingly, this study also found that increasing worker payment had no effect on reliability, suggesting that even at low payment levels data quality was high.

On the other hand, there clearly exist experimental protocols that simply are not amenable to online

experimentation. Experiments that require very fine-grained temporal control over stimulus presentation, for example, may be unsuited because browsers will not be able to reliably display content fast enough if the presentation time becomes too short (Crump et al, 2013). Similarly, any experiment that requires control over a participant's screen size, resolution, or distance from the screen will be problematic due to the nature of the web browsing environment. One advantage of *psiTurk* is that it automatically collects data on worker's interaction with the experiment window, that is, if and when the window was resized and if and when the user switched tabs or windows. This kind of data can be used to evaluate a worker's level of engagement while completing the task.

We will continue to discuss these challenges at the end of the paper.

## References

- Chandler J, Mueller P, Paolacci G (2014) Nonnaïveté among amazon mechanical turk workers: Consequences and solutions for behavioral researchers. *Behavior research methods* 46(1):112–130
- Chen R, Sakamoto Y (2013) Perspective matters: Sharing of crisis information in social media. In: 46th Hawaii 46th Hawaii International Conference on Systems Sciences, IEEE, pp 2033–2041
- Crump MJ, McDonnell JV, Gureckis TM (2013) Evaluating amazon's mechanical turk as a tool for experimental behavioral research. *PloS one* 8(3):e57,410
- Kramer A, Guillory J, Hancock J (2014) Experimental evidence of massive-scale emotional contagion through social networks. *Proceedings of the National Academy of Sciences of the United States of America* 111(24):8788–8790
- Mason W, Suri S (2012) A guide to behavioral experiments on mechanical turk. *Behavior research methods* 44(1):1–23
- Open Science Collaboration (2012) An open, large-scale collaborative effort to estimate the reproducibility of psychological science. *Perspectives on Psychological Science* 7:657–660
- Raymond E (1999) *The Cathedral and the Bazaar*. O'Reilly
- Wu S, Hofman J, Mason W, Watts D (2011) Who says what to whom on twitter. In: *International Conference on the World Wide Web (WWW)*, Hyderabad, India