



# CSS Font Style

[< Previous](#)[Next >](#)

## Font Style

The `font-style` property is mostly used to specify italic text.

This property has three values:

- normal - The text is shown normally
- italic - The text is shown in italics
- oblique - The text is "leaning" (oblique is very similar to italic, but less supported)

## Example

```
p.normal {  
  font-style: normal;  
}  
  
p.italic {  
  font-style: italic;  
}  
  
p.oblique {  
  font-style: oblique;  
}
```



# Font Weight

The `font-weight` property specifies the weight of a font:

## Example

```
p.normal {  
  font-weight: normal;  
}  
  
p.thick {  
  font-weight: bold;  
}
```

[Try it Yourself »](#)

# Font Variant

The `font-variant` property specifies whether or not a text should be displayed in a small-caps font.

In a small-caps font, all lowercase letters are converted to uppercase letters. However, the converted uppercase letters appears in a smaller font size than the original uppercase letters in the text.

## Example

```
p.normal {  
  font-variant: normal;  
}
```

[HTML](#)[CSS](#)[MORE ▼](#)[EXERCISES ▼](#)

```
}
```

[Try it Yourself »](#)[◀ Previous](#)[Next ▶](#)

COLOR PICKER

[HTML](#)[CSS](#)[MORE ▼](#)[EXERCISES ▼](#)

## SHOP

## HOW TO

Tabs  
Dropdowns  
Accordions  
Side Navigation  
Top Navigation  
Modal Boxes  
Progress Bars  
Parallax  
Login Form  
HTML Includes  
Google Maps  
Range Sliders  
Tooltips  
Slideshow  
Filter List  
Sort List

## SHARE

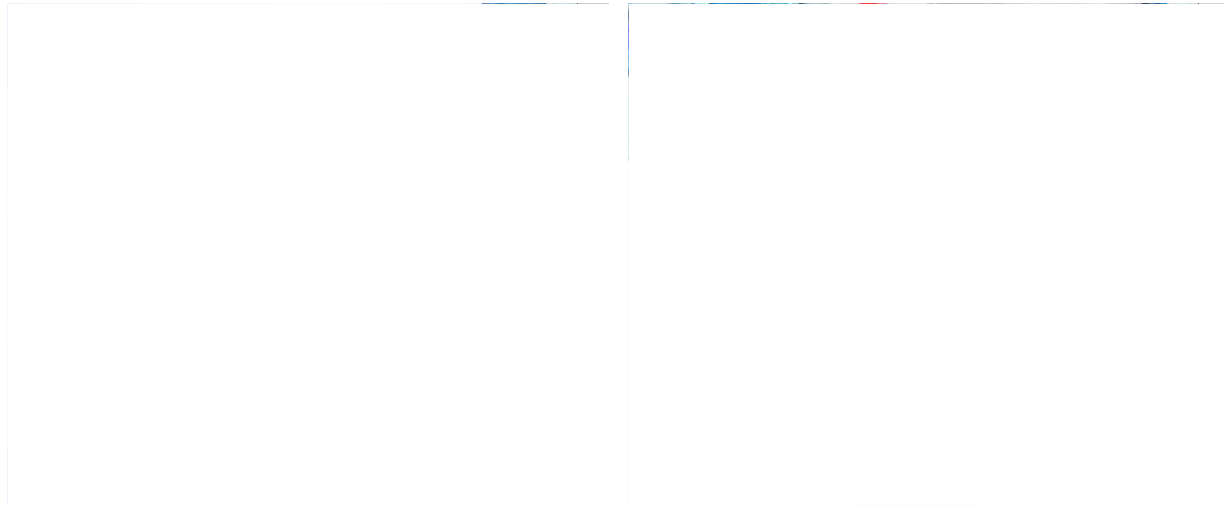


## CERTIFICATES

HTML  
CSS  
JavaScript  
SQL  
Python  
PHP

[HTML](#)[CSS](#)[MORE ▼](#)[EXERCISES ▼](#)

## XML

[Read More »](#)[REPORT ERROR](#)[FORUM](#)[ABOUT](#)[SHOP](#)

## Top Tutorials

[HTML Tutorial](#)[CSS Tutorial](#)[JavaScript Tutorial](#)[How To Tutorial](#)[SQL Tutorial](#)[Python Tutorial](#)[W3.CSS Tutorial](#)[Bootstrap Tutorial](#)[PHP Tutorial](#)[jQuery Tutorial](#)[Java Tutorial](#)[C++ Tutorial](#)

[HTML](#)[CSS](#)[MORE ▼](#)[EXERCISES ▼](#)[HTML Reference](#)[CSS Reference](#)[JavaScript Reference](#)[SQL Reference](#)[Python Reference](#)[W3.CSS Reference](#)[Bootstrap Reference](#)[PHP Reference](#)[HTML Colors](#)[jQuery Reference](#)[Java Reference](#)[Angular Reference](#)

## Top Examples

[HTML Examples](#)[CSS Examples](#)[JavaScript Examples](#)[How To Examples](#)[SQL Examples](#)[Python Examples](#)[W3.CSS Examples](#)[Bootstrap Examples](#)[PHP Examples](#)[jQuery Examples](#)[Java Examples](#)[XML Examples](#)

## Web Certificates

[HTML Certificate](#)[CSS Certificate](#)[JavaScript Certificate](#)[SQL Certificate](#)[Python Certificate](#)[jQuery Certificate](#)[PHP Certificate](#)[Bootstrap Certificate](#)[XML Certificate](#)[Get Certified »](#)

W3Schools is optimized for learning, testing, and training. Examples might be simplified to improve reading and basic understanding. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using this site, you agree to have read and accepted our terms of use, cookie and privacy policy. Copyright 1999-2020 by Refsnes Data. All Rights Reserved.

Powered by W3.CSS.



[HTML](#)[CSS](#)[MORE ▼](#)[EXERCISES ▼](#)