

LAB TASK 6

Nabeera Fatima

26k-3159

Task 1:

```
#include<stdio.h>

int main(){

float km,rate;

int hr;

printf("enter km travelled:");

scanf("%f", &km);

printf("enter Time:");

scanf("%d",&hr);


if(km<=0){

printf("\nInvalid");

return 0;

}

if(km==1){

rate=rate+50;

}

if(km>1){
```

```

rate=km*22;}

if(hr<6 || hr>22){

rate=rate+40;

}


printf("\n Your total fare is  Rs %.2f ", rate);

return 0;

}

```

Output:

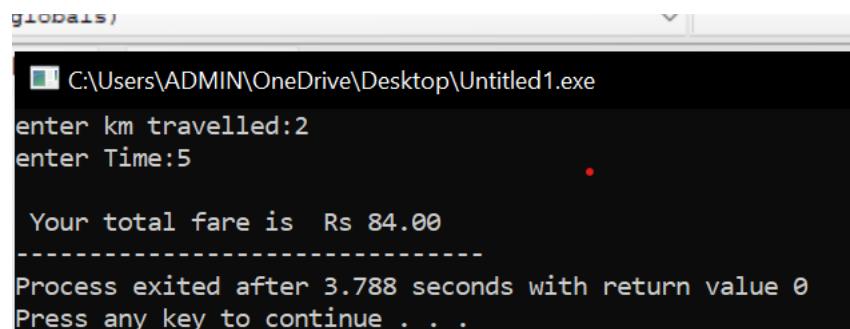

```

C:\Users\ADMIN\OneDrive\Desktop\Untitled1.exe
enter km travelled:2
enter Time:5

Your total fare is  Rs 84.00
-----
Process exited after 3.788 seconds with return value 0
Press any key to continue . . .

```

Task 2:

```

#include<stdio.h>

int main(){

float total;

int ms,d;

printf("enter total bill:");

scanf("%f", &total);

printf("enter membership status:");

scanf("%d",&ms);

if(total<500){

```

```
d=0;
total=total;
}
else if(500<=total<=1999){
d=10;
total=total*0.90;
}
else if(total>=2000){
    d=15;
total=total*0.85;}
    if(ms==1){
        d=8;
total=total*0.92;
}

printf("\n Discount is %d% \n Your total is Rs %f ",d,total);
return 0;
}
```

OUTPUT:

```
enter total bill:450
enter membership status:0

Discount is 0
Your total is Rs 450.000000
-----
Process exited after 4.93 seconds with return value 0
Press any key to continue . . .
```

Task 3:

```
#include<stdio.h>

int main(){

int m;

printf("enter marks:");

scanf("%d",&m);


if((m<0)|| (m>100)){

printf("\n Invalid");

return 0;

}


else if((m<=100)&&(m>=90)){

printf("\n A+");

}
```

```
else if((89>=m)&&(m>=80)){  
    printf("\n A");  
}  
else if((79<=m)&&(m<=80)){  
    printf("\n B");  
}  
    else if((60<=m)&&(69>=m)){  
        printf("\n C");  
    }  
    else if((50<=m)&&(59>=m)){  
  
        printf("\n D");  
    }  
    else{  
        printf("\n F");  
        printf("\n Result:Fail");  
    }  
    printf("\n Result:Pass");  
  
    return 0;  
}
```

OUTPUT:

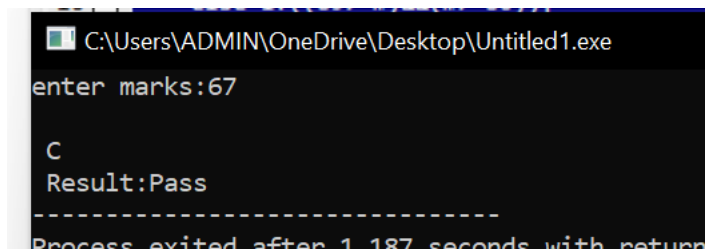

```
C:\Users\ADMIN\OneDrive\Desktop\Untitled1.exe
enter marks:67
C
Result:Pass
-----
Process exited after 1.187 seconds with return
```

Task 4:

```
#include<stdio.h>

int main(){
    int c,lv,rem,rtime;
    float rate,t,bill,e=3.5;
    printf("enter capacity of tank (in litres):");
    scanf("%d",&c);
    printf("\nenter current water level (in litres):");
    scanf("%d",&lv);
    printf("\nmotor fill rate :");
    scanf("%f",&rate);

    if(lv>=c){

        printf("\nTank Already Full");
    }
    rem=c-lv;
    t=rem/rate;
    printf("\n Required time is %.2f minutes",t);
    rtime = (int)(t + 0.999999);
```


```
bill=e*rtime;

printf("\n Total cost is %f:",bill);


return 0;

}
```

OUTPUT:

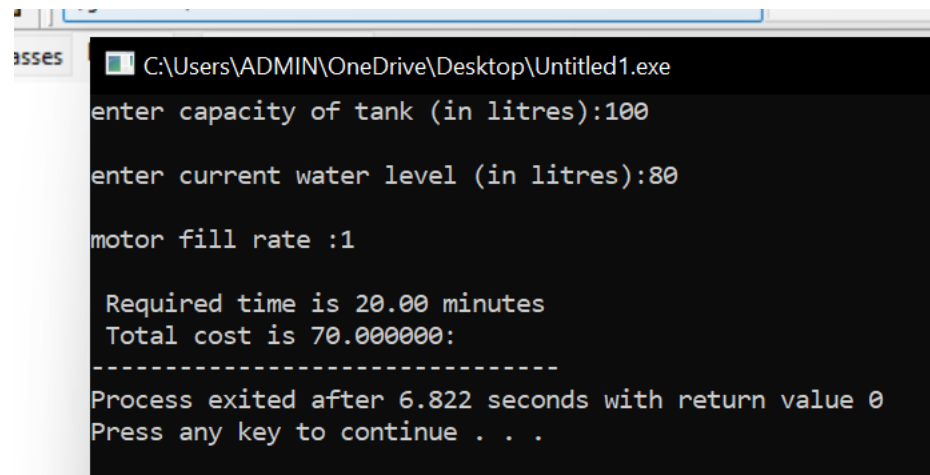

```

C:\Users\ADMIN\OneDrive\Desktop\Untitled1.exe
enter capacity of tank (in litres):100

enter current water level (in litres):80

motor fill rate :1

Required time is 20.00 minutes
Total cost is 70.000000:
-----
Process exited after 6.822 seconds with return value 0
Press any key to continue . . .
```

TASK 5:

```
#include<stdio.h>

int main(){

int code,status;

int bonus;

float load;
```

```
printf("enter mobile load amount:");
scanf("%f",&load);
printf("\n Enter code:");
scanf("%d",&code);
printf("\n Enter weekend status:");
scanf("%d",&status);

if(((100<load)&&(load<499))&&((status=1)&&(code==1 ||
code==2)))){
    bonus=10;
}

else if(((100<load)&&(load<499))&&((status=1)&&(code==3)))){
bonus=5;
}

else if(((100<load)&&(load<499))&&(status=0)){
bonus=5; }

else if((load>=500)&&((status==1)|| (code==1))){
bonus=20;}

else{
bonus=12;


}
```

```
printf("\nbonus is %d",bonus);
```

```
return 0;
```

```
}
```

OUTPUT:

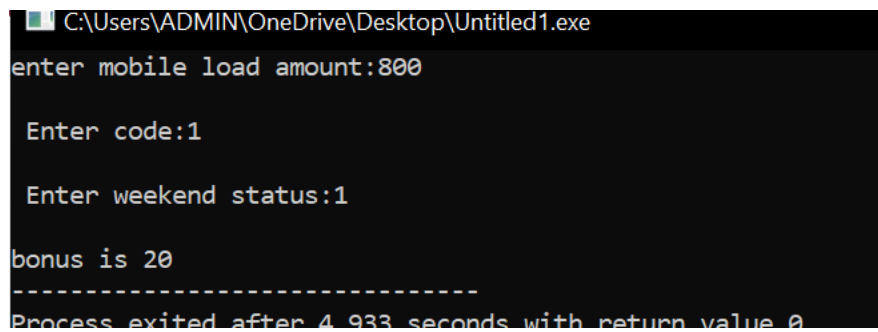

```
C:\Users\ADMIN\OneDrive\Desktop\Untitled1.exe
enter mobile load amount:800

Enter code:1

Enter weekend status:1

bonus is 20
-----
Process exited after 4.933 seconds with return value 0
```

Task 6:

```
#include<stdio.h>
```

```
int main(){
```

```
int days,type,m;
```

```
float cost;
```

```
printf("enter book type:");
```

```
scanf("%d",&type);
```

```
printf("\n Enter membership satus:");
```


```
scanf("%d",&m);
```

```
printf("\n Enter number of over due days:");
```

```
scanf("%d",&days);  
if(type==1){  
    if(days<=7){  
        cost=5*days;  
    }  
else{  
cost=10*days;  
    }}  
  
    else if(type==2){  
        cost=15*days;  
    }  
else if(type==3){  
    if(days<=10){  
cost=30*days;  
    }  
else{  
cost=30 *days;  
printf("\n Banned From Borrowing");}}  
if((m==1)&&(type!=3)){  
cost=cost-0.80;
```

```
}  
  
printf(" Your fine is %.2f",cost);  
  
return 0;  
  
}
```

OUTPUT:

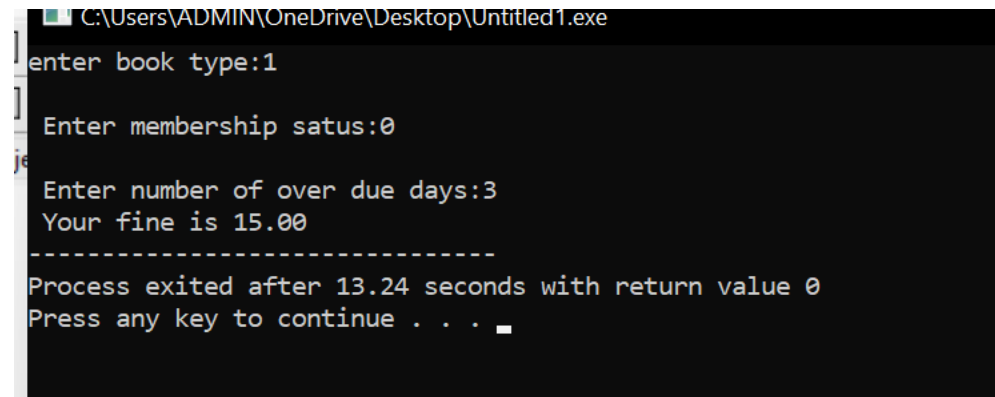

```
C:\Users\ADMIN\OneDrive\Desktop\Untitled1.exe  
enter book type:1  
Enter membership satus:0  
Enter number of over due days:3  
Your fine is 15.00  
-----  
Process exited after 13.24 seconds with return value 0  
Press any key to continue . . .
```

Task 7:

```
#include<stdio.h>  
  
int main(){  
  
int fit,matches;  
  
float avg;  
  
printf("enter batting average:");  
  
scanf("%f",&avg);
```

```
printf("\n Enter matches played:");
scanf("%d",&matches);
printf("\n Enter fitness failure status:");
scanf("%d",&fit);
if(matches<=5){
printf("\n Rejected insufficient matches");
return 0;
}

if(avg>=35){
    if(matches>=10){
        printf("\n selected");
    }


else if((25<=avg)&&(avg<=34.99)){
    if(matches>=20){
        if(fit==0){
            printf("\nselected through experience quota");}
        }

else{
```

```
printf("\n Rejected fitness");  
  
}
```

```
return 0;  
  
}
```

OUTPUT:

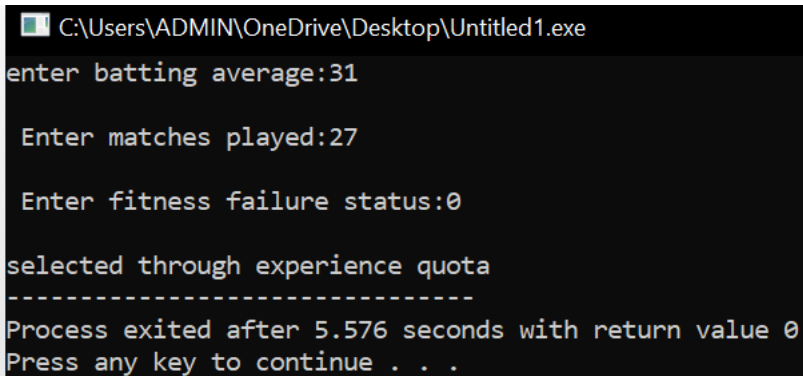

```
C:\Users\ADMIN\OneDrive\Desktop\Untitled1.exe  
enter batting average:31  
  
Enter matches played:27  
  
Enter fitness failure status:0  
  
selected through experience quota  
-----  
Process exited after 5.576 seconds with return value 0  
Press any key to continue . . .
```

Task 8:

```
#include <stdio.h>  
  
int main()  
{  
  
    int meal, customer;  
  
    float bill, ser, d, final;  
  
  
    printf("Enter meal category: ");  
  
    scanf("%d", &meal);  
  
    printf("Enter bill amount: ");
```

```
scanf("%f", &bill);

printf("Enter customer type: ");

scanf("%d", &customer);

if (meal == 1)
{
    ser=bill*5/100;
}

else if (meal == 2)
{
    ser= bill*8/100;
}

else if (meal == 3)
{
    ser=bill*10/100;
}


else
{
    printf("Invalid Selection");

    return 0;
}


if (customer == 1)
{
    if (bill >= 1000)
    {
        d=bill*15/100;
    }
}
```

```
    else
    {
        d=bill*5/100;
    }
}
else if (customer==2)
{
    if (bill >= 1000)
    {
        d=bill*10/100;
    }
    else
    {
        d=0;
    }
}
else
{
    printf("Invalid Selection");
    return 0;
}
final=bill+ser-d;
printf("\nservice Charge = %.2f", ser);
printf("\ndiscount = %.2f", d);
printf("\nfinal Payable Amount = %.2f", final);
return 0;
}
```

OUTPUT:

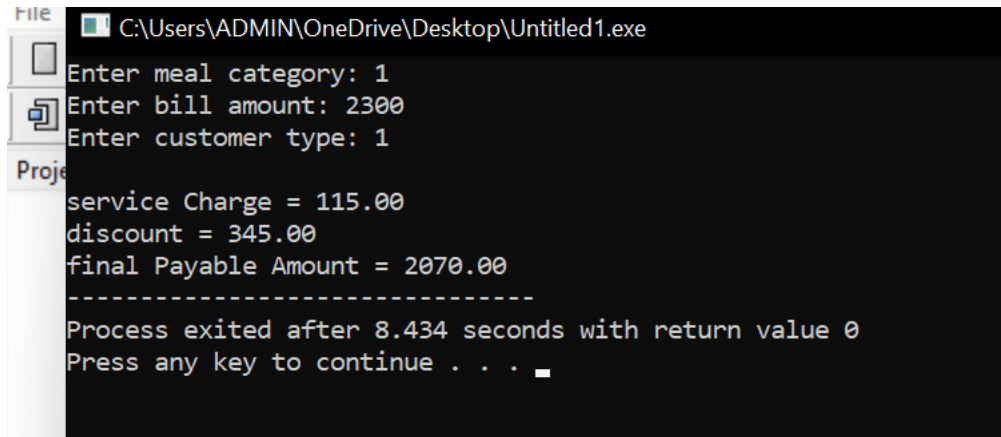

```
File C:\Users\ADMIN\OneDrive\Desktop\Untitled1.exe
Enter meal category: 1
Enter bill amount: 2300
Enter customer type: 1
service Charge = 115.00
discount = 345.00
final Payable Amount = 2070.00
-----
Process exited after 8.434 seconds with return value 0
Press any key to continue . . .
```