

POST LAB TASK

Nabeera Fatima

26k-3159


Task 1:

```
#include<stdio.h>

int main(){
    int amt,i=50000,a=0;
    printf("Enter amount to withdraw:");
    scanf("%d", &amt);
    while(amt>0){
        i=i-amt;
        a++;
        printf("\nEnter if you want to withdraw more amount:");
        scanf("%d", &amt);

    }
    printf("\nBalance left is %d",i);
    printf("\n Total no withdraws is %d",a);
    return 0;
```

}

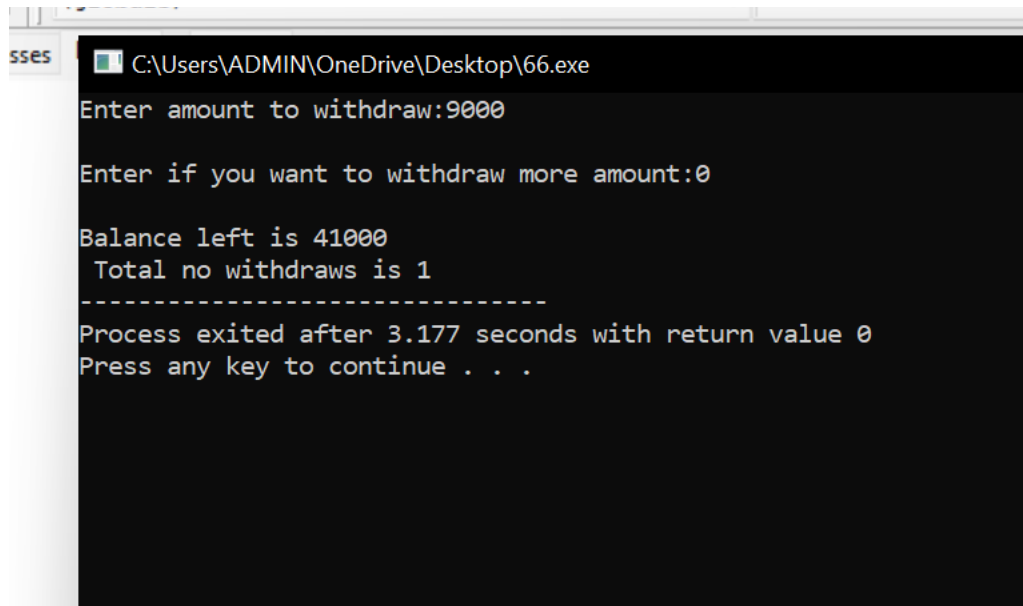

```
sses C:\Users\ADMIN\OneDrive\Desktop\66.exe
Enter amount to withdraw:9000

Enter if you want to withdraw more amount:0

Balance left is 41000
Total no withdraws is 1
-----
Process exited after 3.177 seconds with return value 0
Press any key to continue . . .
```

Task 2:

```
#include<stdio.h>

int main(){
int m,total=0,s=0,avg;
printf("Enter marks:");
scanf("%d", &m);
while(m>-1){
printf("Enter marks:");
scanf("%d", &m);
total=total+m;
s++;
}
}
```

```

avg=total/s;

printf("\nNumber of students is %d",s);

printf("\n Total marks are %d",total);

printf("\n Avg marks are %d",avg);

return 0;

}

```

```

C:\Users\ADMIN\OneDrive\Desktop\66.exe
Enter marks:78
Enter marks:96
Enter marks:89
Enter marks:-1

Number of students is 3
Total marks are 184
Avg marks are 61
-----
Process exited after 9.316 seconds with return value 0
Press any key to continue . . .

```

Task 3:

```

#include <stdio.h>

int main() {

    float amt, total = 0;

    int count = 0;

    do {

        printf("Enter recharge amount :\n");

        scanf("%f", &amt);

```

```

    if (amt > 0) {
        total += amt;
        count++;
    }


    if (total > 5000) {
        printf("Recharge Limit Reached\n");
    }

} while (amt > 0 && total <= 5000);

printf("Total Amount: %.2f\n", total);
printf("Attempts: %d\n", count);

return 0;
}

```

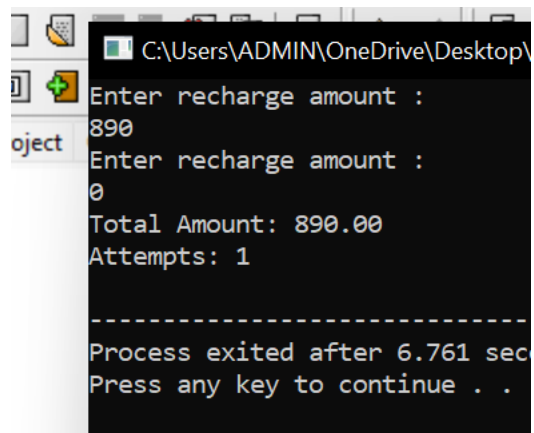

```

C:\Users\ADMIN\OneDrive\Desktop\
Enter recharge amount :
890
Enter recharge amount :
0
Total Amount: 890.00
Attempts: 1
-----
Process exited after 6.761 sec
Press any key to continue . .

```


Task 4:

```
#include<stdio.h>

int main(){
int p,total=0,i,d=0,f;

do
{

printf("Enter Price:");
scanf("%d", &p);
printf("\nEnter if you want to purchase more itmes:");
scanf("%d", &i);
total=total+p;
}
while(i!=0);
if(total>10000){
d=total*10/100;
f=total-d;
}
f=total;
printf("\ndiscount is %d",d);
printf("\n Total price is %d",total);
printf("\n Final price are %d",f);
return 0;
}
```

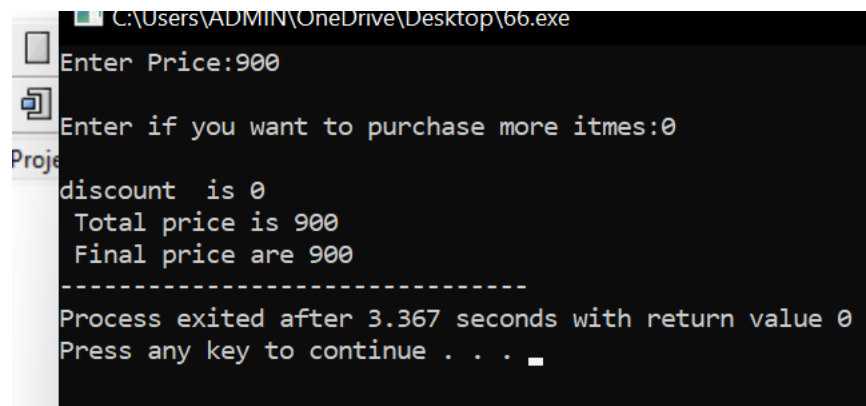

```
C:\Users\ADMIN\OneDrive\Desktop\66.exe
Enter Price:900
Enter if you want to purchase more itmes:0
discount is 0
Total price is 900
Final price are 900
-----
Process exited after 3.367 seconds with return value 0
Press any key to continue . . .
```

Task 5:

```
#include<stdio.h>
```

```
int main(){
```

```
int p,total=0,i,d=0,f;
```

```
do
```

```
{
```

```
printf("Enter Price of food:");
```

```
scanf("%d", &p);
```

```
printf("\nEnter if you want to eat more itmes:");
```

```
scanf("%d", &i);
```

```
total=total+p;
```

```
}
```

```
while(i!=0);
```

```
if(total>5000){
```


```
d= total*5/100;
```

```

f=total-d;
}
else {
f=total;}

printf("\ndiscount is %d",d);
printf("\n Total price is %d",total);
printf("\n Final price are %d",f);
return 0;
}

```

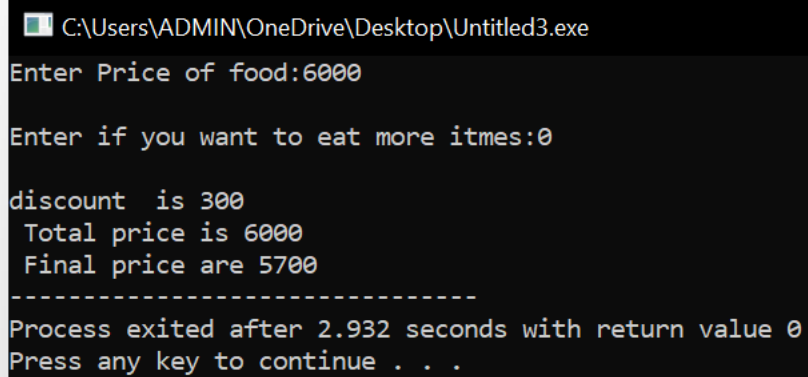

```

C:\Users\ADMIN\OneDrive\Desktop\Untitled3.exe
Enter Price of food:6000

Enter if you want to eat more itmes:0

discount is 300
Total price is 6000
Final price are 5700
-----
Process exited after 2.932 seconds with return value 0
Press any key to continue . . .

```

Task 6:

```

#include <stdio.h>

int main() {
    int pin;

    for (int att=1;att<=3;att++){
        printf("Enter PIN: ");
    }
}

```

```
scanf("%d", &pin);
```

```
if (pin==1234) {
```

```
    printf("Login Successful\n");
```

```
    return 0;
```


```
}
```

```
}
```

```
printf("Account Locked\n");
```

```
return 0;
```

```
}
```

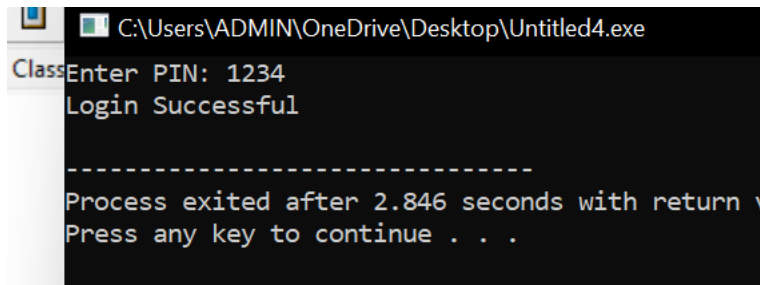

TASK 7:

```
#include <stdio.h>
```

```
int main() {
```

```
    float marks[5];
```

```
    float total = 0.0, average;
```

```
    float highest, lowest;
```

```
    printf("Enter marks for 5 students:\n");
```

```
    for (int i = 0; i < 5; i++) {
```

```
    printf("Student %d: ", i + 1);  
    scanf("%f", &marks[i]);  
}
```

```
highest = marks[0];  
lowest = marks[0];  
for (int i = 0; i < 5; i++) {  
    total += marks[i];  
  
    if (marks[i] > highest) {  
        highest = marks[i];  
    }  
    if (marks[i] < lowest) {  
        lowest = marks[i];  
    }  
}}
```

```
average = total / 5.0;
```

```
printf("Total Marks: %.2f\n", total);  
printf("Average Marks: %.2f\n", average);  
printf("Highest Marks: %.2f\n", highest);  
printf("Lowest Marks: %.2f\n", lowest);
```

```
return 0;
```

}

```
C:\Users\ADMIN\OneDrive\Desktop\Untitled1
Enter marks for 5 students:
Student 1: 90
Student 2: 89
Student 3: 87
Student 4: 67
Student 5: 77
Total Marks: 410.00
Average Marks: 82.00
Highest Marks: 90.00
Lowest Marks: 67.00

-----
Process exited after 9.224 seconds wi
Press any key to continue . . .
```

Task 8:

```
#include <stdio.h>
```

```
int main() {
```

```
    float prices[5];
```

```
    float originalTotal = 0.0;
```

```
    float discount = 0.0;
```

```
    float finalAmount;
```

```
    printf("Enter prices for 5 products:\n");
```

```
    for (int i = 0; i < 5; i++) {
```

```
        printf("Product %d price: ", i + 1);
```

```
        scanf("%f", &prices[i]);
```

```
    }
```

```
    for(int i = 0; i < 5; i++) {
```

```
        originalTotal += prices[i];
```

```
    }
```

```


if (originalTotal > 10000.0) {
    discount = originalTotal * 0.10;
}

finalAmount = originalTotal - discount;

printf("Original Total:%f\n", originalTotal);
printf("Discount: %f\n", discount);
printf("Final Amount:%f\n", finalAmount);

return 0;
}

```

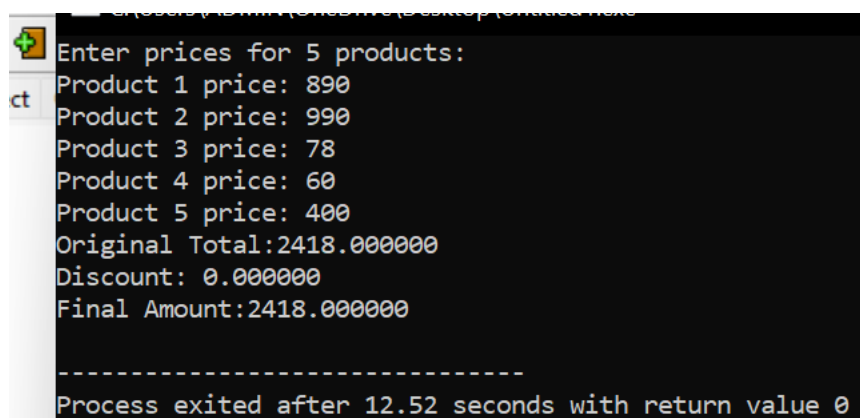

```

Enter prices for 5 products:
Product 1 price: 890
Product 2 price: 990
Product 3 price: 78
Product 4 price: 60
Product 5 price: 400
Original Total:2418.000000
Discount: 0.000000
Final Amount:2418.000000
-----
Process exited after 12.52 seconds with return value 0

```

Task 9:

```

#include <stdio.h>

int main() {
    float u[5], tot_u = 0, tot_amt = 0, hi, lo;
    printf("Enter units for 5 households:\n");
}

```

```
for (int i = 0; i < 5; i++) {  
    printf("Household %d: ", i + 1);  
    scanf("%f", &u[i]);  
}  
hi = u[0];  
lo = u[0];  
for (int i = 0; i < 5; i++) {  
    tot_u += u[i];  
    if (u[i] > hi) hi = u[i];  
    if (u[i] < lo) lo = u[i];  
    float bill = u[i] * 10;  
    if (u[i] > 500) bill += bill * 0.05;  
    tot_amt += bill;  
}  
printf("Total Units: %.2f\n", tot_u);  
printf("Highest Units: %.2f\n", hi);  
printf("Lowest Units: %.2f\n", lo);  
printf("Total Amount: Rs. %.2f\n", tot_amt);  
  
return 0;  
}
```

```

Enter units for 5 households:
Household 1: 890
Household 2: 900
Household 3: 780
Household 4: 700
Household 5: 690
Total Units: 3960.00
Highest Units: 900.00
Lowest Units: 690.00
Total Amount: Rs. 41580.00

-----
Process exited after 17.52 seconds with return value 0

```

TASK 10:

```
#include <stdio.h>
```

```

int main() {
    float p[5], sum = 0, avg, hi, lo;

    printf("Enter prices for 5 pairs of shoes:\n");
    for (int i = 0; i < 5; i++) {
        printf("Shoe Pair %d: ", i + 1);
        scanf("%f", &p[i]);
    }

    hi = p[0];
    lo = p[0];
    for (int i = 0; i < 5; i++) {
        sum += p[i];
        if (p[i] > hi) hi = p[i];
        if (p[i] < lo) lo = p[i];
    }

    avg = sum / 5.0;
}

```

```

printf("Highest: Rs. %.2f\n", hi);

printf("Lowest: Rs. %.2f\n", lo);


printf("Total: Rs. %.2f\n", sum);

printf("Average: Rs. %.2f\n", avg);


return 0;

}

```

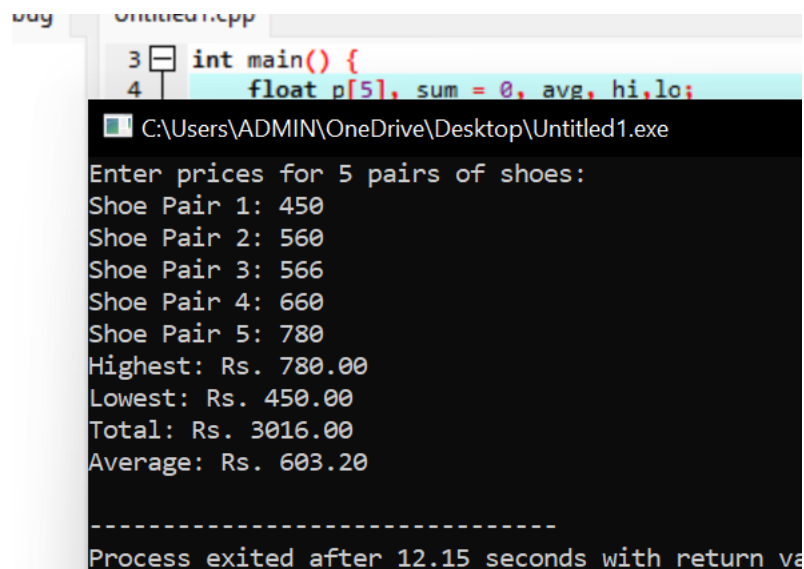

The screenshot shows a C++ program running in a console window. The program prompts the user to enter prices for 5 pairs of shoes. The user enters the following values: 450, 560, 566, 660, and 780. The program then calculates and displays the highest, lowest, total, and average prices.

```

3 int main() {
4     float p[5], sum = 0, avg, hi, lo;

C:\Users\ADMIN\OneDrive\Desktop\Untitled1.exe

Enter prices for 5 pairs of shoes:
Shoe Pair 1: 450
Shoe Pair 2: 560
Shoe Pair 3: 566
Shoe Pair 4: 660
Shoe Pair 5: 780
Highest: Rs. 780.00
Lowest: Rs. 450.00
Total: Rs. 3016.00
Average: Rs. 603.20

-----
Process exited after 12.15 seconds with return va

```

Task 11:

```

#include <stdio.h>

int main() {

    float u[5], b[5], tot= 0;


    printf("Enter units for 5 households:\n");

    for (int i = 0; i < 5; i++) {

        printf("Household %d: ", i + 1);

```

```

scanf("%f", &u[i]);
}


for (int i = 0; i < 5; i++) {
    b[i] = u[i] * 10;
    if (u[i] > 500) b[i] += b[i] * 0.05;
    tot += b[i];
}

for (int i = 0; i < 5; i++) {
    printf("Household %d: Rs. %.2f\n", i + 1, b[i]);
}

printf("Total: Rs. %.2f\n", tot);

return 0;
}

```

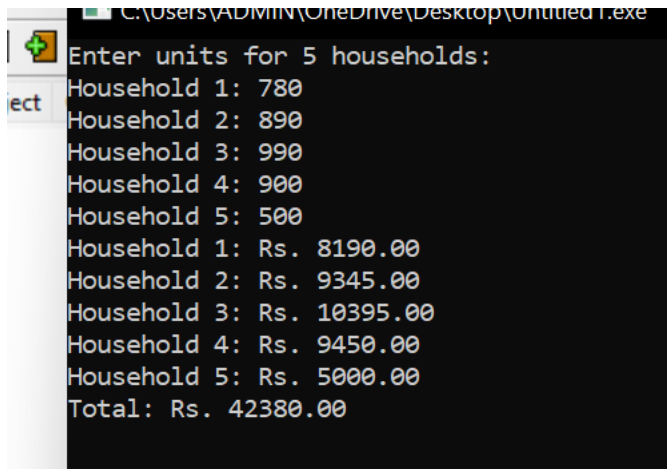

```

C:\Users\ADMIN\OneDrive\Desktop\Untitled1.exe
Enter units for 5 households:
Household 1: 780
Household 2: 890
Household 3: 990
Household 4: 900
Household 5: 500
Household 1: Rs. 8190.00
Household 2: Rs. 9345.00
Household 3: Rs. 10395.00
Household 4: Rs. 9450.00
Household 5: Rs. 5000.00
Total: Rs. 42380.00

```

Task 12:

```
#include <stdio.h>
```

```
int main() {
```

```
    float p[5], sum = 0, avg;
```

```
    printf("Enter prices for 5 shoes:\n");
```

```
    for (int i = 0; i < 5; i++) {
```

```
        printf("Shoe %d: ", i + 1);
```

```
        scanf("%f", &p[i]);
```

```
    }
```

```
    for (int i = 0; i < 5; i++) {
```

```
        sum += p[i];
```

```
    }
```

```
    avg = sum / 5.0;
```

```
    printf("Total: %.2f\n", sum);
```

```
    printf("Average: %.2f\n", avg);
```

```
    return 0;
```

```
}
```

```
C:\Users\ADMIN\OneDrive\Desktop\Untitled1.exe
Enter prices for 5 shoes:
Shoe 1: 900
Shoe 2: 230
Shoe 3: 300
Shoe 4: 400
Shoe 5: 280
Total: 2110.00
Average: 422.00

-----
Process exited after 9.901 seconds with return value 0
Press any key to continue . . .
```