PDQ: the week in numbers

4 October 2026. Nada.

	before	after
wrong answers (125 clips)	7	**1**
correct answers	52	48
mirrored clips identified	0 of 8	**8 of 8**
letterboxed clips identified	1 of 8	**6 of 8**

1. What was working before

- The pod's engine, as an exact laptop copy. 52 of 125 known clips right, 7 wrong.
- Three parts can answer, in order: pre-scan, probe (P0), then the rules.

decider	evidence it needs	checks offsets?	share of answers
pre-scan	3 frames, best under 20	no	most
probe P0	1 frame under 30	no	some
rules P1-P9	1 to 30 frames by rule	only the mid rules	the rest

2. How it was working

- The quick parts decide most clips on counting alone. The careful checks sit in rules that rarely decide.
- A true match gives the same offset (film time minus clip time) for every frame. Nothing that decides most of the traffic checks this.
- Every answer now records the rule that made it. The seven wrong answers:

rule	wrong answers	distance
pre-scan	4 (Krrish 3, Northman, Civil War, In Between)	6 - 18
P0 probe	1 (Smile)	26.8
P9E	1 (Grave Encounters 2)	34.0
P8	1 (Demeter)	41.4

```
PS C:\Users\nadaa\pdq_for_nada> python attribute_rules.py --engine pdq_engine_ORIGINAL.py

================================================================================
  WHICH RULE PRODUCED THE ANSWERS   (engine: pdq_engine_ORIGINAL.py)
================================================================================

  WRONG answers reproduced (these rules are the problem): 7
     SCAN       4
     P0         1
     P9E        1
     P8         1
       SCAN       Krrish 3                          avg=6.0 frames=27
       P0         Smile                             avg=26.8 frames=5
       SCAN       Captain America: Civil War        avg=12.0 frames=4
       P9E        Grave Encounters 2                avg=34.0 frames=2
       SCAN       The In Between                    avg=18.0 frames=4
       SCAN       The Northman                      avg=6.0 frames=6
       P8         The Last Voyage of the Demeter    avg=41.4 frames=31

  CORRECT answers (these rules must keep working): 52
     SCAN       46
     P0         3
     P3.5       2
     P1         1
```

• Four of seven come from the pre-scan. Rule changes can never reach them.

3. What I built

• **Attribution testing**: every answer tagged with the rule that produced it.

• **A rebuilt probe**: whole-clip view + the careful checks, as one decider.

• **An edits test**: 10 reposter edits x 8 clips that work unedited.

• **Two fixes**: mirrored views, and cutting black bars before fingerprinting.

4. How the new probe works

• Samples 40 frames across the whole clip; keeps a scorecard per film: frames, best distance, and every hit's (clip time, film time) pair.

• Answers only when the evidence agrees like a real scene does:

bar	needs	copied from
PV-A	2 near-identical frames	P2.5
PV-B	3 frames, best under 20, 2 agreeing on offset	pre-scan + P4
PV-C	5 medium frames agreeing, from 2 clip moments	P6a

• The one-frame P0 is retired. The rules stay behind it as backup.

Proof, on real clips. Both pass the OLD pre-scan bar; only the agreement question separates them:

```
PS C:\Users\nadaa\pdq_for_nada> python probe_walkthrough.py <the Northman clip> Northman
clip: vm_tiktok_com_ZS4MtfV2y_This_post_is_shared_via_TikTok_Lite_Download_TikTok_Lite.mp4
film examined: 290:The Northman (tmdb=639933)

THE PROBE'S EVIDENCE for this film (6 sampled frames hit it):
  clip time   film time   distance      offset
    0.74min    49.62min          6    48.88min
    0.36min    40.31min         16    39.95min
    0.41min    43.39min         20    42.98min
    0.52min    49.13min         26    48.61min
    0.25min    36.96min         30    36.71min
    0.30min    37.02min         44    36.72min

THE THREE BARS:

  PV-A  two near-identical frames?
        best=6 (needs <12)   frames under 16: 1 (needs 2)
        -> FAIL

  PV-B  decent frames that AGREE on film position?
        best=6 (needs <20)   frames under 28: 4 (needs 3)
        hits agreeing on one offset: 1 (needs 2)
        -> FAIL

  PV-C  mediocre frames, proven twice over?
        best=6 (needs <26)   frames under 33: 5 (needs 5)
        agreeing: 1 (needs 3)   clip moments: 5 (needs 2)
        -> FAIL

VERDICT of the probe for this film: STAYS QUIET - the rules (or nothing) take over
```

```
PS C:\Users\nadaa\pdq_for_nada> python probe_walkthrough.py <the Brick clip> Brick
clip: vm_tiktok_com_ZN8rNvaKw_.mp4
film examined: 202981:Brick (tmdb=9270)

THE PROBE'S EVIDENCE for this film (13 sampled frames hit it):
  clip time   film time   distance      offset
    0.31min    97.10min          8    96.80min
    0.13min    42.59min         16    42.46min
    0.34min    88.16min         16    87.83min
    0.36min    67.31min         18    66.95min
    0.08min    19.14min         20    19.06min
    0.12min    19.17min         26    19.06min
    0.28min    17.12min         36    16.84min
    0.30min    74.77min         36    74.47min
    0.01min    29.46min         40    29.45min
    0.03min    19.09min         42    19.06min
    0.29min    17.15min         42    16.87min
    0.38min    45.03min         42    44.65min
    0.04min    19.09min         44    19.05min

THE THREE BARS:

  PV-A  two near-identical frames?
        best=8 (needs <12)   frames under 16: 1 (needs 2)
        -> FAIL

  PV-B  decent frames that AGREE on film position?
        best=8 (needs <20)   frames under 28: 6 (needs 3)
        hits agreeing on one offset: 2 (needs 2)
        -> PASS

  PV-C  mediocre frames, proven twice over?
        best=8 (needs <26)   frames under 33: 6 (needs 5)
        agreeing: 2 (needs 3)   clip moments: 2 (needs 2)
        -> FAIL

VERDICT of the probe for this film: ANSWER: 202981:Brick (tmdb=9270)
```

5. Results

Real clips, all 125:

engine	wrong	correct
pod's rules	7	52
new probe alone	1	41
new probe + rules backup	**1**	**48**

```
PS C:\Users\nadaa\pdq_for_nada> python attribute_rules.py --engine pdq_engine_PROBEV2.py


================================================================================
  WHICH RULE PRODUCED THE ANSWERS   (engine: pdq_engine_PROBEV2.py)
================================================================================

  WRONG answers reproduced (these rules are the problem): 1
     PV-A       1
       PV-A       Krrish 3                            avg=6.0 frames=16

  CORRECT answers (these rules must keep working): 48
     PV-A       22
     PV-B       17
     P1         4
     P3.5       3
     PV-C       2
```

- The 1 left: Krrish 3, distance 6, identical pictures. Needs audio / SSCD.
- The 4 lost: fan edits that jump scenes. Recovering them readmits 2 wrongs. Kept strict.

Edited clips:

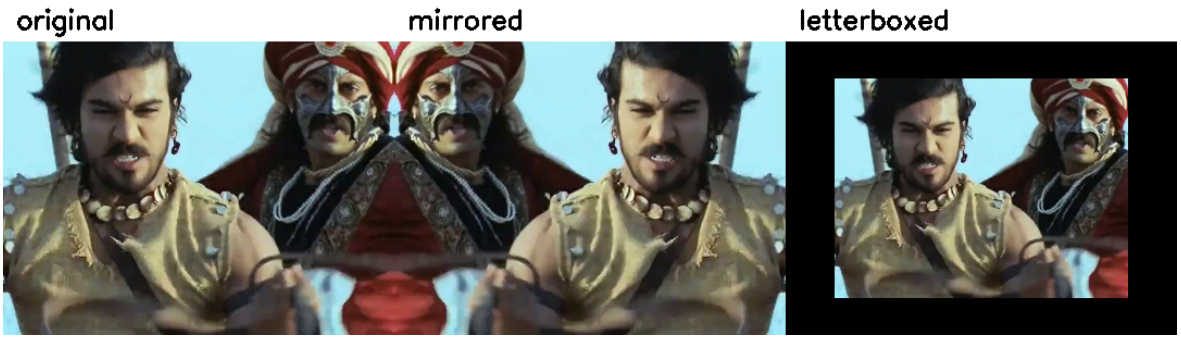

edit	before	after
mirror	0 of 8	**8 of 8** (distance 2)
letterbox	1 of 8	**6 of 8**
filter / b&w / recompress / speeds	6-8 of 8	unchanged

- No edit ever produced a wrong film, on any version. Edits silence, never fool.
- Safety gate: all 125 real clips re-run with the fixes. Zero answers changed.
- Cost: probe 4x slower with extra views. Pod shape: normal views first.

The asks

1. Policy call: the 4 fan-edit clips. I recommend staying strict.
2. Someone watches the Misfits clip (both engines say F1, distance 8).
3. Direction: take the probe towards the pod? Next step: normal-views-first at pod scale.
4. Still open: keep clip_query_hashes rows for voted clips. Clips are still rotting.