

Day-2

step-by-step guide to setting up a simple Python "Hello, Docker!" Flask application using Docker and Docker Compose.

1. Install Docker

First, install Docker to get the Docker engine running on your system:

```
sudo apt install -y docker.io
```

- **Explanation:** Installs Docker on your system using the apt package manager. The -y flag auto-confirms any prompts.
-

2. Start and Enable Docker Service

Start the Docker service and enable it to start automatically at boot time:

```
sudo systemctl start docker
```

```
sudo systemctl enable docker
```

- **Explanation:** The start command starts the Docker daemon, and enable ensures Docker runs on startup.
-

3. Verify Docker Installation

Verify that Docker was installed correctly by checking its version:

```
docker --version
```

- **Explanation:** Displays the installed Docker version to confirm the installation.
-

4. Install Docker Compose

Now, install Docker Compose, a tool to define and manage multi-container Docker applications:

```
sudo curl -L "https://github.com/docker/compose/releases/latest/download/docker-compose-$(uname -s)-$(uname -m)" -o /usr/local/bin/docker-compose
```

```
sudo chmod +x /usr/local/bin/docker-compose
```

- **Explanation:** The first command downloads the latest Docker Compose binary, and the second command makes it executable.
-

5. Verify Docker Compose Installation

Check the installed version of Docker Compose:

```
docker-compose --version
```

- **Explanation:** Displays the installed Docker Compose version to verify the installation.
-

6. Create Project Directory

Create a directory for your project and navigate into it:

```
mkdir ~/docker-python-app
```

```
cd ~/docker-python-app
```

- **Explanation:** Creates a directory for your project and navigates into it.
-

7. Create the app.py file

Create a Python file app.py for the Flask application:

```
nano app.py
```

Paste the following Flask application code:

```
from flask import Flask
```

```
app = Flask(__name__)
```

```
@app.route('/')
```

```
def hello_world():
```

```
    return 'Hello, world Running inside the docker!'
```

```
if __name__ == '__main__':
```

```
    app.run(host='0.0.0.0', port=5000)
```

- **Explanation:** A simple Flask app with one route (/) that returns a greeting message. The Flask server listens on all interfaces (0.0.0.0) and port 5000.
-

8. Create requirements.txt

Create a requirements.txt file to list Python dependencies:

```
nano requirements.txt
```

Add the following content:

flask

- **Explanation:** Lists the Flask library as the required dependency for your project.
-

9. Install pip (if not already installed)

Ensure pip is installed to handle Python package installations:

sudo apt update

sudo apt install python3-pip

- **Explanation:** Updates the package list and installs pip to handle Python packages.
-

10. Create Dockerfile

Create a Dockerfile that defines how the Docker image should be built:

nano Dockerfile

Add the following content:

```
# Use the official Python image from Docker Hub
```

```
FROM python:3.9-slim
```

```
# Set the working directory inside the container
```

```
WORKDIR /app
```

```
# Copy the current directory contents into the container at /app
```

```
COPY . /app
```

```
# Install any needed packages specified in requirements.txt
```

```
RUN pip install --no-cache-dir -r requirements.txt
```

```
# Make port 5000 available to the world outside the container
```

```
EXPOSE 5000
```

```
# Define the environment variable for Flask to run in production mode
```

```
ENV FLASK_ENV=production
```

```
# Run app.py when the container launches
```

```
CMD ["python", "app.py"]
```

- **Explanation:** This Dockerfile defines the Python environment, installs dependencies, exposes port 5000, and starts the Flask app inside the container.
-

11. Create docker-compose.yml

Create a docker-compose.yml file to manage the application's services:

```
nano docker-compose.yml
```

Add the following content:

```
version: '3.8'
```

```
services:
```

```
  web:
```

```
    build: .
```

```
    ports:
```

```
      - "5000:5000"
```

```
    environment:
```

```
      - FLASK_ENV=development
```

```
    volumes:
```

```
      - ./app
```

```
    restart: always
```

- **Explanation:** This Compose file:

- Defines the web service.
 - Builds the image from the current directory.
 - Maps port 5000 from the host to the container.
 - Mounts the current directory (.) into the container to enable live code reloading.
 - Restarts the container if it crashes.
-

12. Add User to Docker Group (if needed)

To avoid using sudo with Docker commands, add your user to the Docker group:

```
sudo usermod -aG docker $USER
```

```
newgrp docker
```

- **Explanation:** The first command adds your user to the Docker group, and the second command applies the changes to your current session.
-

13. Build and Run the Application

Now, you can build and start the Flask app container using Docker Compose:

```
docker-compose up --build
```

- **Explanation:** This command builds the Docker image and starts the container based on the docker-compose.yml configuration. The --build flag forces a rebuild of the Docker image.
-

14. Access the Application

Once the container is running, open your browser and navigate to:

```
http://localhost:5000
```

You should see the message: "**Hello, Docker Python App!**"

Summary of Commands

1. Install Docker:
2. `sudo apt install -y docker.io`
3. Start and enable Docker service:
4. `sudo systemctl start docker`
5. `sudo systemctl enable docker`
6. Install Docker Compose:
7. `sudo curl -L "https://github.com/docker/compose/releases/latest/download/docker-compose-$(uname -s)-$(uname -m)" -o /usr/local/bin/docker-compose`
8. `sudo chmod +x /usr/local/bin/docker-compose`
9. Create project directory:
10. `mkdir ~/docker-python-app`
11. `cd ~/docker-python-app`
12. Create `app.py` with Flask code.
13. Create `requirements.txt` with flask.

14. Install pip (if needed):

15. sudo apt update

16. sudo apt install python3-pip

17. Create Dockerfile with the configuration.

18. Create docker-compose.yml with service definition.

19. Add your user to the Docker group (if necessary):

20. sudo usermod -aG docker \$USER

21. newgrp docker

22. Build and run the app:

23. docker-compose up --build

Now your "Hello, Docker!" Flask app should be running inside a Docker container, accessible at <http://localhost:5000>.

```
aboone@NADHEEMS-ASUS:~$ sudo apt install -y docker.io
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
The following packages were automatically installed and are no longer required:
  libxaw7 libxcb-shape0 libxft2 libxkbfile1 libxmu6 libxpm4 libxv1 libxxf86dg1
Use 'sudo apt autoremove' to remove them.
The following additional packages will be installed:
  bridge-utils containerd dns-root-data dnsmasq-base iptables libip4tc2 libip6tc2 libnetfilter-conntack3
  libnfnetlink0 libnftables1 libnftnl11 nftables pigz runc ubuntu-fan
Suggested packages:
  ifupdown aufs-tools btrfs-progs cgroupfs-mount | cgroup-lite debootstrap docker-buildx docker-compose-v2 docker-doc
  rinse zfs-fuse | zfsutils firewalld
The following NEW packages will be installed:
  bridge-utils containerd dns-root-data dnsmasq-base docker.io iptables libip4tc2 libip6tc2 libnetfilter-conntack3
  libnfnetlink0 libnftables1 libnftnl11 nftables pigz runc ubuntu-fan
0 upgraded, 16 newly installed, 0 to remove and 56 not upgraded.
Need to get 79.6 MB of archives.
After this operation, 306 MB of additional disk space will be used.
Get:1 http://archive.ubuntu.com/ubuntu noble/universe amd64 pigz amd64 2.8-1 [65.6 kB]
Get:2 http://archive.ubuntu.com/ubuntu/noble/main amd64 libip4tc2 amd64 1.8.10-3ubuntu2 [23.3 kB]
Get:3 http://archive.ubuntu.com/ubuntu/noble/main amd64 libip6tc2 amd64 1.8.10-3ubuntu2 [23.7 kB]
```

```

=> [web internal] load build definition from Dockerfile
  0.1s
=> => transferring dockerfile: 193B
  0.0s
=> [web internal] load metadata for docker.io/library/python:3.11
  0.0s
=> [web internal] load .dockerignore
  0.1s
=> => transferring context: 2B
  0.0s
=> [web 1/5] FROM docker.io/library/python:3.11
  0.3s
=> [web internal] load build context
  0.1s
=> => transferring context: 634B
  0.0s
=> [web 2/5] WORKDIR /app
  0.1s
=> [web 3/5] COPY requirements.txt .
  0.1s
=> [web 4/5] RUN pip install --no-cache-dir -r requirements.txt
16.0s
=> [web 5/5] COPY . .
  0.1s
=> [web] exporting to image
  0.8s
=> => exporting layers
[+] Building 1/1
 ✓web   Built
  0.0s
aboон@NADHEEMS-ASUS:~/docker-python$ sudo docker-compose up -d
WARN[0000] /home/aboон/docker-python/docker-compose.yml: the attribute 'version' is obsolete, it will be ignored, please remove it to avoid potential confusion
[+] Running 2/2
 ✓Network docker-python_default  Created
  0.9s
 ✓Container docker-python-web-1  Started
  1.1s
aboон@NADHEEMS-ASUS:~/docker-python$ sudo docker run -itd -p 5000:5000 text
395e4272efb280144771414d4a31f043d02a5f486b9fff2edf537ca4fc700a31
docker: Error response from daemon: driver failed programming external connectivity on endpoint clever_dhawan (97a97e9dd4e38215240c848ab8293b8e5a49314afc4d5f840335585814d7a889): Bind for 0.0.0.0:5000 failed: port is already allocated.
aboон@NADHEEMS-ASUS:~/docker-python$ ^C
aboон@NADHEEMS-ASUS:~/docker-python$ sudo docker run -itd -p 5000:5001 text
bf5fbe2fc923e188c48203e4fb7c6077e90c6c11a3a0e77f72c36ee653ecc1ba
aboон@NADHEEMS-ASUS:~/docker-python$ sudo docker run -itd -p 5001:5001 text
243ecbcf0110ef1b4d102a731a56b6aa8f314a15717c61f6480a41cdb8b395b1
aboон@NADHEEMS-ASUS:~/docker-python$ sudo docker run -itd -p 5000:5000 text
2cb8e842163a4de1954e4a23f4066c8aa5867e83fe22de53e2f08a5c48f34bcd
aboон@NADHEEMS-ASUS:~/docker-python$ sudo docker images
REPOSITORY          TAG      IMAGE ID      CREATED        SIZE
docker-python-web   latest   6d3123eadf1e  3 minutes ago  1.03GB
text                latest   b8abcb3f4852  12 minutes ago  1.03GB

```

```

To https://github.com/NadheemM/devops_nadhee.git
 eb0fe6b..6109578 main -> main
aboон@NADHEEMS-ASUS:~/docker-python/devops_nadhee$ sudo usermod -aG docker jenkins
[sudo] password for aboon:
Sorry, try again.
[sudo] password for aboon:
Sorry, try again.
[sudo] password for aboon:
aboон@NADHEEMS-ASUS:~/docker-python/devops_nadhee$ sudo systemctl restart jenkins
aboон@NADHEEMS-ASUS:~/docker-python/devops_nadhee$ nano Jenkinsfile
aboон@NADHEEMS-ASUS:~/docker-python/devops_nadhee$ git add .
aboон@NADHEEMS-ASUS:~/docker-python/devops_nadhee$ git commit -m "fourth commit"
[main f39ff81] fourth commit
 1 file changed, 1 insertion(+), 1 deletion(-)
aboон@NADHEEMS-ASUS:~/docker-python/devops_nadhee$ git push origin main
Username for 'https://github.com': NadheemM
Password for 'https://NadheemM@github.com':
Enumerating objects: 5, done.
Counting objects: 100% (5/5), done.
Delta compression using up to 4 threads
Compressing objects: 100% (3/3), done.
Writing objects: 100% (3/3), 287 bytes | 287.00 KiB/s, done.
Total 3 (delta 2), reused 0 (delta 0), pack-reused 0
remote: Resolving deltas: 100% (2/2), completed with 2 local objects.
To https://github.com/NadheemM/devops_nadhee.git
 6109578..f39ff81 main -> main
aboон@NADHEEMS-ASUS:~/docker-python/devops_nadhee$ |

```

```

18e551499a0dc118134710cba6b4de574f35d4de96d013f6a874d3a16443bd3d
docker: Error response from daemon: driver failed programming external connectivity on endpoint pensive_banzai
(5d04af725bfd7a9c8e01a9feb3cdefe59657a4811f006ac31c10d3d4f1e6eb22): Bind for 0.0.0.0:5000 failed: port is already allocated.
abooin@NADHEEMS-ASUS:~/docker-python$ lsb_release -a
No LSB modules are available.
Distributor ID: Ubuntu
Description:    Ubuntu 24.04.2 LTS
Release:        24.04
Codename:       noble
abooin@NADHEEMS-ASUS:~/docker-python$ cat app.py
from flask import Flask # Corrected import statement (uppercase 'F' in Flask)

app = Flask(__name__) # Corrected to 'Flask' instead of 'Flash'

@app.route("/")
def hello():
    return "Hello, World! Running inside Docker!"

if __name__ == "__main__":
    app.run(host="0.0.0.0", port=5000)
abooin@NADHEEMS-ASUS:~/docker-python$ sudo systemctl start jenkins
[sudo] password for abooin:
abooin@NADHEEMS-ASUS:~/docker-python$ sudo systemctl enable jenkins
Synchronizing state of jenkins.service with SysV service script with /usr/lib/systemd/systemd-sysv-install.
Executing: /usr/lib/systemd/systemd-sysv-install enable jenkins
abooin@NADHEEMS-ASUS:~/docker-python$ curl localhost://github.com/NadheemM/new-site

```

Hello, Docker Python App!

Jenkins Pipeline Through Git Token - Setup Procedure

Step 1: Generate a Git Personal Access Token

Before configuring the Jenkins pipeline, you need to generate a **Personal Access Token (PAT)** from your Git service.

GitHub (Example)

1. **Log in to GitHub** and navigate to your profile.
2. Go to **Settings > Developer Settings > Personal Access Tokens**.
3. Click **Generate New Token**.
4. Select the necessary permissions for the token. For example, to clone repositories, select:
 - o repo (full control of private repositories)
 - o read:org (for organization repository access)
5. Generate the token and **copy it**. This token will act as the password when Jenkins connects to GitHub.

GitLab (Example)

1. **Log in to GitLab** and go to **Profile Settings > Access Tokens**.

2. Generate a new token with appropriate scopes (e.g., read_repository).
3. **Save the token** to use in Jenkins.

Bitbucket (Example)

1. **Log in to Bitbucket** and go to **Personal Settings > App Passwords**.
2. Create an app password with necessary permissions (like repository read).
3. **Save the password** to use in Jenkins.

Step 2: Store Git Token in Jenkins Credentials

Once you've generated the Git token, the next step is to store it securely in Jenkins.

1. **Log in to Jenkins** and navigate to the Jenkins dashboard.
2. In the left menu, click on **Manage Jenkins**.
3. Click on **Manage Credentials**.
4. Select the appropriate **scope** (e.g., (Global)).
5. Click on **Add Credentials**.
6. In the **Kind** dropdown, select **Username with password**.
7. In the **Username** field, enter your Git username (e.g., your-username for GitHub).
8. In the **Password** field, paste the **Git token** you generated.
9. Optionally, give it an ID (e.g., git-token-jenkins).
10. Click **OK** to save the credentials.

Step 3: Configure Jenkins Pipeline

Now that the Git token is securely stored in Jenkins, you can configure a Jenkins pipeline to use it for Git interactions.

Example Pipeline Script (Declarative Pipeline)

You'll now set up a pipeline that uses Git for the source code. Here's an example using a declarative pipeline.

1. **Create a New Pipeline Job:**
 - Go to Jenkins Dashboard.
 - Click **New Item**, select **Pipeline**, and name your pipeline (e.g., Git-Pipeline).
 - Click **OK**.
2. **Configure the Pipeline:**
 - In the pipeline configuration, scroll to the **Pipeline** section.
 - Choose **Pipeline script from SCM**.

- Set the **SCM** dropdown to **Git**.
- In the **Repository URL** field, enter your repository URL (e.g., <https://github.com/yourusername/your-repository.git>).
- Select **Credentials**. Choose the credentials you created earlier (e.g., `git-token-jenkins`).

Step 4: Run the Jenkins Pipeline

- After configuring the pipeline, click **Save** and then **Build Now** to run the pipeline.
- Jenkins will use the credentials you provided to authenticate with Git, clone the repository, and run the pipeline steps.

Step 5: Monitor and Troubleshoot

- If the pipeline fails, check the Jenkins job's **Console Output** for debugging information. Common issues can be due to incorrect credentials, Git URL, or permission issues.

New Item

Enter an item name
Nisanth

Select an item type

Freestyle project
Classic, general-purpose job type that checks out from up to one SCM, executes build steps serially, followed by post-build steps like archiving artifacts and sending email notifications.

Pipeline
Orchestrates long-running activities that can span multiple build agents. Suitable for building pipelines (formerly known as workflows) and/or organizing complex activities that do not easily fit in free-style job type.

Multi-configuration project
Suitable for projects that need a large number of different configurations, such as testing on multiple environments, platform-specific builds, etc.

Folder
Creates a container that stores nested items in it. Useful for grouping things together. Unlike view, which is just a filter, a folder creates a separate namespace, so you can have multiple things of the same name as long as they are in different

OK

Configure

General

Description
Jenkins with github through docker

Enabled

General

General

Triggers

Pipeline

Advanced

Description
Jenkins with github through docker

Plain text [Preview](#)

Discard old builds ?

Do not allow concurrent builds

Do not allow the pipeline to resume if the controller restarts

GitHub project

Pipeline speed/durability override ?

Preserve stashes from completed builds ?

Configure

Set up automated actions that start your build based on specific events, like code changes or scheduled times.

Build after other projects are built ?
 Build periodically ?
 GitHub hook trigger for GITScm polling ?
 Poll SCM ?
 Trigger builds remotely (e.g., from scripts) ?

Pipeline

Define your Pipeline using Groovy directly or pull it from source control.

Definition

Pipeline script from SCM

SCM ?
None

Script Path ?
Jenkinsfile

Save **Apply**

Configure

GitHub hook trigger for GITScm polling ?
 Poll SCM ?
 Trigger builds remotely (e.g., from scripts) ?

Pipeline

Define your Pipeline using Groovy directly or pull it from source control.

Definition

Pipeline script
Pipeline script
Pipeline script from SCM

try sample Pipeline... ▾

Save **Apply**

Dashboard > helooo > Configuration

Configure

Set up automated actions that start your build based on specific events, like code changes or scheduled times.

Build after other projects are built ?
 Build periodically ?
 GitHub hook trigger for GITScm polling ?
 Poll SCM ?
 Trigger builds remotely (e.g., from scripts) ?

Pipeline

Define your Pipeline using Groovy directly or pull it from source control.

Definition

Pipeline script


Script ?
1

try sample Pipeline... ▾

Use Groovy Sandbox ?

Pipeline Syntax

Save **Apply**

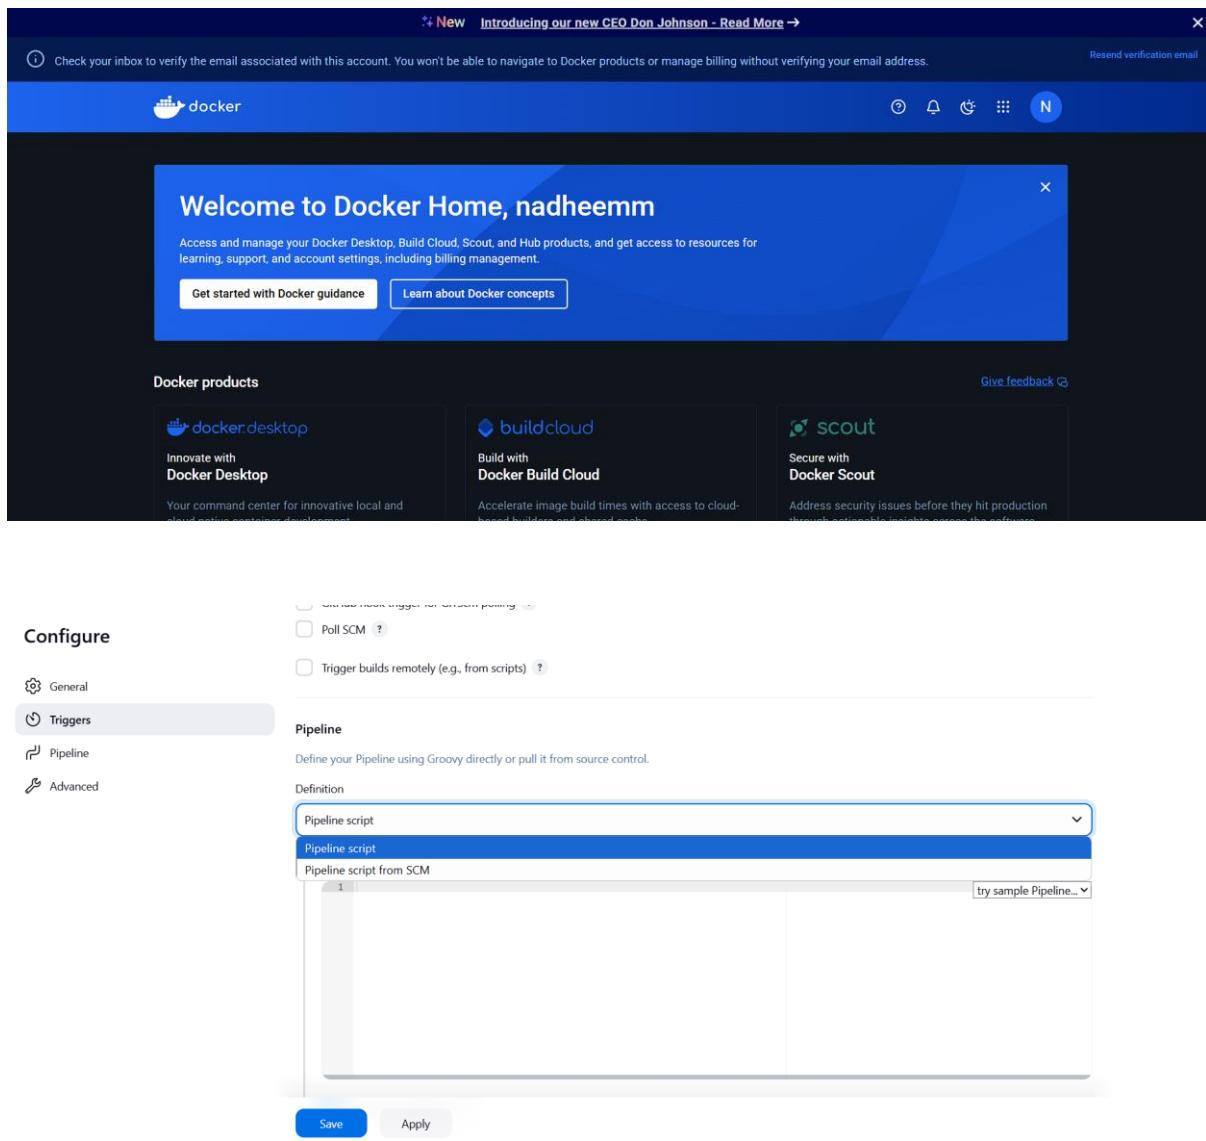

Jenkins Pipeline for Dockerized Application Deployment

This document provides a step-by-step guide on how the Jenkins pipeline automates the process of fetching the code from GitHub, building a Docker image, pushing it to a container registry, and deploying the application in a running Docker container.

Pipeline Overview

The pipeline follows these key steps:

1. **Checkout Code** - Fetch the latest code from the GitHub repository.
2. **Build Docker Image** - Create a Docker image for the application.
3. **Login to Docker Registry** - Authenticate to the container registry.
4. **Push to Container Registry** - Upload the built image to a Docker registry.

5. **Stop & Remove Existing Container** - Stop and remove any existing container with the same name.
 6. **Run Docker Container** - Deploy a new container with the updated image.
 7. **Post Actions** - Handle success or failure messages.
-

Step-by-Step Execution

1. Checkout Code

- Uses Jenkins credentials to authenticate and fetch the latest code from GitHub.
- Ensures secure access using stored credentials instead of exposing raw tokens.

Implementation:

```
stage('Checkout Code') {  
    steps {  
        withCredentials([usernamePassword(credentialsId: 'github-nisanthg1010',  
            usernameVariable: 'GIT_USER', passwordVariable: 'GIT_TOKEN')]) {  
            git url:  
                "https://$GIT_USER:$GIT_TOKEN@github.com/nisanthg1010/Devops_Nisanth.git",  
                branch: 'main'  
        }  
    }  
}
```

2. Build Docker Image

- Builds the Docker image using the Dockerfile present in the repository.
- Tags the image with the latest version.

Implementation:

```
stage('Build Docker Image') {  
    steps {  
        sh 'docker build -t $DOCKER_IMAGE .'  
    }  
}
```

3. Login to Docker Registry

- Uses stored Jenkins credentials to log in securely to the Docker registry.
- Prevents exposing login credentials in the script.

Implementation:

```
stage('Login to Docker Registry') {  
    steps {  
        withCredentials([usernamePassword(credentialsId: 'docker_nisanth', usernameVariable: 'DOCKER_USER', passwordVariable: 'DOCKER_PASS')]) {  
            sh 'echo $DOCKER_PASS | docker login -u $DOCKER_USER --password-stdin'  
        }  
    }  
}
```

4. Push to Container Registry

- Pushes the newly built Docker image to the specified container registry.
- Ensures the latest version of the application is stored and accessible.

Implementation:

```
stage('Push to Container Registry') {  
    steps {  
        sh 'docker push $DOCKER_IMAGE'  
    }  
}
```

5. Stop & Remove Existing Container

- Stops and removes the running container if it exists.
- Prevents conflicts when deploying the new version.

Implementation:

```
stage('Stop & Remove Existing Container') {  
    steps {  
        script {  
            sh ""  
            if [ "$(docker ps -aq -f name=$CONTAINER_NAME)" ]; then  
                docker stop $CONTAINER_NAME || true  
                docker rm $CONTAINER_NAME || true  
            fi  
        ""  
    }
```

```
        }
    }
}
```

6. Run Docker Container

- Starts a new Docker container with the updated image.
- Maps the internal application port 5000 to 5001 on the host machine.

Implementation:

```
stage('Run Docker Container') {
    steps {
        sh 'docker run -d -p 5001:5000 --name $CONTAINER_NAME $DOCKER_IMAGE'
    }
}
```

7. Post Actions

- If successful, displays a success message.
- If failed, displays an error message.

Implementation:

```
post {
    success {
        echo "Build, push, and container execution successful!"
    }
    failure {
        echo "Build or container execution failed."
    }
}
```

Conclusion

This Jenkins pipeline automates the entire process of fetching the code, building a Docker image, pushing it to a registry, and deploying the container. It ensures a seamless CI/CD workflow, making application updates smooth and efficient. 

Hello, Docker Python App!

The screenshot shows the Docker Hub 'My Hub' interface for the user 'gnisanth'. The left sidebar contains links for 'Repositories', 'Settings', 'Default privacy', 'Notifications', 'Billing', 'Usage', 'Pulls', and 'Storage'. The main area is titled 'Repositories' and shows one repository: 'gnisanth/docker-app'. The repository details are: Name: 'gnisanth/docker-app', Last Pushed: '11 minutes ago', Contains: 'IMAGE', Visibility: 'Public', and Status: 'Inactive'. There is also a 'Create a repository' button.

The screenshot shows the Docker Hub homepage. The top features a large blue banner with the text 'Docker's curated GenAI catalog' and 'Everything you need to build, scale, and deploy AI with ease.', followed by a 'View catalog now' button. Below the banner, there is a 'Catalogs' sidebar with 'Gen AI' and 'Trusted content' options. The main content area is titled 'Spotlight' and includes three cards: 'Build up to 39x faster with Docker Build Cloud' (Cloud Development), 'LLM everywhere: Docker and Hugging Face' (AI/ML Development), and 'Take action on prioritized insights' (Software Supply Chain).