

**Tunisian Republic**  
*Ministry of Higher Education and Scientific Research*  
**Private Higher School of Engineering and Technology**  
**TEK-UP**

---

**Final Year Project Report**  
*Submitted in partial fulfilment of the requirements for the*  
**National Engineering Degree in Applied and Technological Sciences**  
*Speciality: Web, Mobile and Multimedia Development*

*Prepared by*  
**Nadim JEBALI**



## **Design and Development of an Intelligent Multi-Vendor Marketplace: Cheebo**

**Professional Supervisor:** Mr. Mohammed Aziz Chibani  
*NeuralBey*

**Academic Supervisor:** Ms. Sawssen Jalel  
*Lecturer*

I authorise the student to submit his internship report for a defence.

**Professional Supervisor, Mr. Mohammed Aziz Chibani**

*Signature and stamp*

I authorise the student to submit his internship report for a defence.

**Academic Supervisor, Ms. Sawssen Jalel**

*Signature*

# Dedication

---

*To my parents, for their unwavering love, patience and encouragement during every step of this project.*

*To my friends and colleagues at NeuralBey and TEK-UP who offered guidance, feedback and inspiration.*

# Acknowledgements

---

I would like to express my sincere gratitude to all those who contributed to the completion of this project.

First, my deepest thanks to my professional supervisor, Mr. Mohammed Aziz Chibani (NeuralBey), for his continuous guidance, domain expertise, and support throughout the development and evaluation phases.

I am also grateful to Ms. Sawssen Jalel for her academic supervision and valuable feedback which helped shape the report.

Special thanks to my colleagues and friends for testing features, providing constructive critiques, and motivating me during challenging moments.

Finally, I thank my family for their encouragement and patience during this work.

# Abstract

---

**Keywords:** marketplace, multi-vendor, NestJS, React, Prisma, Artificial Intelligence, Docker, CI/CD, Terraform.

---

# Contents

|                                                        |           |
|--------------------------------------------------------|-----------|
| <b>Dedication</b>                                      | <b>2</b>  |
| <b>Acknowledgements</b>                                | <b>3</b>  |
| <b>Abstract</b>                                        | <b>4</b>  |
| <b>List of Abbreviations</b>                           | <b>11</b> |
| <b>General Introduction</b>                            | <b>12</b> |
| <b>1 General Project Context</b>                       | <b>13</b> |
| 1.1 Presentation of the Host Organisation . . . . .    | 13        |
| 1.1.1 NeuralBey — Company Overview . . . . .           | 13        |
| 1.1.2 Domain, Team and Mission . . . . .               | 13        |
| 1.2 Project Context . . . . .                          | 14        |
| 1.2.1 Project Origin and Motivation . . . . .          | 14        |
| 1.2.2 Multi-Vendor Marketplace Concept . . . . .       | 14        |
| 1.2.3 Target Users . . . . .                           | 15        |
| 1.3 Study of Existing Solutions . . . . .              | 15        |
| 1.3.1 Existing Tunisian E-Commerce Platforms . . . . . | 15        |
| 1.3.2 Limitations of Current Solutions . . . . .       | 15        |
| 1.3.3 Competitive Analysis . . . . .                   | 16        |
| 1.4 Proposed Solution . . . . .                        | 16        |
| 1.4.1 Cheebo Overview . . . . .                        | 16        |
| 1.4.2 Key Differentiators . . . . .                    | 17        |
| 1.4.3 Project Scope . . . . .                          | 17        |
| 1.5 Work Methodology . . . . .                         | 18        |
| 1.5.1 Classical vs Agile Approaches . . . . .          | 18        |
| 1.5.2 Why Scrum? . . . . .                             | 18        |
| 1.5.3 The Scrum Framework . . . . .                    | 19        |
| 1.5.4 Scrum Roles . . . . .                            | 19        |
| 1.5.5 Scrum Events . . . . .                           | 20        |
| 1.5.6 Scrum Artefacts . . . . .                        | 20        |
| 1.5.7 Tools Used . . . . .                             | 21        |
| Chapter Conclusion . . . . .                           | 22        |

|          |                                                      |           |
|----------|------------------------------------------------------|-----------|
| <b>2</b> | <b>Requirements Analysis and Specification</b>       | <b>24</b> |
| 2.1      | Identification of Actors . . . . .                   | 24        |
| 2.1.1    | Customer . . . . .                                   | 24        |
| 2.1.2    | Seller . . . . .                                     | 24        |
| 2.1.3    | Administrator . . . . .                              | 25        |
| 2.2      | Functional Requirements . . . . .                    | 25        |
| 2.2.1    | User Registration and Authentication . . . . .       | 25        |
| 2.2.2    | Store Management . . . . .                           | 25        |
| 2.2.3    | Product Management . . . . .                         | 26        |
| 2.2.4    | Order System . . . . .                               | 27        |
| 2.2.5    | Admin Dashboard . . . . .                            | 27        |
| 2.2.6    | AI Verification . . . . .                            | 27        |
| 2.2.7    | Featured Content Curation . . . . .                  | 28        |
| 2.3      | Non-Functional Requirements . . . . .                | 28        |
| 2.4      | Use Case Diagrams . . . . .                          | 29        |
| 2.4.1    | Global Use Case Diagram . . . . .                    | 30        |
| 2.4.2    | Detailed Use Cases — Customer . . . . .              | 30        |
| 2.4.3    | Detailed Use Cases — Seller . . . . .                | 31        |
| 2.4.4    | Detailed Use Cases — Administrator . . . . .         | 32        |
| 2.5      | Sequence Diagrams . . . . .                          | 33        |
| 2.5.1    | Registration, Email Verification and Login . . . . . | 33        |
| 2.5.2    | Order Placement . . . . .                            | 34        |
| 2.5.3    | Product Verification (AI + Administrator) . . . . .  | 35        |
| 2.6      | Modelling Language . . . . .                         | 36        |
| 2.7      | Project Backlog . . . . .                            | 36        |
| 2.7.1    | Scrum Team . . . . .                                 | 36        |
| 2.7.2    | MoSCoW Priority Legend . . . . .                     | 36        |
| 2.7.3    | Product Backlog . . . . .                            | 37        |
|          | Chapter Conclusion . . . . .                         | 41        |
| <b>3</b> | <b>Design and Architecture</b>                       | <b>42</b> |
| 3.1      | Global Architecture . . . . .                        | 42        |
| 3.1.1    | 3-Tier Architecture Overview . . . . .               | 42        |
| 3.1.2    | N8N as an Automation Layer . . . . .                 | 42        |
| 3.2      | Detailed Technical Architecture . . . . .            | 42        |
| 3.2.1    | NestJS Modular Architecture . . . . .                | 43        |
| 3.2.2    | React SPA Architecture . . . . .                     | 43        |
| 3.2.3    | Docker Compose Services Diagram . . . . .            | 43        |
| 3.3      | Database Design . . . . .                            | 44        |
| 3.3.1    | Entity-Relationship Diagram . . . . .                | 44        |

|          |                                                               |           |
|----------|---------------------------------------------------------------|-----------|
| 3.3.2    | Prisma Schema Overview . . . . .                              | 45        |
| 3.3.3    | Explanation of Key Relationships . . . . .                    | 45        |
| 3.4      | API Design . . . . .                                          | 45        |
| 3.4.1    | REST API Design Principles . . . . .                          | 45        |
| 3.4.2    | Endpoint Structure . . . . .                                  | 46        |
| 3.4.3    | Authentication Flow (BetterAuth) . . . . .                    | 46        |
| 3.5      | N8N Workflow Design . . . . .                                 | 46        |
| 3.5.1    | AI Verification Workflow . . . . .                            | 47        |
| 3.5.2    | Database Chat Assistant Workflow . . . . .                    | 47        |
| 3.6      | Class Diagram . . . . .                                       | 48        |
| <b>4</b> | <b>Development and Implementation</b>                         | <b>50</b> |
| 4.1      | Development Environment . . . . .                             | 50        |
| 4.1.1    | Hardware and Software . . . . .                               | 50        |
| 4.1.2    | VSCode and Extensions . . . . .                               | 50        |
| 4.1.3    | pnpm Monorepo Structure . . . . .                             | 50        |
| 4.2      | Backend (NestJS) . . . . .                                    | 51        |
| 4.2.1    | Project Structure . . . . .                                   | 51        |
| 4.2.2    | Key Modules . . . . .                                         | 51        |
| 4.2.3    | Authentication Guards and Role-Based Access Control . . . . . | 51        |
| 4.2.4    | File Upload System (Multer) . . . . .                         | 51        |
| 4.2.5    | Email System (Nodemailer) . . . . .                           | 51        |
| 4.3      | Frontend (React + Vite) . . . . .                             | 51        |
| 4.3.1    | Project Structure . . . . .                                   | 51        |
| 4.3.2    | Routing and Layouts . . . . .                                 | 51        |
| 4.3.3    | State Management (TanStack Query + Zustand) . . . . .         | 51        |
| 4.3.4    | Admin Dashboard Panels . . . . .                              | 51        |
| 4.3.5    | Store and Product Management Interface . . . . .              | 52        |
| 4.4      | AI Integration with N8N . . . . .                             | 53        |
| 4.4.1    | AI Product/Store Verification Pipeline . . . . .              | 53        |
| 4.4.2    | Database Chat Assistant . . . . .                             | 53        |
| 4.4.3    | Google Gemini / Groq Integration . . . . .                    | 53        |
| 4.4.4    | N8N Workflow Implementation . . . . .                         | 53        |
| 4.5      | Interface Screenshots . . . . .                               | 53        |
| 4.5.1    | Landing Page . . . . .                                        | 53        |
| 4.5.2    | Store Dashboard . . . . .                                     | 54        |
| 4.5.3    | AI Verification Panel . . . . .                               | 55        |
| 4.5.4    | Analytics Page . . . . .                                      | 56        |
| <b>5</b> | <b>Infrastructure and Deployment</b>                          | <b>58</b> |



|       |                                                             |           |
|-------|-------------------------------------------------------------|-----------|
| 5.1   | Containerisation with Docker . . . . .                      | 58        |
| 5.1.1 | Dockerfiles (Frontend and Backend) . . . . .                | 58        |
| 5.1.2 | Docker Compose Configuration . . . . .                      | 58        |
| 5.1.3 | Multi-Service Networking . . . . .                          | 58        |
| 5.2   | Infrastructure as Code with Terraform . . . . .             | 59        |
| 5.2.1 | DigitalOcean Provider . . . . .                             | 59        |
| 5.2.2 | VPC, Droplet and Firewall Resources . . . . .               | 59        |
| 5.2.3 | DNS Management with DigitalOcean . . . . .                  | 59        |
| 5.2.4 | Remote State Management with DigitalOcean Spaces . . . . .  | 59        |
| 5.3   | CI/CD Pipeline with GitHub Actions . . . . .                | 60        |
| 5.3.1 | Workflow Overview . . . . .                                 | 60        |
| 5.3.2 | Build Stage (Docker Build and Push to Docker Hub) . . . . . | 61        |
| 5.3.3 | Deployment Stage (SSH and Docker Compose) . . . . .         | 61        |
| 5.3.4 | Environment Secrets Management . . . . .                    | 61        |
| 5.4   | Production Environment . . . . .                            | 61        |
| 5.4.1 | DigitalOcean Droplet Specifications . . . . .               | 61        |
| 5.4.2 | Production Service Architecture . . . . .                   | 61        |
| 5.4.3 | N8N Deployment Alongside the Application . . . . .          | 62        |
|       | <b>General Conclusion</b>                                   | <b>63</b> |
|       | <b>Bibliography and Webography</b>                          | <b>64</b> |
|       | <b>A Complete Prisma Schema</b>                             | <b>65</b> |
|       | <b>B API Endpoints Reference</b>                            | <b>66</b> |
|       | <b>C N8N Workflow JSON Exports</b>                          | <b>67</b> |
|       | <b>D Docker Compose File</b>                                | <b>68</b> |
|       | <b>E GitHub Actions Workflow</b>                            | <b>69</b> |

# List of Figures

|     |                                                                 |    |
|-----|-----------------------------------------------------------------|----|
| 1.1 | Scrum methodological framework . . . . .                        | 19 |
| 2.1 | Global use case diagram . . . . .                               | 30 |
| 2.2 | Customer use cases . . . . .                                    | 31 |
| 2.3 | Seller use cases . . . . .                                      | 32 |
| 2.4 | Administrator use cases . . . . .                               | 33 |
| 2.5 | Sequence: registration, email verification and login . . . . .  | 34 |
| 2.6 | Sequence: order placement . . . . .                             | 35 |
| 2.7 | Sequence: product verification (AI and administrator) . . . . . | 35 |
| 3.1 | Global system architecture . . . . .                            | 42 |
| 3.2 | NestJS modular architecture . . . . .                           | 43 |
| 3.3 | Docker Compose services . . . . .                               | 44 |
| 3.4 | Entity-Relationship diagram . . . . .                           | 45 |
| 3.5 | BetterAuth authentication flow . . . . .                        | 46 |
| 3.6 | N8N workflow — AI verification . . . . .                        | 47 |
| 3.7 | N8N workflow — Database chat assistant . . . . .                | 48 |
| 3.8 | Class diagram . . . . .                                         | 49 |
| 4.1 | Cheebo monorepo structure . . . . .                             | 50 |
| 4.2 | Role-based access control implementation . . . . .              | 51 |
| 4.3 | Admin dashboard . . . . .                                       | 52 |
| 4.4 | Store and product management interface . . . . .                | 53 |
| 4.5 | Landing page . . . . .                                          | 54 |
| 4.6 | Store dashboard . . . . .                                       | 55 |
| 4.7 | AI verification panel . . . . .                                 | 56 |
| 4.8 | Analytics page . . . . .                                        | 57 |
| 5.1 | Docker Compose network architecture . . . . .                   | 58 |
| 5.2 | Terraform resources . . . . .                                   | 60 |
| 5.3 | GitHub Actions CI/CD pipeline . . . . .                         | 60 |
| 5.4 | Production architecture . . . . .                               | 62 |

# List of Tables

|     |                                                       |    |
|-----|-------------------------------------------------------|----|
| 1.1 | Comparative analysis of competing platforms . . . . . | 16 |
| 2.1 | Non-functional requirements . . . . .                 | 29 |
| 2.2 | MoSCoW priority and complexity legend . . . . .       | 37 |
| 3.1 | Main REST API endpoints . . . . .                     | 46 |

## List of Abbreviations

---

|             |                                        |
|-------------|----------------------------------------|
| <b>AI</b>   | Artificial Intelligence                |
| <b>API</b>  | Application Programming Interface      |
| <b>CD</b>   | Continuous Deployment                  |
| <b>CI</b>   | Continuous Integration                 |
| <b>DB</b>   | Database                               |
| <b>DNS</b>  | Domain Name System                     |
| <b>DTO</b>  | Data Transfer Object                   |
| <b>DWMM</b> | Web, Mobile and Multimedia Development |
| <b>JWT</b>  | JSON Web Token                         |
| <b>ORM</b>  | Object-Relational Mapping              |
| <b>PFE</b>  | Final Year Project                     |
| <b>REST</b> | Representational State Transfer        |
| <b>SPA</b>  | Single Page Application                |
| <b>SSH</b>  | Secure Shell                           |
| <b>UML</b>  | Unified Modeling Language              |
| <b>VPC</b>  | Virtual Private Cloud                  |

# General Introduction

---

This introduction explains the context for the Cheebo project, why the system was created, who the intended users are, and how the work was organised from conception through delivery.

Cheebo is a multi-vendor marketplace developed as a final year engineering project in partnership with TEK-UP and NeuralBey. The platform is designed to give Tunisian sellers a modern, secure online storefront while offering customers an intelligent shopping experience and administrators a reliable way to manage vendors, products, and verification workflows.

The project combines academic goals and real-world needs: it must satisfy the PFE requirements for software engineering, while also providing a practical solution that addresses the host organisation's expectations for a modern web application. The following chapters present the host organisation, the business context, the requirements analysis, the system architecture, implementation details, and the deployment strategy.

# Chapter 1 General Project Context

---

*This chapter sets the scene — why this project exists, who it is for, and how its development was organised. It introduces the host organisation, the business motivation behind Cheebo, the competitive landscape in which it operates, the proposed solution, and the working methodology adopted throughout the internship.*

## 1.1 Presentation of the Host Organisation

### 1.1.1 NeuralBey — Company Overview

NeuralBey is a Tunisian technology company that delivers end-to-end engineering services across a broad spectrum of modern computing fields. The company positions itself as a partner that translates client visions into working systems, summarised by its own statement: *“From web and mobile apps to AI systems, IoT, embedded engineering, and 3D solutions — we build the technology that powers your vision.”*

This breadth allows NeuralBey to handle a project from initial concept through deployment without external dependencies, and to combine disciplines that are usually siloed — for example, integrating artificial intelligence into conventional web platforms, or interfacing embedded devices with cloud services. The company’s portfolio reflects this versatility:

- **Web and mobile applications** for consumer products and enterprise tooling;
- **AI systems**, including model integration, automation pipelines and intelligent assistants;
- **IoT and embedded engineering**, where NeuralBey designs firmware and connected devices;
- **3D solutions** for product visualisation, AR/VR and digital twins.

### 1.1.2 Domain, Team and Mission

NeuralBey operates as a multidisciplinary studio. Each project is staffed by engineers selected from the relevant domain (frontend, backend, AI, hardware, 3D), and a professional supervisor accompanies the work from scoping through delivery. The team’s working culture emphasises code review, iterative delivery and frequent stakeholder

feedback — practices that aligned naturally with the academic requirements of a final year project.

The present project was carried out under the professional supervision of **Mr. Mohammed Aziz Chibani**, who provided architectural guidance, regular reviews, and technology recommendations throughout the internship. Academic oversight was provided in parallel by **Ms. Sawssen Jalel**, ensuring the work also satisfied the methodological and documentation standards of the engineering diploma.

## 1.2 Project Context

### 1.2.1 Project Origin and Motivation

The Cheebo project originated from an internal need identified at NeuralBey: the Tunisian online retail landscape lacks a modern, multi-vendor platform that is both seller-friendly and equipped with the automation features expected of contemporary marketplaces. Existing local solutions are typically single-vendor stores or classified-ad sites, and they offer limited tooling for moderation, content quality and discovery.

NeuralBey saw an opportunity for a product combining three differentiating capabilities:

- (i) a true multi-vendor model with self-service onboarding for sellers;
- (ii) AI-assisted moderation of stores and products to reduce manual review load;
- (iii) a deployment story that demonstrates contemporary DevOps practices end-to-end.

The PFE topic was therefore scoped jointly with the professional supervisor, with the explicit goal of producing a system that could serve both as a portfolio piece for the company and as a foundation for further internal development beyond the internship.

### 1.2.2 Multi-Vendor Marketplace Concept

A *multi-vendor marketplace* is a platform on which independent sellers operate their own stores within a shared environment governed by a central operator. It differs from two adjacent models:

- a **single-vendor store**, where the platform itself owns the inventory and the brand;
- a **classified-ad site**, where the platform only lists offers and plays no role in transactions or quality control.

A marketplace must reconcile three concerns simultaneously: **seller autonomy** (each seller manages catalogue, branding and inventory), **buyer trust** (the platform

guarantees a baseline of product authenticity and fulfilment) and **operator governance** (administrators onboard sellers, moderate content, suspend stores and curate featured selections). These three perspectives drive the architecture of Cheebo: every feature is designed to balance autonomy for sellers, trust for buyers, and control for administrators. The integration of AI verification is a direct response to the buyer-trust requirement at the scale a marketplace demands.

### 1.2.3 Target Users

Three actor categories were identified at the scoping stage:

- **Customer** — an end-user who browses the catalogue, places orders and tracks deliveries. Expects a fast, mobile-friendly experience with reliable search and clear product information.
- **Seller** — a small or medium merchant who creates a store, manages a product catalogue and fulfils orders. Expects low onboarding friction, clear analytics, and protection against unfair competition from low-quality listings.
- **Administrator** — the platform operator (NeuralBey staff) who reviews seller applications, moderates flagged content, curates featured stores, and intervenes when a store violates the marketplace rules.

## 1.3 Study of Existing Solutions

### 1.3.1 Existing Tunisian E-Commerce Platforms

Three categories of competing platforms were studied:

- **Pan-African marketplaces (Jumia).** Jumia Tunisia is the most visible regional marketplace. It supports multiple vendors at scale and offers a polished customer experience, but seller onboarding is heavyweight and the platform is not tailored to small Tunisian merchants.
- **Classified-ad sites (Tayara, Affariyet).** Tayara dominates the local classified-ad market. It offers excellent discovery for sellers, but performs no escrow, no order management, no integrated payment and no quality moderation.
- **Single-vendor stores (MyTek, Wiki, etc.).** These are vertically integrated retailers that operate their own catalogue. They cannot be used by independent sellers.

### 1.3.2 Limitations of Current Solutions

From the study above, four gaps emerged:



- L1. No AI-assisted moderation.** On existing platforms, store and product verification are entirely manual — slow, inconsistent, and impractical at scale.
- L2. Heavyweight seller onboarding.** Pan-regional players require contractual paperwork unsuitable for small merchants.
- L3. Limited operator tooling.** Classified-ad sites have weak admin dashboards; single-vendor stores have none for external sellers.
- L4. Outdated technical foundations.** Several platforms still rely on monolithic stacks without modern CI/CD or infrastructure-as-code, making evolution costly.

### 1.3.3 Competitive Analysis

Table 1.1 summarises the comparison along the four criteria that drove the design of Cheebo. A check mark (✓) indicates the criterion is fully supported, a cross (✗) indicates it is absent, and a tilde (~) indicates partial support.

Table 1.1: Comparative analysis of competing platforms

| Criterion              | Jumia | Tayara | Cheebo |
|------------------------|-------|--------|--------|
| Multi-vendor model     | ✓     | ~      | ✓      |
| AI verification        | ✗     | ✗      | ✓      |
| Admin dashboard        | ~     | ✗      | ✓      |
| CI/CD pipeline (open)  | ✗     | ✗      | ✓      |
| Lightweight onboarding | ✗     | ✓      | ✓      |

The **C** column type used above is defined locally as a centred variant of **X**; it is declared once in the preamble.

## 1.4 Proposed Solution

### 1.4.1 Cheebo Overview

Cheebo is a multi-vendor marketplace designed around three pillars: a self-service seller experience, AI-assisted content verification, and a modern, fully containerised deployment. The platform is built as a single-page **React 19** application backed by a modular **NestJS** API, with **MariaDB** as the relational store and **n8n** acting as an orchestration layer for AI tasks. Authentication is handled by **Better-Auth** with email verification, and **Prisma** is used as the ORM. The full system is packaged with Docker Compose, provisioned on DigitalOcean via Terraform, and delivered through a GitHub Actions CI/CD pipeline.

Sellers create a store in minutes, populate it with products and tags, and benefit from automatic AI verification that surfaces a trust badge to potential buyers. Administrators review borderline cases through a dedicated dashboard, suspend stores when needed, and override automated decisions. Customers browse a unified catalogue, place orders across multiple sellers in a single checkout, and interact with an in-app AI assistant for discovery and support.

#### 1.4.2 Key Differentiators

Five differentiators set Cheebo apart from the platforms surveyed in the previous section:

- D1. AI verification of stores and products** via an n8n workflow that calls a hosted LLM and writes back an `adminReviewed` flag plus a textual rationale.
- D2. Lightweight seller onboarding** through a seller application form reviewed by administrators, with a free tier offering a single store at zero cost.
- D3. Integrated administration tooling** (review, suspend, curate, cascade-delete) implemented as first-class features rather than database admin scripts.
- D4. Conversational data access** via a database-aware chatbot built on n8n, allowing administrators to query the platform in natural language.
- D5. Modern DevOps foundations** — pnpm monorepo, Docker Compose, Terraform on DigitalOcean, and GitHub Actions CI/CD — demonstrating production-grade engineering practices end-to-end.

#### 1.4.3 Project Scope

The scope was agreed with the professional supervisor and is split between in-scope and out-of-scope items so that the deliverables remain clear and bounded.

**In scope:** account creation and email verification; seller application workflow with admin review; store and product CRUD with image upload; tag-based product recommendations with a top-seller fallback; order placement, items and history; admin moderation panels (store suspension, AI-verified badges, cascade-delete); AI verification and chat assistant via n8n; premium tier unlocking additional stores; and infrastructure-as-code deployment.

**Out of scope** (deferred to future iterations): integrated payment processing (e.g. Konnect or Stripe); a native mobile application; advanced fraud detection; on-premise LLM hosting; multi-currency support; and a full-text search engine such as Elasticsearch or Typesense.

## 1.5 Work Methodology

### 1.5.1 Classical vs Agile Approaches

Every software project requires a methodological framework to organise work, manage priorities, and guarantee the delivery of a quality product. Two major families of methods have historically competed: the **classical** (predictive) approach and the **agile** (adaptive) approach. Their fundamental difference lies in how they handle change and value delivery.

**Classical approach — Waterfall.** The Waterfall method divides the project into strictly sequential phases: requirements, design, development, testing, and delivery. Each phase must be fully validated before the next begins. This model suits projects whose requirements are stable and known in advance, but it shows its limits as soon as the context evolves:

- Requirements are frozen at launch; any late change is costly.
- The client sees a working product only at the very end of the project.
- Defects and risks are detected in the test phase, too late to address without significant impact.
- Documentation tends to be voluminous and quickly out of sync with the actual code.

**Agile approach — Core principles.** Agility was born from the *Agile Manifesto* (2001), which champions collaboration, adaptability, and the continuous delivery of value. Rather than planning the entire project upfront, work is organised into **short cycles called sprints** (one to four weeks), each producing a functional and tested increment. This approach offers several concrete advantages:

- Requirements are refined continuously from client and stakeholder feedback.
- Value is delivered from the first sprints; the product is usable well before the end of the project.
- Risks are identified and addressed early.
- Daily communication fosters responsiveness and team alignment.

### 1.5.2 Why Scrum?

Among the agile methodologies available — Scrum, Kanban, XP, SAFe — **Scrum** was chosen to manage this project for the following reasons:

- **Flexibility:** the requirements of Cheebo evolved throughout the internship; Scrum allows supervisor feedback to be integrated at each sprint.
- **Visibility:** a prioritised backlog and bounded sprints provide a clear view of progress at any point.
- **Regular rhythm:** two-week sprints impose a structuring cadence well-suited to the internship calendar.
- **Frequent deliveries:** each sprint produces a functional increment, facilitating demonstrations and validations with the professional supervisor.
- **Industry adoption:** Scrum is the most widely practised agile framework, and its use in a PFE context prepares the student for professional practice.

### 1.5.3 The Scrum Framework

Scrum is an agile project management framework that helps teams organise and supervise their work through values, principles, and practices. It encourages teams to learn from experience, self-organise while working on a problem, and reflect on their successes and failures to continuously improve.

Figure 1.1 illustrates the Scrum process: successive sprints feed functional increments into the product, validated at each iteration by the Product Owner.

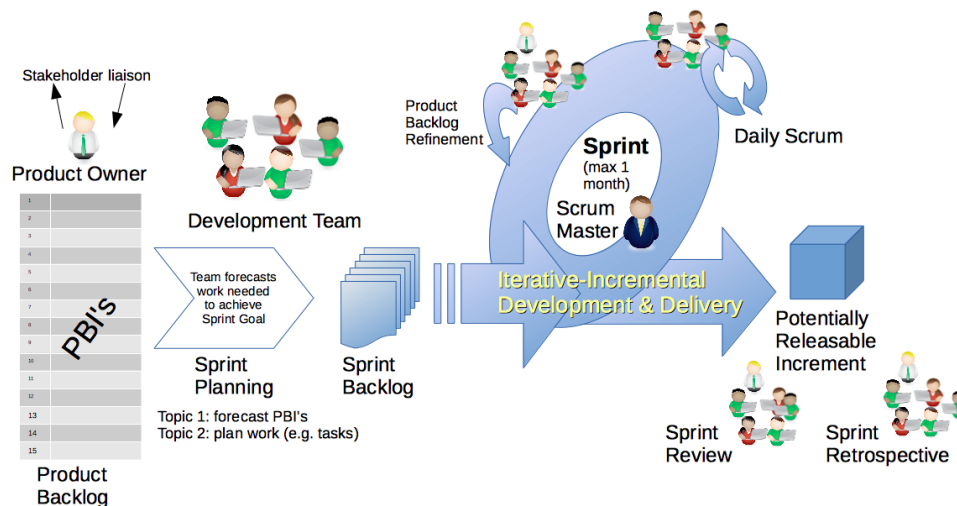


Figure 1.1: Scrum methodological framework (source: Dr Ian Mitchell, Wikimedia Commons, CC0 / CC BY-SA 4.0).

### 1.5.4 Scrum Roles

Scrum defines three complementary roles:

- **Product Owner:** represents the stakeholders and defines the product vision. He prioritises the Product Backlog items and validates each delivered increment. In this project, this role was fulfilled by **Mr. Mohammed Aziz Chibani** (NeuralBey), who approved the sprint backlog and conducted sprint reviews.
- **Scrum Master:** guarantees the application of the Scrum framework, facilitates team work, and removes obstacles. Given the single-developer nature of this PFE, this role was also assumed by Mr. Chibani, who provided architectural guidance and methodology coaching.
- **Development Team:** responsible for the technical realisation of features and the delivery of a potentially deployable increment at the end of each sprint. Composed in this project of the student, **Nadim Jebali**.

#### 1.5.5 Scrum Events

The Scrum framework organises work around five key events:

- **Sprint:** a fixed-duration iteration (two weeks in this project) during which the team produces a product increment.
- **Sprint Planning:** an opening meeting in which the team selects and plans the backlog items to realise during the sprint.
- **Daily Scrum:** a brief daily synchronisation of 15 minutes to coordinate work and surface blockers.
- **Sprint Review:** a demonstration of the increment to stakeholders at the end of the sprint to collect feedback and validate progress.
- **Sprint Retrospective:** a process improvement meeting at the end of each sprint. Key improvements that emerged from retrospectives in this project include the adoption of `pnpm` for monorepo management, the migration from manual deployments to GitHub Actions, and the introduction of `n8n` for AI workflows.

#### 1.5.6 Scrum Artefacts

Three artefacts ensure transparency of the work:

- **Product Backlog:** a prioritised list of all expected product functionalities, maintained as user stories with MoSCoW priorities and complexity estimates (see Chapter 2).
- **Sprint Backlog:** a sub-set of the Product Backlog selected for a given sprint, broken down into technical tasks.

- **Increment:** a potentially deliverable version of the product obtained at the end of each sprint. The full project ran across approximately ten sprints, grouped into three milestones:
- **Foundations (sprints 1–3):** repository setup, authentication with Better-Auth, base data model, and the seller-application flow.
- **Core marketplace (sprints 4–7):** stores, products, orders, admin panels, and tag-based recommendations.
- **Intelligence and delivery (sprints 8–10):** the AI verification pipeline, the in-app AI chat assistant, Dockerisation, Terraform provisioning, and the CI/CD pipeline.

### 1.5.7 Tools Used

The following tools were used throughout the project, covering source control, development, containerisation, infrastructure provisioning, workflow automation, and API testing.

**GitHub**[github.com](https://github.com)

A web-based platform for version control and collaborative software development built on Git. It was used for source control, code review via pull requests, and continuous integration and deployment through GitHub Actions workflows.

**Notion**[notion.so](https://notion.so)

An all-in-one productivity workspace combining notes, databases, and kanban boards. It served as the project's backlog management tool, sprint board, and a living record of user stories and acceptance criteria.

**Visual Studio Code**[code.visualstudio.com](https://code.visualstudio.com)

A lightweight but powerful source-code editor developed by Microsoft. It was the primary IDE throughout the project, extended with plugins for TypeScript, Prisma schema editing, ESLint linting, and Git integration.

**Docker**[docker.com](https://docker.com)

An open platform for developing, shipping, and running applications inside isolated containers. It was used to containerise all services — PostgreSQL, the NestJS backend, the React frontend, and the n8n workflow engine — ensuring parity between development and production environments.



**Terraform**  
[terraform.io](https://terraform.io)

An open-source infrastructure-as-code tool by HashiCorp that allows cloud resources to be defined in declarative configuration files. It was used to provision and manage the DigitalOcean droplet, DNS records, and firewall rules in a reproducible way.



**n8n**  
[n8n.io](https://n8n.io)

A fair-code workflow automation platform with a visual node-based editor. It was used to orchestrate the AI-assisted product and store verification pipeline as well as the in-app AI chat assistant, connecting the backend to large language model APIs.



**Postman**  
[postman.com](https://postman.com)

A collaborative API development platform for designing, testing, and documenting HTTP endpoints. It was used during back-end development to manually exercise and validate every REST endpoint before integration with the frontend.



**pnpm**  
[pnpm.io](https://pnpm.io)

A fast, disk-efficient package manager for Node.js that uses hard links and a content-addressable store. It managed all JavaScript dependencies across the monorepo workspace, ensuring consistent installs in both development and CI.

## Key Takeaways

- Cheebo originates from an internal NeuralBey brief: build a modern, Tunisia-oriented multi-vendor marketplace with AI-assisted moderation.
- Three actors — customer, seller, administrator — drive every architectural decision throughout the report.
- Compared with Jumia and Tayara, Cheebo differentiates on *AI verification*, *lightweight seller onboarding*, *first-class admin tooling*, and *modern DevOps* (Docker, Terraform, GitHub Actions).
- Development followed two-week Scrum sprints with NeuralBey reviews, structured around three milestones: foundations, core marketplace, and intelligence-and-delivery.

## Chapter Conclusion

This chapter established the foundations of the Cheebo project. It introduced NeuralBey, the host organisation, and explained the business motivation behind building

a modern Tunisian multi-vendor marketplace. A study of existing platforms revealed four gaps — absent AI moderation, heavyweight onboarding, weak admin tooling, and outdated technical foundations — that Cheebo directly addresses. The proposed solution, its key differentiators, and its bounded scope were presented. Finally, the Scrum agile methodology was described in detail, including its roles, events, and artefacts, and the three-milestone sprint plan that organised the ten-week development was outlined. The following chapter formalises the requirements derived from this context.



## Chapter 2 Requirements Analysis and Specification

---

*This chapter identifies the three system actors, formalises the functional and non-functional requirements of Cheebo, and illustrates them with UML use-case and sequence diagrams. The requirements were consolidated during the first three sprints in collaboration with the professional supervisor and serve as the contract that the rest of the report builds upon.*

### 2.1 Identification of Actors

The platform recognises three actor categories. They are distinct *roles* stored on the `User` table rather than distinct user records — a single account can be promoted from *customer* to *seller* once a seller application is approved, and an administrator account is created automatically on first boot.

#### 2.1.1 Customer

The Customer is the default role assigned upon registration. A Customer can browse the catalogue, search products, view individual stores, manage a cart, place an order across multiple sellers in a single checkout, and review their personal order history. The Customer is also the entry point for the seller pipeline: any Customer can submit a seller application and, once approved, gain the Seller role on the same account. Anonymous (non-authenticated) visitors share the read-only abilities of the Customer but cannot maintain a cart or place an order.

#### 2.1.2 Seller

The Seller is a Customer whose seller application has been approved by an administrator. A Seller can create and edit one store under the free tier (or several under the premium tier), populate that store with products, upload product images, attach product tags, view per-store analytics, and consult the order history specific to their store. Sellers also choose a visual template for their store from the templates exposed by the frontend. They cannot, however, review or moderate the work of other sellers.

### 2.1.3 Administrator

The Administrator is created automatically by the backend at first boot and is not exposed through the registration form. The Administrator reviews seller applications, browses every store and every product on the platform, suspends or deletes stores (with cascading deletion of dependent records), overrides automated AI verification decisions, curates featured stores and products on the landing page, manages categories and sub-categories, and consults the platform through a database-aware AI chat assistant.

## 2.2 Functional Requirements

The functional requirements are grouped into seven domains. Each domain corresponds to a NestJS module on the backend and to a matching set of pages on the React frontend; the mapping is made explicit in Chapter 3.

### 2.2.1 User Registration and Authentication

- FR-A1.** The system shall allow a visitor to create an account with an email address and password.
- FR-A2.** The system shall send a verification email containing a one-time link upon successful registration.
- FR-A3.** The system shall prevent unverified accounts from creating a store or placing an order.
- FR-A4.** The system shall authenticate returning users via Better-Auth sessions and issue an HTTP-only cookie.
- FR-A5.** The system shall allow the user to log out and invalidate the corresponding session.
- FR-A6.** The system shall enforce role-based access control on every non-public route through guards and the `@Roles()` decorator.

### 2.2.2 Store Management

- FR-S1.** A Seller shall be able to create a store with a name, description, logo and template.
- FR-S2.** A Seller shall be able to edit their store profile at any time.
- FR-S3.** A free-tier Seller shall be limited to a single store.
- FR-S4.** A premium-tier Seller shall be able to operate multiple stores from the same account.

- FR-S5.** Each store shall expose a public storefront URL identified by a human-readable slug derived from the store name (e.g. `/stores/pawsome-pet-foods`), rather than by its numeric primary key.
- FR-S6.** Slug uniqueness shall be enforced at the database level and collisions resolved by an automatic numeric suffix (`-2`, `-3`, ...). The slug shall be regenerated when the store name changes.
- FR-S7.** The store status (active, pending, suspended) shall be persisted in a `StoreStatusLog` audit trail.
- FR-S8.** The Seller shall be able to customise the storefront across six independent sections — *Theme*, *Header*, *Banner*, *Sidebar*, *Product grid* and *Footer* — through a dedicated split-screen editor with a live preview pane.
- FR-S9.** Four pre-built presets shall be available as starting points for customisation: *Default* and *Minimal* are available to all sellers, while *Modern* and *Classic* are restricted to premium accounts. Applying a preset overwrites the current draft with the preset's section defaults.
- FR-S10.** The Seller shall be able to upload a custom banner image, stored under `/uploads/stores/` and referenced from the customisation JSON.
- FR-S11.** The customisation editor shall support undo/redo on every section change and shall warn the seller before discarding unsaved changes.
- FR-S12.** Customisation features shall be tiered. Free accounts may use a curated subset — a six-colour palette for the primary colour, two fonts (*Inter* and the system default), the *soft* corner radius, checkbox-style filters, square product images, and section visibility toggles. Premium accounts unlock the full set: free-form hex colours, all four fonts, all radii, banner image upload with heading and overlay controls, sidebar inner panel and text colours, non-checkbox filter styles, product grid background, non-square aspect ratios, and footer social links. When a premium subscription expires, the seller's existing customisation values are preserved at the database level and remain visible to visitors; the seller is only prevented from *modifying* those premium fields going forward.

### 2.2.3 Product Management

- FR-P1.** A Seller shall be able to create, edit and delete products belonging to their own store(s).
- FR-P2.** Each product shall accept one or more images of supported MIME types, with a configurable maximum file size.

**FR-P3.** Each product shall support an arbitrary number of tags used by the recommendation engine.

**FR-P4.** Each product shall carry an `AIReviewed` flag controlled by the AI verification pipeline and overridable by an Administrator.

**FR-P5.** Products shall be browsable by category and sub-category.

#### 2.2.4 Order System

**FR-O1.** A Customer shall be able to add and remove items in a cart persisted on the client side.

**FR-O2.** Checkout shall create a single `Order` entity even when the cart spans multiple stores, with one `OrderItem` per product line.

**FR-O3.** Order placement shall trigger a confirmation email through Nodemailer.

**FR-O4.** Each Customer shall be able to consult their personal order history.

**FR-O5.** Each Seller shall be able to consult the orders that include at least one product from their store.

#### 2.2.5 Admin Dashboard

**FR-D1.** The Administrator shall access a dashboard listing pending seller applications, recent activity and platform-wide statistics.

**FR-D2.** The Administrator shall be able to approve or reject seller applications, granting the Seller role on approval.

**FR-D3.** The Administrator shall be able to suspend, reactivate or delete any store, with cascading deletion of its products and orders.

**FR-D4.** The Administrator shall be able to override the `adminReviewed` verdict of any product or store.

#### 2.2.6 AI Verification

**FR-V1.** Upon creation, every store and product shall be sent to an n8n workflow (`cheebo-ai-verify`) that calls a hosted large-language model.

**FR-V2.** The workflow shall return a decision (*approve*, *flag*, *reject*) together with a textual rationale, written back to the entity through a callback endpoint.

**FR-V3.** Auto-approved entities shall display an *AI-verified* badge to customers.

**FR-V4.** Flagged entities shall be listed in the moderation queue for administrative review.

### 2.2.7 Featured Content Curation

**FR-C1.** The Administrator shall be able to mark any store or product as *featured*.

**FR-C2.** Featured entities shall be promoted on the landing page.

**FR-C3.** In the absence of featured products for a given tag, the recommendation engine shall fall back to top-selling products of that tag.

## 2.3 Non-Functional Requirements

The non-functional requirements, summarised in Table 2.1, were prioritised by the professional supervisor during the requirements review and define the qualities the deliverable must exhibit beyond pure functionality.

Table 2.1: Non-functional requirements

| Criterion            | Description                                                                                                                                                                                                                                                                                                            |
|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Performance          | The catalogue and store pages must render in under one second on a desktop connection of 10 Mbit/s; API endpoints under the median use case must respond in under 300 ms.                                                                                                                                              |
| Security             | All passwords are hashed by Better-Auth; sessions are stored in HTTP-only, <code>SameSite=Lax</code> cookies; uploads are MIME- and size-validated; every protected route is gated by an <code>AuthGuard</code> and the <code>@Roles()</code> decorator.                                                               |
| Scalability          | The backend is stateless and horizontally scalable behind a load balancer; uploads are written to a Docker volume that can be migrated to object storage with no code change.                                                                                                                                          |
| Availability         | The production stack runs under Docker Compose with restart policies; CI/CD deployment is zero-downtime through rolling container replacement.                                                                                                                                                                         |
| Usability            | The frontend follows the accessible component patterns of Radix UI, is fully responsive, and complies with the WCAG 2.1 AA contrast guidelines for primary text. Public URLs are slug-based and human-readable, improving share-ability and search-engine indexing.                                                    |
| Maintainability      | The codebase is split into clearly-bounded NestJS modules, the schema is versioned through Prisma migrations, and the infrastructure is reproducible through Terraform. Storefront theming is driven entirely by CSS variables on a single scoped wrapper, so a per-store re-skin requires no component-level changes. |
| Observability        | Application logs are emitted to <code>stdout</code> and aggregated by Docker; the chat assistant offers a queryable view of the database for operational diagnostics.                                                                                                                                                  |
| Internationalisation | The interface is currently English-only; copy is centralised to enable future translation without code changes.                                                                                                                                                                                                        |

## 2.4 Use Case Diagrams

The use cases below were derived directly from the functional requirements in the previous section. They are presented from the most abstract (global) to the most granular (per actor), so that the reader can zoom from the platform-level overview into each role’s specific interactions.

### 2.4.1 Global Use Case Diagram

Figure 2.1 groups the principal use cases of Cheebo around the three actors. Two dotted dependencies illustrate the cross-actor flows on which the rest of the chapter relies: a seller application *triggers* an administrative review («triggers»), and product creation is automatically *verified by AI* («verified by AI»).

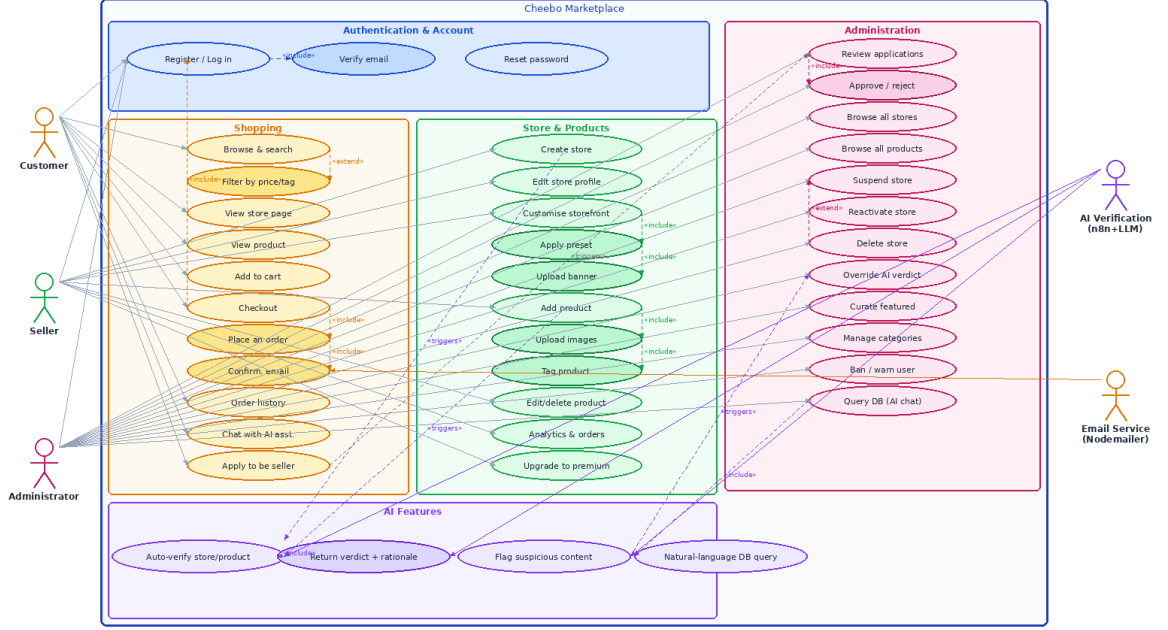


Figure 2.1: Global use case diagram

### 2.4.2 Detailed Use Cases — Customer

The Customer view in Figure 2.2 expands the shopping path from registration to order placement. Registration «includes» email verification, and checkout «includes» both order placement and an authenticated session.

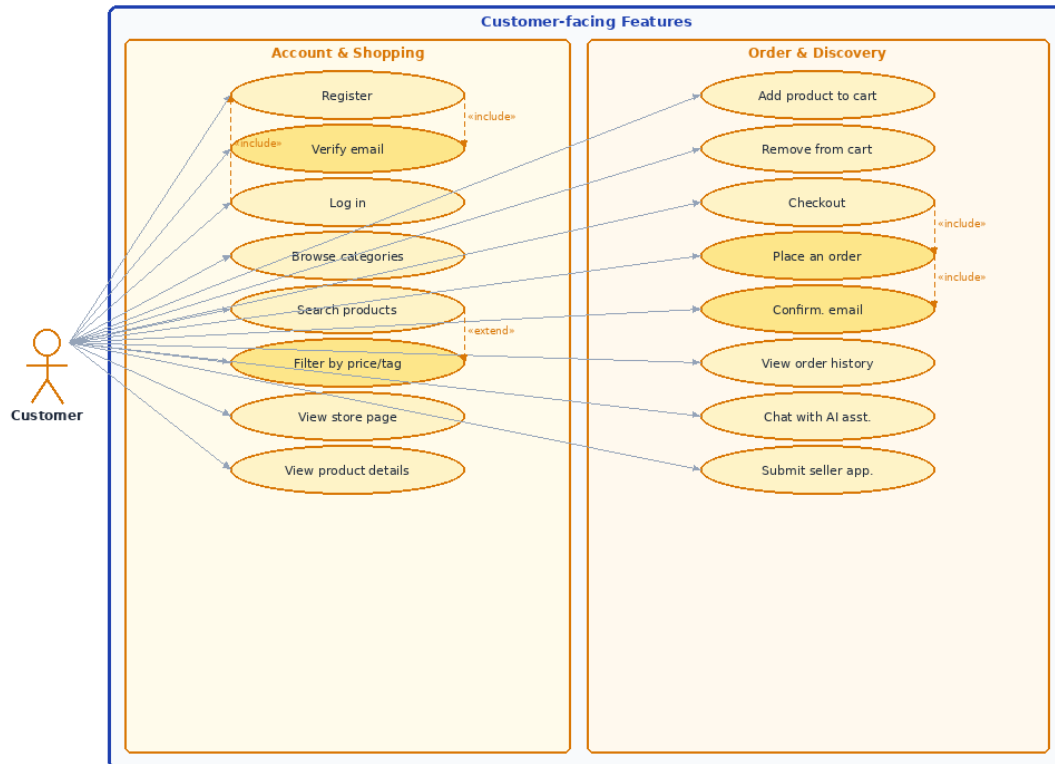


Figure 2.2: Customer use cases

### 2.4.3 Detailed Use Cases — Seller

Figure 2.3 shows that store creation depends on a prior approved seller application, and that opening additional stores depends on having activated the premium tier — the two gating conditions that govern the seller funnel.



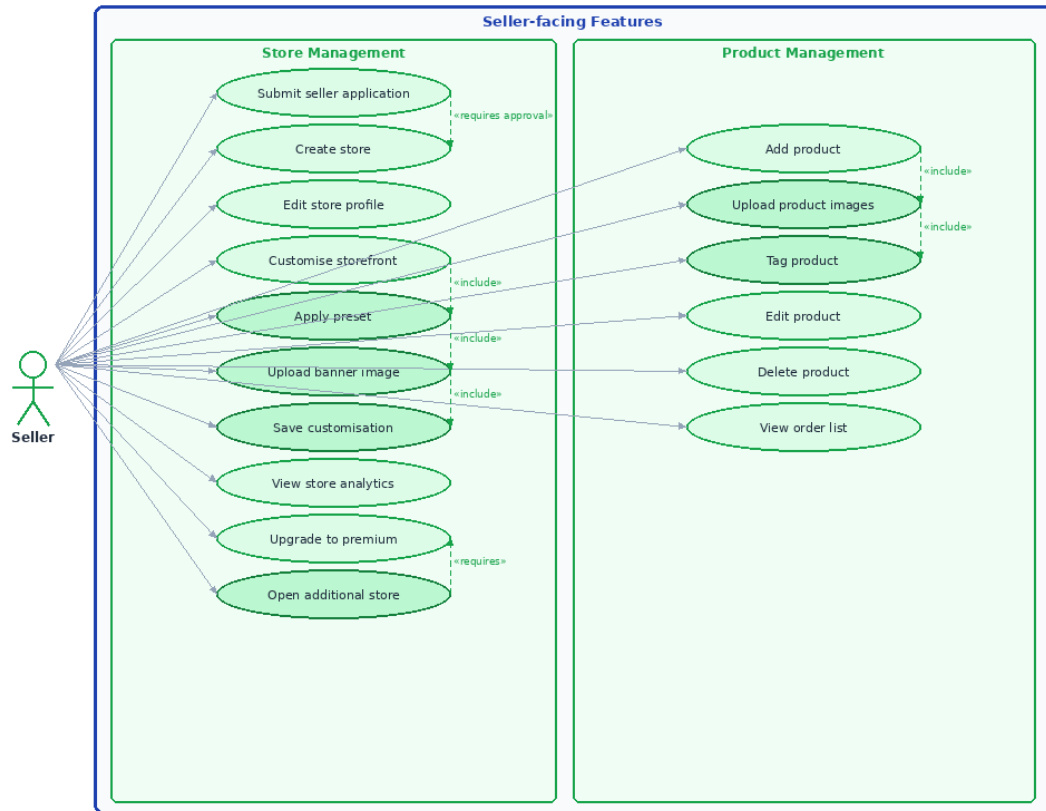


Figure 2.3: Seller use cases

#### 2.4.4 Detailed Use Cases — Administrator

Figure 2.4 highlights the AI verification subsystem as a secondary actor that injects *auto-flag* events into the administration queue. The Administrator remains the final authority on every override, suspension and deletion.

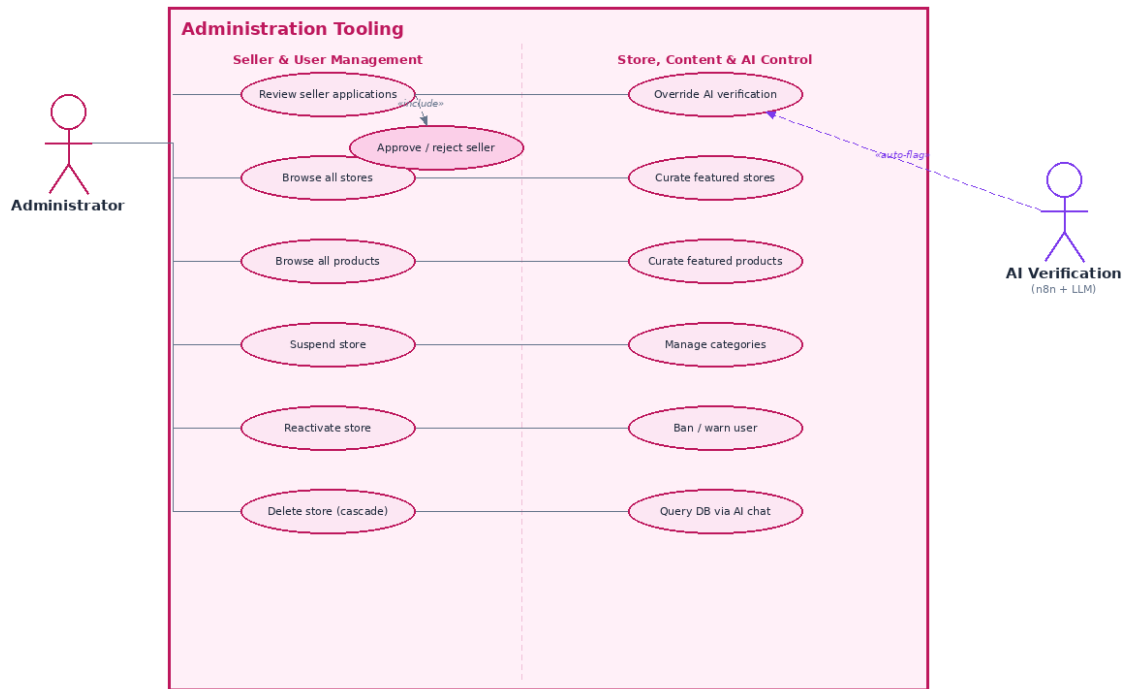


Figure 2.4: Administrator use cases

## 2.5 Sequence Diagrams

Three flows are particularly load-bearing for the architecture of the system: authentication, order placement, and AI-driven product verification. Each is described below with a UML sequence diagram generated from PlantUML sources stored under `diagrams/` in the project repository.

### 2.5.1 Registration, Email Verification and Login

Figure 2.5 traces the authentication flow. Registration creates a `User` row with `emailVerified=false` and triggers a Nodemailer message containing a one-time token; the user activates the account by clicking the link, which flips the flag and allows them to log in. Both Better-Auth and the NestJS layer participate, with sessions materialised as HTTP-only cookies returned by the API.

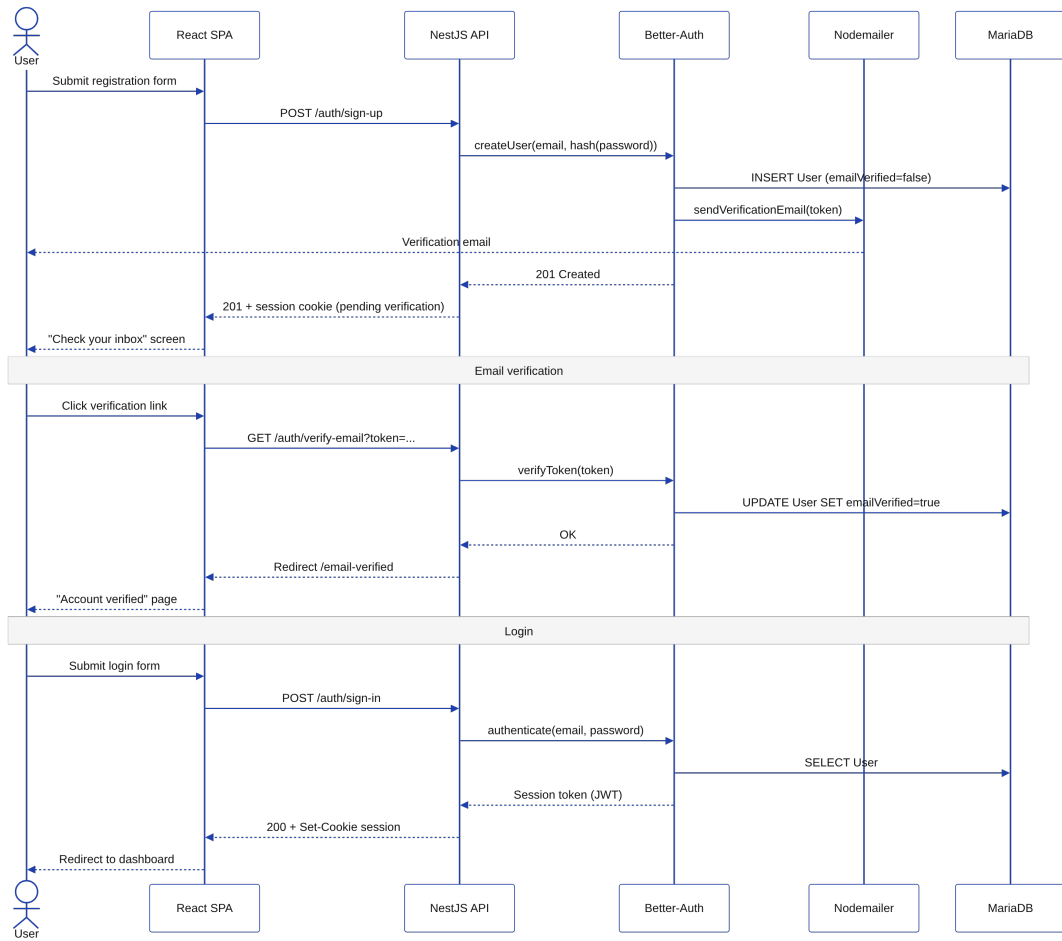


Figure 2.5: Sequence: registration, email verification and login

### 2.5.2 Order Placement

Figure 2.6 describes the checkout path. The cart is held client-side in a Zustand store and posted to the API as a single payload. The `AuthGuard` validates the session before the Order module persists the `Order` row and delegates the creation of line items to the OrderItems module; a confirmation email is sent before the response returns to the SPA, which then clears the cart store and redirects to the success page.

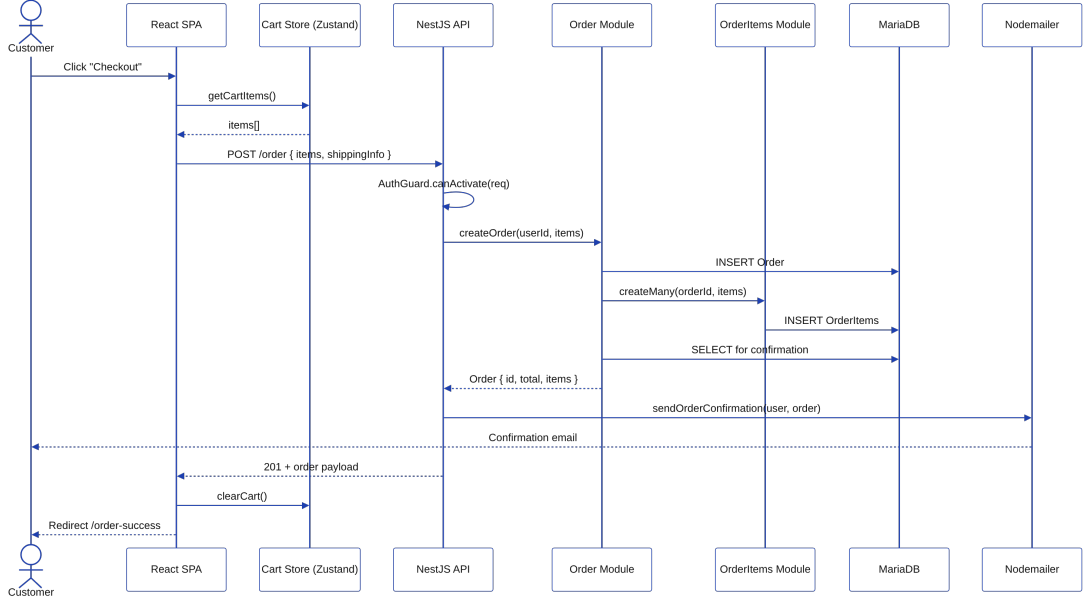


Figure 2.6: Sequence: order placement

### 2.5.3 Product Verification (AI + Administrator)

Figure 2.7 shows the dual-track verification process. Every product creation is forwarded to the `cheebo-ai-verify` webhook on `n8n`, which prompts a hosted LLM (Gemini or Groq) to apply the marketplace rules. The decision flows back to the back-end through a callback endpoint and updates the `adminReviewed` column. The `alt` block at the bottom of the diagram captures the two outcomes: automatic approval (badge shown to the customer) and flagging (entry in the moderation queue, manual override by the Administrator).

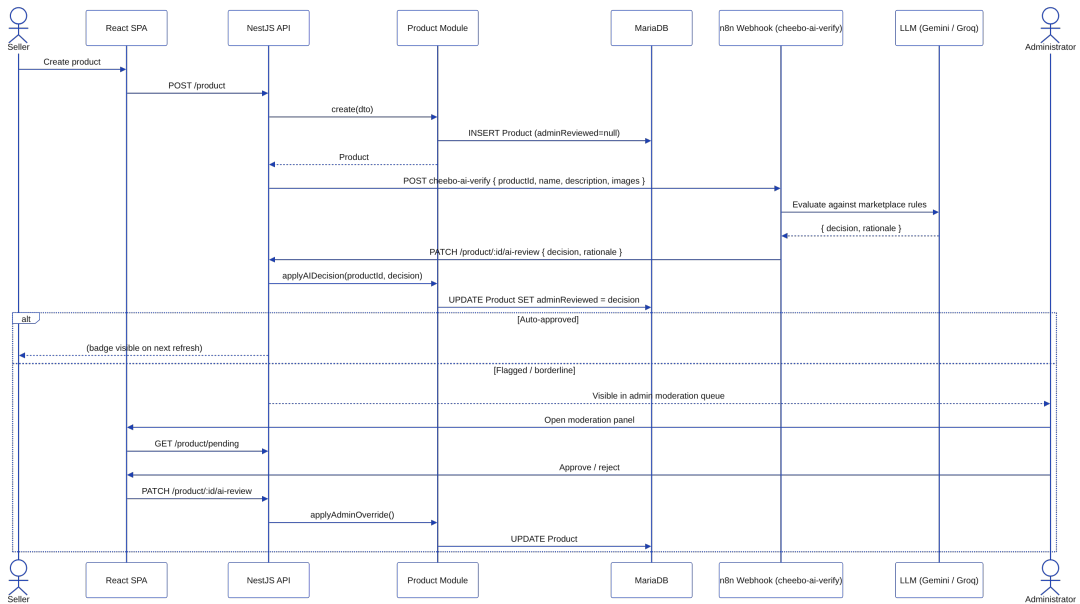


Figure 2.7: Sequence: product verification (AI and administrator)

## 2.6 Modelling Language

This project adopts the **Unified Modelling Language (UML)** to formalise both the static structure and the dynamic behaviour of the system. UML provides a standardised set of diagrams that represent software systems in a language-independent and tool-independent way. Three diagram types are used throughout this report:

- **Use Case diagrams** — describe the interactions between actors (Customer, Seller, Administrator) and the system, identifying the boundaries of the platform’s functionality.
- **Sequence diagrams** — model the temporal exchanges of messages between system components for the three load-bearing flows: authentication, order placement, and AI-driven product verification.
- **Class diagrams** — represent the main domain entities, their attributes, and their associations, providing the structural blueprint from which the Prisma schema is derived.

All diagrams are authored in Mermaid (`.mmd` files) and rendered to PNG via the Mermaid CLI (`mmdc`), keeping diagrams version-controlled alongside source code.

## 2.7 Project Backlog

### 2.7.1 Scrum Team

- **Product Owner:** Mr. Mohammed Aziz Chibani (NeuralBey)
- **Scrum Master:** Mr. Mohammed Aziz Chibani (NeuralBey)
- **Development Team:** Nadim Jebali

### 2.7.2 MoSCoW Priority Legend

Each user story carries a **MoSCoW** priority and a **complexity** estimate, defined in Table 2.2.

Table 2.2: MoSCoW priority and complexity legend

| MoSCoW Priority |                    |                                          |
|-----------------|--------------------|------------------------------------------|
| <b>Must</b>     | <i>Must have</i>   | Essential feature, required for the MVP. |
| <b>Should</b>   | <i>Should have</i> | Important but not blocking.              |
| <b>Could</b>    | <i>Could have</i>  | Desirable, included if time permits.     |
| <b>Won't</b>    | <i>Won't have</i>  | Out of scope for this version.           |

| Complexity |              |                                                 |
|------------|--------------|-------------------------------------------------|
| <b>1</b>   | Simple       | Straightforward implementation, minimal effort. |
| <b>2</b>   | Moderate     | Average complexity, moderate effort.            |
| <b>3</b>   | Complex      | Significant effort, elaborate logic.            |
| <b>5</b>   | Very complex | High effort, advanced technical challenge.      |

### 2.7.3 Product Backlog

Table 2.7.3 presents the product backlog structured as user stories following the template: “As a <role>, I want <action> so that <benefit>”. The columns **P** and **Cx** indicate respectively the MoSCoW priority and the estimated complexity.

| Feature                       | ID   | User Story                                                                                                                 | Priority    | Cx       |
|-------------------------------|------|----------------------------------------------------------------------------------------------------------------------------|-------------|----------|
| <b>F1</b><br>Authentication   | US01 | As a visitor, I want to create an account with my email address so that I can access the platform.                         | <b>Must</b> | <b>2</b> |
|                               | US02 | As a visitor, I want to receive a verification email so that I can activate my account securely.                           | <b>Must</b> | <b>2</b> |
|                               | US03 | As a user, I want to sign in with my credentials so that I can access my personalised dashboard.                           | <b>Must</b> | <b>1</b> |
|                               | US04 | As a user, I want to sign out so that I can protect my account on a shared device.                                         | <b>Must</b> | <b>1</b> |
| <b>F2</b><br>Store Management | US05 | As a seller, I want to create a store with a name, description and logo so that customers can find and recognise my brand. | <b>Must</b> | <b>2</b> |

*Continued on next page*

| Feature                         | ID   | User Story                                                                                                                           | Priority | Cx |
|---------------------------------|------|--------------------------------------------------------------------------------------------------------------------------------------|----------|----|
|                                 | US06 | As a seller, I want my store URL to use a human-readable slug so that it is easy to share.                                           | Must     | 2  |
|                                 | US07 | As a seller, I want to customise my storefront across six sections through a split-screen editor so that my store reflects my brand. | Should   | 5  |
|                                 | US08 | As a seller, I want to apply a preset to my store so that I can get a professional look quickly.                                     | Should   | 2  |
|                                 | US09 | As a premium seller, I want to operate multiple stores so that I can segment my product offerings.                                   | Should   | 2  |
| <b>F3</b><br>Product Management | US10 | As a seller, I want to create, edit and delete products so that I can keep my catalogue up to date.                                  | Must     | 2  |
|                                 | US11 | As a seller, I want to upload multiple product images so that customers can see my products clearly.                                 | Must     | 2  |
|                                 | US12 | As a seller, I want to assign tags to my products so that the recommendation engine can surface them.                                | Should   | 1  |
|                                 | US13 | As a customer, I want to browse products by category so that I can discover relevant items.                                          | Must     | 1  |
| <b>F4</b><br>Order System       | US14 | As a customer, I want to add products to a cart so that I can purchase multiple items at once.                                       | Must     | 2  |
|                                 | US15 | As a customer, I want to check out across multiple stores in a single order so that I do not need separate transactions.             | Must     | 3  |
|                                 | US16 | As a customer, I want to receive a confirmation email after placing an order so that I have a record of my purchase.                 | Must     | 1  |

Continued on next page

| Feature                         | ID   | User Story                                                                                                                                               | Priority | Cx |
|---------------------------------|------|----------------------------------------------------------------------------------------------------------------------------------------------------------|----------|----|
|                                 | US17 | As a seller, I want to view orders containing my products so that I can prepare and fulfil them.                                                         | Must     | 2  |
| <b>F5</b><br>Administration     | US18 | As an admin, I want to review seller applications so that I can approve legitimate merchants.                                                            | Must     | 2  |
|                                 | US19 | As an admin, I want to suspend or delete any store so that I can enforce marketplace rules.                                                              | Must     | 2  |
|                                 | US20 | As an admin, I want to curate featured stores and products so that the landing page promotes quality content.                                            | Should   | 1  |
|                                 | US21 | As an admin, I want to manage categories and sub-categories so that the catalogue stays organised.                                                       | Must     | 1  |
| <b>F6</b><br>AI<br>Verification | US22 | As the system, I want to automatically verify every new store and product via an LLM so that low-quality content is flagged without manual effort.       | Should   | 3  |
|                                 | US23 | As an admin, I want to override any AI verdict so that I remain the final authority on moderation decisions.                                             | Must     | 1  |
|                                 | US24 | As a customer, I want to see an AI-verified badge on trusted products so that I can shop with confidence.                                                | Should   | 1  |
| <b>F7</b><br>Premium<br>Tier    | US25 | As a seller, I want to subscribe to a premium plan so that I can unlock advanced storefront features.                                                    | Should   | 3  |
|                                 | US26 | As a premium seller, I want access to all customisation controls so that I can fully personalise my store appearance.                                    | Should   | 3  |
|                                 | US27 | As the system, I want to preserve a seller's existing premium customisation after subscription expiry so that their store continues to look as designed. | Could    | 2  |

Continued on next page



| Feature                     | ID   | User Story                                                                                                                                                                                                                   | Priority | Cx |
|-----------------------------|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|----|
| F8<br>CI/CD &<br>Deployment | US28 | As a developer, I want every service to run in a Docker container so that the environment is identical across development and production.                                                                                    | Must     | 2  |
|                             | US29 | As a developer, I want the backend and frontend images to be automatically built and pushed to Docker Hub on every push to main so that deployments are always up to date.                                                   | Must     | 2  |
|                             | US30 | As a developer, I want the production droplet to be provisioned automatically via Terraform so that the infrastructure is reproducible and version-controlled.                                                               | Should   | 3  |
|                             | US31 | As a developer, I want the application to be deployed to DigitalOcean via SSH on every push to main so that updates reach production without manual intervention.                                                            | Must     | 3  |
|                             | US32 | As a developer, I want all secrets and environment variables to be managed through GitHub Actions secrets so that no credentials are stored in the repository.                                                               | Must     | 1  |
|                             | US33 | As a developer, I want the domain DNS A records to be updated automatically to the new droplet IP via the DigitalOcean Terraform provider so that the application is always reachable at <code>nadimjebali.engineer</code> . | Should   | 2  |

## Key Takeaways

- Three actors — Customer, Seller, Administrator — are modelled as roles on a single **User** table; an account can be promoted across roles without re-registering.
- Functional requirements are grouped into seven domains (authentication, store, product, order, admin dashboard, AI verification, featured curation), each mapped one-to-one with a backend NestJS module.
- The non-functional contract privileges *security*, *performance* and *maintainability* as first-order qualities, with concrete targets stated in Table 2.1.
- The Product Backlog comprises 33 user stories across 8 features, prioritised with

MoSCoW and estimated for complexity.

## Chapter Conclusion

This chapter formalised the requirements of the Cheebo platform. The three system actors were identified and their responsibilities delimited. Functional requirements were grouped into eight domains — authentication, store management, product management, orders, administration, AI verification, premium tier, and CI/CD deployment — and expressed both as structured requirement statements and as a user-story Product Backlog with MoSCoW priorities and complexity estimates. Non-functional constraints were captured in a consolidated table. UML use-case and sequence diagrams illustrated the system boundaries and the three load-bearing flows. The following chapter builds on these specifications to present the system design and architecture.

## Chapter 3 Design and Architecture

---

*This chapter presents the global and detailed system architecture, database design, API design, and the N8N automation workflow designs.*

### 3.1 Global Architecture

#### 3.1.1 3-Tier Architecture Overview

Cheebo follows a classic three-tier architecture separating presentation, business logic, and data concerns. Figure 3.1 illustrates how the React SPA (frontend), the NestJS API (backend), and the MariaDB database interact, with n8n sitting alongside the backend as an automation layer.

*[IMAGE TO INSERT: 3-tier architecture diagram (Frontend / Backend / DB)]*

Figure 3.1: Global system architecture

#### 3.1.2 N8N as an Automation Layer

### 3.2 Detailed Technical Architecture

### 3.2.1 NestJS Modular Architecture

The backend is structured as a set of feature modules, each encapsulating its own controller, service, and DTOs. Figure 3.2 shows the principal modules — Auth, Store, Product, Order, Category, and AI — and their dependency relationships.


*[IMAGE TO INSERT: NestJS module diagram (Auth, Store, Product, Order, AI...)]*

Figure 3.2: NestJS modular architecture

### 3.2.2 React SPA Architecture

### 3.2.3 Docker Compose Services Diagram

The full application stack is defined in a single `docker-compose.yml` file. Figure 3.3 shows the four services — frontend (Nginx), backend (NestJS), database (MariaDB), and n8n — together with their exposed ports and shared volumes.

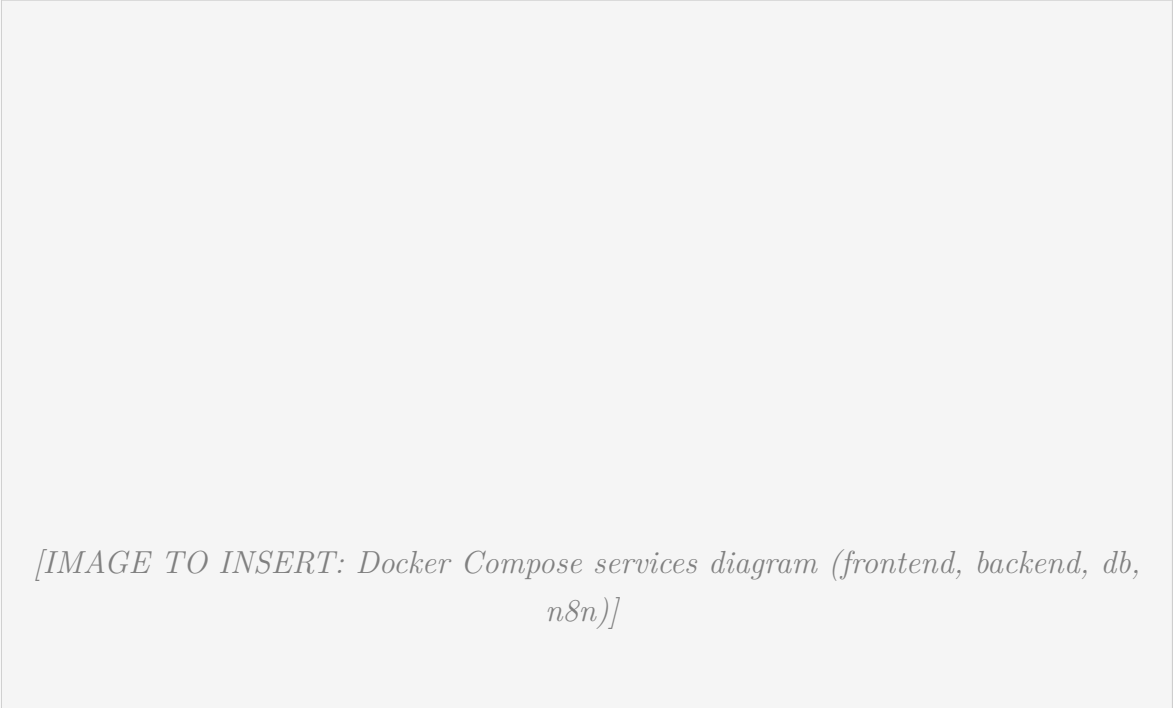

*[IMAGE TO INSERT: Docker Compose services diagram (frontend, backend, db, n8n)]*

Figure 3.3: Docker Compose services

## 3.3 Database Design

### 3.3.1 Entity-Relationship Diagram

Figure 3.4 presents the full entity-relationship diagram of the Cheebo database. The central **User** entity branches into **Store**, **SellerApplication**, and **Order**, while **Product** links to **Store**, **Category**, and the AI verification status fields.



*[IMAGE TO INSERT: Full ER diagram (User, Store, Product, Order, SellerApplication...)]*

Figure 3.4: Entity-Relationship diagram

### 3.3.2 Prisma Schema Overview

### 3.3.3 Explanation of Key Relationships

## 3.4 API Design

### 3.4.1 REST API Design Principles

### 3.4.2 Endpoint Structure

Table 3.1: Main REST API endpoints

| Method | Route               | Description                 |
|--------|---------------------|-----------------------------|
| POST   | /auth/sign-up       | Register a new user         |
| POST   | /auth/sign-in       | Log in                      |
| GET    | /store              | List stores                 |
| POST   | /store              | Create a store              |
| GET    | /product            | List products               |
| POST   | /product            | Create a product            |
| GET    | /order/my           | Get my orders               |
| POST   | /seller-application | Submit a seller application |

### 3.4.3 Authentication Flow (BetterAuth)

Authentication is handled entirely by the Better-Auth library. Figure 3.5 details the session creation flow: after successful credential validation, Better-Auth issues an HTTP-only session cookie that is verified on every subsequent protected request via the AuthGuard.

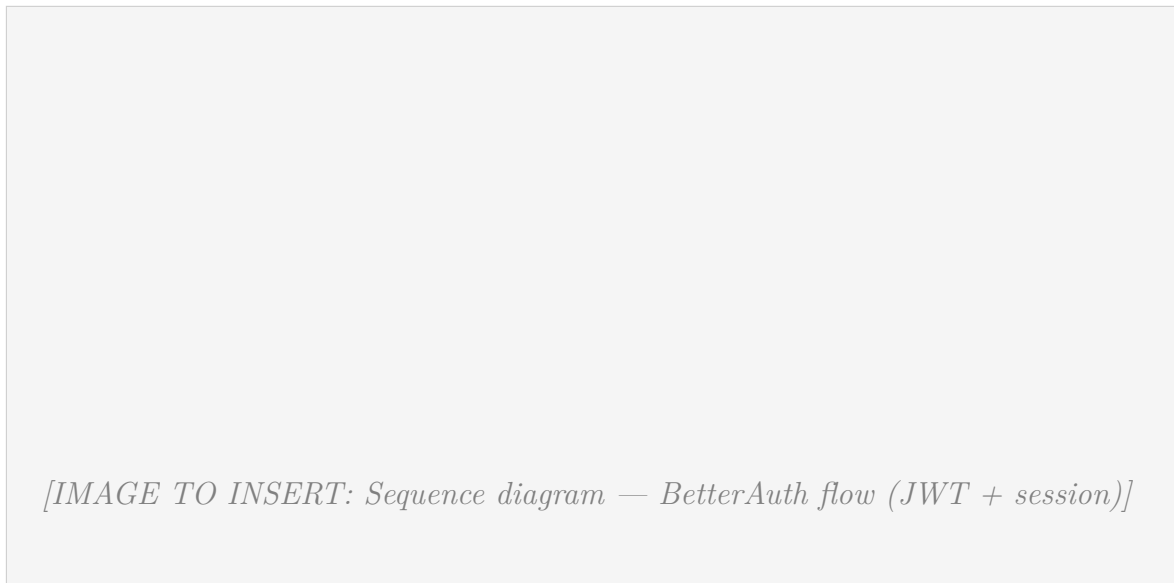


Figure 3.5: BetterAuth authentication flow

## 3.5 N8N Workflow Design

### 3.5.1 AI Verification Workflow

Figure 3.6 shows the n8n workflow responsible for automatic store and product verification. Upon creation of a new entity, the backend fires a webhook to n8n, which calls the hosted LLM (Gemini or Groq), evaluates the content against the marketplace rules, and posts the verdict back to the `/callback` endpoint.


*[IMAGE TO INSERT: N8N workflow screenshot/diagram — product/store AI verification]*

Figure 3.6: N8N workflow — AI verification

### 3.5.2 Database Chat Assistant Workflow

Figure 3.7 illustrates the database chat assistant workflow. Administrator messages are forwarded to n8n, which uses an LLM to translate the natural-language query into SQL, executes it against the MariaDB instance, and returns a formatted response.



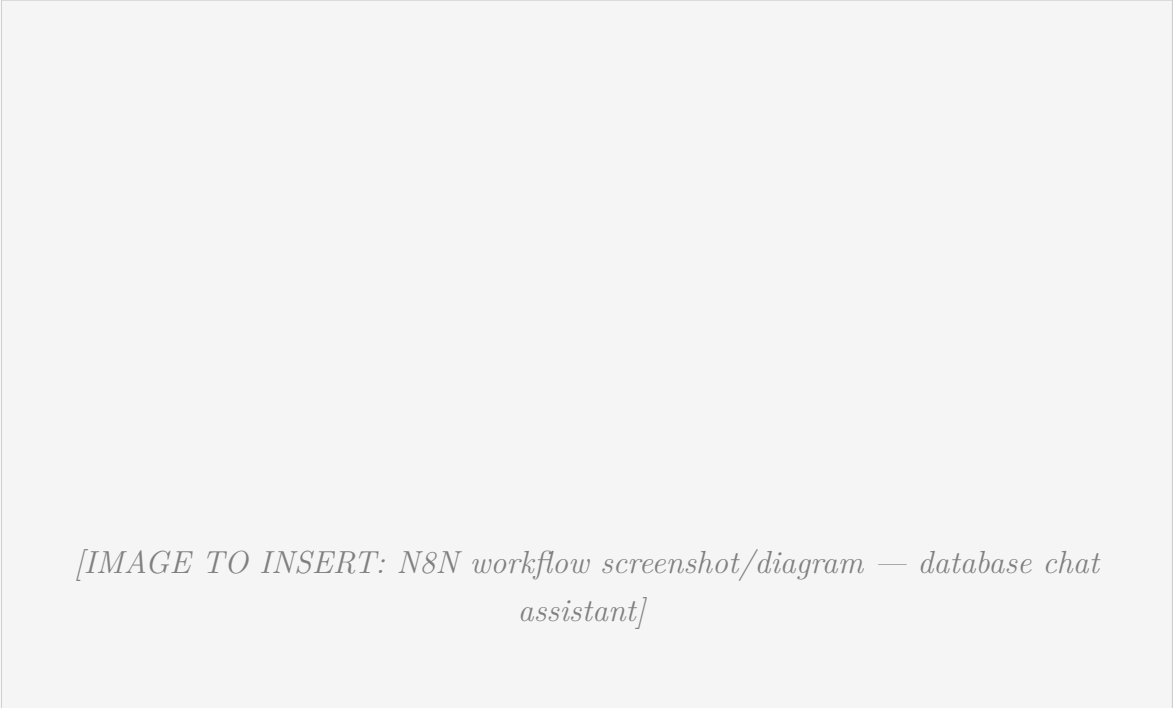


*[IMAGE TO INSERT: N8N workflow screenshot/diagram — database chat assistant]*

Figure 3.7: N8N workflow — Database chat assistant

### 3.6 Class Diagram

Figure 3.8 presents the UML class diagram of the main domain entities. It highlights the inheritance hierarchy between **User**, **Seller**, and **Administrator**, the composition relationship between **Store** and **Product**, and the aggregation between **Order** and **OrderItem**.

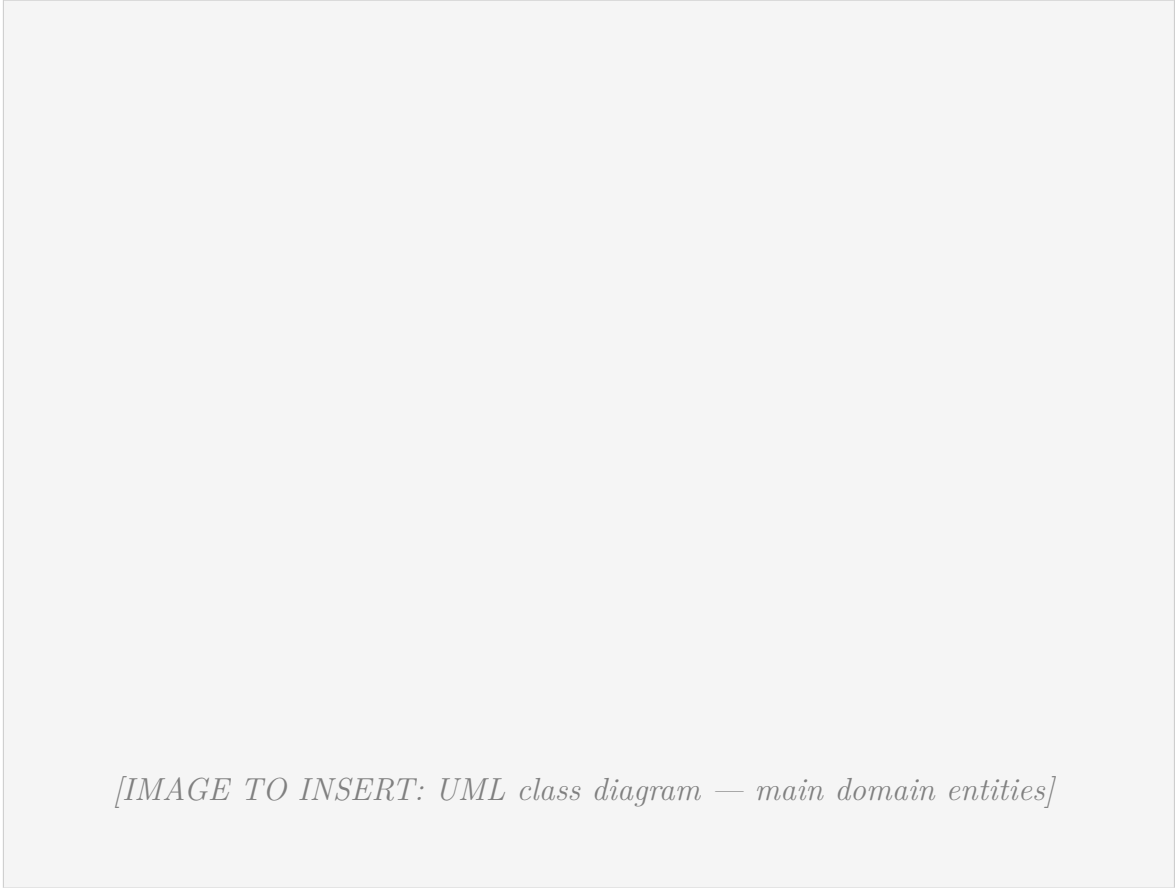

*[IMAGE TO INSERT: UML class diagram — main domain entities]*

Figure 3.8: Class diagram

## Chapter 4 Development and Implementation

---

*This chapter details the development environment, backend and frontend implementation decisions, and the AI integration via N8N.*

### 4.1 Development Environment

#### 4.1.1 Hardware and Software

#### 4.1.2 VSCode and Extensions

#### 4.1.3 pnpm Monorepo Structure

The project is organised as a **pnpm** workspace monorepo with three top-level packages. Figure 4.1 shows the directory tree: **backend/** contains the NestJS API, **frontend/** the React SPA, and **terraform/** the infrastructure-as-code definitions.

*[IMAGE TO INSERT: Monorepo directory tree (backend/, frontend/, terraform/)]*

Figure 4.1: Cheebo monorepo structure


## 4.2 Backend (NestJS)

### 4.2.1 Project Structure

### 4.2.2 Key Modules

### 4.2.3 Authentication Guards and Role-Based Access Control

Every protected route is secured through a combination of `AuthGuard` and the `@Roles()` decorator. Figure 4.2 shows a representative controller method annotated with both guards, illustrating how the framework enforces role-based access at the route level before the handler executes.

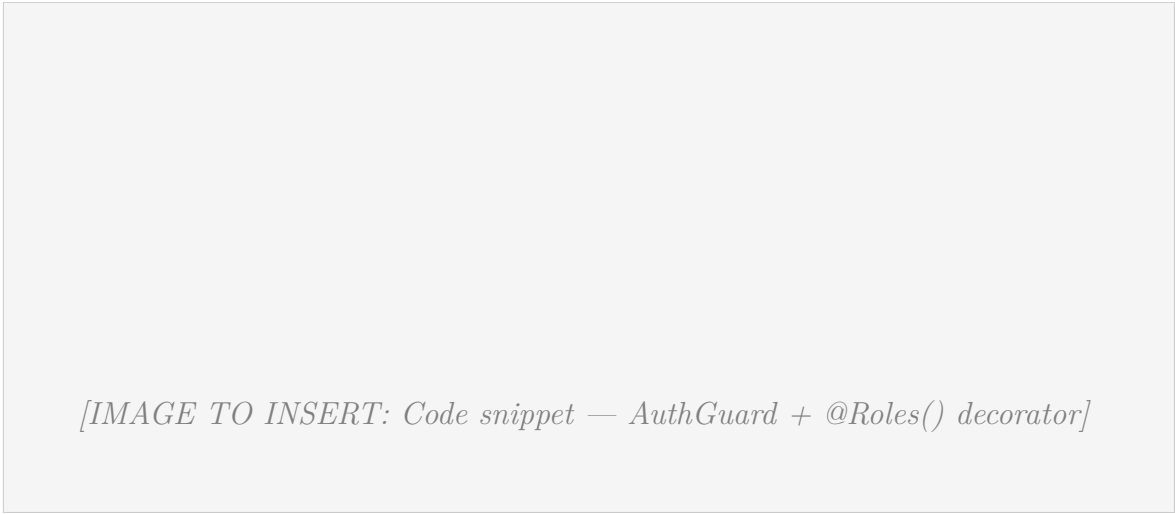

*[IMAGE TO INSERT: Code snippet — AuthGuard + @Roles() decorator]*

Figure 4.2: Role-based access control implementation

### 4.2.4 File Upload System (Multer)

### 4.2.5 Email System (Nodemailer)

## 4.3 Frontend (React + Vite)

### 4.3.1 Project Structure

### 4.3.2 Routing and Layouts

### 4.3.3 State Management (TanStack Query + Zustand)

### 4.3.4 Admin Dashboard Panels

Figure 4.3 shows the administrator dashboard, which centralises seller application reviews, store moderation, user management, and featured content curation in a single tabbed interface.



*[IMAGE TO INSERT: Screenshot — Admin dashboard]*

Figure 4.3: Admin dashboard

#### 4.3.5 Store and Product Management Interface

Figure 4.4 presents the seller-facing store and product management panels, from which a seller can create and edit their store, manage their product catalogue, upload images, and monitor incoming orders.

*[IMAGE TO INSERT: Screenshot — Store / product management (seller view)]*

Figure 4.4: Store and product management interface

## 4.4 AI Integration with N8N

### 4.4.1 AI Product/Store Verification Pipeline

### 4.4.2 Database Chat Assistant

### 4.4.3 Google Gemini / Groq Integration

### 4.4.4 N8N Workflow Implementation

## 4.5 Interface Screenshots

### 4.5.1 Landing Page

Figure 4.5 shows the Cheebo public landing page, which surfaces featured stores, featured products, and the tag-based recommendation section. The navigation bar provides direct access to the catalogue, login, and cart.



*[IMAGE TO INSERT: Screenshot — Cheebo landing page]*

Figure 4.5: Landing page

#### 4.5.2 Store Dashboard

Figure 4.6 presents the seller store dashboard, from which a seller can monitor live store metrics, access the customisation editor, and review recent order activity.



*[IMAGE TO INSERT: Screenshot — Seller store dashboard]*

Figure 4.6: Store dashboard

#### 4.5.3 AI Verification Panel

Figure 4.7 illustrates the AI verification panel available to administrators. Each entry displays the entity name, the AI verdict, the LLM rationale, and override controls allowing the administrator to confirm or reverse the automated decision.






*[IMAGE TO INSERT: Screenshot — AI verification panel (admin)]*

Figure 4.7: AI verification panel

#### 4.5.4 Analytics Page

Figure 4.8 shows the per-store analytics page available to sellers, displaying revenue trends, top-selling products, order volumes, and visitor statistics.

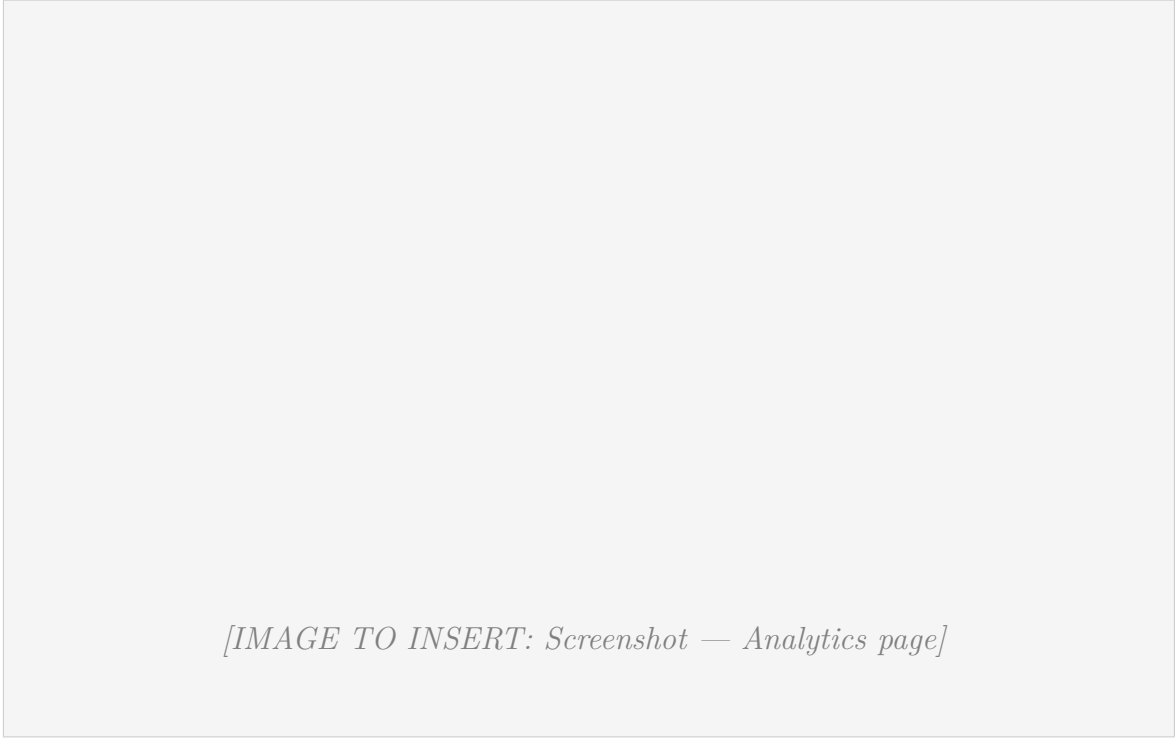

*[IMAGE TO INSERT: Screenshot — Analytics page]*

Figure 4.8: Analytics page

## Chapter 5 Infrastructure and Deployment

---

*This chapter covers Docker containerisation, infrastructure as code with Terraform, the GitHub Actions CI/CD pipeline, DNS management, and the production environment.*

### 5.1 Containerisation with Docker

#### 5.1.1 Dockerfiles (Frontend and Backend)

#### 5.1.2 Docker Compose Configuration

#### 5.1.3 Multi-Service Networking

All services communicate over a private Docker bridge network, meaning the backend, database, and n8n are never directly exposed to the public internet. Only the frontend container publishes port 80. Figure 5.1 shows the network topology and how Nginx on the frontend container proxies all API paths to the backend service over the internal network.

*[IMAGE TO INSERT: Docker Compose bridge network diagram]*

Figure 5.1: Docker Compose network architecture

## 5.2 Infrastructure as Code with Terraform

### 5.2.1 DigitalOcean Provider

### 5.2.2 VPC, Droplet and Firewall Resources

### 5.2.3 DNS Management with DigitalOcean

Rather than managing DNS records at the domain registrar (name.com) through a separate API, the project delegates DNS entirely to DigitalOcean using the same Terraform provider that manages the droplet. Two resources are declared in `main.tf`:

- `digitalocean_domain` — creates the DNS zone for `nadimjebali.engineer` on DigitalOcean's authoritative nameservers and automatically adds the apex (`@`) A record pointing to the droplet's IPv4 address.
- `digitalocean_record` — adds a second A record for the `www` subdomain, also pointing to the droplet.

Both records reference `digitalocean_droplet.cheebo.ipv4_address` directly. This means that if the droplet is ever replaced (e.g. after a destructive Terraform change), Terraform updates both DNS records in the same `apply` run that creates the new droplet, with no manual intervention required.

The domain's nameservers are delegated to DigitalOcean (`ns1-ns3.digitalocean.com`) from the name.com registrar panel, which is a one-time configuration step. After that, A-record updates propagate in under five minutes thanks to a 300-second TTL.

### Key Takeaways

DNS is version-controlled alongside infrastructure — the domain always points to the current droplet IP with no manual update step.

TTL 300s means a full redeploy (destroy old droplet, create new one, update DNS) converges in under ten minutes end-to-end.

### 5.2.4 Remote State Management with DigitalOcean Spaces

Terraform state is stored remotely in a DigitalOcean Spaces bucket configured as an S3-compatible backend. This ensures that every CI/CD run reads from and writes to a single shared state file, preventing conflicts if the workflow is triggered concurrently. Figure 5.2 shows the key resource declarations in `main.tf`, including the VPC, the droplet, and the DNS records.

[IMAGE TO INSERT: Terraform code snippet — main.tf]

Figure 5.2: Terraform resources

## 5.3 CI/CD Pipeline with GitHub Actions

### 5.3.1 Workflow Overview

The CI/CD pipeline is defined as a single GitHub Actions workflow file that runs on every push to the `main` branch. Figure 5.3 presents the three parallel jobs — *provision* (Terraform), *build-backend*, and *build-frontend* — followed by the *deploy* job that SSH-deploys the composed stack once all three complete.

[IMAGE TO INSERT: CI/CD pipeline diagram (build → push → deploy)]

Figure 5.3: GitHub Actions CI/CD pipeline

### 5.3.2 Build Stage (Docker Build and Push to Docker Hub)

### 5.3.3 Deployment Stage (SSH and Docker Compose)

### 5.3.4 Environment Secrets Management

## 5.4 Production Environment

### 5.4.1 DigitalOcean Droplet Specifications

The production workload runs on a single DigitalOcean droplet provisioned by Terraform with the following specifications:

| Property   | Value                                                                 |
|------------|-----------------------------------------------------------------------|
| Region     | Frankfurt (fra1)                                                      |
| Size       | s-2vcpu-2gb (2 vCPUs, 2 GB RAM)                                       |
| Image      | Ubuntu 24.04 LTS                                                      |
| VPC        | cheebo-vpc (192.168.1.0/24)                                           |
| Public URL | <a href="http://nadimjebali.engineer">http://nadimjebali.engineer</a> |
| DNS        | Managed by DigitalOcean (Terraform)                                   |

The application is accessed exclusively through the domain name `nadimjabali.engineer`. The raw droplet IP is reserved for SSH access by the CI/CD pipeline and is never exposed to end users. CORS on the backend is configured with the domain as the single trusted origin, so any attempt to reach the API directly from the IP is rejected by the browser's same-origin policy.

### 5.4.2 Production Service Architecture

Figure 5.4 depicts the production environment as deployed on the DigitalOcean droplet. All four Docker Compose services run on the same host inside a private bridge network; only the frontend Nginx container is reachable from the public internet via the domain `nadimjebali.engineer`.



*[IMAGE TO INSERT: Production environment diagram (Droplet + services)]*

Figure 5.4: Production architecture

#### 5.4.3 N8N Deployment Alongside the Application

## General Conclusion

---

Summary of Achievements

Implemented Features vs Initially Planned Features

Challenges Encountered and Solutions Provided

Current Implementation Limitations

Future Improvements



## Bibliography and Webography

---

- NestJS Official Documentation — <https://docs.nestjs.com>
- React Official Documentation — <https://react.dev>
- Prisma ORM Documentation — <https://www.prisma.io/docs>
- TanStack Query Documentation — <https://tanstack.com/query>
- Docker Documentation — <https://docs.docker.com>
- Terraform Documentation — <https://developer.hashicorp.com/terraform>
- N8N Documentation — <https://docs.n8n.io>
- GitHub Actions Documentation — <https://docs.github.com/en/actions>
- DigitalOcean Developer Docs — <https://docs.digitalocean.com>

## Chapter A Complete Prisma Schema

---

Listing A.1: Prisma schema — excerpt

```
% TODO: paste the contents of backend/prisma/schema/ here
```

## Chapter B API Endpoints Reference

---

## Chapter C N8N Workflow JSON Exports

---

Listing C.1: N8N workflow — AI verification (JSON)

```
% TODO: paste the JSON exported from N8N
```

## Chapter D Docker Compose File

---

Listing D.1: docker-compose.yml

```
% TODO: paste the contents of docker-compose.yml
```

## Chapter E GitHub Actions Workflow

---

Listing E.1: .github/workflows/deploy.yml

```
% TODO: paste the CI/CD workflow content
```