
Used Oracle SQL Developer

- CREATE TABLE EventRequest (
- eventno varchar(8) NOT NULL,
- dateheld date NOT NULL,
- 4. datereq date NOT NULL,
- 5. facno varchar(8) NOT NULL,
- 6. custno varchar(8) NOT NULL,
- 7. dateauth date,
- 8. status varchar(100) NOT NULL,
- 9. extcost float(2) NOT NULL,
- 10. estaudience integer NOT NULL,
- 11. budno varchar(8),
- 12. CONSTRAINT PKevent PRIMARY KEY(eventno),
- 13. CONSTRAINT FKfacnoER FOREIGN KEY (facno) REFERENCES Facility (facno),
- CONSTRAINT FKcustnoER FOREIGN KEY (custno) REFERENCES Customer (custno),
- 15. CONSTRAINT validstatus CHECK (status IN ('Pending', 'Denied', 'Approved')),
- 16. CONSTRAINT audience CHECK (estaudience >0)
- 17.);



SELECT * FROM EventRequest;

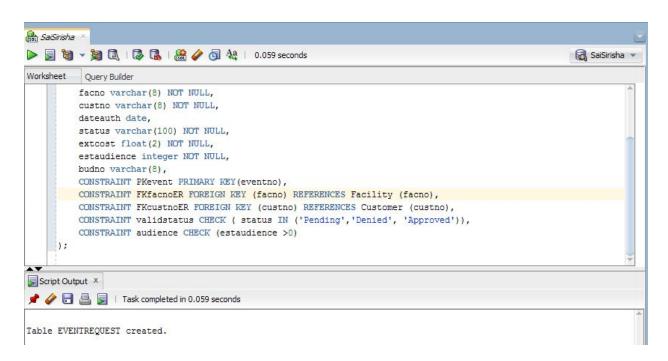