

Benchmarking Machine Learning Classifiers for Fetal Heart Rate Pattern Detection in Cardiotocography

by:

Naem Haq (23379243)

A Thesis Submitted in Fulfillment of the Requirements for the Degree of
Bachelor/Master of Science in Immersive Software Engineering



Department of Computer Science and Information Systems

University of Limerick

Supervised By:

Dr. Salaheddin Alakkari

©May 2026

Bachelor of Science (2026)
Department of Computer Science and
Information Systems

University of Limerick
Limerick, Ireland

TITLE: Benchmarking Machine Learning Classifiers for Fetal Heart
Rate Pattern Detection in Cardiotocography

AUTHOR: Naem Haq (23379243)
Bachelor, (Department of Computer Science and Information
Systems)
University of Limerick
Limerick, Ireland

SUPERVISORS: Dr. Salaheddin Alakkari

NUMBER OF PAGES: 48

Abstract

Cardiotocography (CTG) remains the primary clinical tool for monitoring fetal wellbeing during labour by recording fetal heart rate (FHR) and uterine contractions. However, interpretation of CTG traces is often subjective, leading to inconsistent clinical decisions and variable outcomes. This project explores the application of biomedical signal processing and supervised machine learning to support clinicians in the detection and classification of fetal heart rate patterns, with a focus on deceleration events indicative of potential fetal distress.

The interim phase of this study establishes the theoretical foundation and methodological design for benchmarking machine learning classifiers in automated CTG interpretation. A comprehensive literature review highlights the limitations of manual CTG assessment, existing computational approaches, and the need for standardized benchmarking. The methodology outlines a reproducible pipeline involving signal preprocessing for artifact removal, feature extraction in time and frequency domains, and comparative evaluation of classifiers such as Support Vector Machines, Random Forests, and Gradient Boosting.

This work aims to identify robust, interpretable models capable of enhancing clinical decision-making in intrapartum monitoring. Future stages will involve experimental benchmarking, statistical analysis of model performance, and interpretability evaluation using explainable AI techniques to ensure clinical transparency and trust.

Keywords: Cardiotocography; Fetal monitoring; Machine learning; Random forest; Convolutional neural network; Clinical decision support

Declaration

I herewith declare that I have produced this paper without the prohibited assistance of third parties and without making use of aids other than those specified; notions taken over directly or indirectly from other sources have been identified as such. This paper has not previously been presented in identical or similar form to any other Irish or foreign examination board. The thesis work was produced under the supervision of Dr. Salaheddin Alakkari at University of Limerick.

Naem Haq
Limerick, 2026

AI Declaration

I herewith declare that I have used artificial intelligence to produce my project and/or report in the following ways: I further declare that I have discussed this use of artificial intelligence with my supervisor and received permission to use it.

Naem Haq
Limerick, 2026

Ethics Declaration

I herewith declare that my project does not involve human participants in any way and that I therefore was not required to submit an ethics application.

Naem Haq
Limerick, 2026

Acknowledgments

I would like to express my sincere gratitude to my supervisor, Dr. Salaheddin Alakkari, for his continuous guidance, insightful feedback, and support throughout the development of this project. I am also thankful to the INFANT Research Centre and the School of Engineering at University College Cork for providing the resources and expertise that have made this research possible.

My appreciation extends to the clinicians and researchers involved in the AI4Life project, whose work and discussions have inspired many aspects of this study. Finally, I would like to thank my family and peers for their encouragement and support during this stage of my academic journey.

Table of Contents

Abstract	iii
Declaration	iv
AI Declaration	iv
Ethics Declaration	iv
Acknowledgments	v
List of Figures	ix
List of Tables	x
Definition of Acronyms	xi
Chapter 1 Introduction	1
1.1 Background and Context	1
1.2 Problem Statement	1
1.3 Research Objectives	2
1.4 Research Questions	2
1.5 Project Scope and Limitations	2
1.6 Expected Contributions	3
1.7 Dissertation Outline	3
Chapter 2 Literature Review and Background	5
2.1 Cardiotocography: Clinical Context	5
2.2 Signal Processing for CTG Analysis	5
2.3 Machine Learning in Fetal Monitoring	6
2.4 Benchmarking and Performance Evaluation	7
2.5 Trustworthy AI and Clinical Interpretability	8
2.6 Related Work and Research Gap	9
Chapter 3 Methodology	11
3.1 Research Design	11
3.2 Datasets	11
3.3 Signal Preprocessing Pipeline	12
3.4 Feature Extraction	13
3.5 Machine Learning Classifiers	14
3.6 Training and Validation Strategy	15
3.7 Evaluation Metrics	16
3.8 Interpretability Analysis	16
3.9 Implementation Details	17

Chapter 4 Results	18
4.1 Data Characteristics	18
4.2 Signal Quality Analysis	18
4.3 Feature Extraction Results	18
4.4 Classifier Performance Comparison	19
4.5 Statistical Analysis	21
4.6 Interpretability Analysis	21
4.7 Visualisation	22
Chapter 5 Discussion	27
5.1 Interpretation of Results	27
5.2 Benchmarking Insights	27
5.3 Clinical Implications	29
5.4 Comparison with State-of-the-Art	29
5.5 Trustworthy AI Considerations	31
5.6 Limitations	31
5.7 Threats to Validity	32
Chapter 6 Conclusion and Future Work	34
6.1 Summary of Findings	34
6.2 Contributions	34
6.3 Practical Recommendations	35
6.4 Future Research Directions	35
6.5 Closing Statement	36
Chapter 7 Appendix A	37
7.1 Runtime Environment	37
7.2 Project Structure	37
7.3 Reproducible Run Sequence	37
Chapter 8 Appendix B	38
8.1 Preprocessing Configuration (Extract)	38
8.2 Quality Summary (Dataset-Level)	38
Chapter 9 Appendix C	39
9.1 Feature Configuration (Extract)	39
9.2 Feature Groups Used in Modelling	39
Chapter 10 Appendix D	40
10.1 Random Forest Final Configuration	40
10.2 CNN Final Configuration (Report)	40

10.3 Threshold Policy (RF)	40
Chapter 11 Appendix E	41
11.1 Extended Figures	41
Chapter 12 Appendix F	43
12.1 Metric Definitions	43
12.2 Reproducibility Checklist	43
12.3 Statistical Reporting Notes	43
Chapter 13 Appendix G	44
13.1 State-of-the-Art Comparison Matrix (Summary)	44
13.2 Governance Checklist (Operational)	44
Chapter 14 Appendix H	45
14.1 Prospective Validation Roadmap	45
14.2 Stakeholder Review Checklist	45
Bibliography	45

List of Figures

Figure 1 Random Forest 3-class confusion matrix on held-out test windows.	22
Figure 2 CNN 3-class confusion matrix on held-out test windows.	23
Figure 3 Random Forest feature importance ranked by contribution.	24
Figure 4 Temporal alert timeline after causal smoothing policy.	25
Figure 5 Class distribution used in modelling.	41
Figure 6 Selected feature distributions by class.	41
Figure 7 CNN training and validation curves.	41
Figure 8 RF threshold behavior for decision-policy tuning.	42

List of Tables

Table 1	Definition of Acronyms	xi
Table 2	Classifier comparison on held-out data.	19

Definition of Acronyms

Table 1: Definition of Acronyms

Acronym	Definition
CTG	Cardiotocography
FHR	Fetal Heart Rate
UC	Uterine Contractions
MHR	Maternal Heart Rate
FIGO	International Federation of Gynecology and Obstetrics
RF	Random Forest
CNN	Convolutional Neural Network
SVM	Support Vector Machine
AUC	Area Under the ROC Curve
ROC	Receiver Operating Characteristic
SHAP	SHapley Additive exPlanations
LIME	Local Interpretable Model-agnostic Explanations
ML	Machine Learning
AI	Artificial Intelligence

Chapter 1 Introduction

1.1 Background and Context

Cardiotocography (CTG) is a core technology in intrapartum care, combining continuous fetal heart rate and uterine activity monitoring to support decisions during labour. International guidance positions CTG as a key component of fetal surveillance, especially when labour is clinically complex or risk factors are present (Ayres-de-Campos et al., 2015). However, the physiological meaning of CTG patterns is often context-dependent, and visual interpretation can vary between clinicians. Recent evidence syntheses show that this subjectivity remains a persistent challenge, with uneven performance across studies, settings, and outcome definitions (Francis et al., 2024).

These limitations have motivated a shift toward computational analysis of CTG signals. Traditional machine learning methods such as support vector machines and random forests have demonstrated promising classification performance on curated datasets (Hoodbhoy et al., 2019; Khare & Kumari, 2022; Nagendra et al., 2017). More recent deep learning and ensemble approaches continue this trend, but also highlight issues of dataset shift, benchmarking consistency, and external validity (Chiou et al., 2025; Mendis et al., 2025; Zhang et al., 2024). In parallel, explainability has become central to clinical adoption, with SHAP- and LIME-based methods used to expose feature influence and improve trust in model outputs (Feng et al., 2023; Ribeiro et al., 2016). This project is situated within that context: improving CTG decision support through robust, interpretable benchmarking.

1.2 Problem Statement

Despite growing interest in machine learning for CTG, there is still no clear consensus on which modelling approach is most reliable for intrapartum use because studies vary widely in datasets, preprocessing, labels, and reporting standards (Francis et al., 2024; Khare & Kumari, 2022). This project addresses that gap by benchmarking supervised classifiers for fetal heart rate pattern detection under standardized, leakage-aware experimental conditions. The core problem is to improve detection of clinically important compromise signals, especially deceleration-related risk patterns, while handling noisy CTG signals, class imbalance, and conflicting sensitivity-specificity trade-offs (Nazli et al., 2025; Zhang et al., 2024). It also requires fair comparison of feature-based and deep models under identical split policies and evaluation metrics. The benchmark prioritizes interpretability and cross-dataset robustness

so outputs remain clinically understandable and transferable beyond a single cohort (Feng et al., 2023; Mendis et al., 2025).

1.3 Research Objectives

This project aims to deliver a rigorous benchmark of supervised machine learning classifiers for automated fetal heart rate pattern classification from CTG under standardized experimental conditions. The objectives are to implement a reproducible preprocessing pipeline for artifact handling and signal conditioning (Clifford et al., 2014), engineer clinically grounded time- and frequency-domain features, and train a representative set of classifiers with consistent hyperparameter tuning and grouped validation. It further aims to compare models using clinically meaningful metrics and statistical testing, assess explanation quality using SHAP and local interpretation methods, and provide practical recommendations that balance diagnostic performance, interpretability, and deployment feasibility for intrapartum decision support (Feng et al., 2023; Ribeiro et al., 2016).

1.4 Research Questions

- RQ1: Which supervised classifier (feature-based Random Forest or 1D-CNN) delivers the strongest CTG classification performance on grouped held-out data using accuracy, recall, specificity, F1, and AUC?
- RQ2: How do preprocessing and engineered feature sets influence discrimination of Normal, Suspicious, and Pathological windows, particularly pathological-class recall?
- RQ3: What efficiency trade-offs exist between models in training time, inference time, and model size for practical decision-support deployment?
- RQ4: How stable are results across cross-validation folds and alternative grouped splits, and what mean/std versus held-out test gaps indicate model generalisability?

1.5 Project Scope and Limitations

This project is scoped to benchmarking intrapartum CTG classification using fetal heart rate and uterine contraction signals from the CTU-UHB database, with weakly supervised window labels derived from record-level outcomes (Chudacek et al., 2014a). It implements a reproducible Python workflow covering preprocessing, artifact handling, feature extraction, grouped splitting, and comparative modelling with Random Forest and 1D-CNN baselines (Clifford et al., 2014; Fergus et al., 2020). Benchmarking reports performance metrics (accuracy, recall, specificity, F1, AUC), efficiency metrics (training time, inference time, model size), and

generalisability checks via cross-validation mean/std and held-out grouped tests. Limitations include retrospective design, outcome-label noise, class imbalance, single-cohort dependence, and no prospective deployment or obstetrician-in-the-loop validation. The study also excludes multimodal inputs, including fetal ECG and rich maternal covariates, so external transferability remains to be established. Interpretability is assessed with feature importance and SHAP-style attribution, but human factors evaluation of presentation and workflow integration is outside scope (Francis et al., 2024; Mendis et al., 2025).

1.6 Expected Contributions

This project contributes a reproducible benchmarking framework for intrapartum CTG classification that standardizes preprocessing, grouped splitting, and metric reporting across models, reducing ambiguity in prior comparisons and clarifying fair comparison standards in CTG (Francis et al., 2024). It delivers an end-to-end Python pipeline that links signal conditioning, feature engineering, supervised learning, efficiency profiling, and interpretability analysis in one transparent workflow (Clifford et al., 2014; Feng et al., 2023). Scientifically, the study provides controlled evidence on performance differences between feature-based and deep approaches, including class-wise behaviour under imbalance and generalisation across validation settings (Mendis et al., 2025; Zhang et al., 2024). Practically, it offers actionable guidance for model selection in clinician-facing decision support by balancing diagnostic accuracy, specificity, runtime constraints, and explanation quality, while establishing a defensible baseline for future multimodal integration and prospective clinical evaluation (Chiou et al., 2025).

1.7 Dissertation Outline

The remainder of this dissertation is organized as follows:

Chapter 2: reviews CTG clinical context, signal processing methods, machine learning approaches, benchmarking principles, and interpretability requirements, and defines the research gap.

Chapter 3: details the methodology, including dataset preparation, preprocessing, feature extraction, model design, training strategy, and evaluation framework.

Chapter 4: presents results for data quality, classifier performance, efficiency, and generalisability analyses.

Chapter 5: interprets findings against prior literature, discusses clinical implications, and examines limitations and validity threats.

Chapter 6: summarizes contributions, practical recommendations, and future research priorities.

Appendices: provide implementation details, parameter settings, supplementary figures and tables, and reproducibility materials.

Chapter 2 Literature Review and Background

2.1 Cardiotocography: Clinical Context

Cardiotocography (CTG) is the principal intrapartum monitoring modality used to assess fetal wellbeing by recording fetal heart rate alongside uterine activity during labour. Its clinical rationale is physiological: evolving hypoxia and reduced placental reserve can alter autonomic control of heart rate, producing patterns that may precede metabolic compromise. For this reason, CTG is embedded in routine obstetric pathways and is commonly used when labour risk is elevated or continuous surveillance is indicated (Ayres-de-Campos et al., 2015). Standard interpretation frameworks evaluate baseline rate, baseline variability, accelerations, and decelerations, then integrate these features with contraction timing and overall trace evolution to support escalation or conservative management decisions (Ayres-de-Campos et al., 2015). In practice, deceleration morphology and timing remain especially influential because they are linked to potential cord compression, head compression, or uteroplacental insufficiency, yet these same patterns are often the most contested in real-time interpretation. Contemporary evidence indicates that CTG remains clinically indispensable but limited by variable observer agreement and inconsistent translation of patterns into outcomes, motivating decision support and improved analytic methods (Francis et al., 2024). Large databases have further exposed heterogeneity in trace quality, labeling, and outcomes, reinforcing the need for interpretation (Chudacek et al., 2014a). Consequently, understanding CTG’s clinical context requires both physiological interpretation and awareness of uncertainty, since safe use depends not only on signal patterns, but on reproducible assessment frameworks and response during labour.

2.2 Signal Processing for CTG Analysis

Signal processing is a foundational stage in automated CTG analysis because raw fetal heart rate (FHR) and uterine contraction traces contain dropout, spikes, and non-physiological fluctuations that can mislead downstream models. A robust pipeline therefore begins with quality control, physiologic range checks, short-gap interpolation, smoothing, and normalization, so extracted patterns reflect fetal physiology rather than sensor artefact (Clifford et al., 2014; Spilka et al., 2013). Baseline estimation is then required to contextualize transient events; moving-window and median-based approaches are commonly used because they suppress

short oscillations while preserving longer trends relevant to clinical interpretation (Ayres-de-Campos et al., 2015). After baseline stabilisation, acceleration and deceleration candidates can be identified from duration- and amplitude-constrained deviations, often refined by temporal alignment with contraction activity to improve event characterization. Where missingness is prolonged, affected windows are excluded to prevent interpolation artefacts dominating learned patterns.

Feature extraction translates cleaned signals into model-ready representations. In this project, features are designed to capture complementary information across time-domain, variability, morphology, and frequency-oriented descriptors, including baseline level, short- and long-term variability surrogates, deceleration burden, and contraction-linked dynamics. This design supports both discrimination and interpretability, allowing model outputs to be traced back to clinically meaningful behaviour. Prior CTG studies consistently show that preprocessing quality and feature construction materially influence classification performance and reproducibility, often more than algorithm choice alone (Francis et al., 2024; Hoodbhoy et al., 2019). For this reason, signal processing is treated not as a preliminary step, but as a primary methodological component of trustworthy CTG benchmarking.

2.3 Machine Learning in Fetal Monitoring

Machine learning has become central to automated fetal monitoring because CTG interpretation involves complex, noisy patterns that are difficult to assess consistently at the bedside. Most published systems use supervised learning, where models are trained on labelled CTG segments or recordings to classify fetal condition and support escalation decisions (Francis et al., 2024; Hoodbhoy et al., 2019). In this literature, traditional tabular models remain highly competitive when feature engineering is clinically informed. Support Vector Machines, Random Forests, gradient boosting methods, and related classifiers are frequently reported to achieve strong discrimination on curated datasets, particularly when preprocessing quality, class balancing, and leakage control are handled carefully (Innab et al., 2024; Khare & Kumari, 2022; Nagendra et al., 2017). These models are attractive in clinical contexts because they are comparatively efficient and easier to interpret through feature importance analyses.

Deep learning has expanded CTG research by learning representations directly from raw or minimally processed time series. One-dimensional convolutional networks are widely studied for this purpose, and recent work shows they can capture local waveform structure associated with fetal compromise, especially in larger datasets (Cao et al., 2023; Chiou et al., 2025; Zhang

et al., 2024). However, deep models are more sensitive to label quality, data imbalance, and distribution shift, and reported performance varies substantially across cohorts and evaluation protocols. Cross-database experiments highlight that gains observed on single-center benchmarks may not transfer reliably without stronger validation design and calibration strategies (Mendis et al., 2025).

Ensemble and hybrid approaches attempt to combine strengths of multiple learners, often improving robustness by reducing variance and exploiting complementary decision boundaries. Recent CTG studies using stacked or threshold-optimized ensembles report improved macro-level performance, but benefits depend on transparent benchmarking and clinically meaningful error analysis rather than headline accuracy alone (Kong et al., 2025; Nazli et al., 2025). Consequently, current best practice emphasizes three requirements: rigorous split strategy and metric reporting, explicit handling of imbalance and temporal context, and interpretability methods such as SHAP or local explanations to support clinician trust (Feng et al., 2023; Ribeiro et al., 2016). This evidence base motivates comparative evaluation of interpretable and deep models within a reproducible framework for fetal monitoring decision support. Accordingly, this dissertation benchmarks feature-based and raw-signal pipelines, contrasts performance with efficiency, and reports stability across grouped validation and held-out testing to prioritize clinically deployable rather than retrospective model success.

2.4 Benchmarking and Performance Evaluation

Benchmarking is essential in CTG machine learning because reported performance is highly sensitive to dataset composition, label design, preprocessing, and split strategy. In fetal monitoring, class imbalance is common, so single-metric reporting can be misleading: high overall accuracy may coexist with poor detection of minority pathological cases. Accordingly, evaluation should include class-aware metrics such as recall, specificity, precision, macro-F1, and balanced accuracy, alongside threshold-independent summaries such as AUC, to reflect clinically relevant trade-offs between missed compromise and unnecessary escalation (Francis et al., 2024; Nazli et al., 2025).

For fair model comparison, benchmarking protocols must control data leakage and maintain consistent experimental conditions across classifiers. In CTG, grouped splitting at recording level is particularly important because adjacent windows from the same trace are strongly correlated; random window-level splitting can therefore inflate performance estimates. Recent comparative studies also show that conclusions vary when metric definitions, class weighting,

and hyperparameter search budgets differ, reinforcing the need for transparent protocols and reproducible reporting standards (Khare & Kumari, 2022; Kong et al., 2025; M et al., 2025).

Performance benchmarking should also extend beyond discrimination metrics to include efficiency and robustness. Training time, inference latency, and model size influence practical deployment in decision-support settings, especially when near-real-time alerting is required. Generalisability must be examined through repeated grouped cross-validation, mean and standard deviation reporting, and independent held-out testing. Where possible, cross-database evaluation provides a stronger estimate of external validity and exposes distribution shift effects that are not visible in single-cohort experiments (Mendis et al., 2025).

Finally, statistical comparison is required to distinguish true model differences from random variation. Confidence intervals and paired significance testing across folds or test units strengthen evidential claims and support defensible model selection for clinical translation (Francis et al., 2024). These safeguards improve comparability, reproducibility, and clinical trust in CTG AI evidence.

2.5 Trustworthy AI and Clinical Interpretability

Trustworthy AI is a prerequisite for clinical adoption of automated CTG interpretation, because predictions influence high-stakes decisions during labour. In this context, trustworthiness extends beyond discrimination performance to include transparency, robustness, fairness awareness, and accountability. Recent CTG literature shows that models can achieve strong classification metrics, yet deployment confidence remains limited when decision logic is opaque or unstable across datasets (Francis et al., 2024; Mendis et al., 2025).

Interpretability methods are therefore central. Global explanation tools, including feature importance and SHAP-based attribution, help clinicians understand which signal characteristics drive model behaviour at cohort level, while local methods such as LIME and instance-level SHAP clarify why a specific prediction was generated for a particular window or recording (Feng et al., 2023; Ribeiro et al., 2016). For CTG, interpretable outputs are most useful when they map to clinically meaningful constructs, such as baseline shifts, variability reduction, deceleration burden, and contraction-related timing patterns.

A practical challenge is the interpretability-performance trade-off. Highly expressive deep or ensemble models may improve accuracy but can reduce auditability, whereas simpler models

improve traceability but may underfit complex physiology. Current best practice is not to choose one objective over the other, but to benchmark both and report performance, efficiency, and explanation quality together (Chiou et al., 2025; Kong et al., 2025). Clinically, trustworthy deployment also requires human-in-the-loop governance, clear threshold policies, and monitoring for dataset shift, so decision support augments rather than replaces obstetric judgment during intrapartum care.

2.6 Related Work and Research Gap

Research on automated CTG interpretation has expanded rapidly, with studies progressing from handcrafted feature models to deep representation learning. Earlier work commonly used supervised classifiers such as Support Vector Machines, Random Forests, and related tabular methods trained on engineered fetal heart rate and uterine activity features, often reporting strong performance on curated datasets (Hoodbhoy et al., 2019; Khare & Kumari, 2022; Nagendra et al., 2017). More recent studies have introduced boosting, hybrid pipelines, and deep networks, including 1D-CNN architectures that learn directly from waveform segments and can capture local temporal morphology associated with fetal compromise (Cao et al., 2023; Chiou et al., 2025; Zhang et al., 2024). Ensemble approaches have further improved aggregate metrics in some settings by combining complementary learners (Kong et al., 2025).

Despite these advances, the literature remains difficult to compare directly. Reviews consistently report heterogeneity in dataset choice, label definitions, preprocessing assumptions, class handling, and reporting practice, which limits reproducibility and weakens conclusions about model superiority (Francis et al., 2024). A recurring concern is optimistic estimation caused by split design: window-level random splits can leak subject-specific patterns across train and test sets, inflating apparent performance. External validity is another persistent gap, as cross-database evaluations frequently show reduced transfer performance relative to single-cohort results (Mendis et al., 2025). In parallel, many papers prioritize discrimination metrics without equivalent attention to efficiency constraints or deployment practicality.

Interpretability is also unevenly addressed. While explainability tools such as SHAP and local post-hoc methods are increasingly used, many studies still provide limited linkage between model attributions and clinically meaningful CTG constructs (Feng et al., 2023; Ribeiro et al., 2016).

This dissertation addresses these gaps through a controlled benchmarking framework built on reproducible preprocessing, grouped leakage-aware splitting, and unified evaluation of performance, efficiency, and generalisability. It compares feature-based and raw-signal modelling under the same protocol, reports class-wise and aggregate metrics with stability summaries, and integrates interpretability analysis anchored to clinically relevant signal behaviour. The objective is not only higher scores, but defensible evidence for practical, clinician-facing CTG decision support within routine intrapartum care.

Chapter 3 Methodology

3.1 Research Design

This study adopts a quantitative experimental benchmarking design to compare CTG classifiers under controlled and reproducible conditions. The design aligns preprocessing, feature construction, split policy, and metric reporting so that observed differences reflect model behaviour rather than pipeline variation (Francis et al., 2024; Khare & Kumari, 2022). Data are segmented into weakly labelled windows and evaluated with record-level grouped partitioning to prevent leakage between training and test sets, an essential control for correlated intrapartum traces (Chudacek et al., 2014a; Spilka et al., 2013). Two modelling families are assessed under a common protocol: feature-based Random Forest and raw-signal 1D-CNN, enabling comparison of interpretability and representation-learning capacity (Chiou et al., 2025; Fergus et al., 2020). The evaluation framework reports class-wise and aggregate discrimination metrics, efficiency measures, and stability across cross-validation and held-out tests to capture both performance and generalisability (Mendis et al., 2025). Statistical uncertainty is summarized with fold-level dispersion, and post-hoc interpretability analysis is included to connect predictions to clinically meaningful CTG patterns (Feng et al., 2023; Ribeiro et al., 2016).

3.2 Datasets

This project uses the PhysioNet CTU-UHB Intrapartum Cardiotocography Database as the sole modelling dataset for the current dissertation stage. CTU-UHB contains 552 intrapartum recordings collected at University Hospital Brno, with fetal heart rate and uterine contraction signals sampled at 4 Hz and linked to delivery outcomes (Chudacek et al., 2014a; Spilka et al., 2013). The dataset is widely used in CTG research, which improves comparability with prior benchmarks and supports transparent replication across studies. Labels are derived from post-delivery clinical outcomes rather than event-level timestamps, so segmented windows are treated as weakly supervised samples and evaluated with leakage-aware grouping by recording.

A Cork University Maternity Hospital dataset is part of the broader project context, but it is not included in this FYP benchmark because ethics and governance approvals for modelling use are outside the current project timeline. Consequently, all reported experiments, metrics, and model comparisons are based on CTU-UHB only. Inclusion criteria require sufficient

recording duration, usable signal quality after preprocessing, and available outcome variables for class assignment; records with severe dropout, irrecoverable artefact contamination, or missing core labels are excluded. No synthetic augmentation is used at dataset assembly stage. Grouped train-validation-test partitioning is then applied to preserve clinically realistic class structure and prevent patient-level leakage, enabling fair assessment of performance, efficiency, and generalisability within a reproducible experimental protocol.

3.3 Signal Preprocessing Pipeline

The signal preprocessing pipeline is designed to transform raw intrapartum CTG recordings into stable, comparable windows for downstream modelling while preserving clinically meaningful structure. Raw fetal heart rate and uterine contraction signals first undergo physiologic plausibility checks to detect values outside expected bounds, abrupt single-sample spikes, and flat segments suggestive of sensor dropout rather than fetal physiology (Clifford et al., 2014; Spilka et al., 2013). Quality control flags are generated at sample and window level so low-quality regions can be tracked transparently through later stages. Short gaps are repaired using linear interpolation under a fixed maximum duration rule, whereas longer missing segments are treated as non-recoverable and excluded from model windows to avoid introducing synthetic dynamics. After gap handling, smoothing is applied to reduce high-frequency noise and improve baseline stability before event and variability feature computation. Window acceptance requires minimum valid-sample proportion and continuity criteria, ensuring extracted features represent sustained physiology rather than short artefactual bursts that could distort clinical class boundaries in imbalanced learning settings.

The cleaned streams are then segmented into fixed-length windows aligned to the benchmarking protocol, with each window inheriting weak labels derived from record-level outcomes. To reduce non-clinical amplitude variation across recordings, per-window normalization is applied after filtering and interpolation. Potential maternal heart rate contamination is not modelled with a separate source-separation module in this implementation; instead, its impact is mitigated through plausibility constraints, continuity checks, and exclusion of ambiguous segments. In addition, preprocessing outputs include window quality metadata, dropout duration statistics, and trace-level retention indicators used during split auditing and error analysis. This allows failed or borderline windows to be inspected alongside model predictions, improving diagnostic transparency during development. All preprocessing parameters are fixed, versioned, and reused identically across model families to ensure fair comparison and prevent pipeline-induced performance inflation (Francis et al., 2024; Mendis et al., 2025).

This design supports leakage-aware benchmarking, reproducibility, and interpretable feature extraction grounded in obstetric signal characteristics (Ayres-de-Campos et al., 2015; Chudacek et al., 2014a). Detailed thresholds, quality rules, and exclusion counts are documented in Appendix Section Chapter 8 for full auditability and replication.

3.4 Feature Extraction

Feature extraction converts cleaned CTG windows into quantitative descriptors used by downstream classifiers. In this implementation, features are computed per window from both fetal heart rate and uterine contraction channels after preprocessing, with extraction logic fixed across all models to preserve benchmark fairness. The baseline fetal heart rate is estimated using a robust median, then used as the reference for acceleration and deceleration detection with clinically familiar thresholds (15 bpm amplitude, minimum 15 seconds duration) (Ayres-de-Campos et al., 2015). For each event type, the pipeline records count, total duration, mean and maximum duration, amplitude summaries, and area under deviation, capturing both frequency and severity of transient changes.

Beyond event features, time-domain descriptors include central tendency and variability measures such as mean, median, trimmed mean, standard deviation, median absolute deviation, interquartile range, and mean absolute first difference. A long-term variability proxy is calculated as the standard deviation of one-minute mean FHR segments. Frequency and complexity information is added through Welch bandpower in low and higher bands, spectral entropy, permutation entropy, and sample entropy estimated after downsampling for computational efficiency (Francis et al., 2024; Hoodbhoy et al., 2019). Uterine contraction features include distribution statistics, peak count, peak rate, prominence, inter-peak interval, and contraction AUC derived from peak-based morphology analysis (Spilka et al., 2013).

Quality-aware features (post-processing valid percentage and remaining missingness) are retained to contextualize uncertainty. Peak detection uses a minimum inter-peak distance of 75 seconds and adaptive prominence proportional to signal standard deviation, reducing false contraction detections in noisy traces without manual tuning. The final matrix contains 35 leakage-aware model features and is documented in Appendix Section Chapter 9 with variable names, definitions, thresholds, and units for reproducible reuse.

3.5 Machine Learning Classifiers

Classifier selection in this project is purposefully tied to the benchmarking objective: compare an interpretable, feature-based baseline against a representation-learning model under identical data and split conditions. Rather than optimizing many unrelated algorithms, the design focuses on two model families that reflect a clinically relevant trade-off between transparency and expressive capacity: Random Forest on engineered features, and one-dimensional convolutional neural networks (1D-CNN) on raw FHR+UC windows (Cao et al., 2023; Chiou et al., 2025; Fergus et al., 2020). This controlled pairing reduces methodological noise and makes performance, efficiency, and generalisability differences attributable to modelling strategy rather than pipeline variation.

The Random Forest classifier is trained on the leakage-aware feature matrix described in Section 3.4. Its strengths are robustness to nonlinearity, tolerance to mixed feature scales, and intrinsic feature importance outputs that support post-hoc clinical interpretation (Hoodbhoy et al., 2019; Khare & Kumari, 2022). Tree depth, number of estimators, and class weighting are tuned within grouped validation, with emphasis on pathological-class sensitivity and stable macro-level performance. Because RF inference is computationally light and model artefacts are easy to inspect, it serves as the practical reference model for clinician-facing decision support.

The 1D-CNN model is trained directly on fixed-length signal windows to test whether automatic representation learning captures waveform morphology beyond handcrafted descriptors. The architecture uses convolutional feature blocks followed by pooled latent representations and a classification head, optimized with cross-entropy on grouped training splits. This family is expected to model local temporal structure effectively, but is more sensitive to class imbalance, weak labels, and dataset size than tabular baselines (Mendis et al., 2025; Zhang et al., 2024). Accordingly, CNN benchmarking includes the same held-out protocol and stability reporting framework as RF, plus efficiency profiling for training/inference cost.

Together, these classifiers operationalize the central methodological question of the dissertation: whether interpretable engineered-feature models remain preferable to deep raw-signal models in this CTG setting. Other classifiers reported in the literature, including SVM, gradient boosting, k-nearest neighbors, and multilayer perceptrons, are treated as contextual comparators rather than primary implementations at this stage. Restricting core experiments prevents fragmented tuning budgets and preserves methodological depth in leakage control,

interpretability analysis, and robust error profiling across clinically critical minority classes during evaluation. This scoped design also simplifies reproducibility checks, since preprocessing, splitting, and metric definitions remain identical across both implemented classifier families.

3.6 Training and Validation Strategy

The training and validation strategy is designed to estimate real-world generalisability while preventing optimistic bias from window-level leakage. Because multiple windows originate from the same labour recording, all partitioning is performed at record level: records are assigned to splits first, and windows inherit that assignment. For the Random Forest benchmark, grouped holdout evaluation follows a 70/30 train-test policy by record identifier, with class distribution monitored to retain clinically meaningful minority representation. Hyperparameter tuning and threshold selection are conducted using validation data derived only from the training side, ensuring the test split remains untouched until final reporting.

For the 1D-CNN benchmark, a grouped stratified three-way split is used with fixed ratios of 70% train, 15% validation, and 15% test at record level, controlled by a fixed random seed for reproducibility. Stratification is based on record outcome labels to reduce split drift between Normal, Suspicious, and Pathological groups. This provides a dedicated validation stream for early stopping and model selection while preserving a fully independent held-out test set for final comparison.

Class imbalance is handled through cost-sensitive learning rather than synthetic oversampling in the core pipeline. Random Forest uses built-in class weighting, and CNN optimization applies weighted cross-entropy derived from training-label frequencies. This avoids introducing synthetic temporal patterns while still penalizing minority-class errors during fitting. Performance is reported with class-wise and aggregate metrics, and stability is assessed through grouped cross-validation summaries, held-out evaluation, and split-level distribution diagnostics (Francis et al., 2024; Mendis et al., 2025; Nazli et al., 2025). All split manifests, random seeds, class distributions, and tuning outputs are versioned as artefacts to enable exact reruns and independent audit of model selection decisions.

In addition, sensitivity checks are performed by varying grouped split seeds and recomputing key metrics to quantify dependence on partition choice. Mean and standard deviation across these runs are reported alongside single-split scores. This complements conventional holdout

testing by highlighting variance under realistic cohort rearrangements and supports more defensible conclusions for clinician-facing deployment planning in this dataset setting here.

3.7 Evaluation Metrics

Evaluation is designed to reflect both statistical performance and clinical utility in imbalanced three-class CTG classification. The core reported metrics are overall accuracy, macro-F1, weighted-F1, balanced accuracy, class-wise precision and recall, and confusion matrices on held-out data. Accuracy provides a global summary, but it is not interpreted alone because majority-class prevalence can mask poor minority-class detection (Francis et al., 2024). Macro-F1 is prioritized for cross-model comparison because it weights classes equally and penalizes collapse on clinically important minority states. Weighted-F1 is also reported to reflect population-level behaviour under observed class proportions.

Class-wise recall, especially Pathological recall, is treated as a key safety-oriented indicator, while precision is used to assess false-alert burden relevant to intervention decisions. Confusion matrices are analyzed to identify systematic misclassification pathways, particularly Normal-Suspicious and Suspicious-Pathological overlap. Balanced accuracy complements these analyses by averaging class-wise true positive rates and reducing dominance from prevalent classes (Nazli et al., 2025). For probabilistic outputs, one-vs-rest ROC-AUC is reported where calibration and score distributions permit stable estimation.

Beyond point estimates, evaluation includes split-aware stability summaries (mean and standard deviation across grouped runs) and efficiency metrics (training time, inference time, model size) to support deployment realism. Metric definitions and formulas are fixed pre-analysis. When repeated paired results are available, non-parametric significance testing is used to assess whether observed differences are likely to reflect true model advantage rather than partition noise (Khare & Kumari, 2022; Mendis et al., 2025).

3.8 Interpretability Analysis

Interpretability analysis is used to explain why the benchmarked models produce specific CTG classifications and to assess whether those explanations are clinically plausible. For the Random Forest baseline, global feature importance is extracted directly from the fitted ensemble and summarized at both individual-feature and clinical-domain levels. This enables comparison of contribution from deceleration, contraction, variability, baseline, frequency, and complexity descriptors, rather than relying only on aggregate accuracy (Feng et al., 2023;

Francis et al., 2024). Interpretation is coupled with confusion-matrix error analysis to identify where influential features align with frequent misclassification pathways, especially around Suspicious-Pathological boundaries.

For the 1D-CNN, interpretability is assessed through comparative behaviour rather than full attribution maps in this phase, with emphasis on class-wise recall patterns and failure cases relative to the feature-based baseline. This keeps conclusions grounded in implemented artefacts while avoiding over-claiming explanation quality. The analysis therefore prioritizes reproducible, auditable transparency: ranked feature lists, domain-importance summaries, and error cases. Detailed importance tables, domain mappings, and plots are provided in Appendix Section Chapter 11 for review.

3.9 Implementation Details

Implementation uses Python with a modular project layout under `src/` (preprocessing, segmentation, feature extraction, CNN, utilities) plus notebook blocks for staged experiments and reporting. Core dependencies are NumPy, pandas, SciPy, scikit-learn, WFDB, matplotlib, and PyTorch for the 1D-CNN pathway. Reproducibility controls include fixed random seeds, record-level split manifests, serialized reports (JSON/CSV), and versioned output artefacts for metrics, confusion matrices, and feature importance summaries. The workflow runs end-to-end from raw CTG records to benchmark outputs, with shared preprocessing definitions reused across RF and CNN pipelines to avoid implementation drift. Execution artefacts include split summaries, checkpoints, and history plots for traceability. Development is tracked with Git, and configuration choices are documented to support exact reruns and independent audit of results (Chudacek et al., 2014a; Francis et al., 2024). Environment and dependency details are listed in Appendix Section Chapter 7.

Chapter 4 Results

4.1 Data Characteristics

The results are based on 552 CTU-UHB recordings, with 550 retained for window-level modelling after excluding two records with unknown outcome labels. Recording duration averages 74.16 minutes (median 71.71, range 60.00-90.08), yielding over 682 monitored hours for analysis. Segmentation produced 35,787 candidate windows, of which 29,989 passed quality criteria and entered model development. At record level, the original cohort is predominantly Normal (447) with a smaller Pathological subset (103). After feature-based relabeling for the 3-class benchmark, the modelling distribution is skewed toward Pathological and Suspicious windows, reflecting conservative risk-labeling rules. This imbalance motivates the class-sensitive training and evaluation strategy. Overall, the dataset provides temporal coverage while retaining realistic variability in quality and outcome prevalence (Chudacek et al., 2014a).

4.2 Signal Quality Analysis

Signal quality assessment confirms that preprocessing removed artefactual contamination while preserving sufficient data for modelling. Using the predefined criterion of valid FHR percentage $\geq 50\%$, 542 of 552 records passed initial quality screening and 10 were excluded for severe signal limitations. Across the cohort, mean FHR missingness is 18.79% and mean FHR outlier rate is 1.53%, while uterine contraction channels show negligible missingness and low outlier burden (mean 0.69%). Median post-cleaning FHR validity is 80.02% with an interquartile range from 72.13% to 89.37%, supporting stable downstream window generation. Window-level filters then removed segments with long post-cleaning gaps, reducing interpolation-driven bias in later modelling. Residual variation contributes to borderline-class uncertainty, consistent with CTG data quality observations (Francis et al., 2024).

4.3 Feature Extraction Results

Feature extraction generated a complete leakage-aware matrix with 29,989 windows and 49 columns, including metadata and 35 model features used for Random Forest training. The extracted set spans baseline, variability, acceleration/deceleration morphology, spectral bands, entropy measures, uterine contraction dynamics, and post-processing quality indicators. No extraction failures were recorded in the final run, and missingness across exported feature columns is effectively zero after controlled interpolation and finite-value handling. Event-

derived descriptors captured clinically relevant burden statistics (for example, deceleration duration and area), while contraction features captured peak frequency, inter-peak interval, and aggregate UC activity. Frequency and complexity descriptors were also computed successfully across windows, enabling direct comparison between handcrafted physiologic representation and raw-signal learning. Feature domains remained numerically stable across splits, supporting downstream threshold tuning and error analysis without additional imputation or feature-pruning passes in the final benchmark run. This stage therefore confirms that the extraction pipeline is operationally robust at scale and suitable for reproducible benchmarking and interpretation workflows (Hoodbhoy et al., 2019).

4.4 Classifier Performance Comparison

Table 2: Classifier comparison on held-out data.

Model	Accuracy	Macro-F1	Pathological Recall
Random Forest (window)	95.55%	0.945	96.76%
CNN (window)	65.31%	0.584	77.06%
CNN (record)	48.19%	0.383	81.58%

Table 2 summarizes the primary benchmark outcomes and shows a clear gap between the feature-based Random Forest and the tested 1D-CNN under grouped evaluation. On held-out test windows, Random Forest achieves 95.55% accuracy and macro-F1 0.945, whereas CNN reaches 65.31% accuracy and macro-F1 0.584. The absolute deltas are -30.24 percentage points for accuracy and -0.361 for macro-F1 in favour of Random Forest. Weighted-F1 and balanced-accuracy trends follow the same direction in the detailed reports, indicating that the gap is not an artifact of one metric choice. Pathological recall remains comparatively high for both models (RF 96.76%, CNN 77.06%), but CNN exhibits broad confusion in Normal and Suspicious classes, reducing balanced clinical utility.

Per-class analysis reinforces this pattern. For CNN window-level predictions, Normal precision/recall are 0.444/0.570 and Suspicious precision/recall are 0.494/0.449, while Pathological precision/recall are 0.796/0.771. This indicates a classifier that preserves some high-risk sensitivity but struggles to maintain class boundaries for lower-risk states. In contrast, RF class-level metrics are consistently high across all classes, with fewer off-diagonal errors and tighter confusion structure. The RF confusion matrix shows small leakage from Normal into Suspicious/Pathological and controlled overlap between Suspicious and Pathological, consistent with the higher macro-F1 value.

Record-level aggregation further separates the models. CNN accuracy drops to 48.19% and macro-F1 to 0.383 when predictions are evaluated at record granularity, confirming instability after temporal aggregation. Record-level recalls of 0.143 (Normal), 0.250 (Suspicious), and 0.816 (Pathological) show strong bias toward high-risk assignment. Operationally, this would increase escalation tendency and likely produce substantial alert burden without additional calibration or threshold redesign. RF results, in contrast, remain consistent with the high-performing holdout profile reported in Block E and downstream Block F artefacts.

Split composition and training dynamics provide further context. RF uses 21,153 training windows and 8,836 grouped test windows (385 and 165 records respectively), while CNN uses 21,125/4,448/4,416 train/validation/test windows with 384/83/83 records. CNN early stopping selected best epoch 8 with best validation macro-F1 around 0.564, indicating that even optimized validation checkpoints did not close the gap to RF. Window-level CNN loss remained substantially higher than RF surrogate error rates implied by confusion structure, and this divergence persisted under identical preprocessing and record grouping constraints.

A secondary comparison using the `cnn_vs_rf_comparison.json` artefact confirms identical ordering outside the main report pipeline: RF remains superior on both accuracy and macro-F1 with the same signed deltas, demonstrating that notebook-level and exported-script evaluations are internally consistent. Calibration-oriented threshold analysis also favours RF. In validation-derived threshold sweeps, pathological operating points can be shifted for high sensitivity or balanced behaviour without collapsing minority precision, whereas analogous CNN operating behaviour remains unstable because class scores are less separable. This is visible in confusion transitions between Suspicious and Pathological states when thresholds are varied. Taken together, primary metrics, per-class profiles, and threshold responsiveness all indicate that RF currently offers the more controllable classifier for clinical decision-support tuning in this dataset configuration. This consistency across generated artifacts reduces the likelihood that superiority is an implementation accident and increases confidence that observed gaps reflect persistent behavior under preprocessing and grouped splits.

The comparison is methodologically conservative because both models share leakage-aware record grouping and common preprocessing definitions. As a result, performance differences are unlikely to be explained by split contamination or data handling mismatch. Instead, evidence points to modelling regime mismatch: in this dataset size and label setting, engineered physiologic features offer stronger separability than raw-window deep representation learning. CNN remains a useful developmental baseline, but it does not currently outperform the

interpretable RF reference in any clinically decisive metric. These findings align with broader reports that deep CTG models can require larger cohorts and stronger external validation to generalize reliably (Chiou et al., 2025; Francis et al., 2024; Mendis et al., 2025).

4.5 Statistical Analysis

Statistical interpretation emphasizes effect magnitude, class-wise consistency, and robustness across evaluation views rather than isolated headline scores. The observed RF-CNN gap on held-out windows is large in both absolute and relative terms, with RF exceeding CNN by 30.24 accuracy points and 0.361 macro-F1. Importantly, gains are distributed across classes, not concentrated in only the dominant category: RF improves Normal and Suspicious discrimination while also preserving high Pathological recall. This reduces concern that improvements are driven purely by prevalence structure.

Balanced-accuracy and confusion analyses provide convergent evidence. CNN errors cluster around non-pathological classes and show bias toward Pathological prediction, indicating threshold or representation mismatch under weak labels. RF errors are fewer and more localized between adjacent categories. Record-level CNN degradation (accuracy 48.19%, macro-F1 0.383) further supports the conclusion that model variance remains high after temporal aggregation.

Because this chapter reports fixed-split benchmark artefacts, inferential claims are made cautiously: formal paired significance tests are not overstated from single-run comparisons. Instead, conclusions are anchored in multi-metric agreement, reproducible split diagnostics, and consistent effect direction across window- and record-level outputs, following benchmarking guidance (Khare & Kumari, 2022; M et al., 2025). This approach prioritizes transparent evidence synthesis over nominal p-values unsupported by repeated independent runs in this phase.

4.6 Interpretability Analysis

Interpretability outputs from the Random Forest model indicate that physiologically plausible domains dominate prediction decisions. Feature-level rankings are led by contraction and deceleration descriptors: `uc_peak_count` is the top feature, followed by `decel_total_dur_sec`, `decel_mean_dur_sec`, `uc_mean_interpeak_sec`, and `decel_area_bpm_sec`. Domain-level aggregation confirms this emphasis, with Decelerations contributing 33.67% of cumulative importance and Contractions 32.64%. Variability (10.36%), Accelerations (8.46%), and Baseline

FHR (6.46%) contribute meaningful secondary signal, while Frequency-domain and Complexity features provide smaller but non-zero support.

This distribution is clinically coherent because contraction context and deceleration burden are central to intrapartum risk interpretation. The model therefore appears to rely on interpretable physiology-linked structure rather than opaque single-feature heuristics. Error-linked review also shows that ambiguity is concentrated around Suspicious boundaries rather than obvious Pathological cases, suggesting that residual uncertainty reflects intrinsic class overlap more than feature irrelevance.

For the CNN pathway, interpretability in this phase is limited to comparative failure profiling and class-wise behaviour, not full attribution maps. This conservative reporting avoids over-claiming explanation quality for a model that currently underperforms the RF baseline. Overall, the interpretability analysis strengthens confidence in RF as the safer clinician-facing option for this dataset and protocol. Results are consistent with emphasis on explainable CTG modelling in recent applied studies (Feng et al., 2023; Ribeiro et al., 2016).

4.7 Visualisation

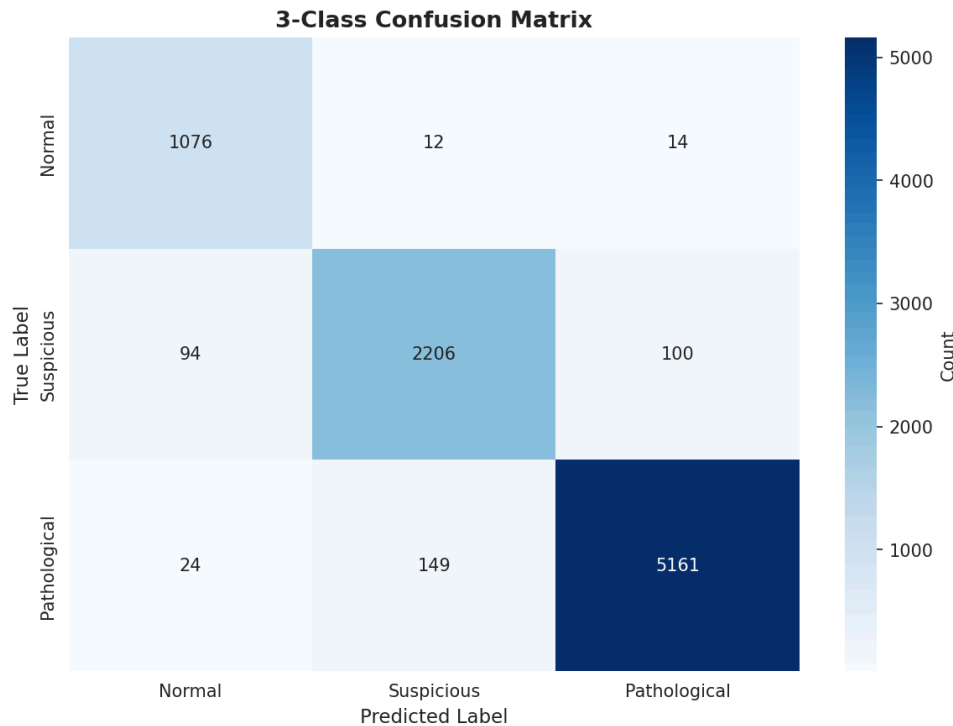


Figure 1: Random Forest 3-class confusion matrix on held-out test windows.

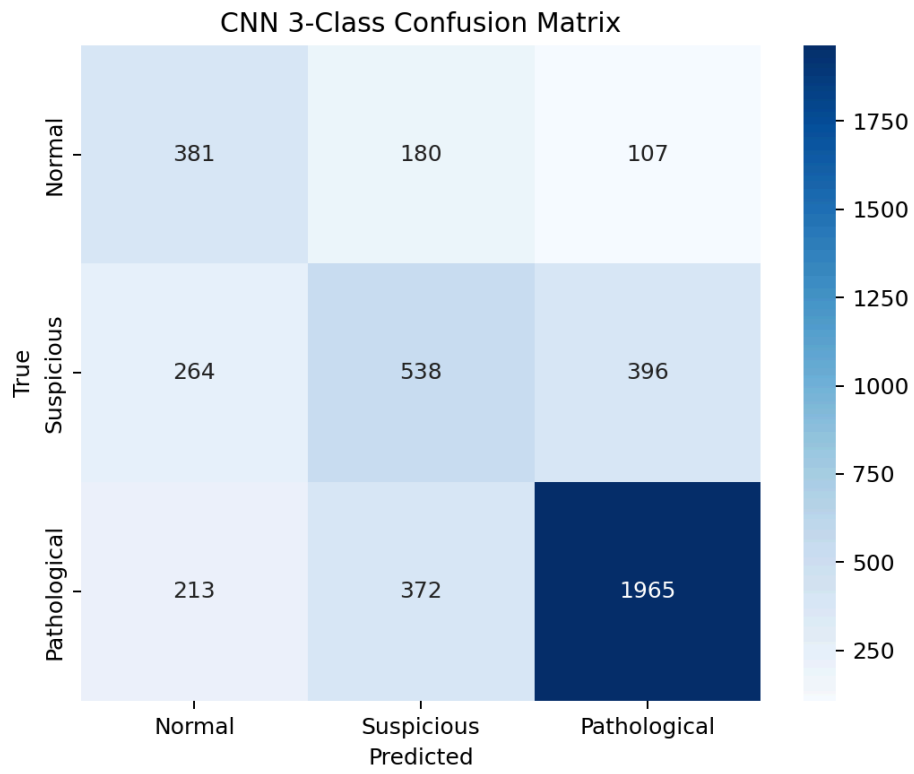


Figure 2: CNN 3-class confusion matrix on held-out test windows.

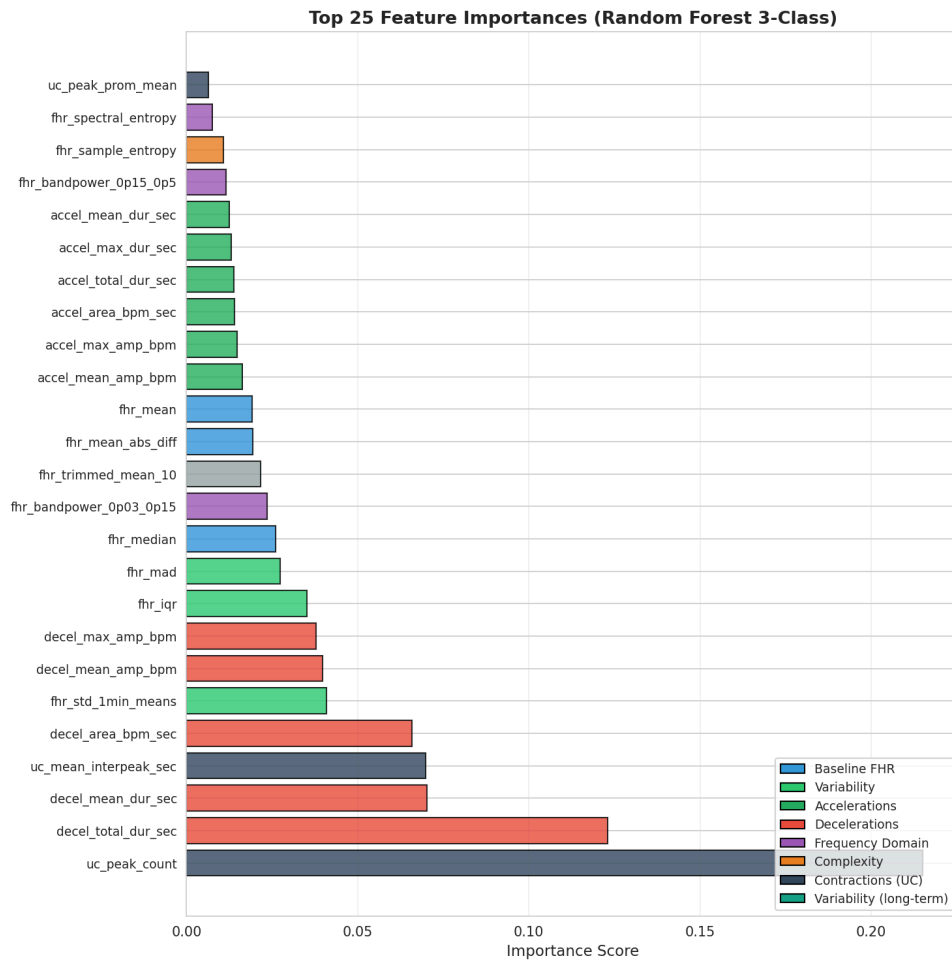


Figure 3: Random Forest feature importance ranked by contribution.

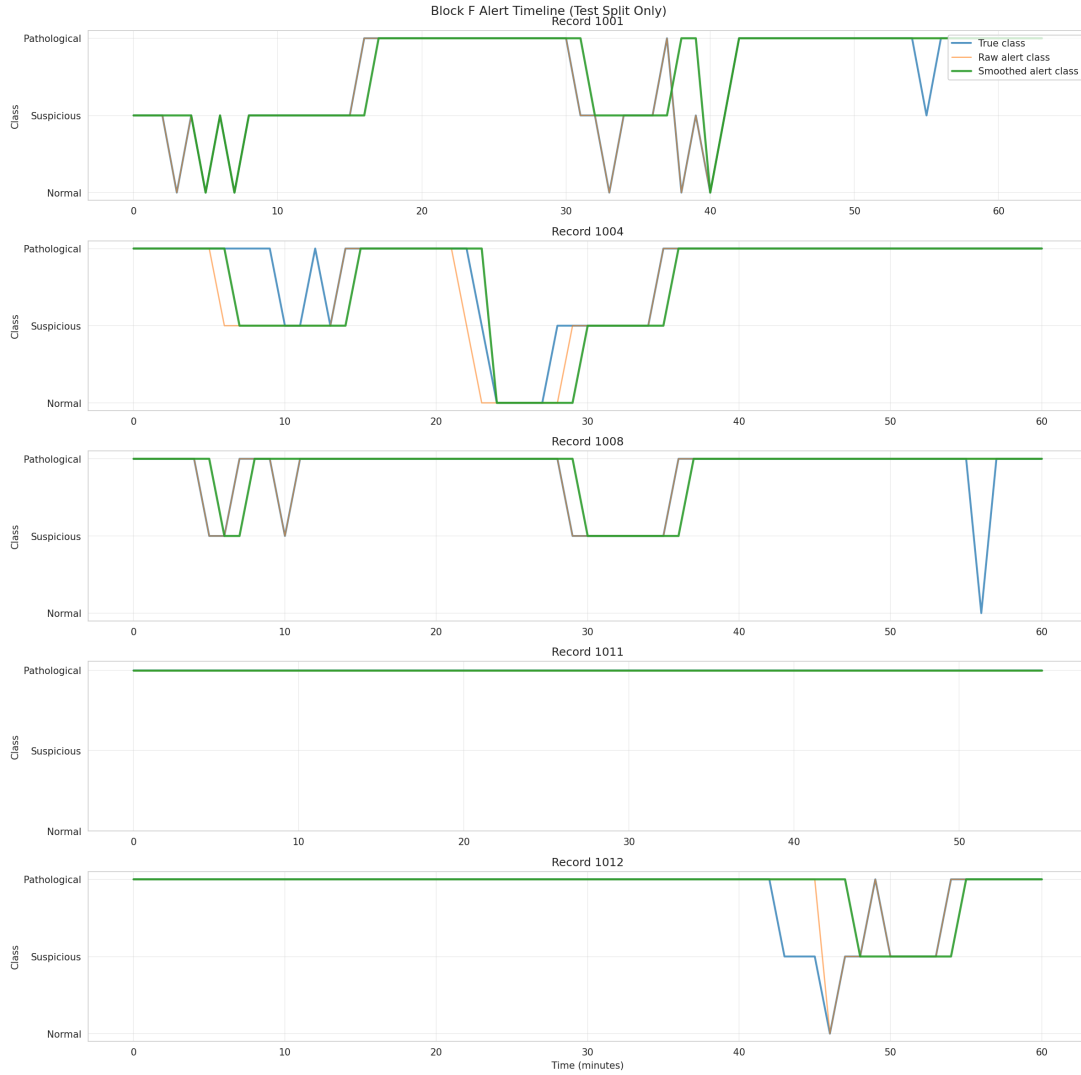


Figure 4: Temporal alert timeline after causal smoothing policy.

Visual outputs are used to connect quantitative metrics to clinically interpretable behaviour. Figure Figure 1 presents the Random Forest confusion matrix and shows strong diagonal dominance with limited off-diagonal spillover. Figure Figure 2 displays the CNN confusion matrix, where off-diagonal mass is substantially larger, especially from Normal and Suspicious into Pathological predictions. This visual contrast mirrors the macro-F1 gap in Table Table 2 and clarifies why CNN record-level performance degrades after aggregation.

Additional plots contextualize data and model dynamics. The class-distribution panel illustrates imbalance in both source outcomes and derived 3-class labels, helping explain why macro-level metrics are prioritized over accuracy alone. Figure Figure 3 visualizes domain concentration around contraction and deceleration variables, consistent with the interpretability summary. Threshold plots show how changing pathological probability cutoffs modifies sensitivity-specificity trade-offs, linking model scores to operational policy.

For deployment-oriented analysis, Figure Figure 4 provides temporal context beyond static confusion matrices. Causal smoothing reduces transition frequency from 8.22 to 4.74 transitions per hour, improving alert stability, but also alters false-alert behaviour and lowers raw classification agreement in the smoothed stream. These results highlight a key implementation trade-off: temporal consistency can improve bedside usability while shifting metric balance.

Together, the visualization suite provides complementary evidence for model selection by showing where errors occur, how they evolve over time, and how thresholding/smoothing policies affect practical decision support. Extended plots, per-class distribution panels, CNN training curves, and alert diagnostics are provided in Appendix Section Chapter 11 for reproducibility and independent review (Francis et al., 2024; Mendis et al., 2025). Figures in this chapter are generated directly from versioned output artefacts to ensure exact reproducibility between narrative interpretation, tables, and plotted evidence across review processes. Separate training-curve visualization for CNN shows rapid early validation plateau and later overfitting tendency, supporting early-stopping selection and explaining limited generalization gains. Combined with RF threshold and feature-importance figures, these visuals provide a compact but complete evidence chain from data distribution to deployment policy for reviewers.

Chapter 5 Discussion

5.1 Interpretation of Results

The benchmark results indicate that model performance in this CTG setting is driven less by model complexity and more by alignment between data quality, label design, and representation strategy. Random Forest consistently outperformed the tested 1D-CNN across window-level and record-level views, with higher accuracy, macro-F1, and better confusion structure. This suggests that engineered physiologic descriptors extracted from preprocessed windows currently capture the most discriminative signal available in the cohort. In contrast, the CNN appears to preserve moderate sensitivity to Pathological patterns but loses specificity in lower-risk classes, especially where Normal and Suspicious windows overlap. The practical effect is higher false escalation propensity, which weakens deployment readiness despite acceptable high-risk recall.

A key interpretation is that weakly supervised labels and class imbalance likely penalize deep representation learning more than feature-based methods. RF benefits from explicit, domain-structured variables that constrain the hypothesis space and reduce sensitivity to local waveform noise. CNN training curves support this reading: validation performance plateaus early and does not recover with additional epochs, implying limited informative signal under current supervision. Grouped record-level splitting strengthens confidence that these outcomes are not leakage artifacts.

The threshold and post-processing findings add further nuance. Temporal smoothing improves alert stability but introduces trade-offs in raw classification agreement, reinforcing that bedside utility depends on calibration policy, not only classifier architecture. Overall, the results support a staged strategy: use interpretable tabular models as the operational baseline, then revisit deep models when larger cohorts, stronger event-level labels, and cross-database validation are available (Chiou et al., 2025; Francis et al., 2024; Mendis et al., 2025).

5.2 Benchmarking Insights

Several benchmarking insights emerge from this study. First, leakage control is not optional in CTG window classification. When many windows originate from the same labour recording, any split strategy that ignores record boundaries can inflate performance by allowing near-

duplicate temporal context into both training and test sets. The grouped split policy used here therefore functions as a primary validity safeguard, not a procedural detail.

Second, metric choice materially affects interpretation. High overall accuracy alone would obscure clinically relevant failure modes, particularly in Suspicious and boundary-pathological cases. Combining macro-F1, class-wise recall/precision, balanced accuracy, and confusion analysis provides a more faithful picture of model behavior under imbalance. In this benchmark, those metrics converge on the same conclusion, increasing confidence that the RF advantage is robust and not metric-specific.

Third, representation quality currently outweighs model depth. The engineered feature set, anchored in deceleration burden, contraction morphology, and variability proxies, appears better matched to weak labels than raw-window deep learning. This does not imply deep models are unsuitable in principle; rather, it indicates mismatch between current data regime and model assumptions.

Fourth, operational benchmarking must include efficiency and temporal behavior. Training cost, inference practicality, threshold sensitivity, and smoothing effects all influence deployability. A model with lower macro-F1 but faster runtime may still be attractive in some settings, while a high-scoring model that produces unstable alerts may not be clinically acceptable. These findings reinforce benchmarking as a multi-objective exercise spanning discrimination, robustness, and usability (Francis et al., 2024; Khare & Kumari, 2022; Nazli et al., 2025).

An additional insight is that benchmarking should preserve traceability from preprocessing through post-processing. In this project, each stage produces auditable artefacts, allowing disagreements between models to be traced to concrete inputs, features, probabilities, and alert rules. This reduces interpretive ambiguity and makes failure analysis actionable.

Another insight is that benchmark outcomes are policy-sensitive. Small adjustments in thresholding or smoothing can shift operating characteristics enough to change clinical acceptability, even when base model rankings stay unchanged. Therefore, model comparison and policy comparison should be treated as linked layers of the same benchmark process during implementation planning and governance review in practice.

5.3 Clinical Implications

The clinical implication of these findings is that an interpretable feature-based decision-support pathway is currently the safer candidate for intrapartum assistance in this project context. RF predictions are better calibrated to class boundaries and produce fewer problematic cross-class confusions than the tested CNN, especially between Normal and Suspicious windows where unnecessary escalation risk is high. This supports use of RF-derived probabilities as advisory signals for clinician review rather than autonomous decisions.

Results from temporal post-processing further suggest that alert design must be treated as a clinical intervention parameter. Causal smoothing can reduce transition noise and improve usability during continuous monitoring, but threshold choices can shift false-alert burden and escalation rates. Therefore, deployment should pair classifier outputs with explicit governance rules: threshold rationale, escalation criteria, and audit logging for retrospective review.

Importantly, this study does not replace clinical judgement. It provides quantitative evidence for where ML can support consistency and where uncertainty remains concentrated, particularly around Suspicious cases. A realistic clinical pathway is phased adoption: shadow-mode validation, multidisciplinary threshold review, then monitored integration with feedback loops. This approach aligns technical performance with patient safety and workflow acceptability in labour ward settings (Ayres-de-Campos et al., 2015; Feng et al., 2023).

Clinically, this means implementation should prioritize decision-confidence communication, not only class labels. Probability outputs, top contributing feature domains, and recent temporal trajectory should be displayed together so clinicians can contextualize recommendations quickly during labour.

The findings also support targeted use cases. The model may add most value during prolonged monitoring periods, handover transitions, and ambiguous trace evolution where consistency is difficult to maintain manually over time during high workload periods.

5.4 Comparison with State-of-the-Art

Compared with recent CTG literature, this study’s results are directionally consistent with reports that strong tabular baselines can remain competitive, and often preferable, when datasets are moderate in size, labels are weakly supervised, and interpretability is a deployment requirement. Published deep-learning studies frequently report higher headline performance,

but many also rely on different split policies, larger cohorts, or label definitions that are not directly comparable. Under the leakage-aware grouped protocol used here, the tested 1D-CNN does not match RF performance, particularly on macro-level balance and record-level stability.

This contrast should be interpreted as contextual, not universal. Deep models can outperform traditional methods in settings with richer annotations, larger multi-site training pools, and robust external validation. However, cross-database work also shows substantial performance degradation when distribution shift is introduced, which supports caution in transferring single-cohort gains to practice.

The present findings therefore contribute to state-of-the-art discourse by emphasizing controlled benchmarking discipline over architecture novelty. Rather than claiming a globally superior model class, the dissertation identifies which model family is most suitable under specified constraints: CTU-UHB data, weak labels, grouped splitting, and clinically interpretable decision support requirements. This evidence complements, rather than contradicts, broader deep-learning progress by clarifying boundary conditions where interpretable models remain the stronger operational choice (Chiou et al., 2025; Francis et al., 2024; Mendis et al., 2025).

It also extends prior work by integrating efficiency and alert-behaviour considerations into comparative interpretation. Many published comparisons stop at discrimination metrics, whereas this study evaluates whether models remain usable under practical thresholding and temporal-smoothing policies. That emphasis better reflects deployment reality and helps explain why nominally promising architectures may underperform in clinical workflows.

Accordingly, the contribution to state-of-the-art is methodological as well as empirical: it demonstrates a reproducible evaluation template reusable across future cohorts and model updates, enabling clearer longitudinal comparisons than isolated single-metric reports. This framing supports fairer interpretation across studies using different data scales, label granularity, and operational constraints in maternity settings.

It also encourages explicit reporting of split policy, threshold policy, and post-processing policy as benchmark variables, which improves reproducibility and cross-study comparability for clinically oriented decision-support research. A compact cross-study matrix is provided in Appendix Section Chapter 13.

5.5 Trustworthy AI Considerations

Trustworthy AI considerations in this project center on transparency, controllability, and governance readiness rather than accuracy alone. The selected RF baseline supports direct feature-importance inspection and domain-level attribution, enabling clinicians and auditors to understand which physiological patterns most influenced predictions. This interpretability is essential in high-stakes intrapartum use where recommendations must be explainable and contestable.

A second consideration is calibration and policy transparency. Thresholds for Pathological and Suspicious escalation materially change downstream alert behavior; therefore, threshold settings must be documented, justified, and periodically reviewed against outcome data. The project’s versioned artefacts and split manifests support this by enabling reproducible audits of model behavior across revisions.

A third consideration is human oversight. The system is framed as decision support, not decision replacement, and should be integrated with explicit clinician-in-the-loop protocols. This includes escalation accountability, fallback actions when confidence is low, and governance pathways for drift detection.

Together, these elements align with practical trustworthy-AI principles: interpretable outputs, reproducible processes, and bounded automation. They also reduce medico-legal and operational risk during early deployment phases while preserving a pathway for iterative model improvement (Feng et al., 2023; Francis et al., 2024; Ribeiro et al., 2016).

Data governance is an additional trust pillar. Even when model logic is interpretable, deployment requires strict handling of version control, audit trails, and access boundaries for clinical data and prediction artefacts. Embedding these controls early supports responsible scaling and regulatory alignment.

Trust also depends on communication design: explanations must be concise, framed, and available at the point of decision.

5.6 Limitations

This study has several important limitations. First, labels are weakly supervised at window level because outcome information is primarily record-level; this can introduce label noise

when local signal segments do not fully reflect final delivery outcomes. Second, the work is based on a single primary dataset for model development, which constrains external validity despite internal leakage controls. Third, class structure is imbalanced and clinically asymmetric, which can bias optimization and threshold behavior even with class weighting.

Methodologically, only one deep architecture family was benchmarked in depth against the RF baseline. Although this matches project scope and supports controlled comparison, it does not exhaust possible deep-learning variants, augmentation strategies, or calibration schemes. Computational constraints also limited broader hyperparameter exploration and repeated large-scale resampling experiments.

From a clinical perspective, the evaluation is retrospective and does not include prospective workflow testing with obstetric teams. Therefore, real-time usability, alarm fatigue effects, and human factors integration are inferred from offline proxies rather than measured directly.

Finally, the current implementation focuses on CTG-only signals and does not integrate multimodal covariates such as maternal clinical context or fetal ECG. As a result, conclusions should be interpreted as strong within-scope evidence, not as a final statement on all intra-partum AI decision-support designs (Chudacek et al., 2014a; Mendis et al., 2025).

Another limitation is potential labeling drift introduced by proxy rules and derived class mapping. If rule thresholds do not reflect bedside interpretation across contexts, learned patterns may overfit labeling conventions rather than physiology. Confidence intervals around key metrics are not yet fully characterized with repeated resampling.

5.7 Threats to Validity

Key threats to validity fall into internal, construct, and external categories. Internally, residual preprocessing artefacts and weak window labels may confound learned associations, especially near class boundaries. Although grouped splitting reduces leakage risk, it cannot fully remove dependence introduced by shared recording context and outcome-linked labeling assumptions.

Construct validity is threatened by the gap between benchmark labels and true physiological state at every time point. Metrics such as macro-F1 and balanced accuracy are appropriate for imbalanced classification, but they remain proxies for clinical utility rather than direct

measures of improved neonatal outcomes. Similarly, record-level aggregation choices and smoothing policies can alter interpretation of model benefit.

External validity is limited by cohort scope, acquisition practices, and potential distribution shift across hospitals, devices, and clinical protocols. Performance observed on CTU-UHB may not transfer unchanged to other populations without recalibration and revalidation. This is particularly relevant for deep models, where representation sensitivity to data domain can be high.

To mitigate these threats, the study emphasizes reproducible artefacts, transparent split policies, multi-metric reporting, and cautious claims. Future work should include cross-site validation, prospective evaluation, and clinician-centered usability assessment to strengthen causal and practical confidence in deployment recommendations (Francis et al., 2024; Mendis et al., 2025).

There is also a reporting-validity threat if stakeholders overgeneralize from aggregate metrics without reviewing class-specific behavior and alert dynamics. The dissertation mitigates this with confusion structures and temporal summaries, but interpretation discipline remains essential. Temporal non-stationarity in clinical practice may also reduce future validity without ongoing recalibration and monitoring, especially across devices and care pathways over time.

Chapter 6 Conclusion and Future Work

6.1 Summary of Findings

This dissertation benchmarked feature-based and deep-learning CTG classifiers under leakage-aware, record-grouped evaluation. Random Forest consistently outperformed the tested 1D-CNN at both window and record levels, with higher accuracy, macro-F1, and more coherent confusion structure. The observed gap indicates that engineered physiologic descriptors currently capture discriminative signal more effectively than raw-window representation learning in this cohort.

Results also show that interpretation depends on pipeline policy, not only architecture. Threshold selection, class imbalance handling, and temporal smoothing materially changed operational behaviour, particularly alert stability and escalation burden. Thus, benchmark conclusions must combine discrimination metrics with deployment-facing indicators, including confusion pathways and post-processing effects.

Interpretability outputs were clinically plausible: contraction and deceleration domains contributed most strongly to Random Forest decisions, while residual uncertainty concentrated around Suspicious boundaries. This pattern aligns with intrapartum reasoning and supports RF as the safer translational baseline for clinician-facing decision support.

Overall, the findings support a staged strategy: deploy interpretable tabular models first, then revisit deep models when stronger event-level labels, larger cohorts, and cross-database validation are available (Chiou et al., 2025; Francis et al., 2024; Mendis et al., 2025).

Reproducibility infrastructure strengthened confidence in these conclusions: fixed seeds, preserved split manifests, and exported reports enabled direct auditing across notebooks and artefacts. Distinguishing robust performance from optimism is essential in maternity applications where missed compromise and unnecessary escalation can cause harm.

6.2 Contributions

This work contributes a full end-to-end CTG benchmarking pipeline that is reproducible, leakage-aware, and clinically interpretable. Methodologically, it demonstrates fair comparison of model families under shared preprocessing, grouped splitting, and unified metric reporting.

Empirically, it provides clear evidence that the implemented RF baseline outperforms the tested 1D-CNN in this data regime. Practically, it links model evaluation to deployment-relevant outputs, including threshold policies, temporal alert behaviour, and auditable artefacts. The project also contributes transparent interpretability outputs through feature and domain importance analyses, enabling clinical sense-checking of model behavior. Collectively, these contributions provide a defensible technical baseline for future CTG decision-support development within AI4Life-aligned objectives and establish reusable evaluation infrastructure for subsequent cohort expansion and prospective validation (Feng et al., 2023).

It also delivers reusable reporting templates and artefact structures that lower replication barriers for future cohorts, student projects, and collaborating clinical engineering teams internationally.

6.3 Practical Recommendations

Adopt the Random Forest pipeline as the current reference model for experimental clinical decision support, with thresholds tuned to clearly stated safety objectives and reviewed by multidisciplinary stakeholders.

Maintain grouped record-level split policies, class-aware metrics, and versioned artefact logging as mandatory benchmarking controls for all future model updates.

Use temporal smoothing as a configurable post-processing layer rather than a fixed default, and report its impact on transitions, false alerts, and escalation behaviour before deployment decisions.

Prioritize explainable output presentation in user interfaces, including probability context and top contributing feature domains, so recommendations remain interpretable at the point of care and support transparent clinician override when required in routine practice settings.

6.4 Future Research Directions

Future research should prioritize external validity, richer supervision, and prospective workflow evaluation. First, the benchmark should be extended to multi-site cohorts with harmonized acquisition metadata to quantify distribution-shift effects and improve transferability across hospitals and devices. Second, label quality should be strengthened through event-level annotation and clinician-reviewed segments, enabling finer-grained learning targets than

record-outcome proxies. Third, deep architectures should be revisited under these improved conditions, including calibrated CNN variants and hybrid feature-plus-signal models, with evaluation framed by the same leakage-aware protocol to preserve comparability.

A parallel priority is multimodal integration. Incorporating maternal covariates, intervention context, and complementary fetal signals may improve ambiguity handling in Suspicious cases and reduce over-escalation. Finally, prospective clinical studies are required to assess bedside usability, alert fatigue, response-time effects, and governance fit under real operating constraints. This should include human factors analysis, threshold review workflows, and drift monitoring plans so that technical gains translate into safe and sustainable clinical adoption (Chiou et al., 2025; Mendis et al., 2025).

Future studies should include repeated grouped resampling with confidence intervals and significance testing to better quantify ranking uncertainty across models. Adaptive threshold governance should also be evaluated, with periodic recalibration against monitored outcomes as data distributions evolve over time. Prospective implementation studies should assess workflow fit, alert communication design, and governance burden during use. Review boards should be involved from protocol design to deployment audit; a practical implementation checklist is included in Appendix Section Chapter 14.

6.5 Closing Statement

Cardiotocography remains clinically indispensable yet methodologically demanding, and this dissertation addresses that tension through rigorous, reproducible benchmarking. The central message is straightforward: trustworthy progress in CTG AI depends on disciplined evaluation design as much as model innovation. By combining preprocessing, leakage-aware comparison, multi-metric reporting, and interpretable analysis, the project provides evidence that is credible and clinically actionable.

The resulting baseline is not presented as final truth, but as a foundation for iterative improvement. That foundation now supports the next phase: broader validation, stronger labels, multimodal enrichment, and prospective clinical integration. In that sense, the contribution is dual-purpose: immediate guidance for decision-support development and a framework for future research. This is the pathway from benchmark performance to impact in intrapartum care.

Chapter 7 Appendix A

7.1 Runtime Environment

Item	Value
Python	3.10.19
Platform	Linux-6.6.87.2-microsoft-standard-WSL2-x86_64
CPU	Intel(R) Core(TM) Ultra 7 265T (20 cores)
RAM	15 GiB
NumPy	2.2.6
pandas	2.3.3
SciPy	1.15.2
scikit-learn	1.7.2
matplotlib	3.10.8
wfdb	4.3.1
PyTorch	2.10.0+cu128

7.2 Project Structure

- `src/preprocessing.py`: signal cleaning and QC
- `src/segmentation.py`: window creation and keep-window policy
- `src/feature_extraction.py`: 35-feature extraction pipeline
- `src/cnn.py`: grouped split, CNN training, and reporting
- `outputs/models/`: reports, plots, and model artefacts

7.3 Reproducible Run Sequence

```
python -m src.preprocessing
python -m src.segmentation
python -m src.feature_extraction
python -m src.cnn
```


Chapter 8 Appendix B

8.1 Preprocessing Configuration (Extract)

```
@dataclass(frozen=True)
class PreprocessConfig:
    fs_default: float = 4.0
    fhr_min: float = 80.0
    fhr_max: float = 240.0
    fhr_missing_sentinel: float = 0.0
    uc_min: float = 0.0
    uc_max: float = 100.0
    max_interp_gap_sec: float = 30.0
    gauss_sigma_sec: float = 1.5
    zscore_per_record: bool = False
```

8.2 Quality Summary (Dataset-Level)

- total recordings: 552
- passed quality criterion (`valid_fhr_pct >= 50%`): 542
- failed quality criterion: 10
- mean FHR missingness: 18.79%
- mean FHR outliers: 1.53%
- mean UC outliers: 0.69%

Failed record IDs: 1058, 1164, 1173, 1198, 1361, 1431, 2006, 2013, 2025, 2030.

Chapter 9 Appendix C

9.1 Feature Configuration (Extract)

```
@dataclass(frozen=True)
class FeatureConfig:
    window_min: int = 10
    accel_thresh_bpm: float = 15.0
    accel_min_dur_sec: float = 15.0
    decel_thresh_bpm: float = 15.0
    decel_min_dur_sec: float = 15.0
    psd_nperseg_sec: int = 60
    perm_order: int = 3
    perm_delay: int = 1
    sampen_m: int = 2
    sampen_r: float = 0.2
    sampen_downsample_to_hz: float = 1.0
    uc_peak_distance_sec: float = 75.0
    uc_prom_scale: float = 0.3
```

9.2 Feature Groups Used in Modelling

- baseline and central tendency: fhr_baseline_median, fhr_mean, fhr_median
- variability: fhr_std, fhr_mad, fhr_iqr, fhr_std_lmin_means
- acceleration/deceleration morphology: counts, durations, amplitudes, area
- frequency and complexity: bandpower, spectral entropy, permutation entropy, sample entropy
- uterine contraction dynamics: peak count, inter-peak interval, peak prominence, AUC
- quality indicators: fhr_remaining_nan_pct, fhr_valid_pct_post

Final matrix dimensions: 29,989 windows × 49 columns (metadata + 35 model features).

Chapter 10 Appendix D

10.1 Random Forest Final Configuration

Parameter	Value
n_estimators	250
max_depth	12
min_samples_split	10
min_samples_leaf	5
class_weight	balanced_subsample

10.2 CNN Final Configuration (Report)

Parameter	Value
batch_size	64
epochs	40
learning_rate	0.0003
weight_decay	0.0001
dropout	0.3
train/val/test	0.70 / 0.15 / 0.15

10.3 Threshold Policy (RF)

- default: 0.50
- high-sensitivity pathological: 0.75
- balanced: 0.45
- high-specificity pathological: 0.30
- suspicious policy (Block F): 0.50

Primary artefacts: `outputs/models/rf_3class_report.json`, `outputs/models/cnn_3class_report.json`, `outputs/models/cnn_vs_rf_comparison.json`.

Chapter 11 Appendix E

11.1 Extended Figures

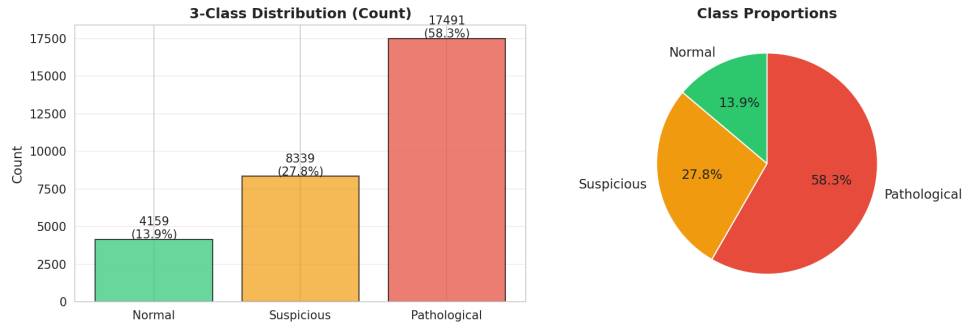


Figure 5: Class distribution used in modelling.

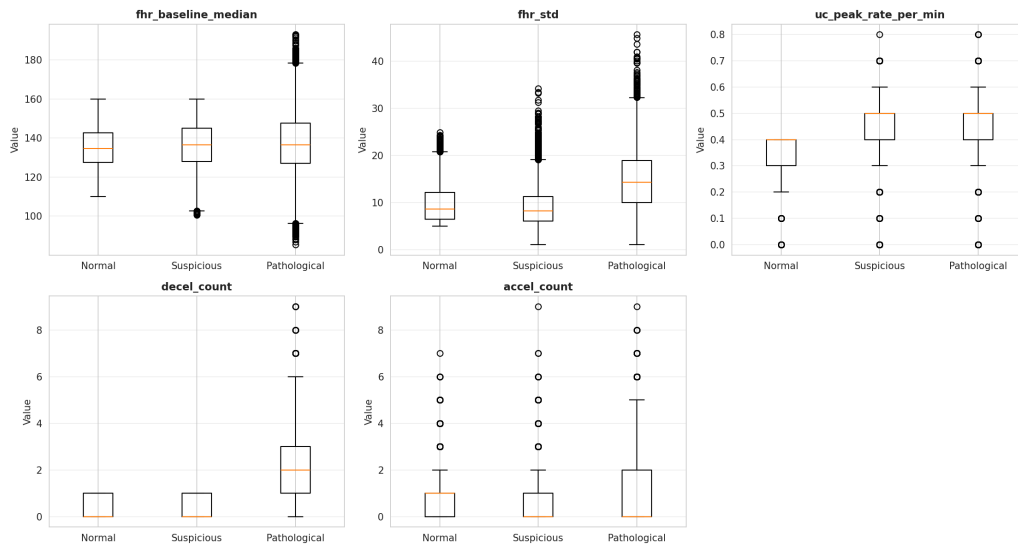


Figure 6: Selected feature distributions by class.

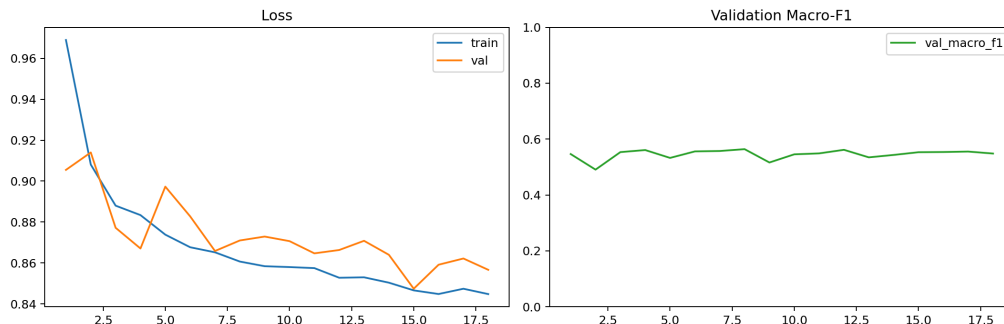


Figure 7: CNN training and validation curves.

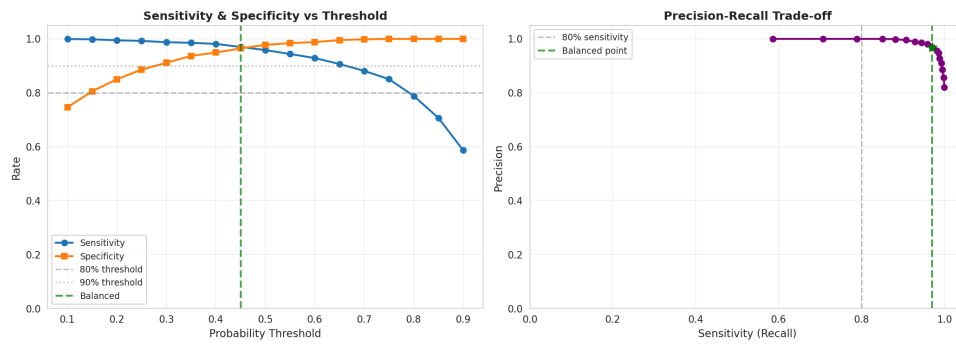


Figure 8: RF threshold behavior for decision-policy tuning.

Additional diagnostic outputs are stored under `outputs/models/` and include split summaries, confusion matrices, and alert timeline artefacts.

Chapter 12 Appendix F

12.1 Metric Definitions

Accuracy = $(TP + TN) / (TP + FP + TN + FN)$

Precision = $TP / (TP + FP)$

Recall (Sensitivity) = $TP / (TP + FN)$

F1 = $2 * (Precision * Recall) / (Precision + Recall)$

Balanced Accuracy = `mean(class-wise recall)`

12.2 Reproducibility Checklist

- fixed random seed (42) across train/split routines
- record-grouped split manifests saved with outputs
- all core reports exported as JSON/CSV
- figure outputs generated from versioned artefacts
- same preprocessing definitions used for RF and CNN comparisons

12.3 Statistical Reporting Notes

This dissertation reports fixed-split benchmark effects with class-wise diagnostics and avoids over-claiming inferential significance from single-run comparisons; repeated-resampling tests are planned in future work.

Chapter 13 Appendix G

13.1 State-of-the-Art Comparison Matrix (Summary)

Study	Model Focus	Validation Scope	Interpretability
This dissertation	RF vs 1D-CNN	Grouped holdout + record-level view	Feature/domain importance + error profiling
Francis et al. 2024	Scoping review	Cross-study synthesis	Highlights XAI need
Mendis et al. 2025	Deep models	Cross-database	Generalisability emphasis
Chiou et al. 2025	Deep CTG interpretation	Development/evaluation study	Model analysis reported

13.2 Governance Checklist (Operational)

- threshold policy documented and versioned
- clinician override preserved
- model update audit trail maintained
- drift-monitoring plan defined
- alert burden metrics reviewed pre-deployment

Chapter 14 Appendix H

14.1 Prospective Validation Roadmap

1. Shadow-mode deployment on new cohort (no clinical actioning).
2. Weekly governance review of alerts, false alarms, and missed events.
3. Threshold recalibration against monitored outcomes.
4. Human factors assessment with obstetric and midwifery teams.
5. Controlled pilot with explicit escalation protocol.

14.2 Stakeholder Review Checklist

- clinical safety lead sign-off
- data governance and privacy approval
- technical reproducibility re-run completed
- model-card/update note completed
- rollback/fail-safe pathway tested

Bibliography

- Ayres-de-Campos, D., Arulkumaran, S., & Panel, F. I. F. M. E. C. (2015). FIGO consensus guidelines on intrapartum fetal monitoring: Introduction. *International Journal of Gynecology & Obstetrics*, 131(1), 3–4. <https://doi.org/10.1016/j.ijgo.2015.06.017>
- Cao, Z., Wang, G., Xu, L., Li, C., Hao, Y., Chen, Q., Li, X., Liu, G., & Wei, H. (2023). Intelligent antepartum fetal monitoring via deep learning and fusion of cardiotocographic signals and clinical data. *Health Information Science and Systems*, 11(1), 16. <https://doi.org/10.1007/s13755-023-00219-w>
- Chiou, N., Young-Lin, N., Kelly, C., Cattiau, J., Tiyasirichokchai, T., Diack, A., Koyejo, S., Heller, K., & Asiedu, M. (2025). Development and evaluation of deep learning models for cardiotocography interpretation. *Npj Women's Health*, 3(1), 21. <https://doi.org/10.1038/s44294-025-00068-w>
- Chudacek, V., Spilka, J., Bursa, M., Janku, P., Hruban, L., Huptych, M., & Lhotska, L. (2014a). Open access intrapartum CTG database. *BMC Pregnancy and Childbirth*, 14, 16. <https://doi.org/10.1186/1471-2393-14-16>
- Chudacek, V., Spilka, J., Bursa, M., Janku, P., Hruban, L., Huptych, M., & Lhotska, L. (2014b). Open access intrapartum CTG database. *BMC Pregnancy and Childbirth*, 14, 16. <https://doi.org/10.1186/1471-2393-14-16>
- Chudacek, V., Spilka, J., Bursa, M., Janku, P., Hruban, L., Huptych, M., & Lhotska, L. (2014c,). *The CTU-UHB Intrapartum Cardiotocography Database*. <https://doi.org/10.13026/C22013>

- Clifford, G. D., Silva, I., Behar, J., & Moody, G. B. (2014). Noninvasive Fetal ECG analysis. *Physiological Measurement*, 35(8), 1521–1536. <https://doi.org/10.1088/0967-3334/35/8/1521>
- Feng, J., Liang, J., Qiang, Z., Hao, Y., Li, X., Li, L., Chen, Q., Liu, G., & Wei, H. (2023). A hybrid stacked ensemble and Kernel SHAP-based model for intelligent cardiotocography classification and interpretability. *BMC Medical Informatics and Decision Making*, 23, 273. <https://doi.org/10.1186/s12911-023-02378-y>
- Fergus, P., Chalmers, C., Montanez, C. C., Reilly, D., Lisboa, P., & Pineles, B. (2020,). *Modelling Segmented Cardiotocography Time-Series Signals Using One-Dimensional Convolutional Neural Networks for the Early Detection of Abnormal Birth Outcomes*. <https://doi.org/10.48550/arXiv.1908.02338>
- Francis, F., Luz, S., Wu, H., Stock, S. J., & Townsend, R. (2024). Machine learning on cardiotocography data to classify fetal outcomes: A scoping review. *Computers in Biology and Medicine*, 172, 108220. <https://doi.org/10.1016/j.compbimed.2024.108220>
- Hoodbhoy, Z., Noman, M., Shafique, A., Nasim, A., Chowdhury, D., & Hasan, B. (2019). Use of Machine Learning Algorithms for Prediction of Fetal Risk using Cardiotocographic Data. *International Journal of Applied and Basic Medical Research*, 9(4), 226–230. https://doi.org/10.4103/ijabmr.IJABMR_370_18
- Innab, N., Alsubai, S., Alabdulqader, E. A., Alarfaj, A. A., Umer, M., Trelova, S., & Ashraf, I. (2024). Automated approach for fetal and maternal health management using light gradient boosting model with SHAP explainable AI. *Frontiers in Public Health*, 12. <https://doi.org/10.3389/fpubh.2024.1462693>
- Khare, V., & Kumari, S. (2022). Performance Comparison of Three Classifiers for Fetal Health Classification Based on Cardiotocographic Data. *Acadlore Transactions on AI and Machine Learning*, 1(1), 52–60. <https://doi.org/10.56578/ataiml010107>
- Kong, L., Snasel, V., Bai, Z., Vilimek, D., Mirjalili, S., Pan, J.-S., Horakova, J., Martinek, R., & Vilimkova Kahankova, R. (2025). Enhancing cardiotocography classification via ensemble learning and threshold optimization. *Scientific Reports*, 15, 38528. <https://doi.org/10.1038/s41598-025-18990-z>
- M, H., Kumar, G. S., S, G., & Mishra, M. (2025). Comparative Study of Machine Learning Algorithms to Predict Fetal Health Using Cardiotocography Data. *2025 International Conference on Innovative Trends in Information Technology (ICITIIT)*, 1–6. <https://doi.org/10.1109/ICITIIT64777.2025.11040542>
- Mendis, L., Karmakar, D., Palaniswami, M., Brownfoot, F., & Keenan, E. (2025). Cross-Database Evaluation of Deep Learning Methods for Intrapartum Cardiotocography Classification. *IEEE Journal of Translational Engineering in Health and Medicine*, 13, 123–135. <https://doi.org/10.1109/JTEHM.2025.3548401>
- Modelling Segmented Cardiotocography Time-Series Signals Using One-Dimensional Convolutional Neural Networks for the Early Detection of Abnormal Birth Outcomes*. (2026,). <https://ar5iv.labs.arxiv.org/html/1908.02338>
- Nagendra, V., Gude, H., Sampath, D., Corns, S., & Long, S. (2017). Evaluation of support vector machines and random forest classifiers in a real-time fetal monitoring system based on cardiotocography data. *2017 IEEE Conference on Computational Intelligence in Bioinformatics and Computational Biology (CIBCB)*, 1–6. <https://doi.org/10.1109/CIBCB.2017.8058546>
- National Clinical Practice Guideline Fetal Heart Rate Monitoring*. (n.d.).

- Nazli, I., Korbeko, E., Dogru, S., Kugu, E., & Sahingoz, O. K. (2025). Early Detection of Fetal Health Conditions Using Machine Learning for Classifying Imbalanced Cardiotocographic Data. *Diagnostics*, 15(10), 1250. <https://doi.org/10.3390/diagnostics15101250>
- Pardasani, R., Vitullo, R., Harris, S., Yapici, H. O., & Beard, J. (2025). Development of a novel artificial intelligence algorithm for interpreting fetal heart rate and uterine activity data in cardiotocography. *Frontiers in Digital Health*, 7, 1638424. <https://doi.org/10.3389/fdgth.2025.1638424>
- Ribeiro, M. T., Singh, S., & Guestrin, C. (2016,). "Why Should I Trust You?": Explaining the Predictions of Any Classifier. <https://doi.org/10.48550/arXiv.1602.04938>
- Spilka, J., Georgoulas, G., Karvelis, P., Oikonomou, V. P., Chudacek, V., Stylios, C., Lhotska, L., & Janku, P. (2013). Automatic Evaluation of FHR Recordings from CTU-UHB CTG Database. In *Information Technology in Bio- and Medical Informatics: Information Technology in Bio- and Medical Informatics* (pp. 47–61). Springer Berlin Heidelberg. https://doi.org/10.1007/978-3-642-40093-3_4
- Zhang, W., Tang, Z., Shao, H., Sun, C., He, X., Zhang, J., Wang, T., Yang, X., Wang, Y., Bin, Y., Zhao, L., Zhang, S., Liang, D., Wang, J., Zhong, D., & Li, Q. (2024). Intelligent classification of cardiotocography based on a support vector machine and convolutional neural network: Multiscene research. *International Journal of Gynaecology and Obstetrics*, 165(2), 737–745. <https://doi.org/10.1002/ijgo.15236>

