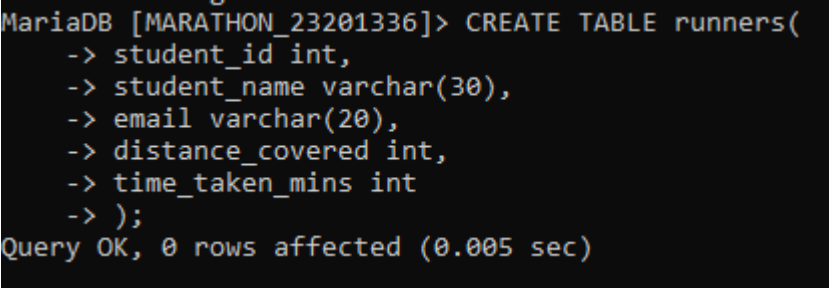


CSE370 : Database Systems

Assignment 01 | Spring 2026

ID : 23201336 | Name : Nafiz Shahriar Sami

No 1 Query (as Plain Text)	CREATE TABLE runners(student_id int, student_name varchar(30), email varchar(20), distance_covered int, time_taken_mins int);
No 1 SS (of Query & Output in Shell)	 <pre>MariaDB [MARATHON_23201336]> CREATE TABLE runners(-> student_id int, -> student_name varchar(30), -> email varchar(20), -> distance_covered int, -> time_taken_mins int ->); Query OK, 0 rows affected (0.005 sec)</pre>
No 2 Query (as Plain Text)	INSERT INTO runners (student_id, student_name, email, distance_covered, time_taken_mins) VALUES (101, 'Mikasa Ackerman', 'mikasa.a@g.bracu.ac.bd', 5, 35), (102, 'Edward Elric', 'e.elric@iub.ac.bd', 10, 59), (103, 'Riza Hawkeye', 'riza.h@ewu.ac.bd', 5, 38), (104, 'Bruce Wayne', 'b.wayne@g.bracu.ac.bd', 10, 63), (105, 'Peter Parker', 'p.parker@iub.ac.bd', 5, 33), (106, 'Alphonse Elric', 'a.elric@iub.ac.bd', 10, 55), (107, 'Son Goku', 'son.goku@g.bracu.ac.bd', 5, 46), (108, 'Gon Freecss', 'gon.f@g.bracu.ac.bd', 10, 68), (109, 'Tanjiro Kamado', 'tanjiro.k@g.bracu.ac.bd', 5, 29),

	(110, 'Roy Mustang', 'roy.m@ewu.ac.bd', 10, 83);
No 2 SS (of Query & Output in Shell)	<pre> MariaDB [marathon_23201336]> INSERT INTO runners (student_id, student_name, email, distance_covered, time_taken_mins) VALUES -> (101, 'Mikasa Ackerman', 'mikasa.a@g.bracu.ac.bd', 5, 35), -> (102, 'Edward Elric', 'e.elric@iub.ac.bd', 10, 59), -> (103, 'Riza Hawkeye', 'riza.h@ewu.ac.bd', 5, 38), -> (104, 'Bruce Wayne', 'b.wayne@g.bracu.ac.bd', 10, 63), -> (105, 'Peter Parker', 'p.parker@iub.ac.bd', 5, 33), -> (106, 'Alphonse Elric', 'a.elric@iub.ac.bd', 10, 55), -> (107, 'Son Goku', 'son.goku@g.bracu.ac.bd', 5, 46), -> (108, 'Gon Freecss', 'gon.f@g.bracu.ac.bd', 10, 68), -> (109, 'Tanjiro Kamado', 'tanjiro.k@g.bracu.ac.bd', 5, 29), -> (110, 'Roy Mustang', 'roy.m@ewu.ac.bd', 10, 83); Query OK, 10 rows affected, 4 warnings (0.006 sec) Records: 10 Duplicates: 0 Warnings: 4 </pre>
No 3 Query (as Plain Text)	<pre> SELECT * FROM runners WHERE distance_covered>6; </pre>
No 3 SS (of Query & Output in Shell)	<pre> MariaDB [marathon_23201336]> SELECT * FROM runners -> WHERE distance_covered>6; +-----+-----+-----+-----+-----+ student_id student_name email distance_covered time_taken_mins +-----+-----+-----+-----+-----+ 102 Edward Elric e.elric@iub.ac.bd 10 59 104 Bruce Wayne b.wayne@g.bracu.ac.b 10 63 106 Alphonse Elric a.elric@iub.ac.bd 10 55 108 Gon Freecss gon.f@g.bracu.ac.bd 10 68 110 Roy Mustang roy.m@ewu.ac.bd 10 83 +-----+-----+-----+-----+-----+ 5 rows in set (0.000 sec) </pre>

No 4 Query (as Plain Text)	SELECT upper(student_name) -> FROM runners -> ORDER BY time_taken_mins DESC;
No 4 SS (of Query & Output in Shell)	<pre> MariaDB [marathon_23201336]> SELECT upper(student_name) -> FROM runners -> ORDER BY time_taken_mins DESC; +-----+ upper(student_name) +-----+ ROY MUSTANG GON FREECSS BRUCE WAYNE EDWARD ELRIC ALPHONSE ELRIC SON GOKU RIZA HAWKEYE MIKASA ACKERMAN PETER PARKER TANJIRO KAMADO +-----+ 10 rows in set (0.000 sec) </pre>
No 5 Query (as Plain Text)	ALTER TABLE runners CHANGE distance_covered total_distance DECIMAL(3,1);
No 5 SS (of Query & Output in Shell)	<pre> MariaDB [marathon_23201336]> ALTER TABLE runners -> CHANGE distance_covered total_distance DECIMAL(3,1); Query OK, 10 rows affected (0.032 sec) Records: 10 Duplicates: 0 Warnings: 0 </pre>

No 6 Query (as Plain Text)	ALTER TABLE runners ADD kmh DECIMAL(3,1);
No 6 SS (of Query & Output in Shell)	<pre>MariaDB [marathon_23201336]> ALTER TABLE runners -> ADD kmh DECIMAL(3,1); Query OK, 0 rows affected (0.004 sec) Records: 0 Duplicates: 0 Warnings: 0</pre>
No 7 Query (as Plain Text)	UPDATE runners SET kmh = (total_distance * 60) / time_taken_mins;
No 7 SS (of Query & Output in Shell)	<pre>MariaDB [marathon_23201336]> UPDATE runners -> SET kmh = (total_distance * 60)/time_taken_mins; Query OK, 10 rows affected, 10 warnings (0.002 sec) Rows matched: 10 Changed: 10 Warnings: 10</pre>
No 8 Query (as Plain Text)	SELECT student_id, student_name, kmh, (total_distance/10)*(time_taken_mins/60)*100 AS points FROM runners;

No 8 SS
(of Query & Output
in Shell)


```
MariaDB [marathon_23201336]> SELECT student_id, student_name, kmh, (total_distance/10)*(time_taken_mins/60)*100 AS points
-> FROM runners;
+-----+-----+-----+-----+
| student_id | student_name | kmh | points |
+-----+-----+-----+-----+
| 101 | Mikasa Ackerman | 8.6 | 29.166666650 |
| 102 | Edward Elric | 10.2 | 98.333333300 |
| 103 | Riza Hawkeye | 7.9 | 31.666666650 |
| 104 | Bruce Wayne | 9.5 | 105.000000000 |
| 105 | Peter Parker | 9.1 | 27.500000000 |
| 106 | Alphonse Elric | 10.9 | 91.666666600 |
| 107 | Son Goku | 6.5 | 38.333333300 |
| 108 | Gon Freecss | 8.8 | 113.333333300 |
| 109 | Tanjiro Kamado | 10.3 | 24.166666650 |
| 110 | Roy Mustang | 7.2 | 138.333333300 |
+-----+-----+-----+-----+
10 rows in set (0.000 sec)
```

No 9 Query
(as Plain Text)

```
SELECT student_name
FROM runners
WHERE total_distance = 10
AND time_taken_mins BETWEEN 40 AND 60;
```

No 9 SS
(of Query & Output
in Shell)

```
MariaDB [marathon_23201336]> SELECT student_name
-> FROM runners
-> WHERE total_distance = 10 AND time_taken_mins BETWEEN 40 and 60;
+-----+
| student_name |
+-----+
| Edward Elric |
| Alphonse Elric |
+-----+
2 rows in set (0.000 sec)
```

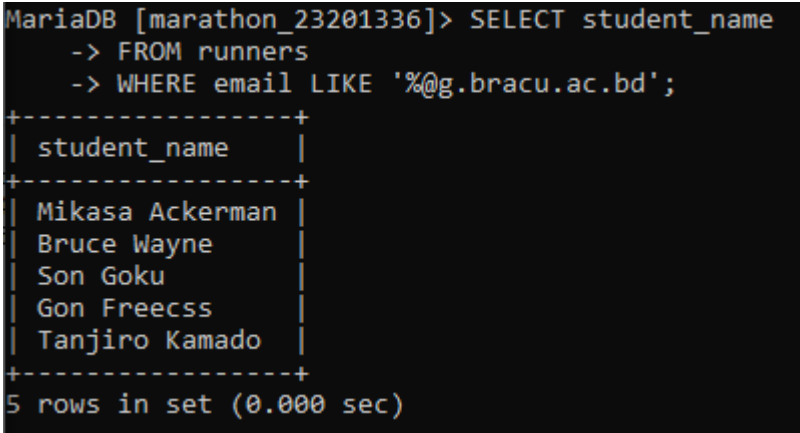No 10 Query (as Plain Text)	SELECT student_name FROM runners WHERE email LIKE '%@g.bracu.ac.bd';
No 10 SS (of Query & Output in Shell)	 <pre>MariaDB [marathon_23201336]> SELECT student_name -> FROM runners -> WHERE email LIKE '%@g.bracu.ac.bd'; +-----+ student_name +-----+ Mikasa Ackerman Bruce Wayne Son Goku Gon Freecss Tanjiro Kamado +-----+ 5 rows in set (0.000 sec)</pre>