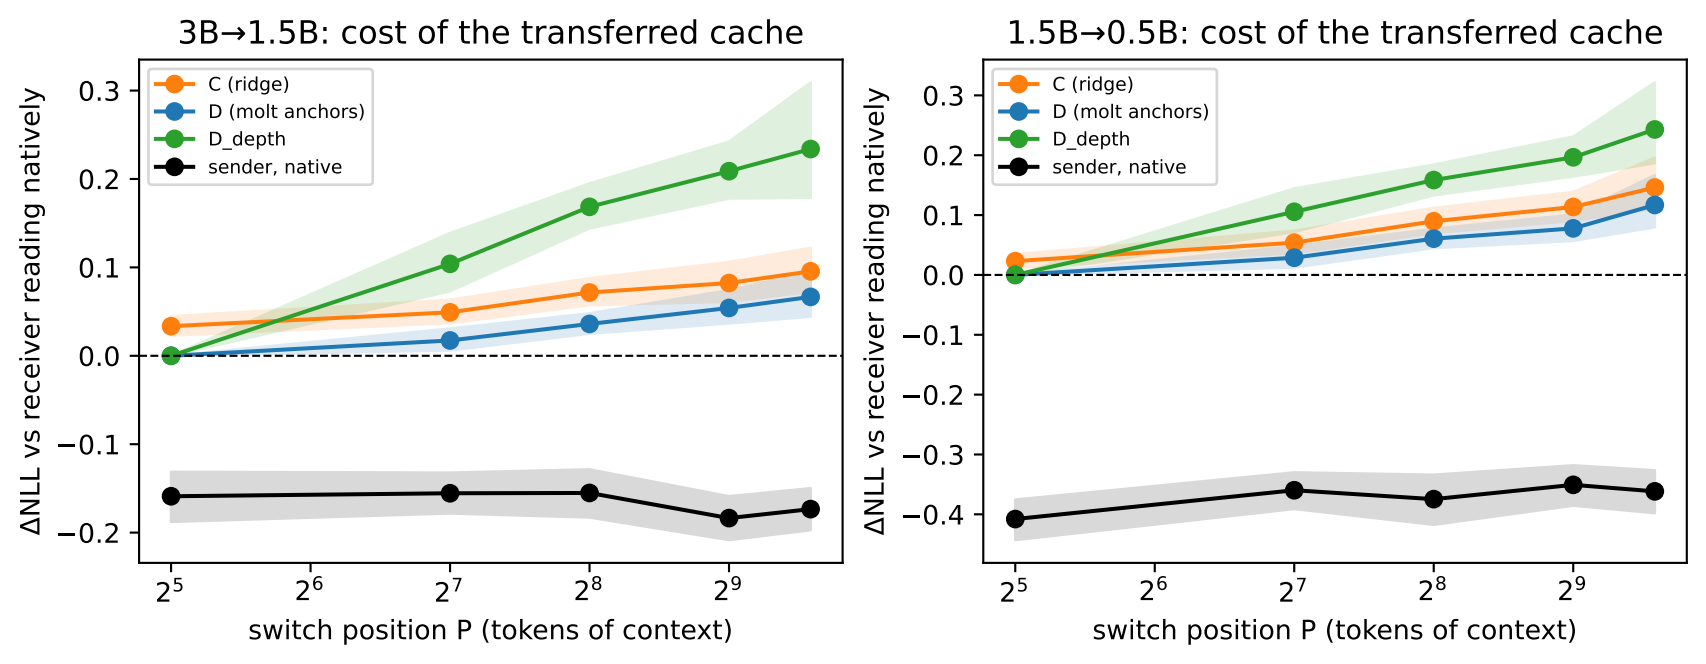
3B→1.5B: cost of the transferred cache
1.5B→0.5B: cost of the transferred cache
C (ridge)
D (molt anchors)
D_depth
sender, native
ΔNLL vs receiver reading natively
switch position P (tokens of context)
0.3
0.2
0.1
0.0
−0.1
−0.2
−0.3
−0.4
2^5
2^6
2^7
2^8
2^9