Non functional automation | Evidence

Attachment 1 of 2 | v1.0 | Artifact references match the main entry

Original technical screenshots show the problem, automated execution, findings and delivery visibility. Identifying labels are redacted; displayed measurements and failure states are preserved. Cropped details are labelled. No email or client feedback exhibits are included.


Artifact reference	Evidence location
N01, N05	Pages 4 to 5. Workload target, arithmetic and automated threshold alert.
N02	Page 14. Cache investigation and reported remediation.
N03	Page 14. PerfOps delivery narrative. Related implementation visuals are N07.
N04, N05	Page 14. Synthetic data, Perf Insights and telemetry completeness calculation.
N06	Pages 6 to 10. Load summary, trends, transaction checks, errors and findings.
N07	Pages 2 to 3 and 11 to 13. Framework, utility output, pipeline and risk dashboards.
A09, A10, A14, A15	Page 15. Implementation, review workflow, dataset and model provenance.
A16, A11	Page 16. IntelliA11y advisory detail. A11 engine results are on page 15.
A17, A12	Page 17. IntelliSec finding evidence. A12 detector results are on page 15.
A18, A13	Page 18. Intelliperf ownership gate. A13 runner results are on page 15.
ARC01, ARC02, ARC03, ARC04	Attachment 2. Architecture PDF, pages 1, 2, 3 and 4 respectively.

The programme screenshots are separate snapshots; a common execution identity is not established. Page 14 contains attributed delivery accounts. Pages 15 to 18 contain bounded local product observations, not evidence of common client deployment.

From manual validation to PerfOps

N07 | Implementation diagram | Related delivery narrative N03

N07 figure 1

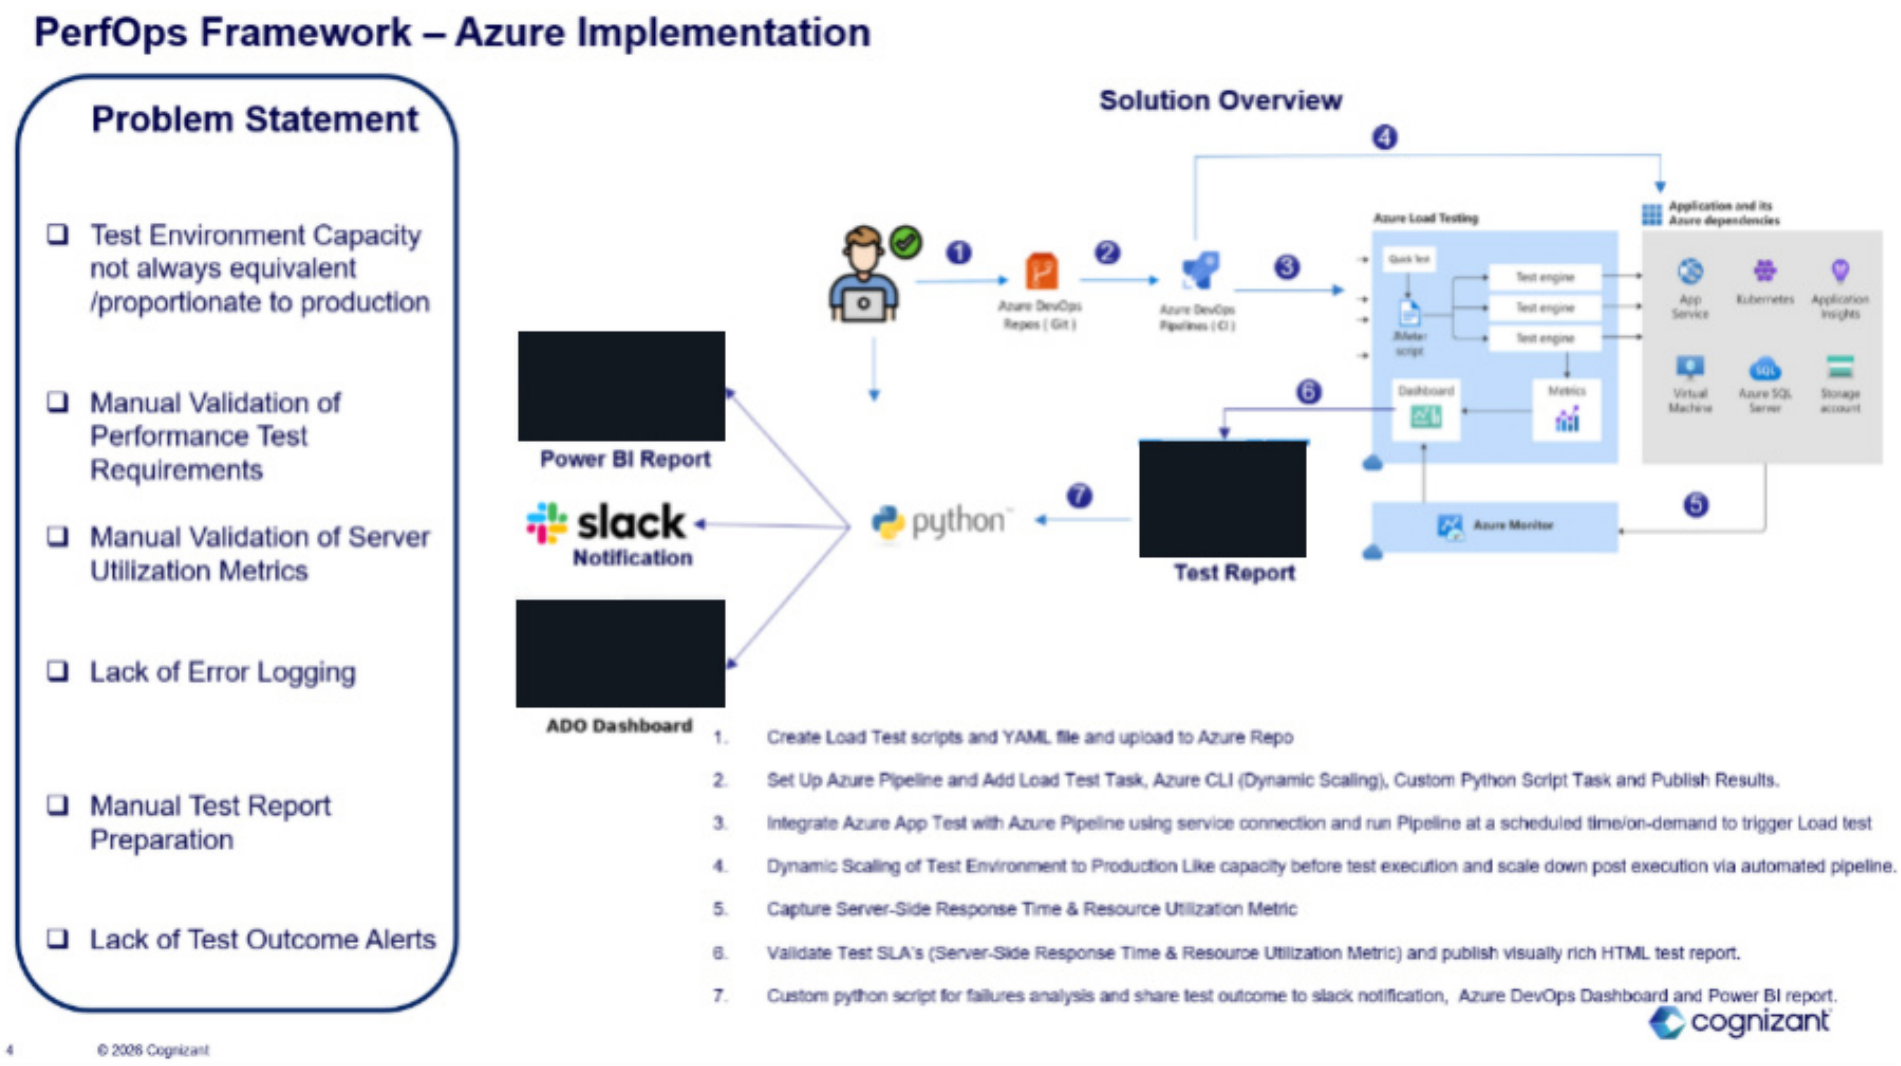


The original problem and solution diagram connects pipeline execution, load testing, infrastructure telemetry, Python checks, reports and alerts. Small embedded report previews are redacted; the workflow is retained. This is an implementation design, not a measured saving.

Workload method and reusable maintenance

N07 | Method diagram and console excerpt | Related delivery narrative N03


N07 figure 2

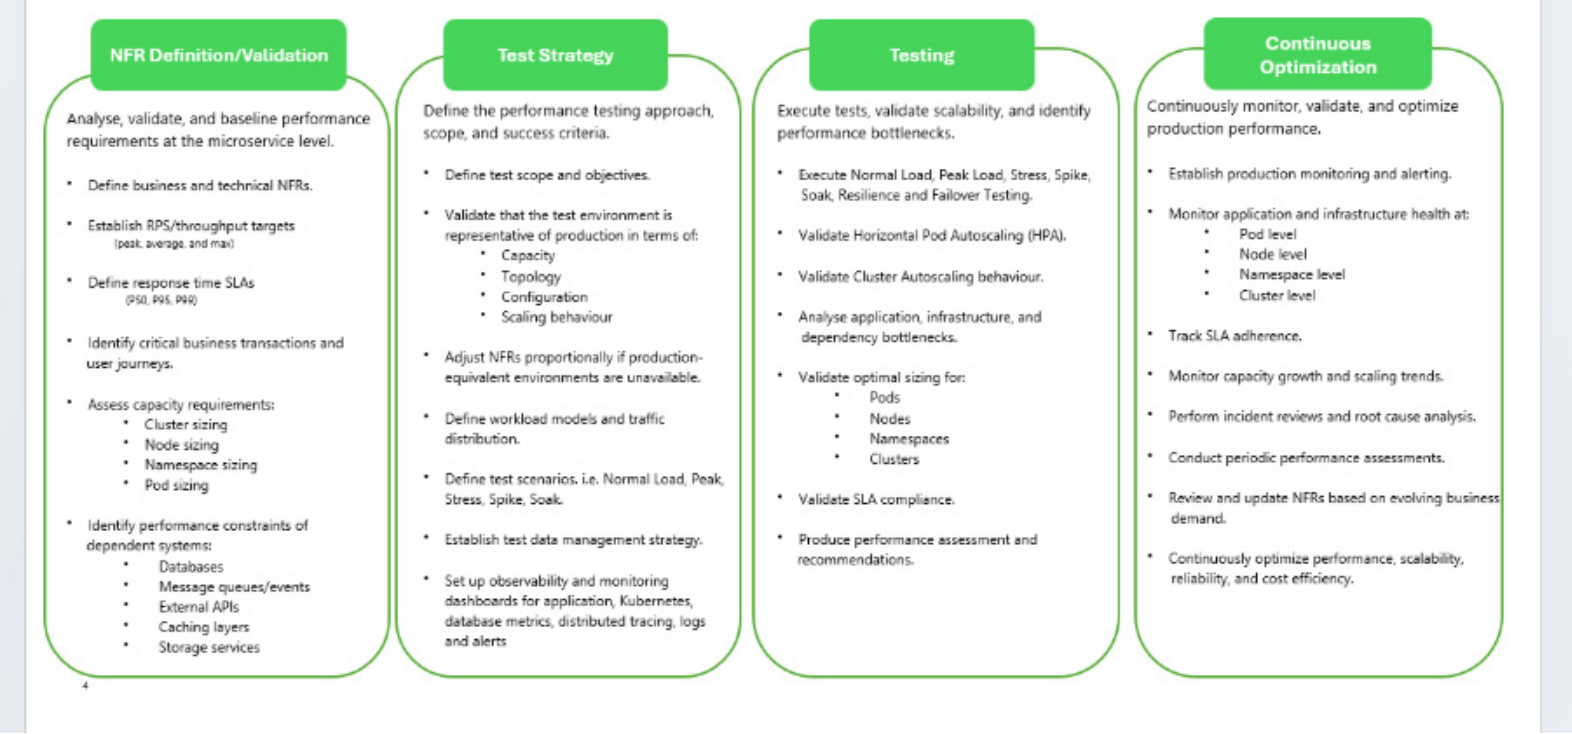

Workload method

The documented four phase method connects NFR definition, representative conditions, execution and continuous optimisation. Its scope includes load, stress, spike, endurance and failover testing.

N07 figure 3

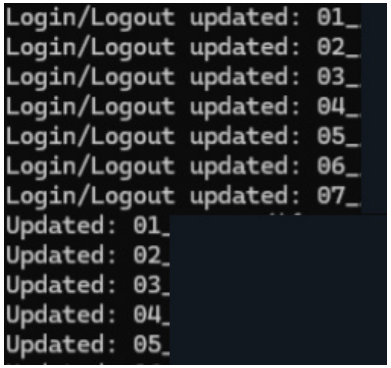

Utility output detail

Cropped console excerpt shows sampler renaming messages. Paths are redacted. No timed saving is established.

Workload target and achieved volume

N01, N05 | Cropped detail from the supplied workload table

N01 figure 1




KPI	Target	[redacted]	QA Team
Peak RPS	2	2.1	0.03
Duration	60 mins	60 mins	15 mins
Requests	7200	7532 (125% of Production load)	46 (0.8 % of Production load)

The recorded workload produced 7,532 requests in 60 minutes against a 7,200-request target, achieving 104.6% of target, or 2.092 requests/second. The screenshot's production percentage labels and QA comparison are not reconciled and are not used as benefit measures.

Automatic threshold failure notification

N01 | Supplied technical alert

N01 figure 2

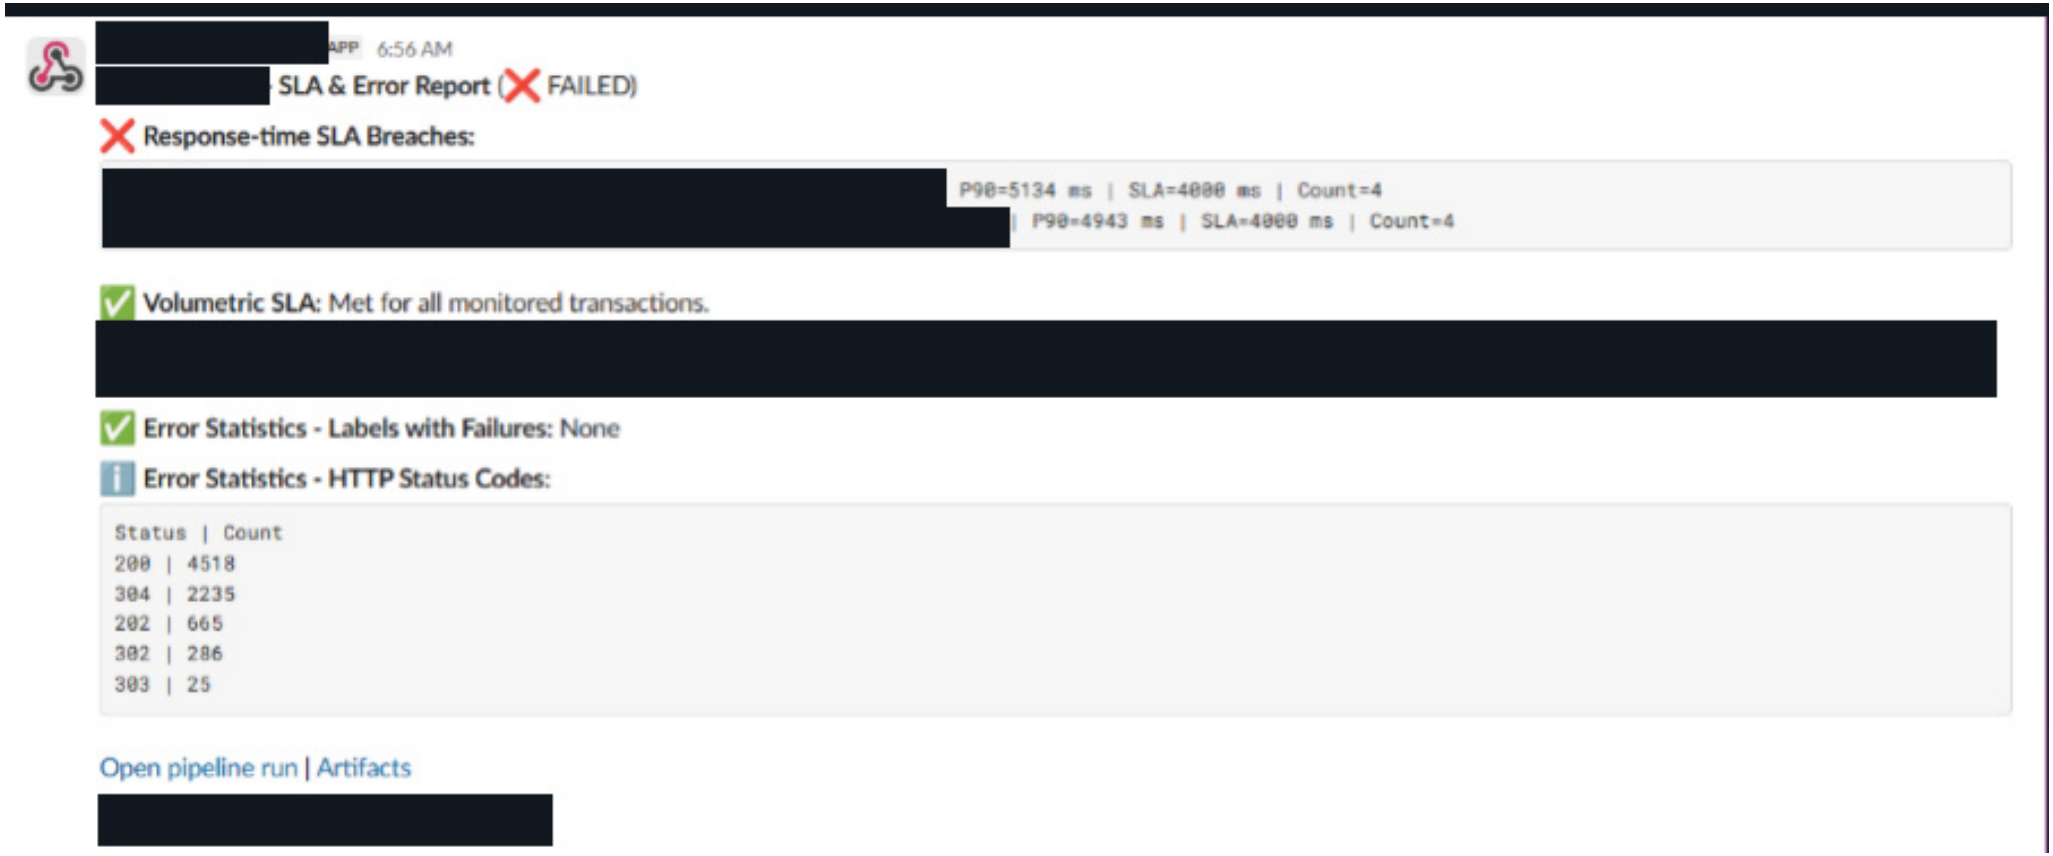

The alert flags P90 of 5,134 ms and 4,943 ms against 4,000 ms. Each row has four displayed observations, supporting threshold detection rather than robust percentile estimation. This is a separate exhibit from the N06 load report; its sample size does not describe that report.

Load execution | Summary

N06 | Supplied performance analysis report

N06 figure 1



A 60-minute steady state shows 120 virtual users, 347,553 samples and 96.5 requests/second. Summary P95 is 1.13 seconds against a 2-second threshold, with 71 failures. Transaction level findings on pages 8 to 10 remain material; the summary alone does not establish a pass.

Load execution | Trends over time

N06 | Supplied performance analysis report

N06 figure 2



The time series view places response time, throughput, active users and errors on the same displayed window. It supports investigation of workload behaviour; it does not establish production equivalence or an accepted remediation retest.

Transaction level performance breaches

N06 | Supplied distribution and transaction views

N06 figure 3




The detail view shows P95 of 2,403 ms and 22 filtered transaction rows. Visible sample counts include 32, 67 and 478; the full steady state population cannot be applied to each transaction. The different summary and distribution P95 values have not been reconciled.

SLO checks and error classification

N06 | Supplied compliance and error taxonomy views

N06 figure 4

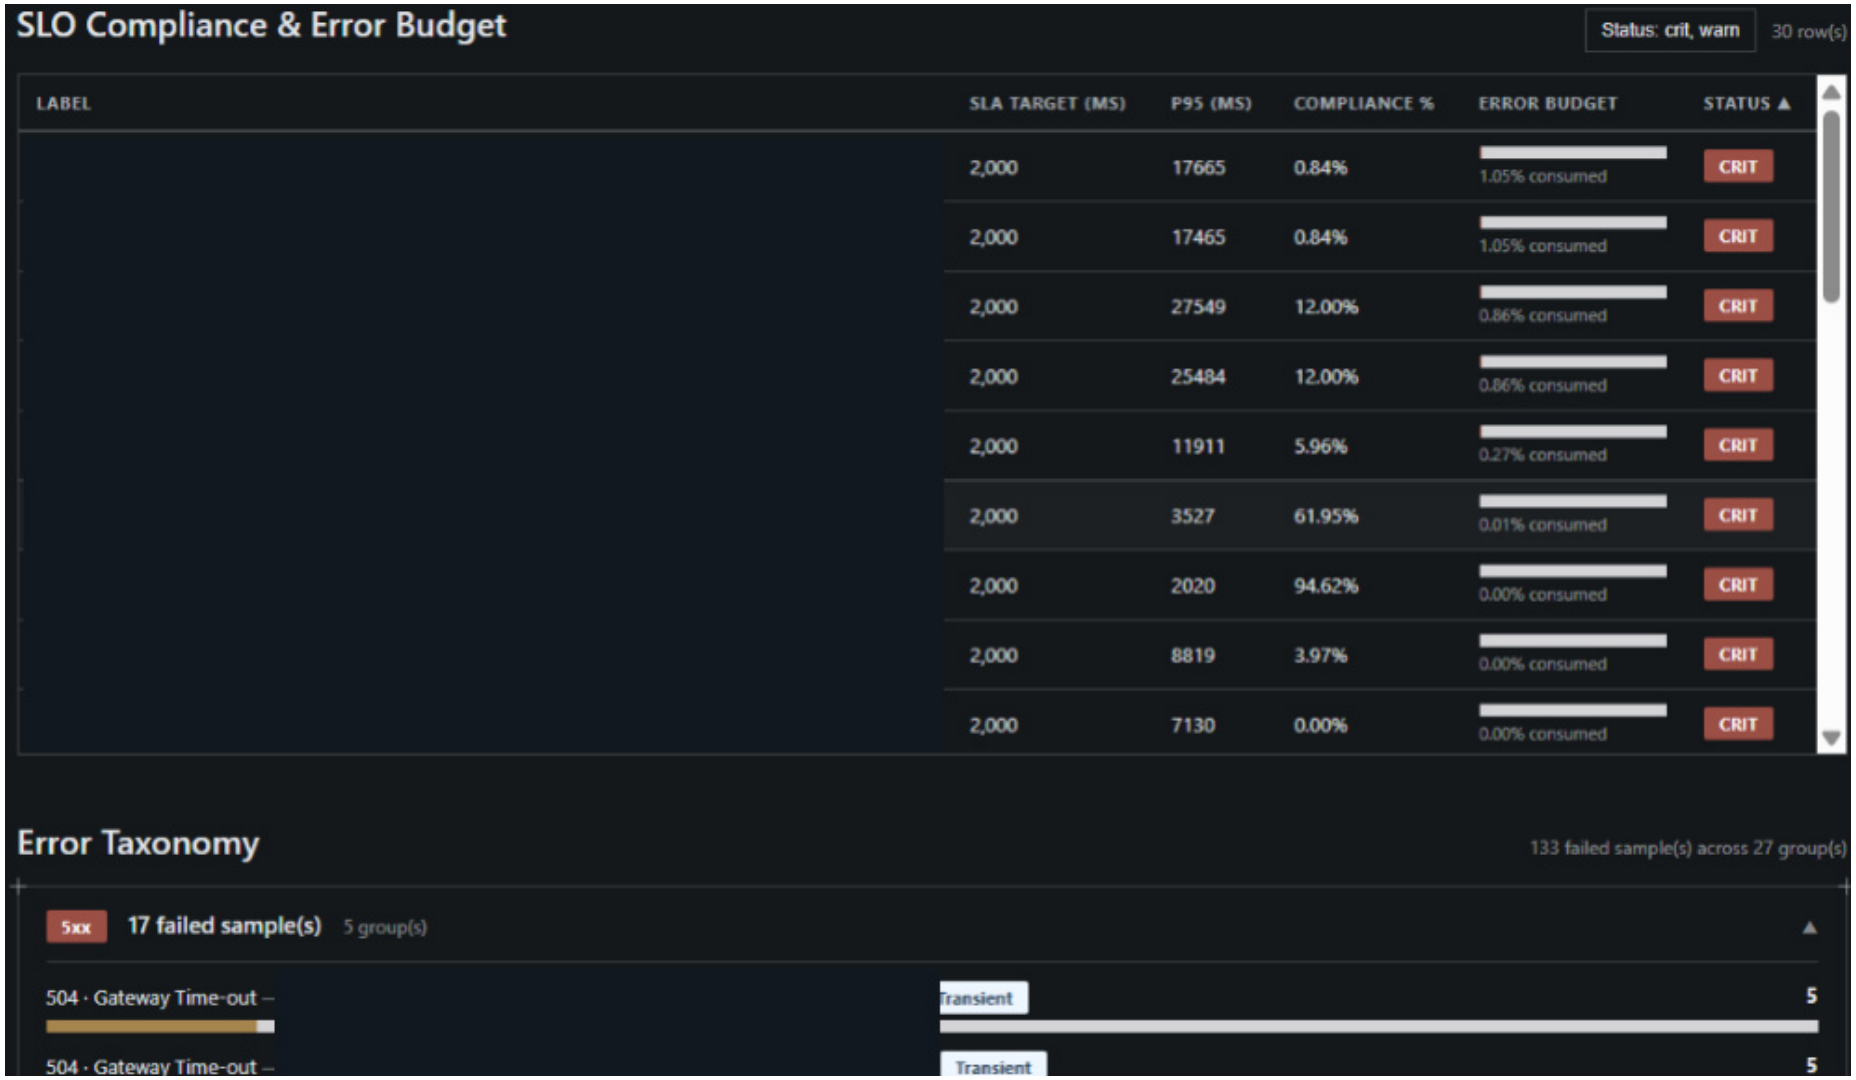

The report preserves critical compliance states and identifies error groups for investigation. Error taxonomy displays 133 failed samples, compared with 71 in the summary. The population or window difference is unverified; these counts are not merged or presented as resolved.

Infrastructure correlation and prioritised findings

N06 | Supplied correlation and findings views

N06 figure 5




The report links load signals to infrastructure metrics and highlights 22 endpoints breaching SLA at P95. Resource identifiers and endpoint labels are redacted. Correlation supports diagnosis but does not prove causation, remediation or release acceptance.

Pipeline execution and published artifacts

N07 | Supplied Azure DevOps pipeline screenshot

N07 figure 4

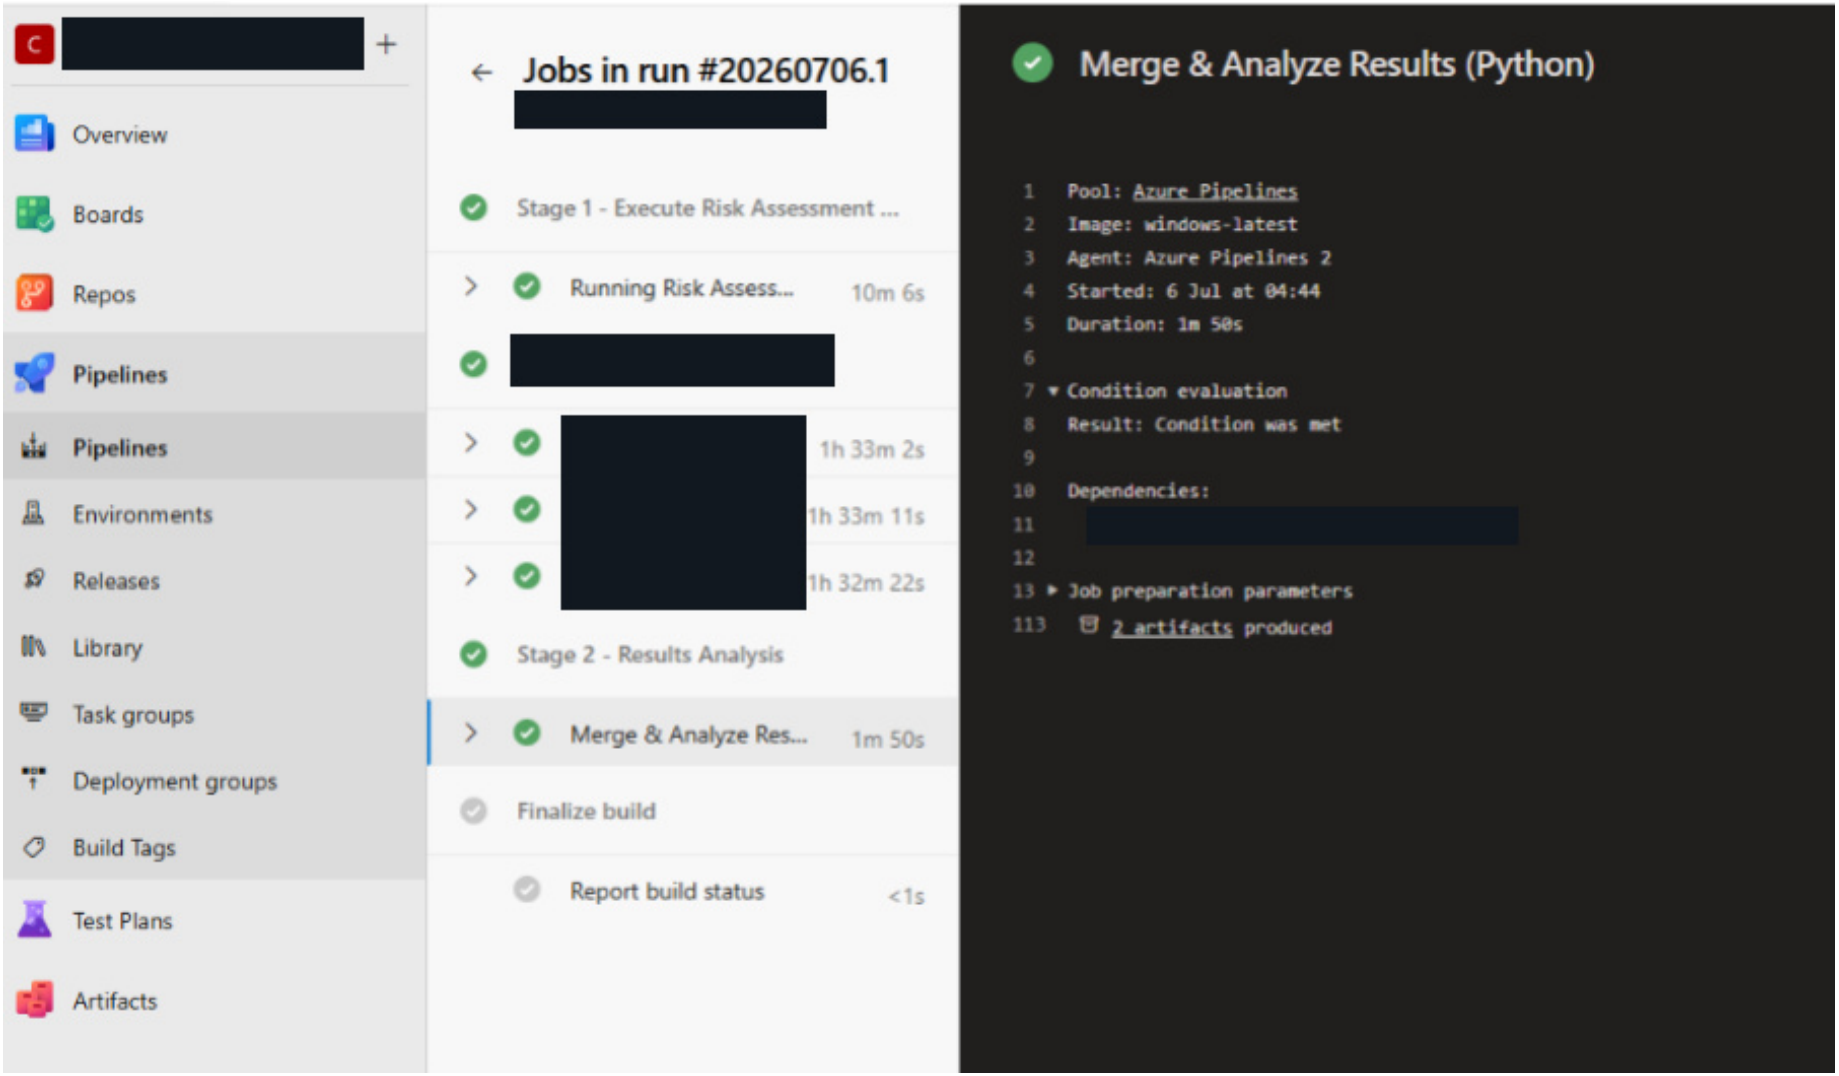


Three workload jobs show completion in approximately 1 hour 32 to 33 minutes. Python merge and analysis takes 1 minute 50 seconds and produces two artifacts. Green task states show execution completion; they do not establish NFR acceptance or a measured reduction in manual effort.

Portfolio wide risk visibility

N07 | Supplied performance testing status dashboard

N07 figure 5

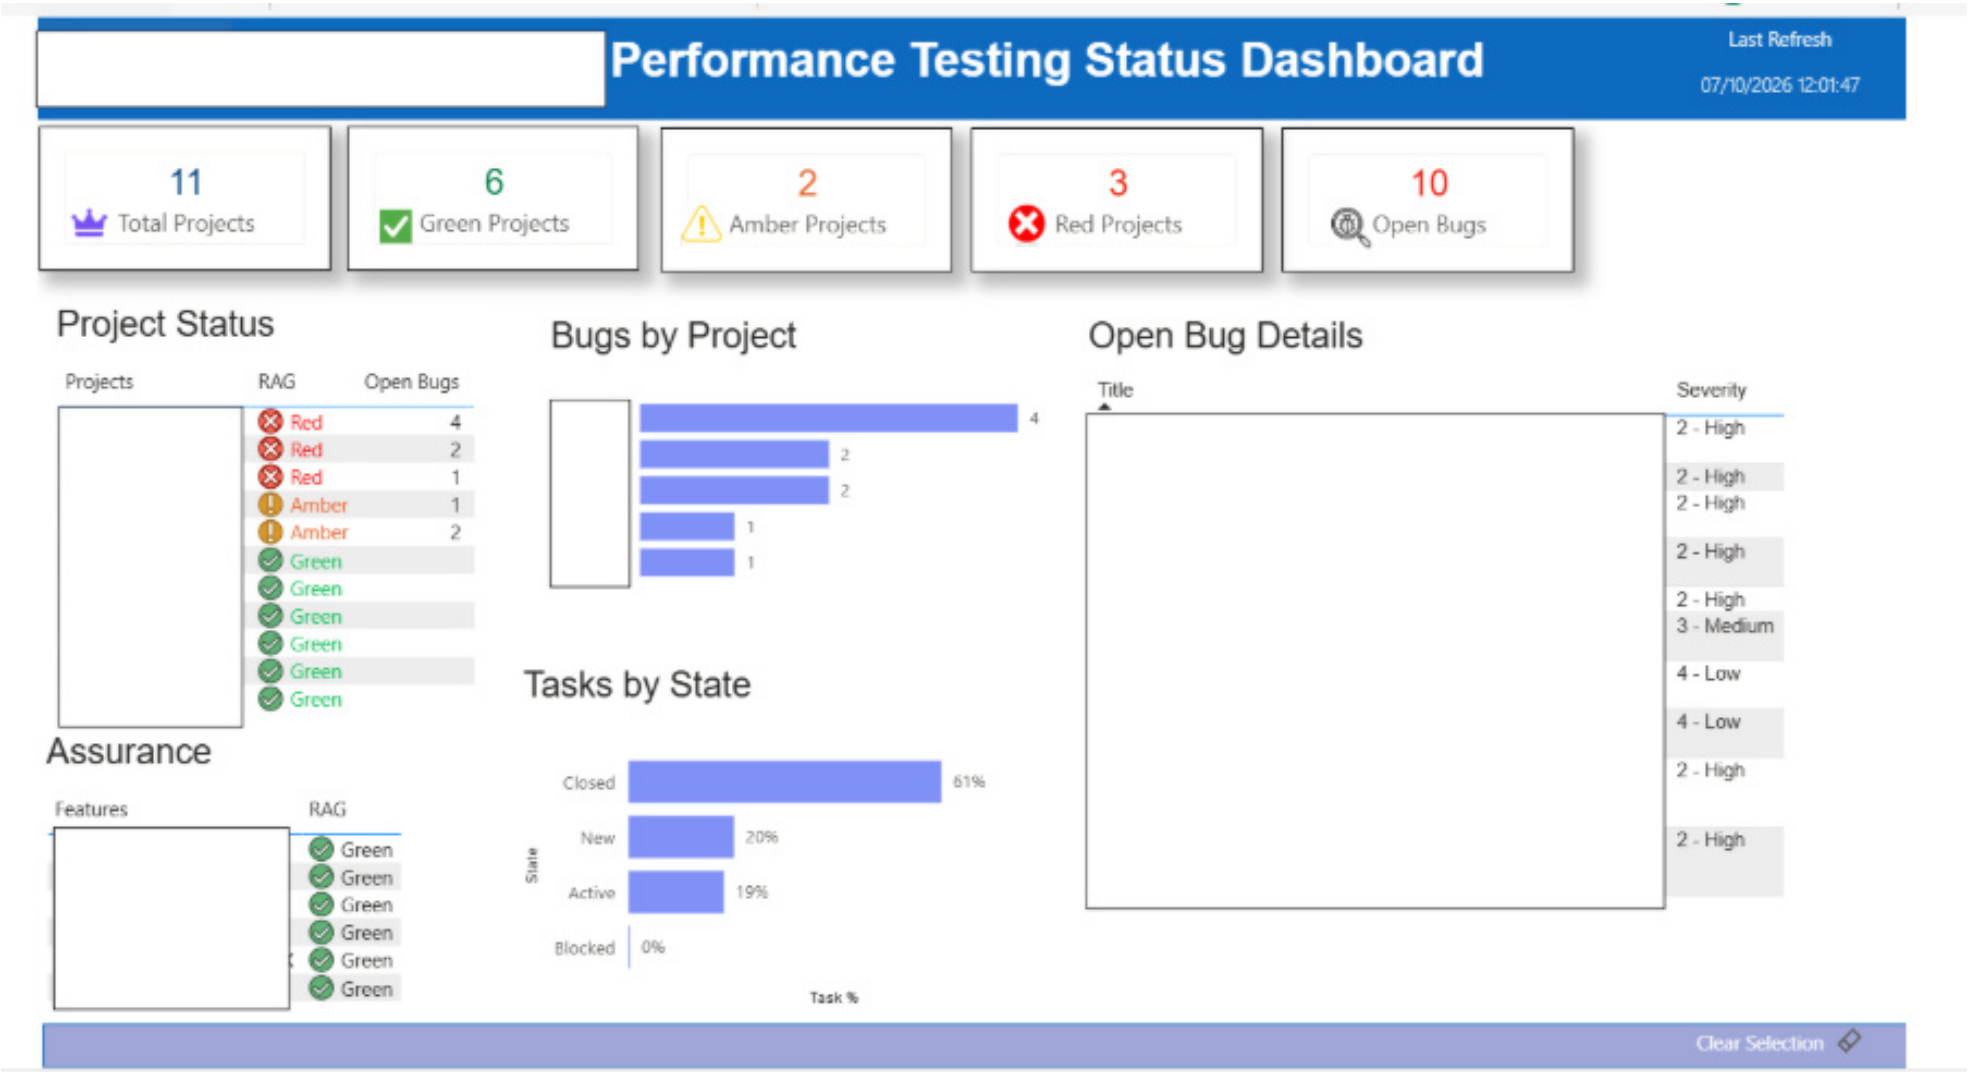


The portfolio view displays 11 projects. Six green, two amber and three red, with ten open bugs. This is a status snapshot showing unresolved risks alongside progress, not a before and after quality or productivity result.

Service level release readiness visibility

N07 | Supplied performance health dashboard

N07 figure 6

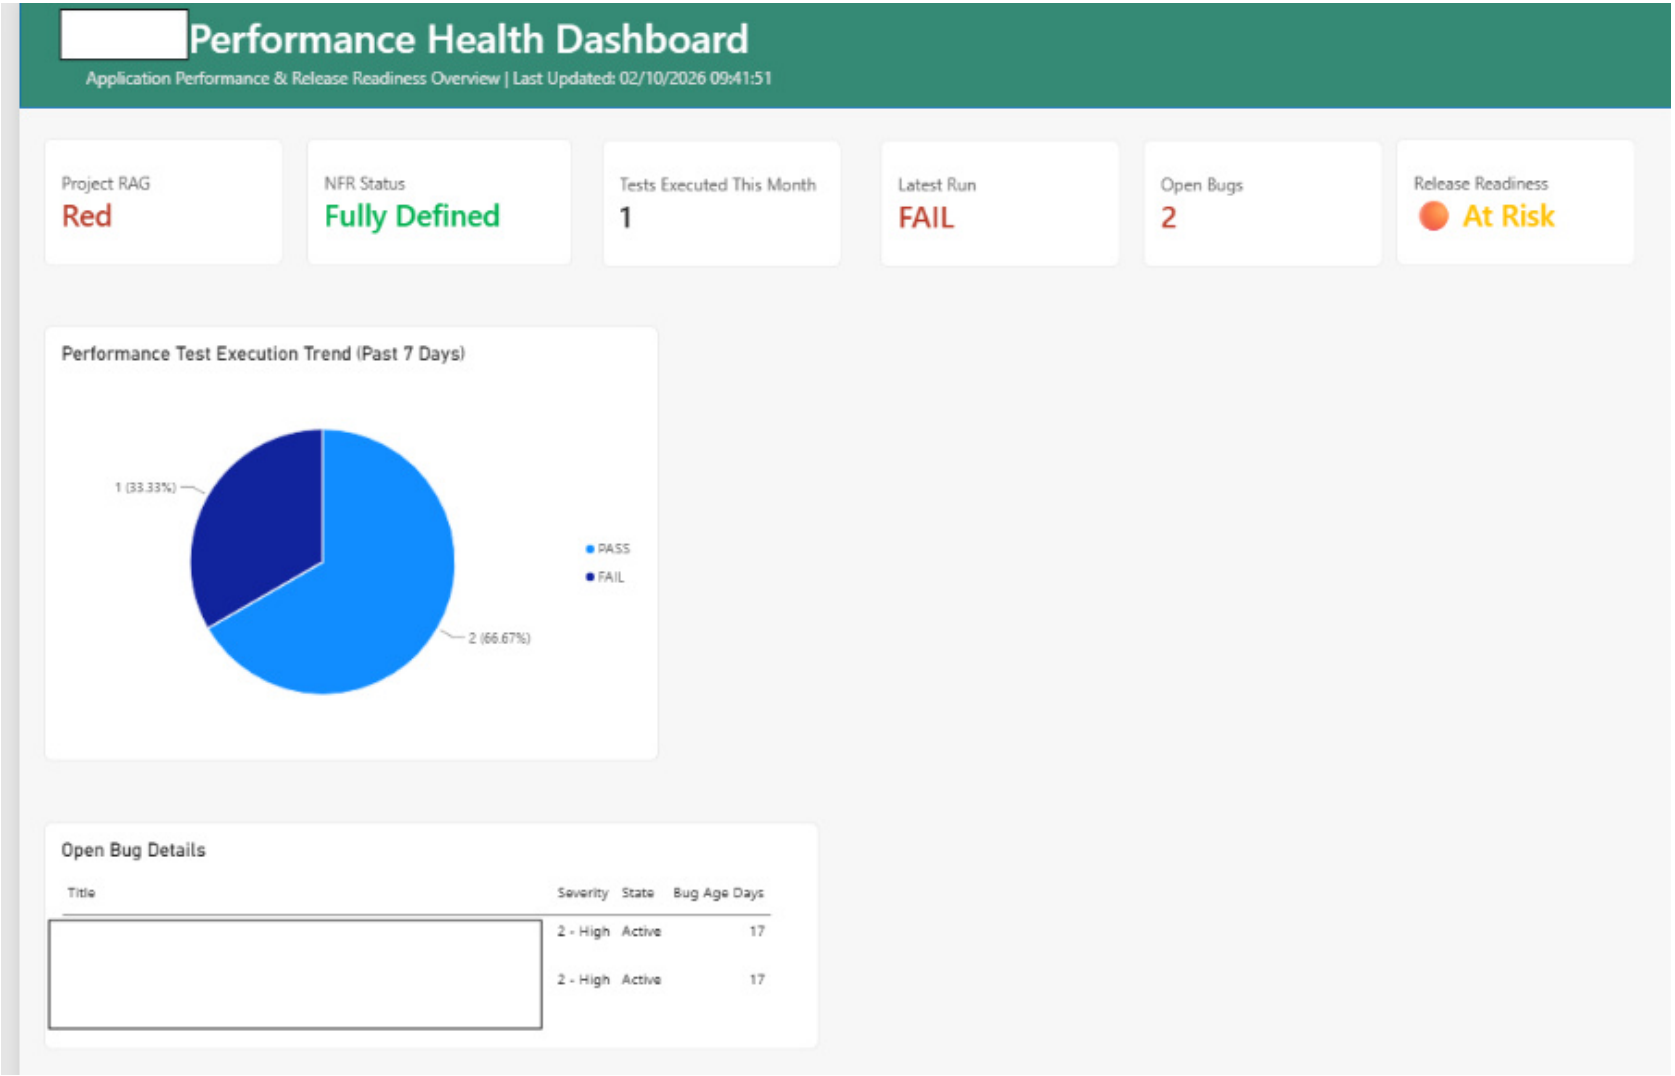

The selected service remains FAIL and At Risk with two open High severity bugs. The month and seven day chart use different labelled periods and have not been reconciled. The display demonstrates risk visibility, not defect resolution or release approval.

Investigation and delivery practice

N02, N03, N04, N05 | Attributed programme accounts and checked arithmetic

Telemetry completeness (N04, N05). The delivery account reports missing telemetry from 57 of 64 configured resources. Seven of 64, or 10.94%, supplied telemetry. Active versus idle expectations and a corrected gate retest are not established; this is not a measured improvement claim.

Workload method and test preparation

The documented method uses Kusto Query Language analysis of production rates, transaction mix and peak periods to inform workloads. Its scope includes load, stress, spike, endurance, failover and Kubernetes autoscaling. The delivery record describes six execution profiles, 16 test data files and metric configuration across 64 resources. The production to test mapping and environment comparability records are not attached.

Daily rebuilds removed test data and limited telemetry collection time. A .NET 8 generator is described as automating routine creation of related synthetic records, with schema checks, duplicate protection, retry/backoff and per file verification. Exceptional partial creation failures retain manual recovery. The narrative also reports correcting false success exit paths and retrieving current storage keys automatically.

N04 also describes six evidence sources, four output formats and approximately ten deterministic insight rules, with a common JSON summary, stable run identifiers and offline report regeneration. AI assistance in engineering the tooling is distinct from deterministic run evaluation.

Cache problem N02

A production service experienced abnormal cache growth. Conventional browser like tests reused cached responses and did not reproduce the behaviour. The team reports analysing logs and cache activity, then using dynamic request fingerprinting and cache key variation in JMeter to model automated client traffic.

The source describes controlled reproduction outside production and validation of cache key normalisation, bucket segregation and retention changes with development colleagues. This supports the investigation method. Paired cache growth measurements under comparable workloads are not supplied, so no numerical cache reduction is claimed.

Reported outcomes and ownership

Performance specialists worked with development and environment teams on workloads, diagnosis and retesting. The narrative reports inputs to three major releases and migration decisions, including load balancing, session stickiness and integration issues followed by remediation and repeat validation. Accepted retests and dated decisions are not attached.

More than 90% lower manual effort is reported separately for performance validation and infrastructure validation. Comparable timings including review and exceptions are absent; these are attributed estimates. A maintenance utility is described for suites exceeding 1,000 requests. A supplied console image shows renaming output, not a measured saving.

Native product demonstrations and implementation

A09-A15 | Local synthetic fixtures and inspected source | Separate from programme deployment

A11 | IntelliA11y

Native JSDOM checks repeated twice on original and manually corrected HTML returned 3 then 0 confirmed records and 11 then 5 review required records, including a newly reported item. Two confirmed records concern the same input. No LLM or rendered browser/assistive technology assessment; optional RAG unavailable. This does not establish accessibility conformance.

A12 | IntelliSec

A native PHP detector returned 1 finding for predictable token generation code and 0 after manual correction. Semantic AI and broader stages were disabled, including a required structural stage despite file level coverage labelled completed. The separate release gate was not executed.

A13 | Intelliperf

The unchanged runner sent real HTTP requests to a synthetic target, recording 3 assertion failures before manual correction and 3 passing requests afterwards. HTTP errors were 0 in both phases; assertion errors triggered the first phase stop. Integrations were isolated and no model inference ran. This is not a latency or sustained load benchmark.

A10, A14 | Implementation and review workflow

Source inspection identifies native engines, security completion/evidence gates, and accessibility expert review with conditional Azure DevOps ticket creation. Versioned prompts, usage recording and experiment machinery exist. A complete review to change to regression to originator rescan chain is not demonstrated. See ARC01-ARC04 in the architecture attachment.


A09, A15 | Dataset and model provenance

Training code exists, but completed training to serving lineage and independent evaluation are absent. The dataset audit found 73 of 186 instruction/input overlaps; 112 deduplicated candidates remain unvalidated. The reported 85% accessibility activity automation has no verified definition, denominator or period. Neither it nor a fine tuning benefit is included in measured results.

IntelliA11y | Accessibility finding and review

A16 | Live advisory detail | Related native engine result A11 | ARC01-ARC02

A16 application screenshot | Captured 12 October 2026

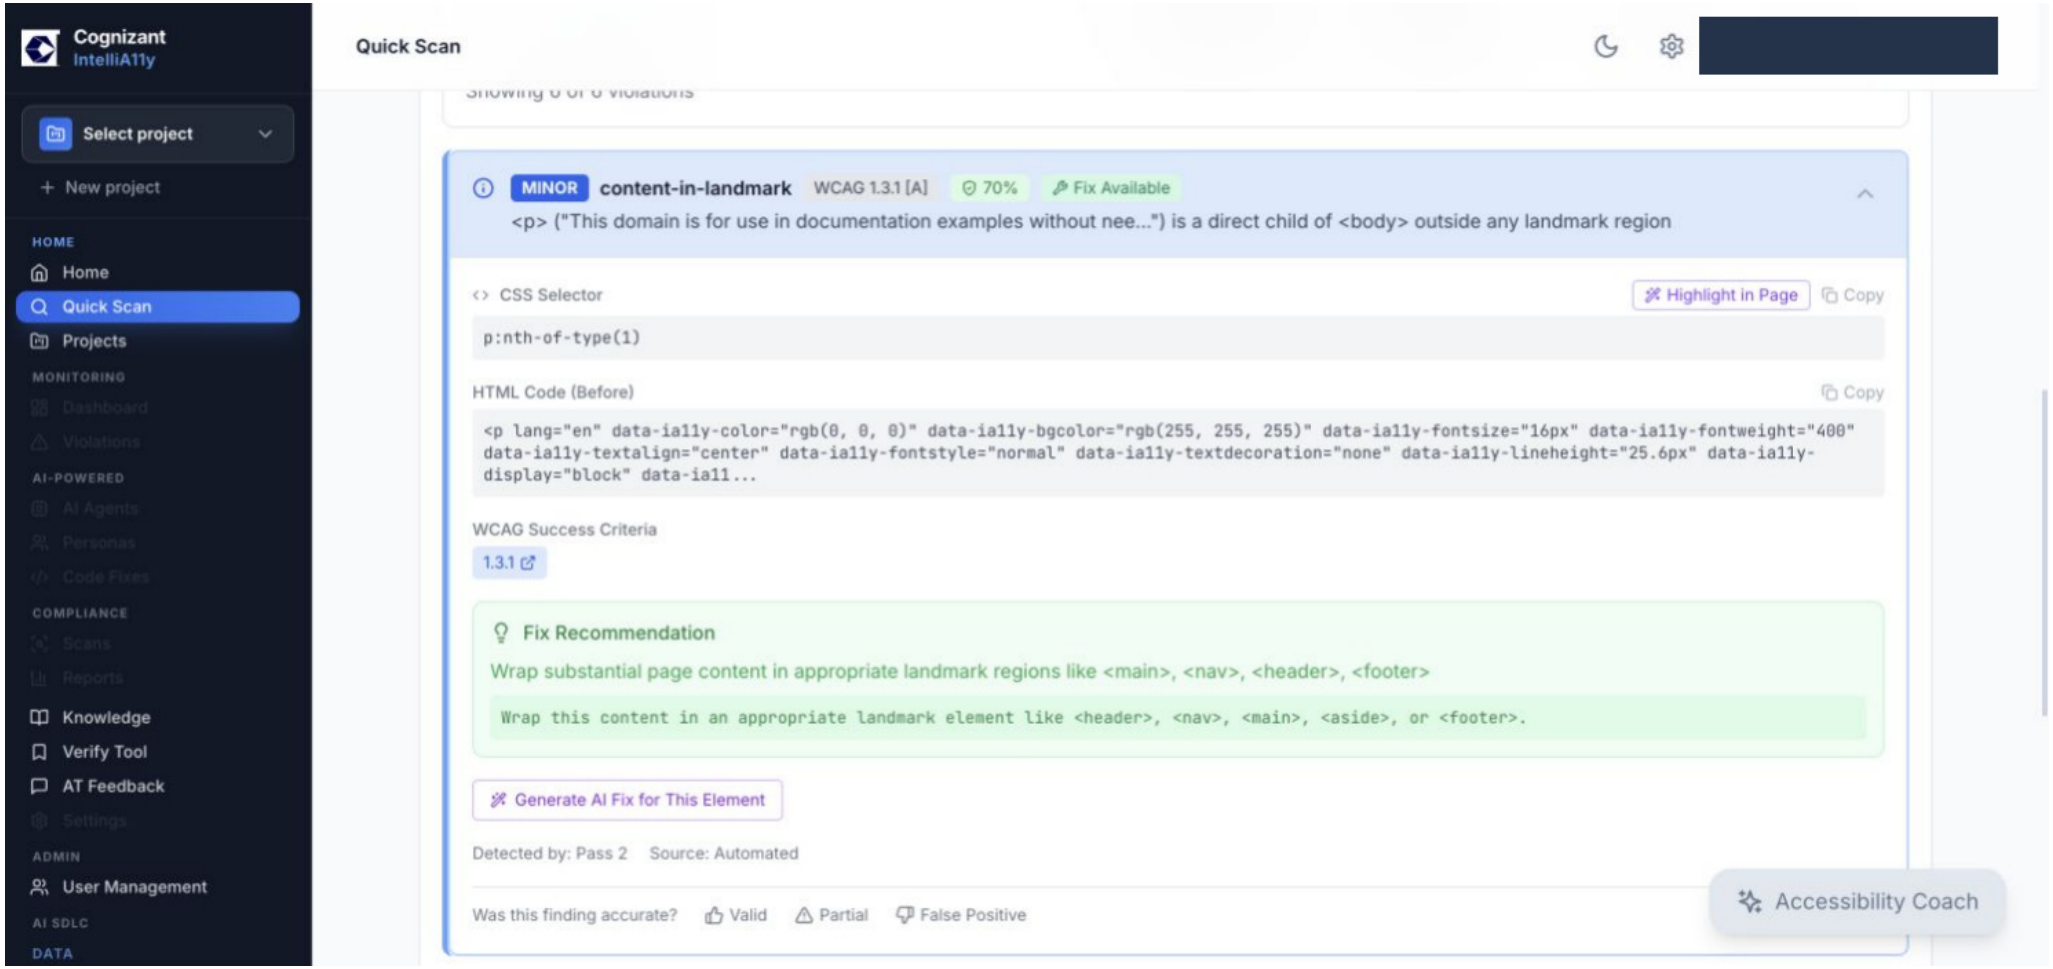


A completed rule only scan of a public example page returned 0 confirmed issues and 6 advisories. This advisory shows the detected element, CSS selector, HTML, WCAG mapping, fix recommendation and reviewer controls. It is an advisory, not a confirmed WCAG AA defect. AI fix generation and reviewer actions were not executed.

Separate A11 engine test on page 15 returned 3 to 0 confirmed records and 11 to 5 review required records after manual correction, repeated twice. The screenshot is a different run and does not establish conformance, AI benefit or the reported 85% automation measure.

IntelliSec | Findings and review status

A17 | Stored DAST demonstration overview | Related native detector result A12 | ARC03

A17 application screenshot | Captured 12 October 2026

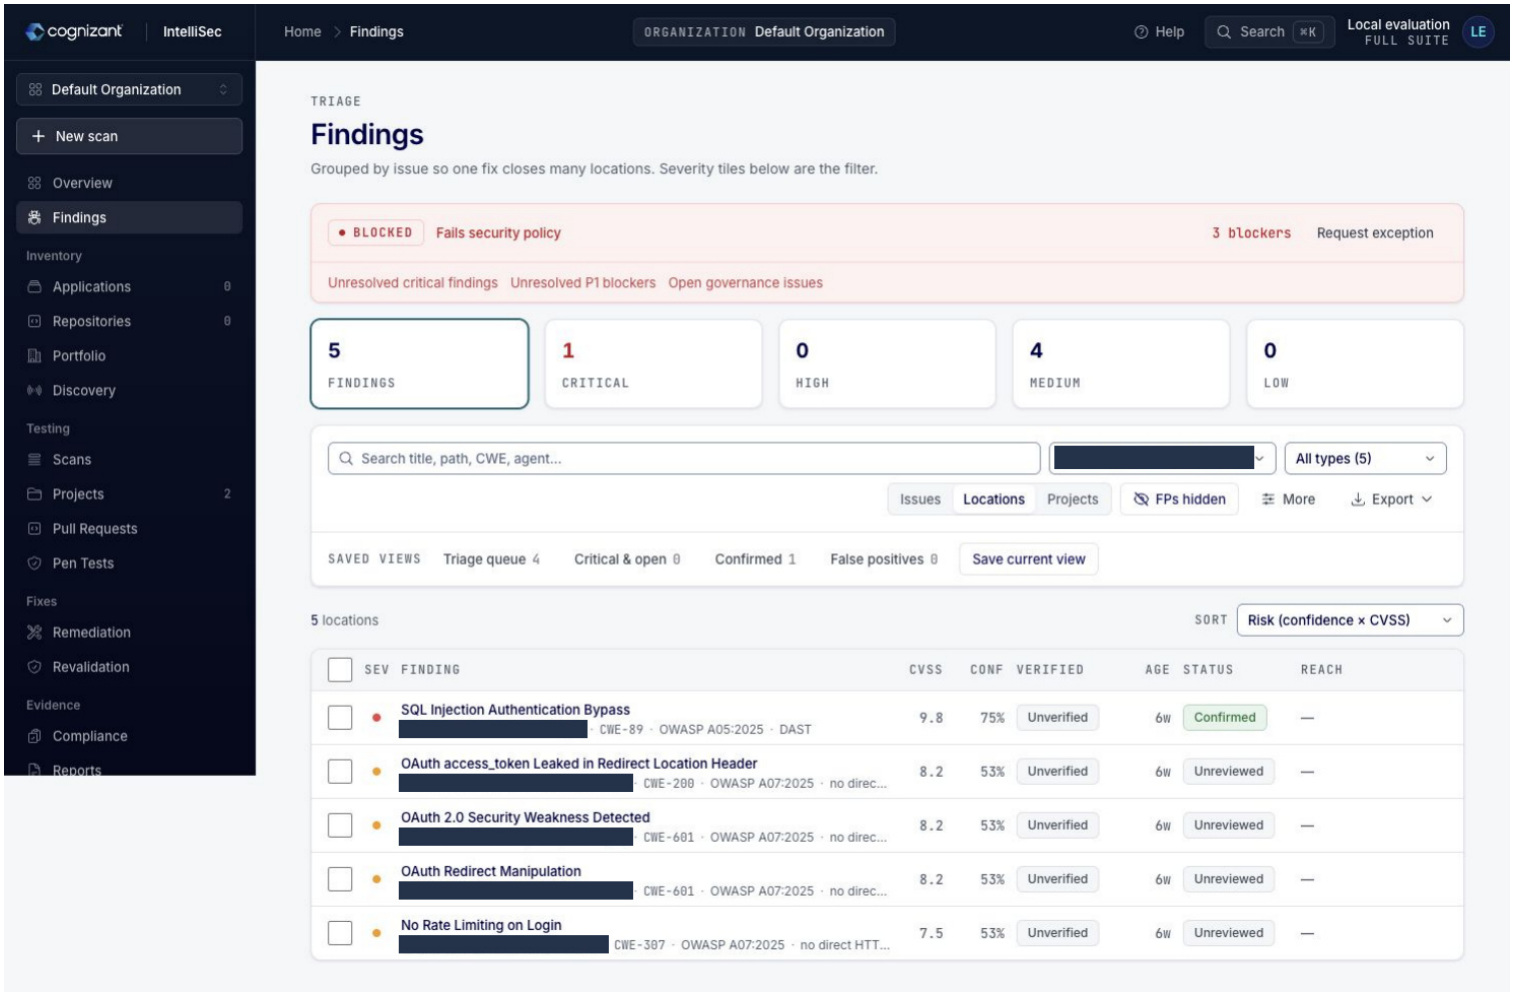


The stored public demonstration scan shows 5 findings, including 1 critical and 4 medium, with a blocked security policy state. The critical record is Confirmed in triage but Unverified for replay evidence. All 5 records remain Unverified. Target addresses and the lab name are redacted. Request bodies and attack payloads are omitted. This partial scan was not rerun.

Separate A12 native PHP detector test on page 15 returned 1 to 0 findings for CWE-330 after manual correction. That test is independent of this DAST record. Neither exhibit establishes a client release approval or complete security coverage.

Intelliperf | Canonical plan and execution gate

A18 | Actual local execution gate | Related native runner result A13 | ARC04

A18 application screenshot | Captured 12 October 2026

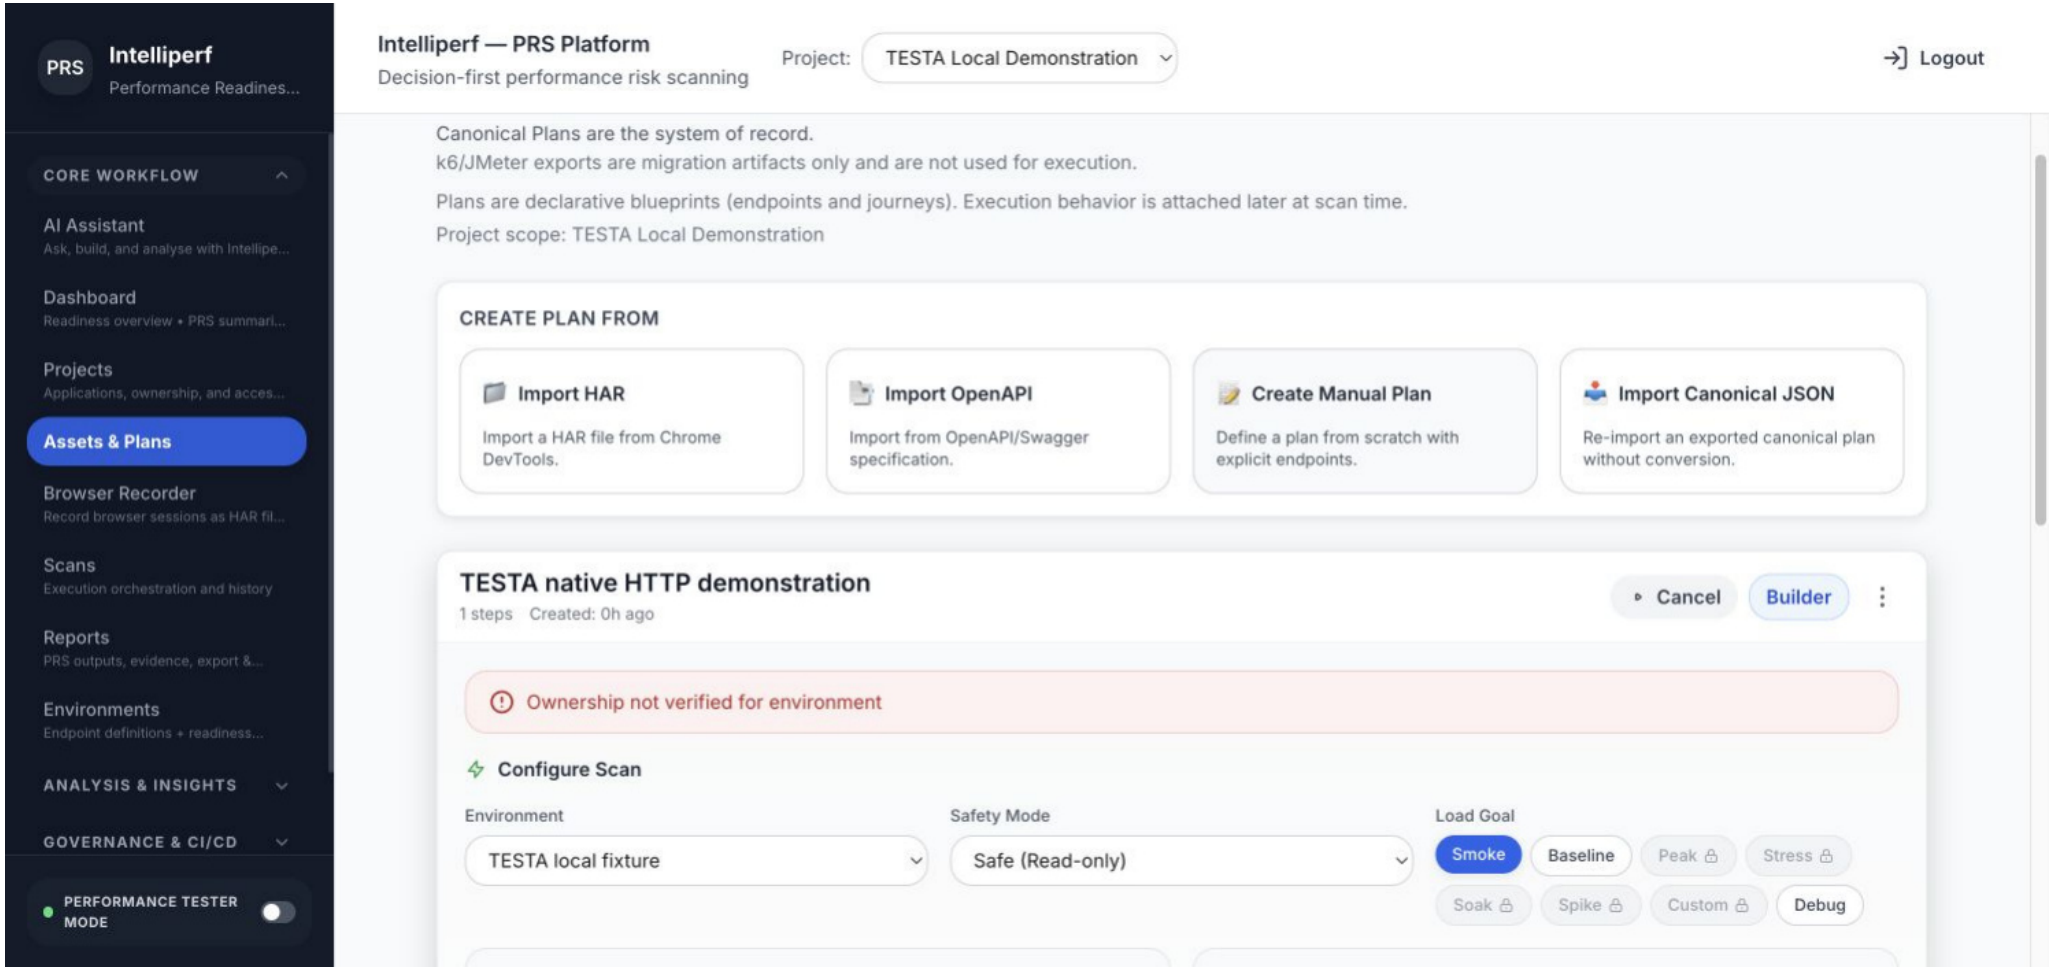

A one step HTTP plan targets an owned local synthetic fixture. Starting a Safe mode Smoke scan was blocked because environment ownership was not verified. The screenshot demonstrates the plan, mode restrictions and enforced ownership gate. It is not a completed performance run or a measured readiness score.

Separate A13 native HTTP runner test on page 15 made 3 requests per phase, with assertion failures falling from 3 to 0 after manual correction and 0 HTTP errors in both phases. Those recorded results are not this blocked UI run and do not establish sustained load or latency improvement.