

STANDARD DEPARTURE CHART -INSTRUMENT

RJSI / HANAMAKI


RNAV SID

SAMBO ONE DEPARTURE

Basic RNP1

Note GNSS required.

VAR 9°W (2019)

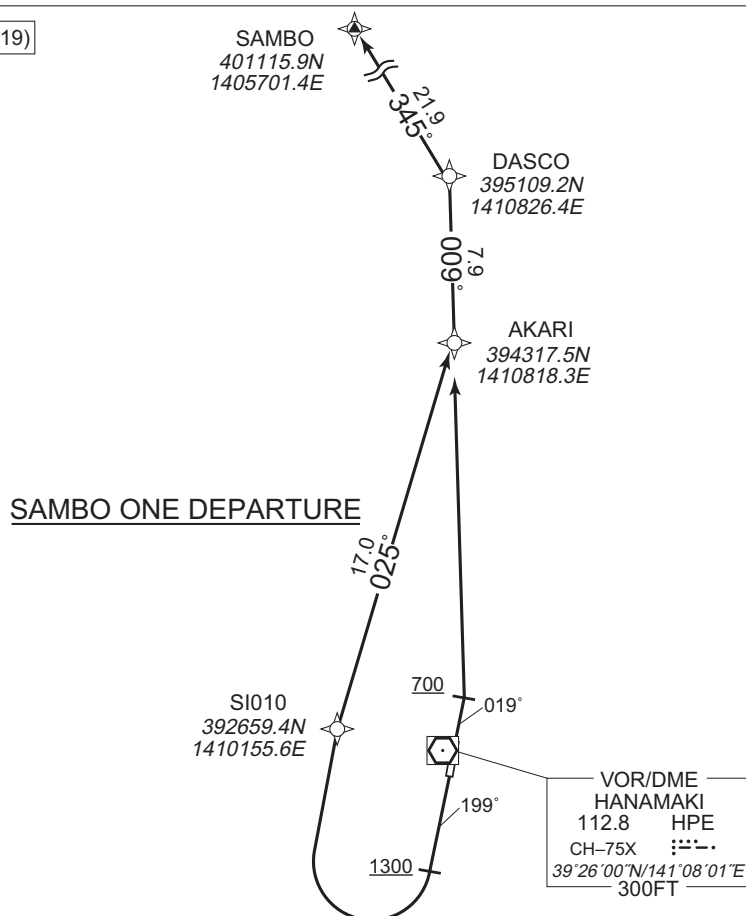

SAMBO ONE DEPARTURE

RWY02 : Climb on HDG 019° at or above 700FT, direct to AKARI, to DASCO to SAMBO.

RWY20 : Climb on HDG 199° at or above 1300FT, turn right direct to SI010, to AKARI, to DASCO to SAMBO.

Note RWY02: 4.0% climb gradient required up to 700FT.

OBST ALT 318FT located at 0.2NM 061° FM end of RWY02.

RWY20: 4.0% climb gradient required up to 2700FT.

OBST ALT 3117FT located at 10.7NM 350° FM end of RWY20.

RWY02

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	019 (010.7)	-8.6	—	—	+700	—	—	Basic RNP1
002	DF	AKARI	—	—	-8.6	—	—	—	—	—	Basic RNP1
003	TF	DASCO	—	009 (000.8)	-8.6	7.9	—	—	—	—	Basic RNP1
004	TF	SAMBO	—	345 (336.6)	-8.6	21.9	—	—	—	—	Basic RNP1

RWY20

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	199 (190.7)	-8.6	—	—	+1300	—	—	Basic RNP1
002	DF	SI010	—	—	-8.6	—	R	—	—	—	Basic RNP1
003	TF	AKARI	—	025 (016.7)	-8.6	17.0	—	—	—	—	Basic RNP1
004	TF	DASCO	—	009 (000.8)	-8.6	7.9	—	—	—	—	Basic RNP1
005	TF	SAMBO	—	345 (336.6)	-8.6	21.9	—	—	—	—	Basic RNP1

CHANGE : New PROC