


RJCN / NAKASHIBETSU

AD CHART

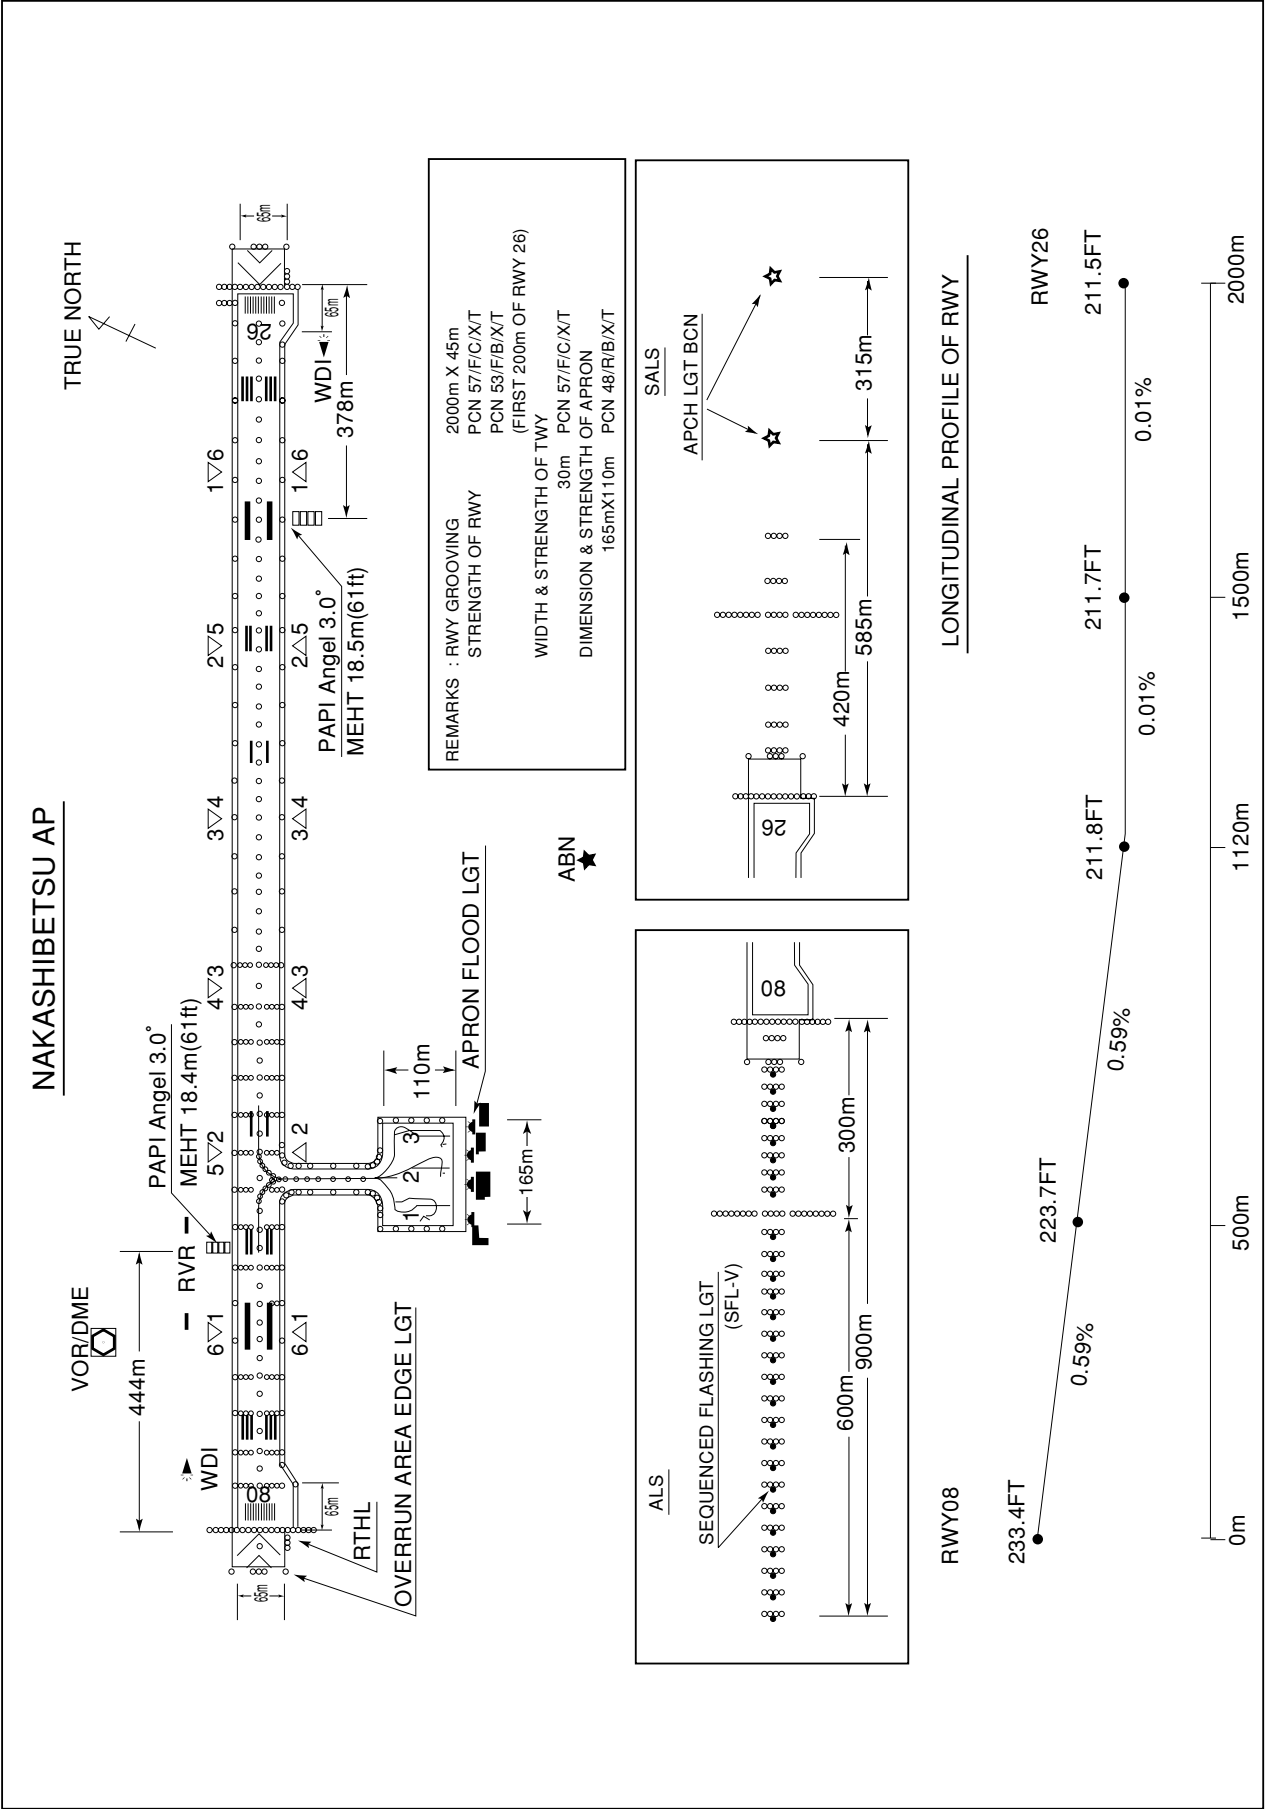

STANDARD DEPARTURE CHART-INSTRUMENT

RJCN / NAKASHIBETSU

SID

MASHU FIVE DEPARTURE

RWY08: Climb RWY HDG to 700FT, turn right HDG305° to intercept and proceed...
RWY26: Climb...
... via NSE R260 to MASHU.
Cross MASHU at or above 5000FT.



STANDARD DEPARTURE CHART-INSTRUMENT

RJCN / NAKASHIBETSU


SID

NAKASHIBETSU REVERSAL FOUR DEPARTURE

RWY08: Climb via NSE R081 to NSE 7.0DME, turn right,...

RWY26: Climb via NSE R259 to NSE 7.0DME, turn left, ... direct to NSE VOR/DME.

NAKASHIBETSU REVERSAL FOUR DEPARTURE

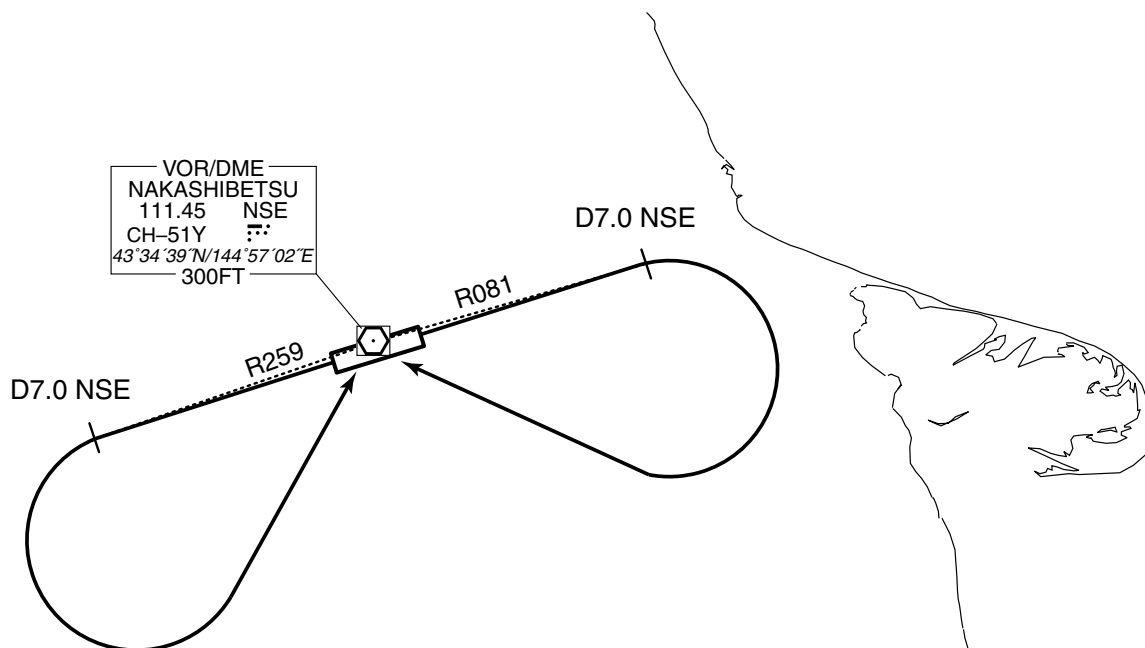

STANDARD DEPARTURE CHART-INSTRUMENT

RJCN / NAKASHIBETSU

RNAV SID

TSURUI ONE DEPARTURE

Basic RNP1

Note GNSS required.

TSURUI ONE DEPARTURE

RWY08 : Climb on HDG080° at or above 700FT, turn right direct to CN743, to CN744, to KSE at or above 10000FT.

RWY26 : Climb on HDG260° at or above 700FT, turn left direct to CN743, to CN744, to KSE at or above 10000FT.

RWY08

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	080 (071.0)	-8.9	—	—	+700	—	—	Basic RNP1
002	DF	CN743	—	—	-8.9	—	R	—	—	—	Basic RNP1
003	TF	CN744	—	260 (250.8)	-8.9	8.8	—	—	—	—	Basic RNP1
004	TF	KSE	—	224 (214.8)	-8.9	30.0	—	+10000	—	—	Basic RNP1

RWY26

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	260 (251.0)	-8.9	—	—	+700	—	—	Basic RNP1
002	DF	CN743	—	—	-8.9	—	L	—	—	—	Basic RNP1
003	TF	CN744	—	260 (250.8)	-8.9	8.8	—	—	—	—	Basic RNP1
004	TF	KSE	—	224 (214.8)	-8.9	30.0	—	+10000	—	—	Basic RNP1

STANDARD DEPARTURE CHART-INSTRUMENT

RJCN / NAKASHIBETSU

RNAV SID

KIRITAPPU ONE DEPARTURE

Basic RNP1

Note GNSS required.

VAR 9°W (2016)

VOR/DME
NAKASHIBETSU
111.45 NSE
CH-51Y
43°34'39"N/144°57'02"E
300FT

VOR/DME
KUSHIRO
112.5 KSE
CH-72X
43°02'02"N/144°12'15"E
300FT

KUSHIRO(KSE)
430201.7N
1441214.8E
10000



KIRITAPPU ONE DEPARTURE

KIRITAPPU ONE DEPARTURE

RWY08 : Climb on HDG080° at or above 700FT, turn right direct to BEKKA, to CN742, to KSE at or above 10000FT.

RWY26 : Climb on HDG260° at or above 700FT, turn left direct to BEKKA, to CN742, to KSE at or above 10000FT.

RWY08

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	080 (071.0)	-8.9	—	—	+700	—	—	Basic RNP1
002	DF	BEKKA	—	—	-8.9	—	R	—	—	—	Basic RNP1
003	TF	CN742	—	188 (179.0)	-8.9	16.6	—	—	—	—	Basic RNP1
004	TF	KSE	—	273 (263.7)	-8.9	44.3	—	+10000	—	—	Basic RNP1

RWY26

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	260 (251.0)	-8.9	—	—	+700	—	—	Basic RNP1
002	DF	BEKKA	—	—	-8.9	—	L	—	—	—	Basic RNP1
003	TF	CN742	—	188 (179.0)	-8.9	16.6	—	—	—	—	Basic RNP1
004	TF	KSE	—	273 (263.7)	-8.9	44.3	—	+10000	—	—	Basic RNP1

CHANGE: Marginal note (Title)

RJCN / NAKASHIBETSU

RNAV STAR

Basic RNP1

VAR 9°W (2016)




Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	KSE	—	—	-8.9	—	—	—	—	—	Basic RNP1
002	TF	OMOTI	—	093 (084.6)	-8.9	40.1	—	+5000	—	—	Basic RNP1

INSTRUMENT APPROACH CHART

RJCN / NAKASHIBETSU

ILS Z or LOC Z RWY08

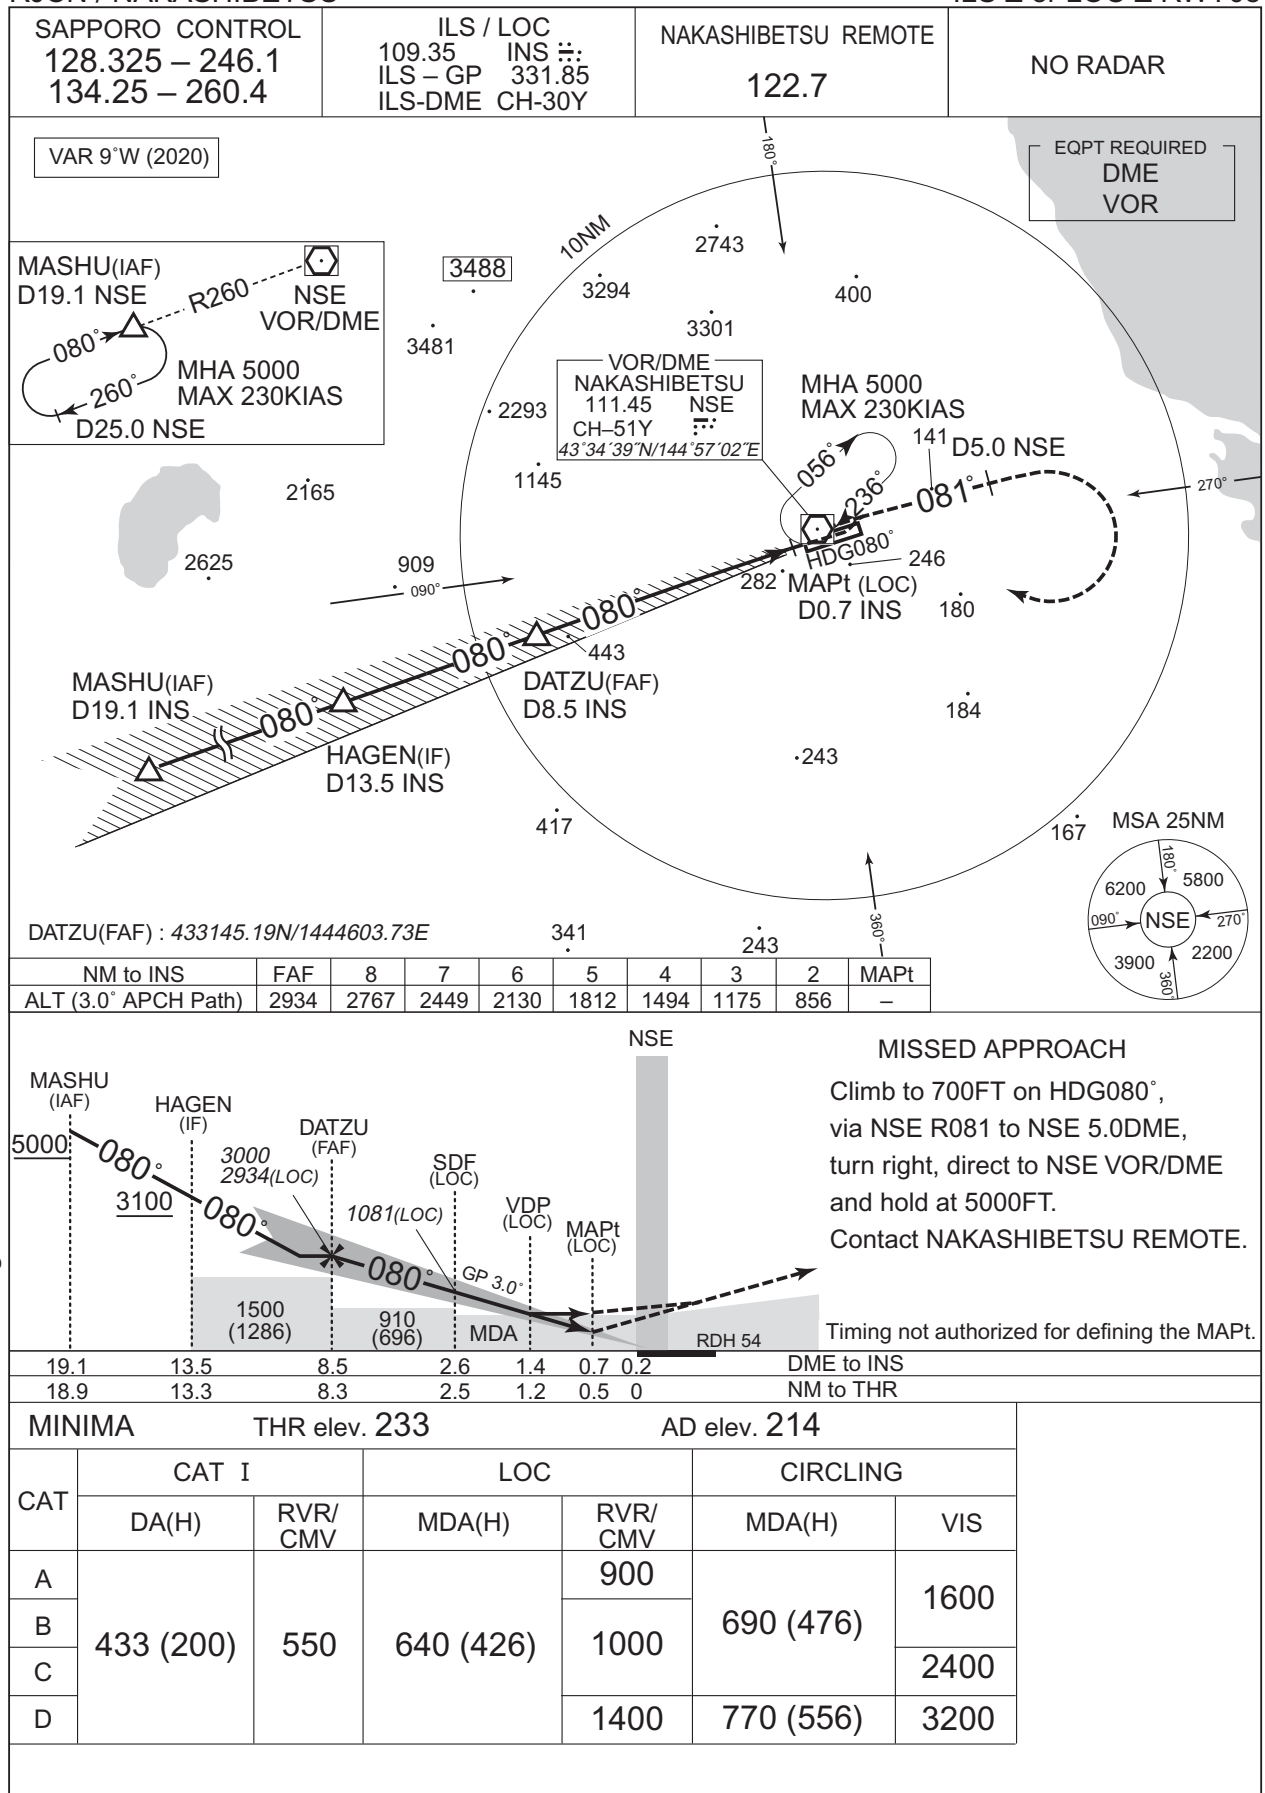


CHANGE : VAR. Radial FM NSE. Bearing on HOLD Pattern.

INSTRUMENT APPROACH CHART

RJCN / NAKASHIBETSU

ILS Y or LOC Y RWY08

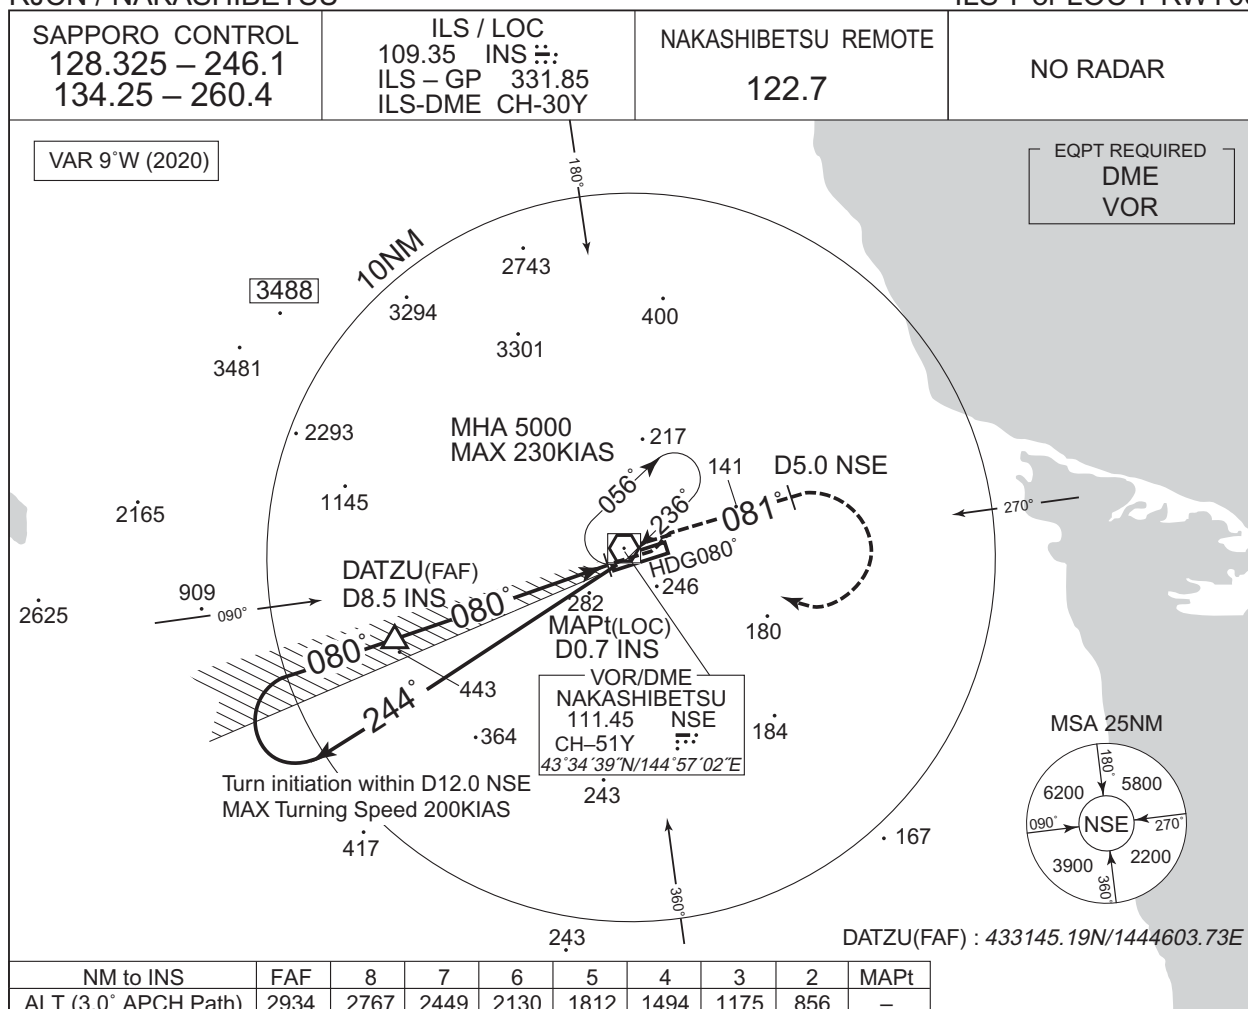


CHANGE : VAR. Bearing on HOLD Pattern.



MINIMA		THR elev. 233		AD elev. 214		
CAT	CAT I		LOC		CIRCLING	
	DA(H)	RVR/ CMV	MDA(H)	RVR/ CMV	MDA(H)	VIS
A	433 (200)	550	640 (426)	900	690 (476)	1600
B				1000		2400
C						
D				1400	770 (556)	3200

INSTRUMENT APPROACH CHART

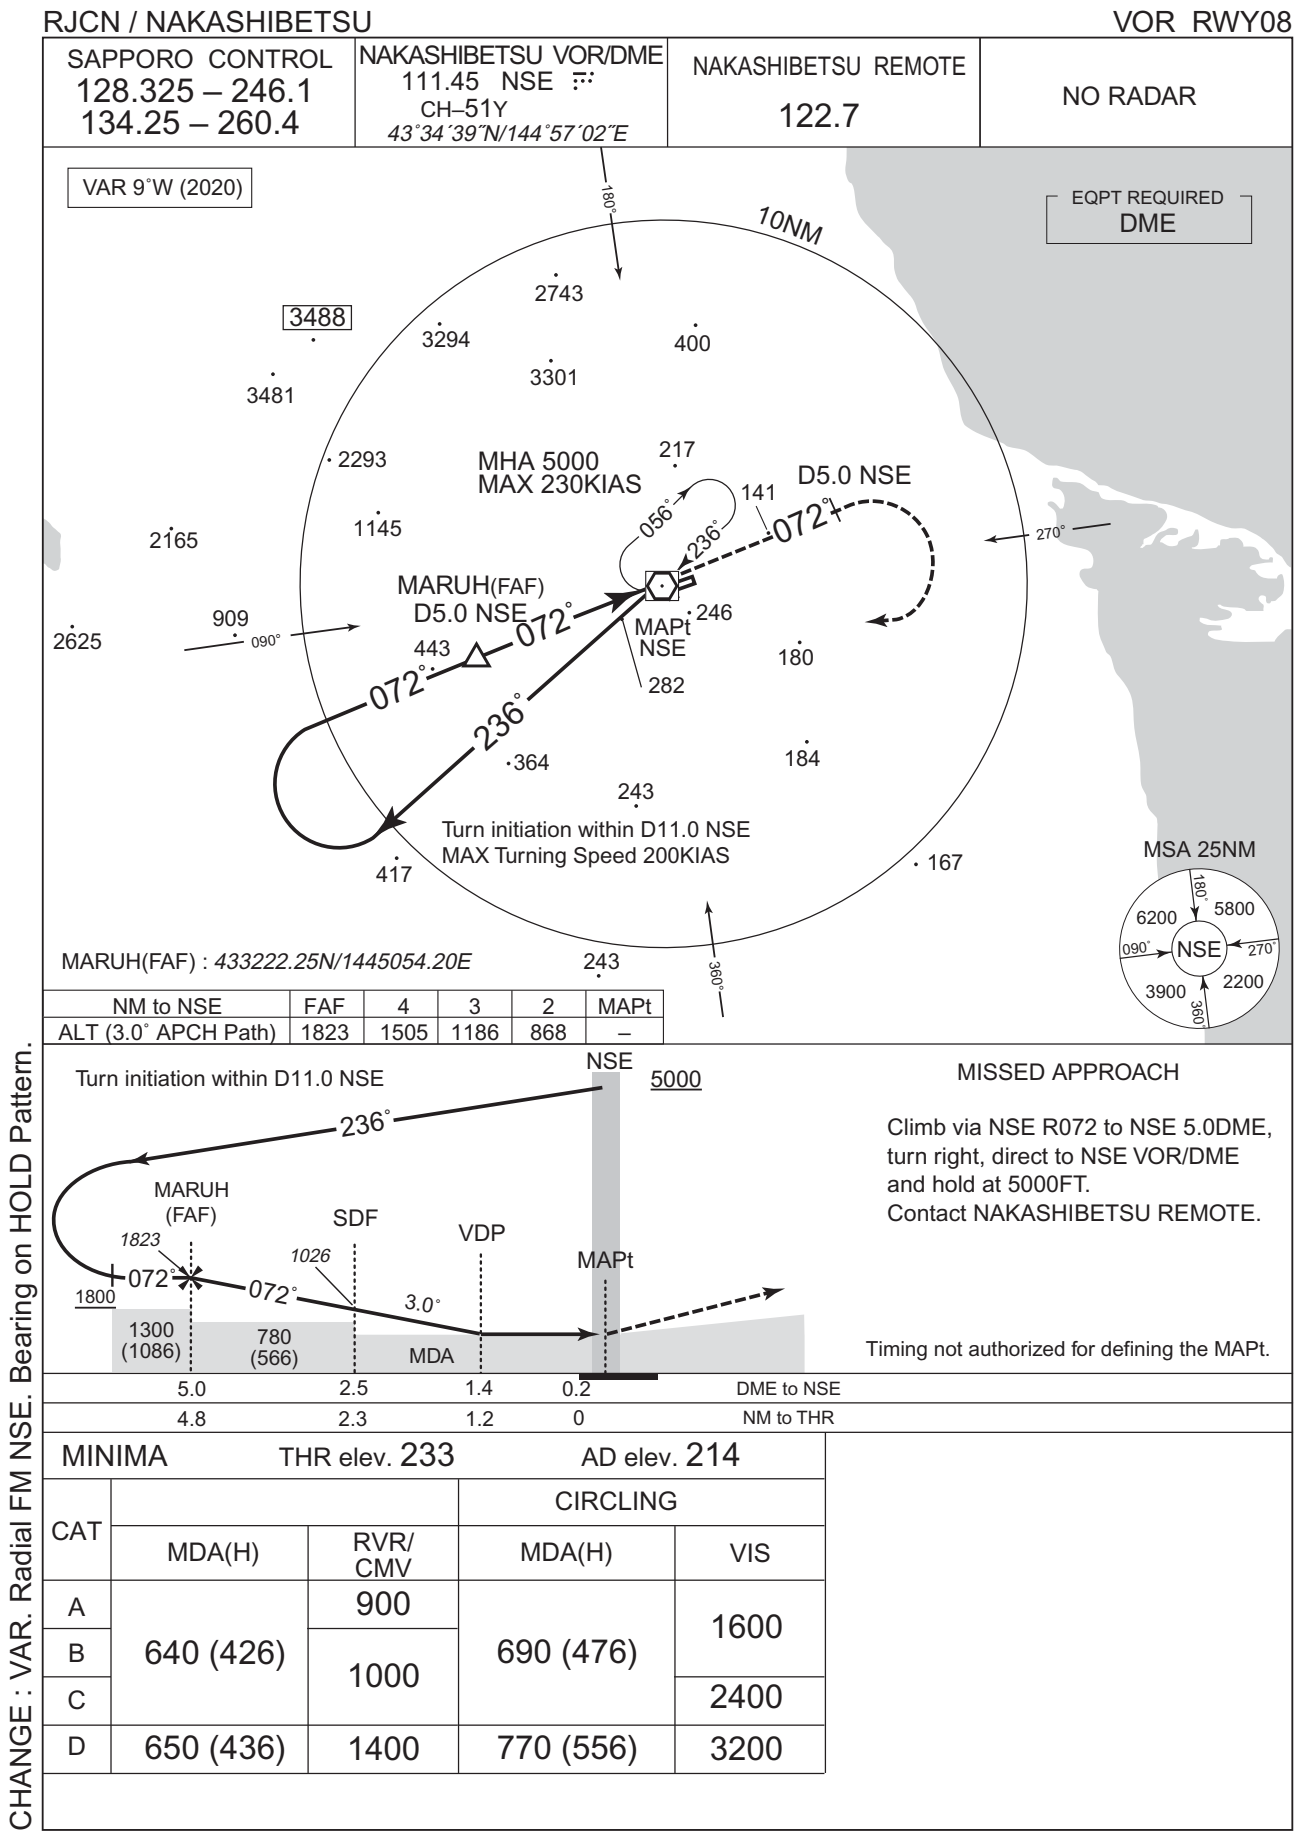

RJCN / NAKASHIBETSU

SAPPORO CONTROL
128.325 – 246.1
134.25 – 260.4

NAKASHIBETSU VOR/DME
111.45 NSE
CH-51Y
43°34'39"N/144°57'02"E

NAKASHIBETSU REMOTE
122.7

NO RADAR

VAR 9°W (2020)

EQPT REQUIRED DME

MOJAO(FAF)
D5.9 NSE

MAPt
D0.9 NSE

MHA 5000
MAX 230 KIAS

Turn initiation
within D11.0 NSE

MAX Turning Speed 200 KIAS

MSA 25 NM

NM to NSE	MAPt	2	3	4	5	FAF
Alt (3.0° APCH Path)	-	602	920	1239	1557	1853

MOJAO(FAF) : 433608.06N/1450455.60E

Diagram illustrating the flight path for the D11.0 NSE. The path starts at 5000 feet, descends to 1400 feet, and then turns to 101°. Key points include NSE, MAPt, VDP, MDA (700/486), and MOJAO (FAF) at 1853 feet. The turn initiation occurs within the D11.0 NSE. The path is labeled with 101°, 3.0°, 264°, and 1400.

NM to THR


0

5.0

CAT			CIRCLING	
	MDA(H)	CMV	MDA(H)	VIS
A	580 (366)	1200	690 (476)	1600
B		1300		
C		1400		2400
D		1600	770 (556)	3200

CHANGE : VAR.

INSTRUMENT APPROACH CHART

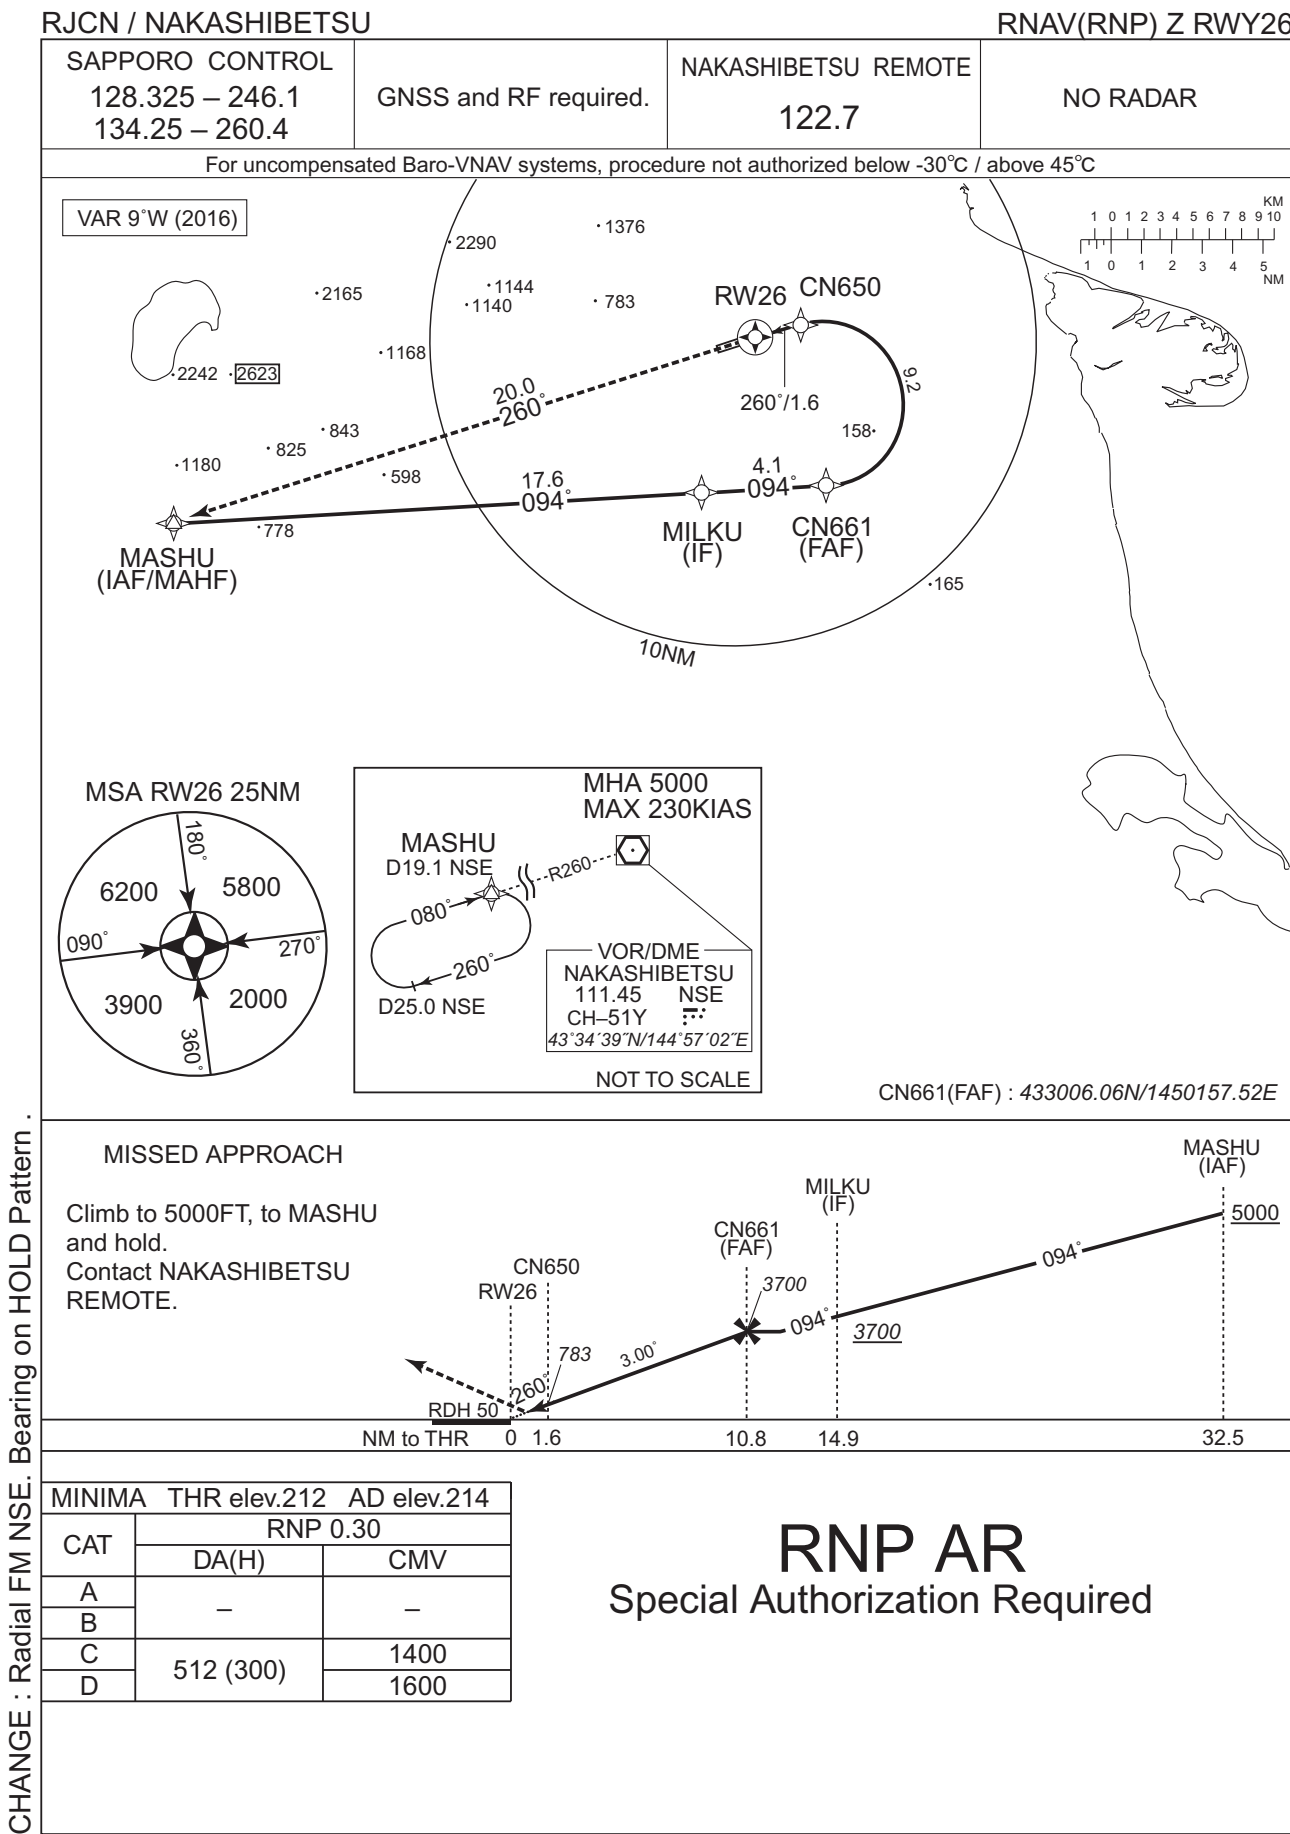

INSTRUMENT APPROACH CHART

RJCN / NAKASHIBETSU

RNAV(RNP) Z RWY26

RNAV(RNP) Z RWY26Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/RDH (°/FT)	RNP Value
001	IF	MASHU	—	—	-8.9	—	—	+5000	—	—	—
002	TF	MILKU	—	094 (084.9)	-8.9	17.6	—	+3700	—	—	1.0
003	TF	CN661	—	094 (085.2)	-8.9	4.1	—	3700	—	—	1.0
004	RF Center: CNRF2 r=2.70NM	CN650	—	—	-8.9	9.2	L	783	—	-3.00	0.3
005	TF	RW26	Y	260 (251.0)	-8.9	1.6	—	262	—	-3.00/50	0.3
006	TF	MASHU	—	260 (251.0)	-8.9	20.0	—	5000	—	—	1.0

Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
MASHU	432815.18N/1443214.49E	CNRF2	433247.93N/1450139.17E
MILKU	432945.72N/1445620.67E		
CN661	433006.06N/1450157.52E		
CN650	433521.30N/1450025.71E		
RW26	433449.27N/1445817.40E		


INSTRUMENT APPROACH CHART

RJCN / NAKASHIBETSU

RNAV(RNP) Y RWY26


SAPPORO CONTROL 128.325 – 246.1 134.25 – 260.4	GNSS and RF required.	NAKASHIBETSU REMOTE 122.7	NO RADAR
--	-----------------------	------------------------------	----------

For uncompensated Baro-VNAV systems, procedure not authorized below -30°C / above 45°C

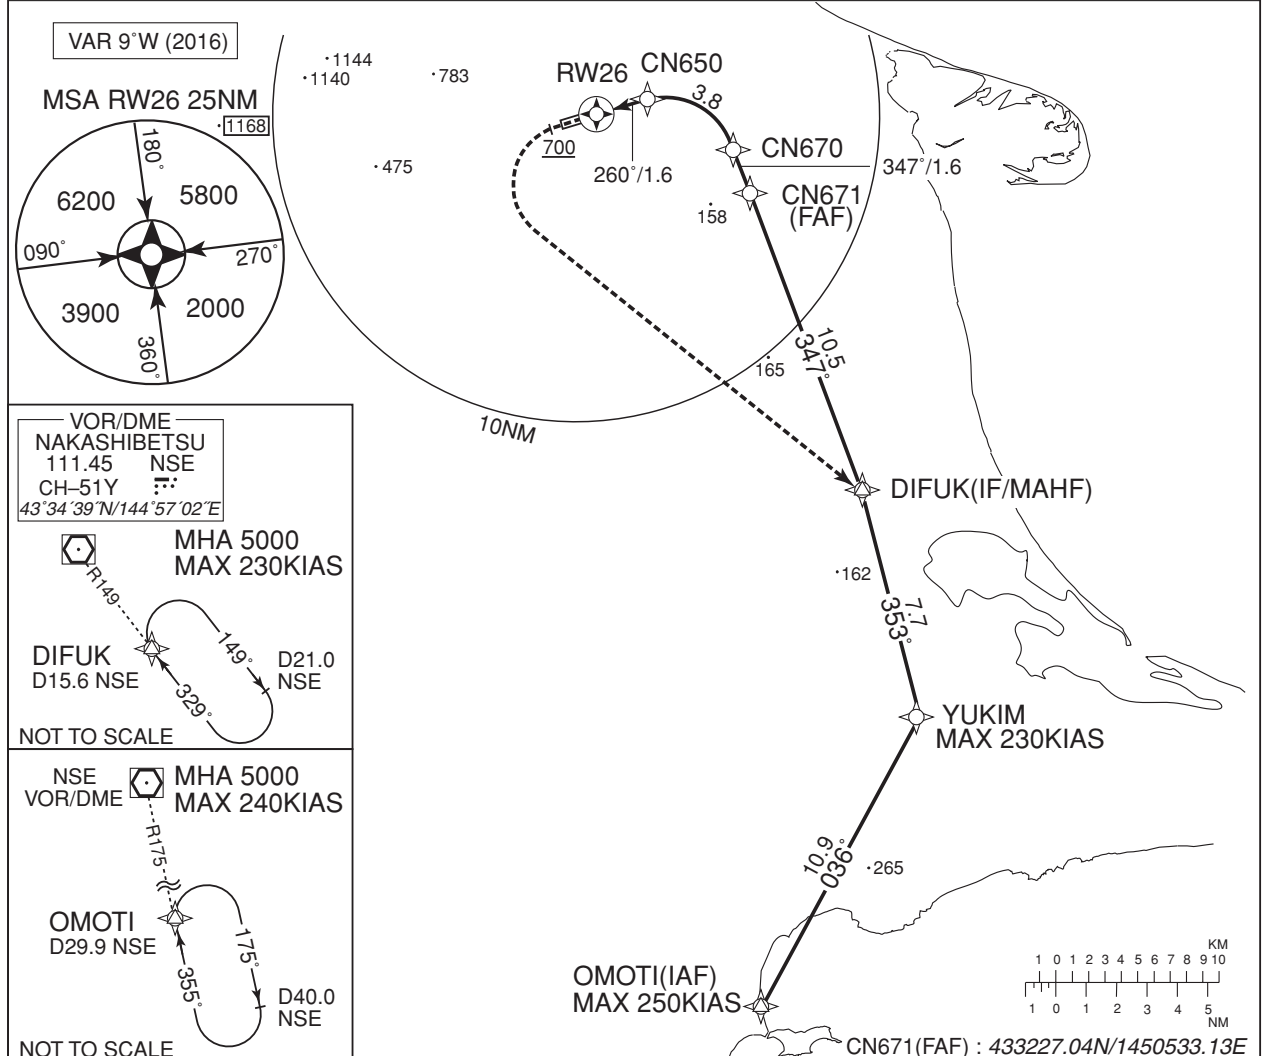

MISSED APPROACH

From RW26 on track 260°, at or above 700FT turn left, direct to DIFUK and hold at 5000FT.
Contact NAKASHIBETSU REMOTE.

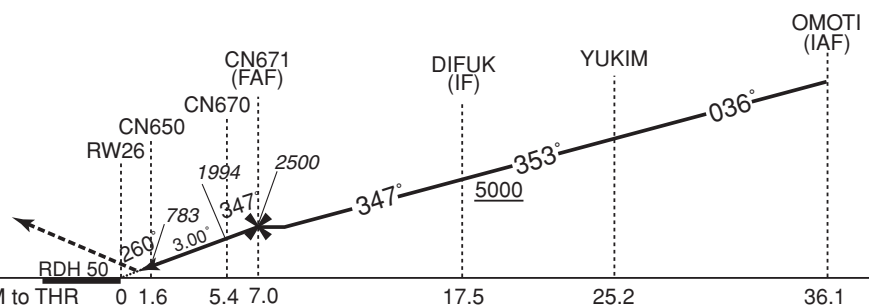

Missed APCH climb gradient MNM 5.0%

MINIMA THR elev.212 AD elev.214

CAT	RNP 0.30	
	DA(H)	CMV
A	—	—
B	—	—
C	512 (300)	1400
D	—	1600

MINIMA with Missed APCH climb gradient of 2.5% are not established.

RNP AR
Special Authorization Required

INSTRUMENT APPROACH CHART

RJCN / NAKASHIBETSU

RNAV(RNP) Y RWY26

RNAV(RNP) Y RWY26Coding Table


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/RDH (°/FT)	RNP Value
001	IF	OMOTI	—	—	-8.9	—	—	+5000	-250	—	—
002	TF	YUKIM	—	036 (027.2)	-8.9	10.9	—	+5000	-230	—	1.0
003	TF	DIFUK	—	353 (344.3)	-8.9	7.7	—	+5000	—	—	1.0
004	TF	CN671	—	347 (338.4)	-8.9	10.5	—	2500	—	—	1.0
005	TF	CN670	—	347 (338.3)	-8.9	1.6	—	1994	—	-3.00	0.3
006	RF Center: CNRF1 r=2.50NM	CN650	—	—	-8.9	3.8	L	783	—	-3.00	0.3
007	TF	RW26	Y	260 (251.0)	-8.9	1.6	—	262	—	-3.00/50	0.3
008	FA	—	—	260 (251.0)	-8.9	—	—	+700	—	—	1.0
009	DF	DIFUK	—	—	-8.9	—	L	5000	—	—	1.0

Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
OMOTI	430535.54N/1450655.47E	CNRF1	433259.00N/1450132.84E
YUKIM	431516.17N/1451345.84E		
DIFUK	432242.79N/1451052.79E		
CN671	433227.04N/1450533.13E		
CN670	433354.84N/1450444.93E		
CN650	433521.30N/1450025.71E		
RW26	433449.27N/1445817.40E		

RJCN / NAKASHIBETSU

Visual REP

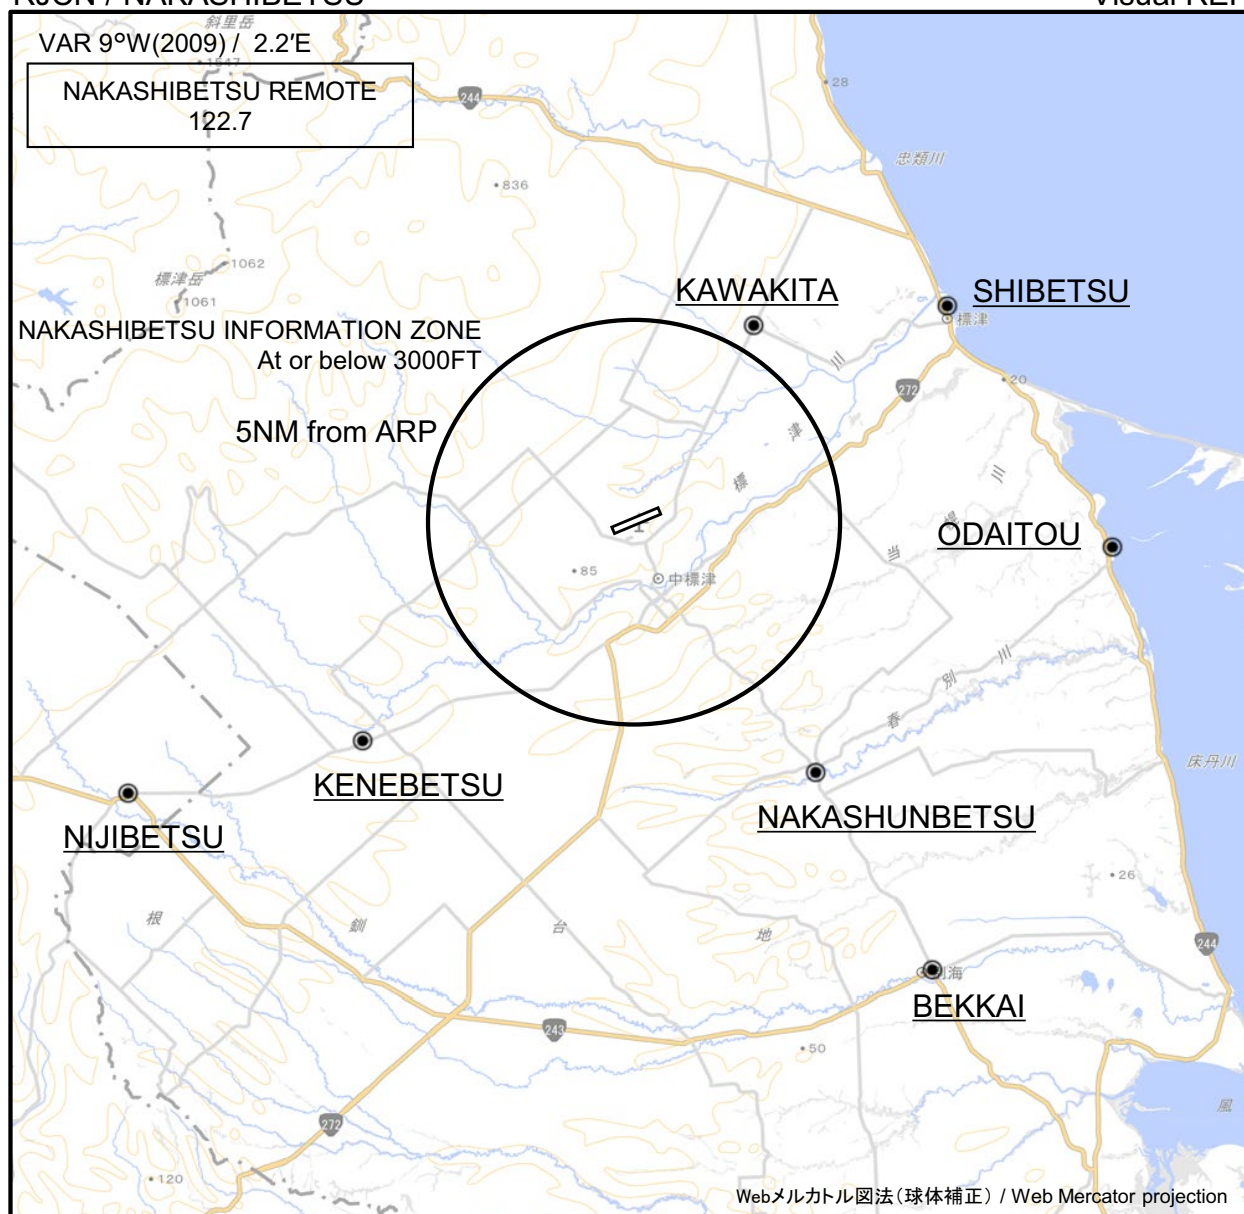

※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

CHANGE : Map updated. BRG/DIST from ARP.	Call sign	BRG / DIST from ARP	Remarks
	標津 Shibetsu	055°T / 9.1NM	標津港 Harbor
	川北 Kawakita	030°T / 5.6NM	市街地 Town
	尾岱沼 Odaitou	093°T / 11.5NM	尾岱沼港 Harbor
	計根別 Kenebetsu	231°T / 8.5NM	市街地 Town
	中春別 Nakashunbetsu	145°T / 7.5NM	市街地 Town
	虹別 Nijibetsu	242°T / 13.9NM	市街地 Town
	別海 Bekkai	147°T / 13.1NM	市街地 Town



RJCN / NAKASHIBETSU

Minimum Vectoring Altitude CHART

