


RJCK / KUSHIRO

AD CHART

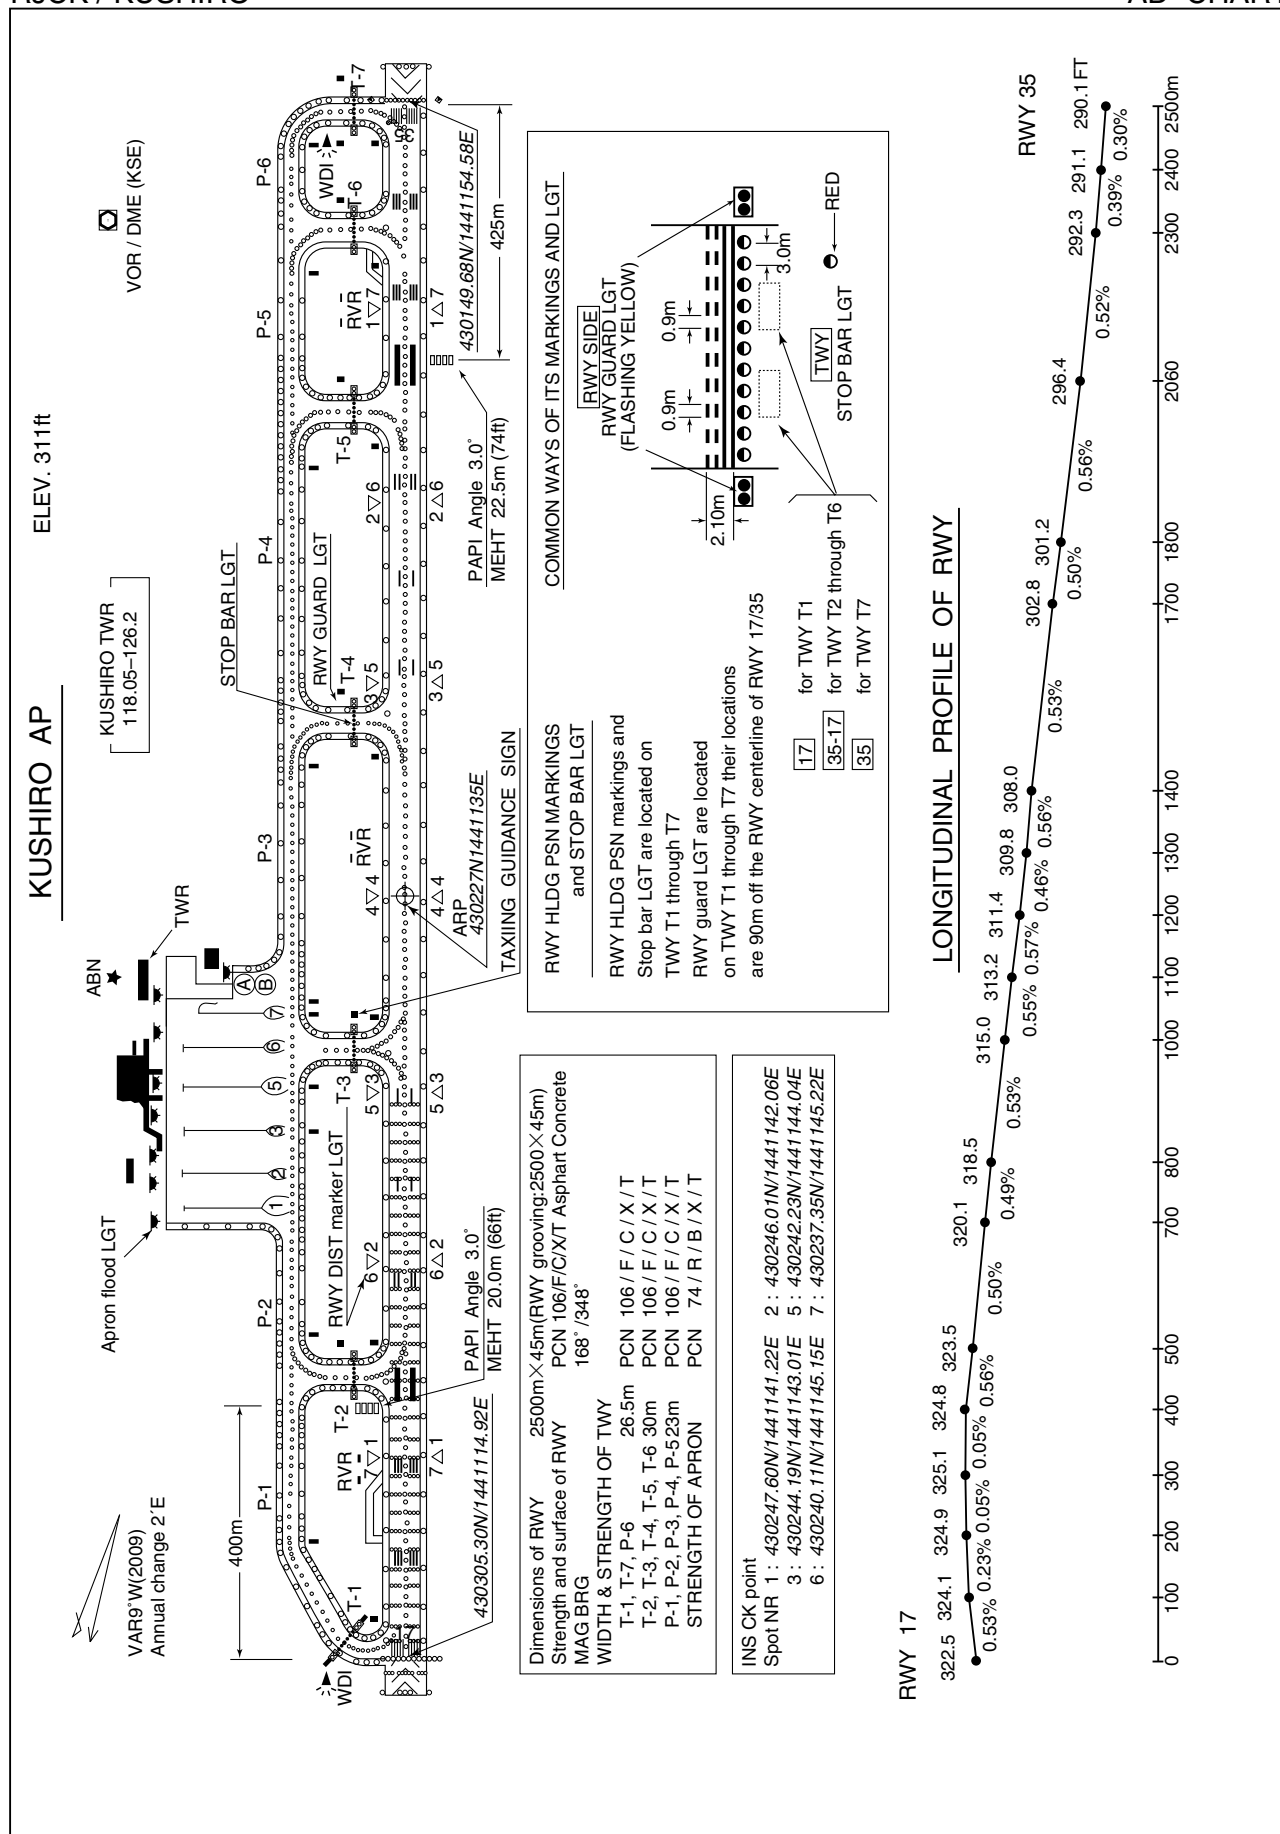

**INTENTIONALLY LEFT BLANK**

RJCK/KUSHIRO

PRECISION APPROACH TERRAIN CHART – ICAO



STANDARD DEPARTURE CHART -INSTRUMENT

RJCK / KUSHIRO

SID

ALICE THREE DEPARTURE

RWY17 : Climb RWY HDG to 1000FT, turn right...  
RWY35 : Climb RWY HDG to 1000FT, turn left HDG155°...  
...to intercept and proceed via KSE R200 to ALICE.  
Cross ALICE at assigned altitude.

Note : No turn before DER.

ERIMO FOUR DEPARTURE

RWY17 : Climb RWY HDG to 1000FT, turn left...  
RWY35 : Climb RWY HDG to 1000FT, turn left HDG116°...  
...to intercept and proceed via KSE R161, via NSE R218, via KSE R200 to  
ERIMO.  
Cross NSE R218/85.4DME at or above 10000FT.

Note : No turn before DER.

OBIHIRO THREE DEPARTURE

RWY17 : Climb RWY HDG to 1000FT, turn right HDG266°...  
RWY35 : Climb RWY HDG to 1000FT, turn left HDG176°...  
...to intercept and proceed via KSE R221, via OBE R097 to OBE VOR/DME.

Note : No turn before DER.

KUSHIRO REVERSAL FOUR DEPARTURE

RWY17 : Climb RWY HDG to 1000FT, turn right...  
RWY35 : Climb RWY HDG to 1000FT, turn left HDG155°...  
...to intercept and proceed via KSE R200 to 3000FT, turn left, direct to  
KSE VOR/DME.  
Cross KSE VOR/DME at or above 5000FT.

Note : No turn before DER.

YUDOH TWO DEPARTURE

RWY17 : Climb RWY HDG to 1000FT, turn right HDG266°...  
RWY35 : Climb RWY HDG to 1000FT, turn left HDG176°...  
...to intercept and proceed via KSE R221 to YUDOH.

Note : No turn before DER.

EATAK ONE DEPARTURE


RWY17 : Climb RWY HDG to 1000FT, turn right HDG328°...  
RWY35 : Climb RWY HDG to 1000FT, turn left HDG238°...  
...to intercept and proceed via KSE R283 to EATAK.  
Cross EATAK at assigned altitude.

Note : No turn before DER.

### STANDARD DEPARTURE CHART -INSTRUMENT

RJCK / KUSHIRO

SID

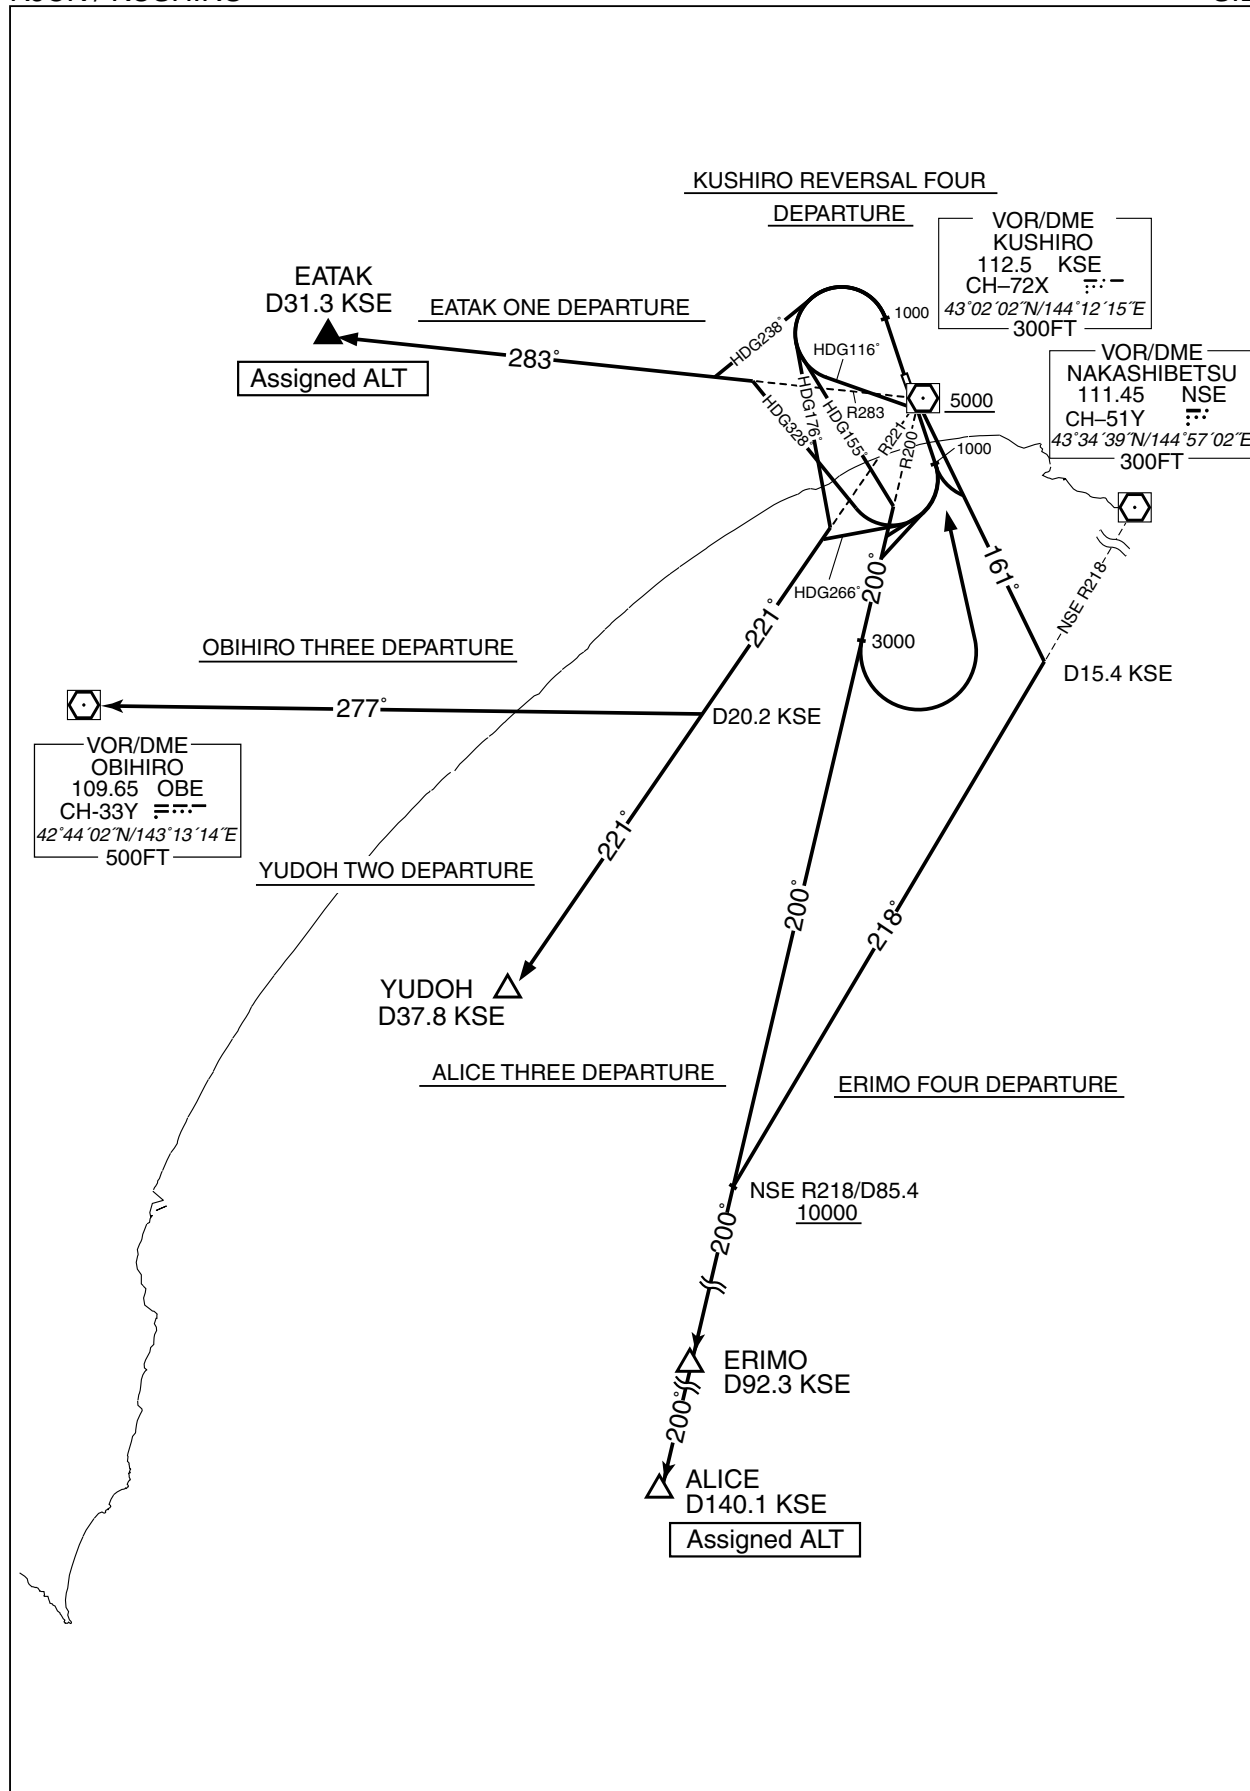

## STANDARD DEPARTURE CHART -INSTRUMENT


RJCK / KUSHIRO

RNAV SID

## AKESI ONE DEPARTURE

Basic RNP1

Note GNSS required.

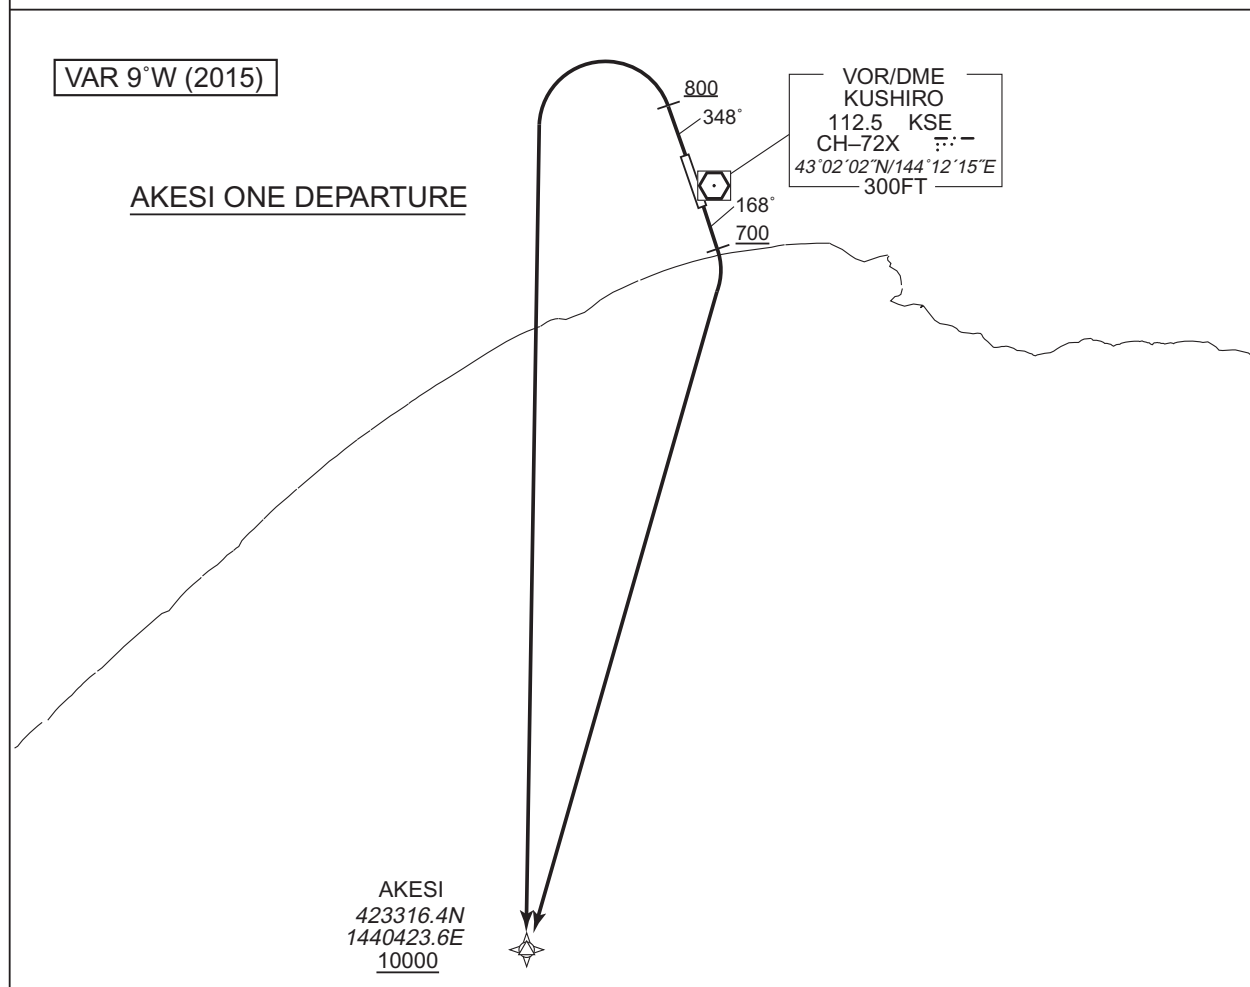

## AKESI ONE DEPARTURE

RWY17 : Climb on HDG168° at or above 700FT, turn right direct to AKESI at or above 10000FT.

RWY35 : Climb on HDG348° at or above 800FT, turn left direct to AKESI at or above 10000FT.

## RWY17

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | —                   | —        | 168 (159.0)   | -8.9               | —             | —              | +700          | —            | —              | Basic RNP1               |
| 002           | DF              | AKESI               | —        | —             | -8.9               | —             | R              | +10000        | —            | —              | Basic RNP1               |

## RWY35

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | —                   | —        | 348 (339.0)   | -8.9               | —             | —              | +800          | —            | —              | Basic RNP1               |
| 002           | DF              | AKESI               | —        | —             | -8.9               | —             | L              | +10000        | —            | —              | Basic RNP1               |

## STANDARD DEPARTURE CHART -INSTRUMENT

RJCK / KUSHIRO

RNAV SID


## TANCHO ONE DEPARTURE

Basic RNP1

Note GNSS required.

VAR 9°W (2015)

## TANCHO ONE DEPARTURE

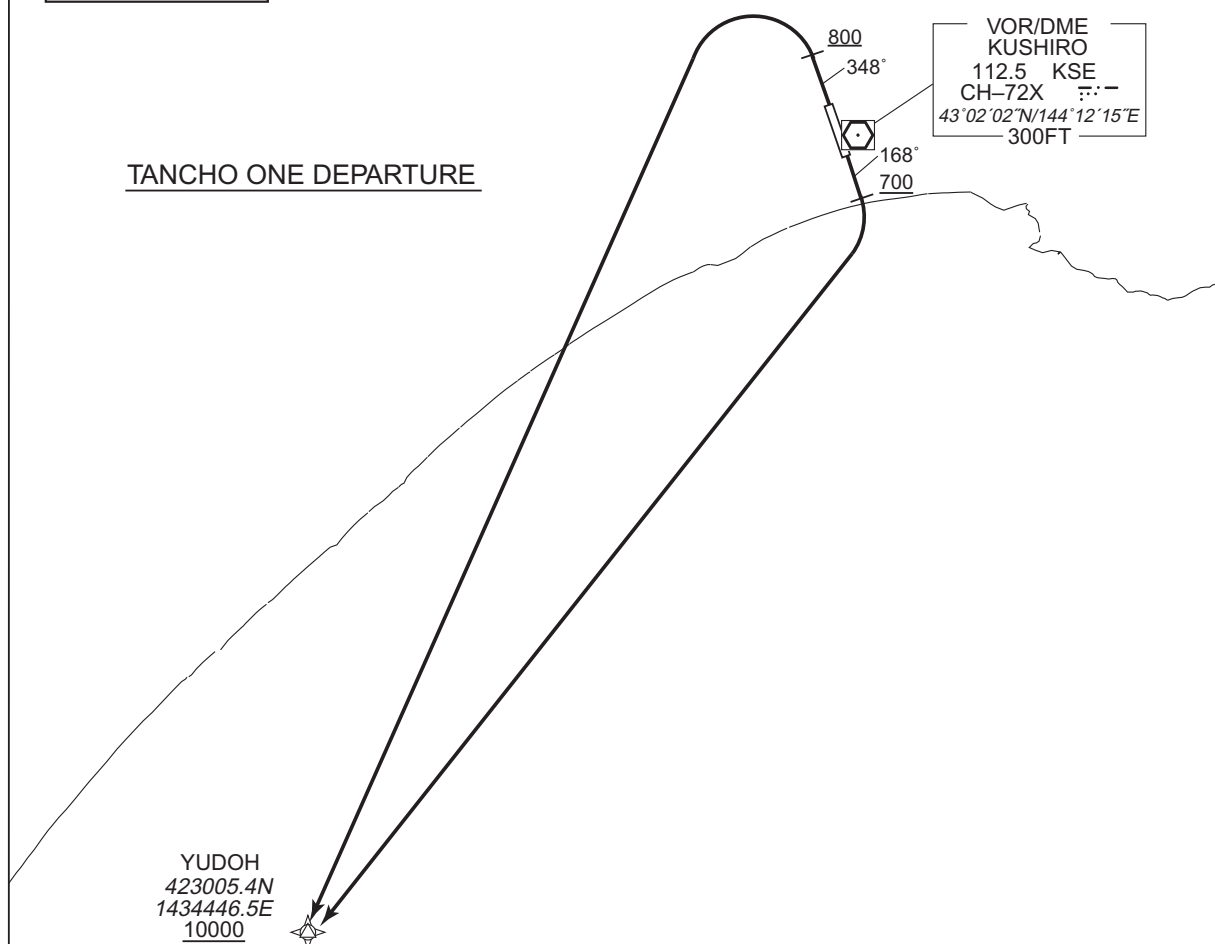

## TANCHO ONE DEPARTURE

RWY17 : Climb on HDG168° at or above 700FT, turn right direct to YUDOH at or above 10000FT.

RWY35 : Climb on HDG348° at or above 800FT, turn left direct to YUDOH at or above 10000FT.

## RWY17

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | —                   | —        | 168<br>(159.0) | -8.9               | —             | —              | +700          | —            | —              | Basic RNP1               |
| 002           | DF              | YUDOH               | —        | —              | -8.9               | —             | R              | +10000        | —            | —              | Basic RNP1               |

## RWY35

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | —                   | —        | 348<br>(339.0) | -8.9               | —             | —              | +800          | —            | —              | Basic RNP1               |
| 002           | DF              | YUDOH               | —        | —              | -8.9               | —             | L              | +10000        | —            | —              | Basic RNP1               |

## STANDARD DEPARTURE CHART -INSTRUMENT

RJCK / KUSHIRO

RNAV SID


## ASHORO ONE DEPARTURE

Basic RNP1

Note GNSS required.

VAR 9°W (2015)

## ASHORO ONE DEPARTURE

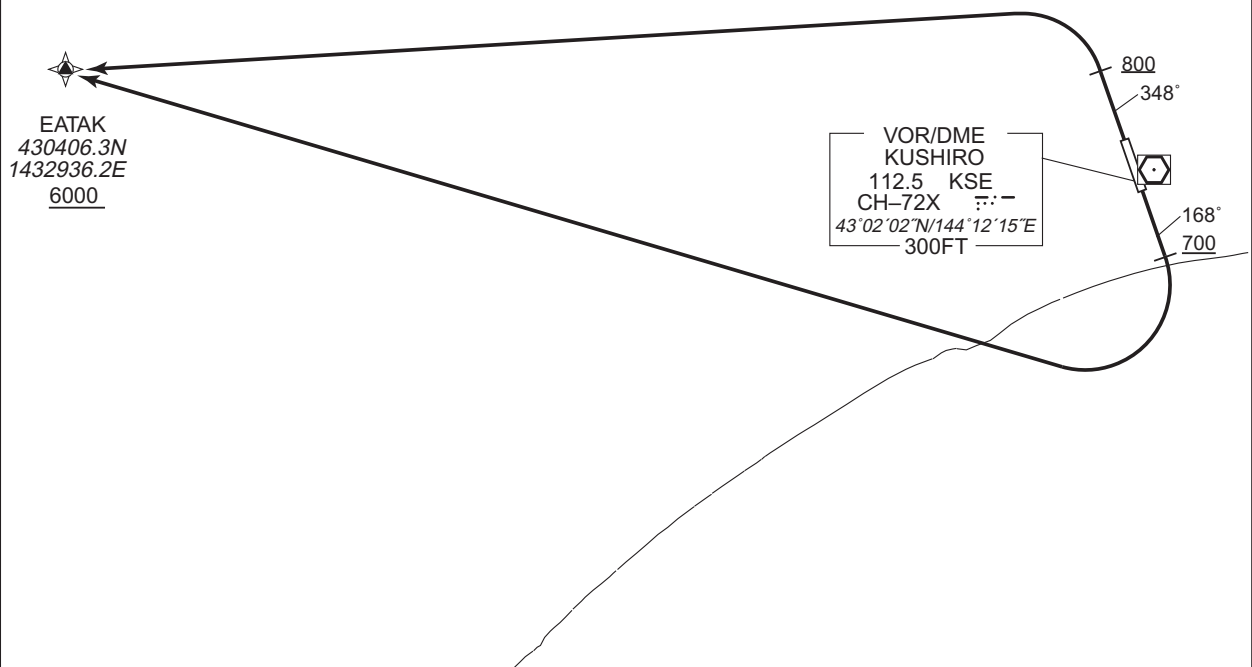

## ASHORO ONE DEPARTURE

RWY17 : Climb on HDG168° at or above 700FT, turn right direct to EATAK at or above 6000FT.

RWY35 : Climb on HDG348° at or above 800FT, turn left direct to EATAK at or above 6000FT.

Note RWY17: No turn before DER.

## RWY17

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | —                   | —        | 168 (159.0)   | -8.9               | —             | —              | +700          | —            | —              | Basic RNP1               |
| 002           | DF              | EATAK               | —        | —             | -8.9               | —             | R              | +6000         | —            | —              | Basic RNP1               |

## RWY35

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | —                   | —        | 348 (339.0)   | -8.9               | —             | —              | +800          | —            | —              | Basic RNP1               |
| 002           | DF              | EATAK               | —        | —             | -8.9               | —             | L              | +6000         | —            | —              | Basic RNP1               |



**INTENTIONALLY LEFT BLANK**

STANDARD ARRIVAL CHART -INSTRUMENT

RJCK / KUSHIRO

STAR

MENOK ARC ARRIVAL

From over CRANE, SHORO, KOTAN, NUPRI, via KSE 13.0DME clockwise ARC to MENOK.

Cross MENOK at or above 3600FT.



## STANDARD ARRIVAL CHART -INSTRUMENT


RJCK / KUSHIRO

STAR

KUSSY ARRIVAL

From over AKESI, via KSE R200 to intercept and proceed via KSE 20.0DME counterclockwise ARC, via KSE R182 to KUSSY.

Cross KUSSY at or above 2000FT.

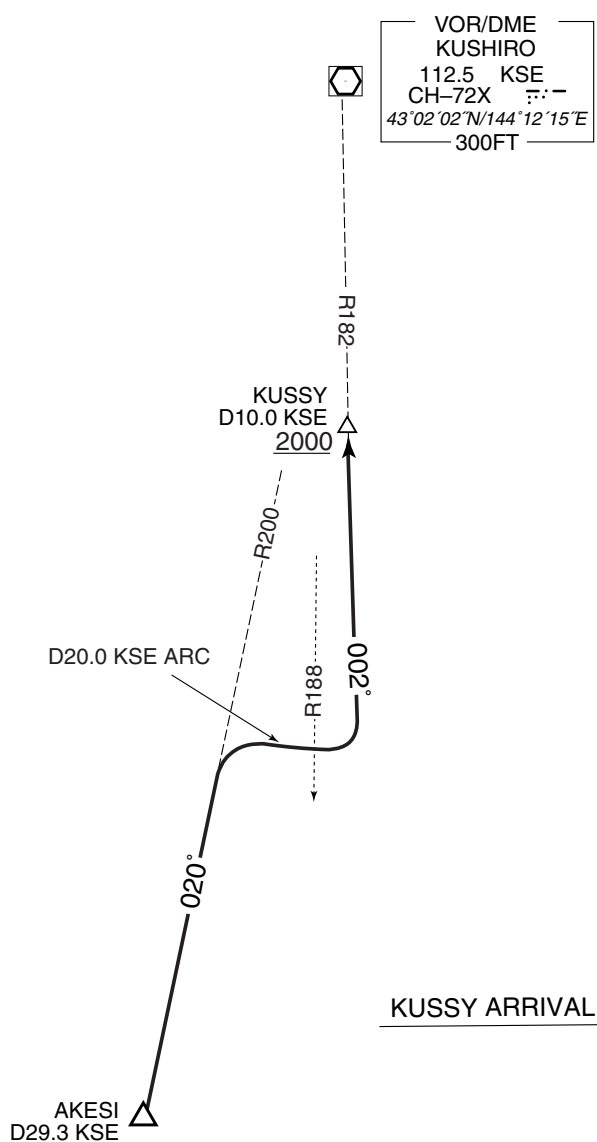

STANDARD ARRIVAL CHART -INSTRUMENT

RJCK / KUSHIRO

STAR

CRANE ARC ARRIVAL

From over MENOK, NUPRI, KOTAN, SHORO, via KSE 13.0DME counterclockwise ARC to CRANE.

Cross CRANE at or above 3600FT.




STANDARD ARRIVAL CHART -INSTRUMENT

RJCK / KUSHIRORNAV STAR RWY17

|               |            |
|---------------|------------|
| MENOK ARRIVAL | Basic RNP1 |
|---------------|------------|

Note GNSS required.

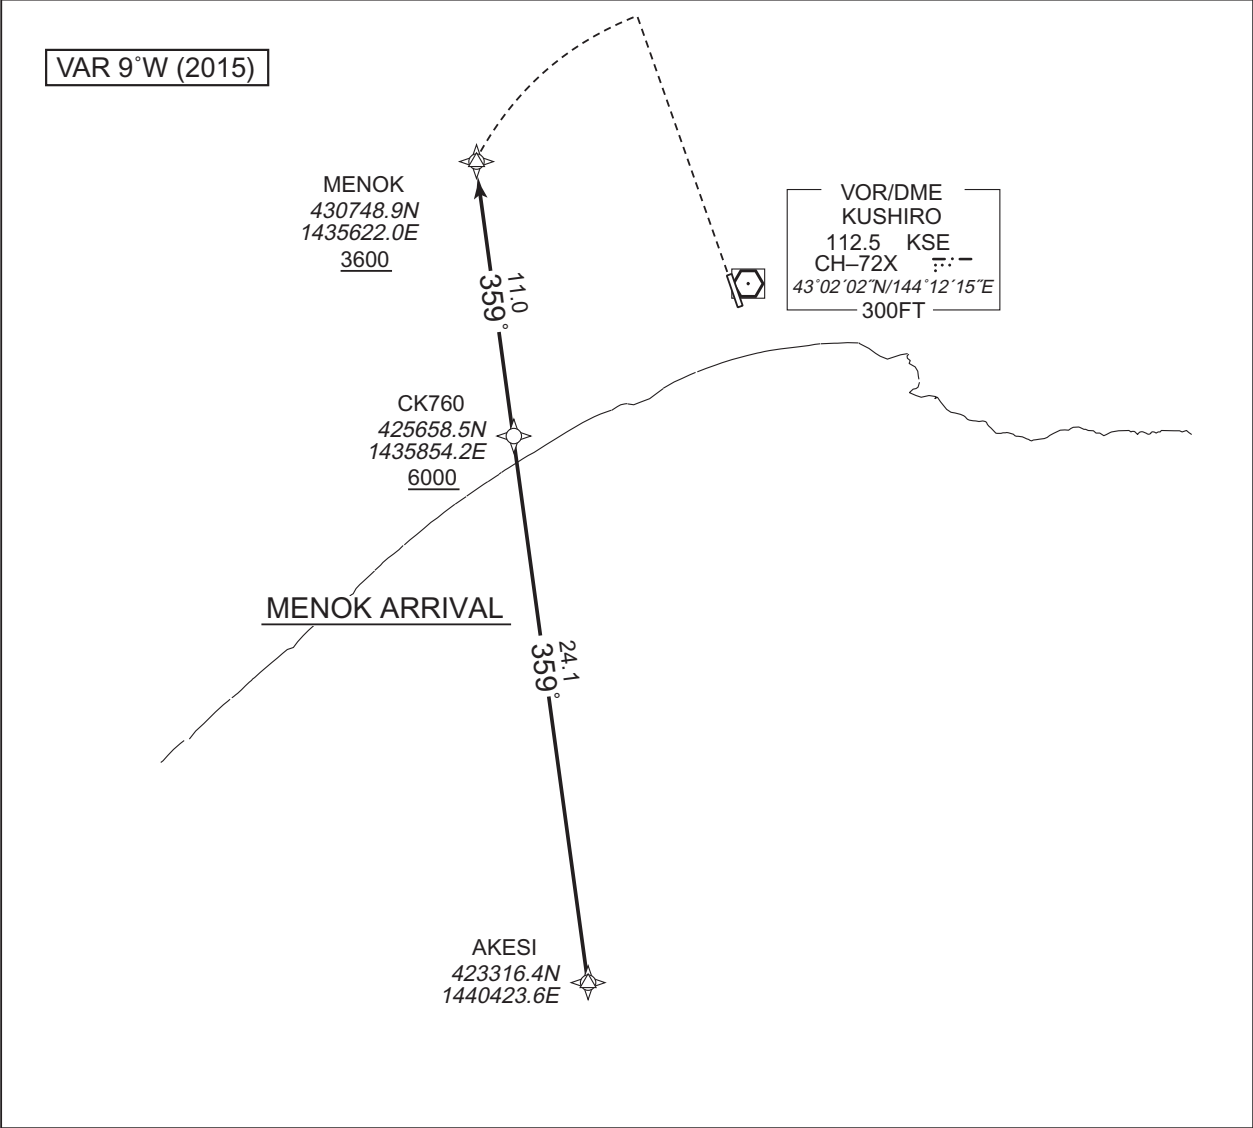


| <u>MENOK ARRIVAL</u><br>From AKESI, to CK760 at or above 6000FT, to MENOK at or above 3600FT. |                 |                     |          |                |                    |               |                |               |              |                |                          |
|---|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| Serial Number   | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
| 001   | IF              | AKESI               | —        | —              | -8.9               | —             | —              | —             | —            | —              | Basic RNP1               |
| 002   | TF              | CK760               | —        | 359<br>(350.4) | -8.9               | 24.1          | —              | +6000         | —            | —              | Basic RNP1               |
| 003   | TF              | MENOK               | —        | 359<br>(350.3) | -8.9               | 11.0          | —              | +3600         | —            | —              | Basic RNP1               |

STANDARD ARRIVAL CHART -INSTRUMENT

RJCK / KUSHIRORNAV STAR RWY17

|               |            |
|---------------|------------|
| MARNY ARRIVAL | Basic RNP1 |
|---------------|------------|

Note GNSS required.

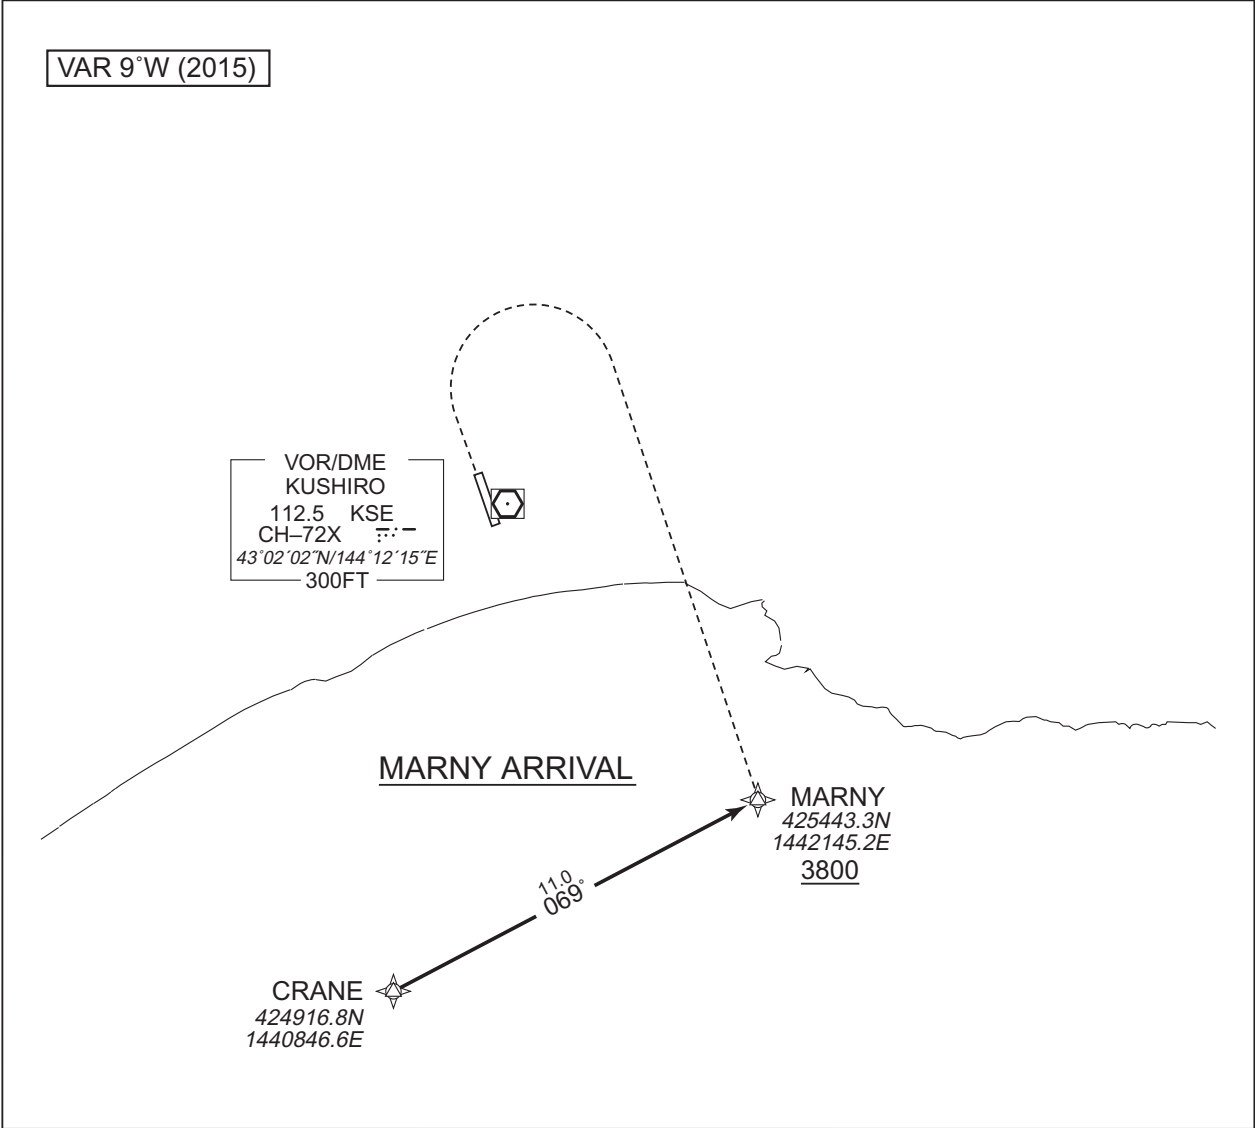

| <div>MARNY ARRIVAL</div> <div>From CRANE, to MARNY at or above 3800FT.</div> |                 |                     |          |                |                    |               |                |               |              |                |                          |
|--|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| Serial Number  | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
| 001  | IF              | CRANE               | —        | —              | -8.9               | —             | —              | —             | —            | —              | Basic RNP1               |
| 002  | TF              | MARNY               | —        | 069<br>(060.2) | -8.9               | 11.0          | —              | +3800         | —            | —              | Basic RNP1               |

## RJCK / KUSHIRO ILS or LOC RWY17 (CAT Ⅲ)



## INSTRUMENT APPROACH CHART

RJCK / KUSHIRO

VOR RWY17






## INSTRUMENT APPROACH CHART

RJCK / KUSHIRO

VOR Z RWY35

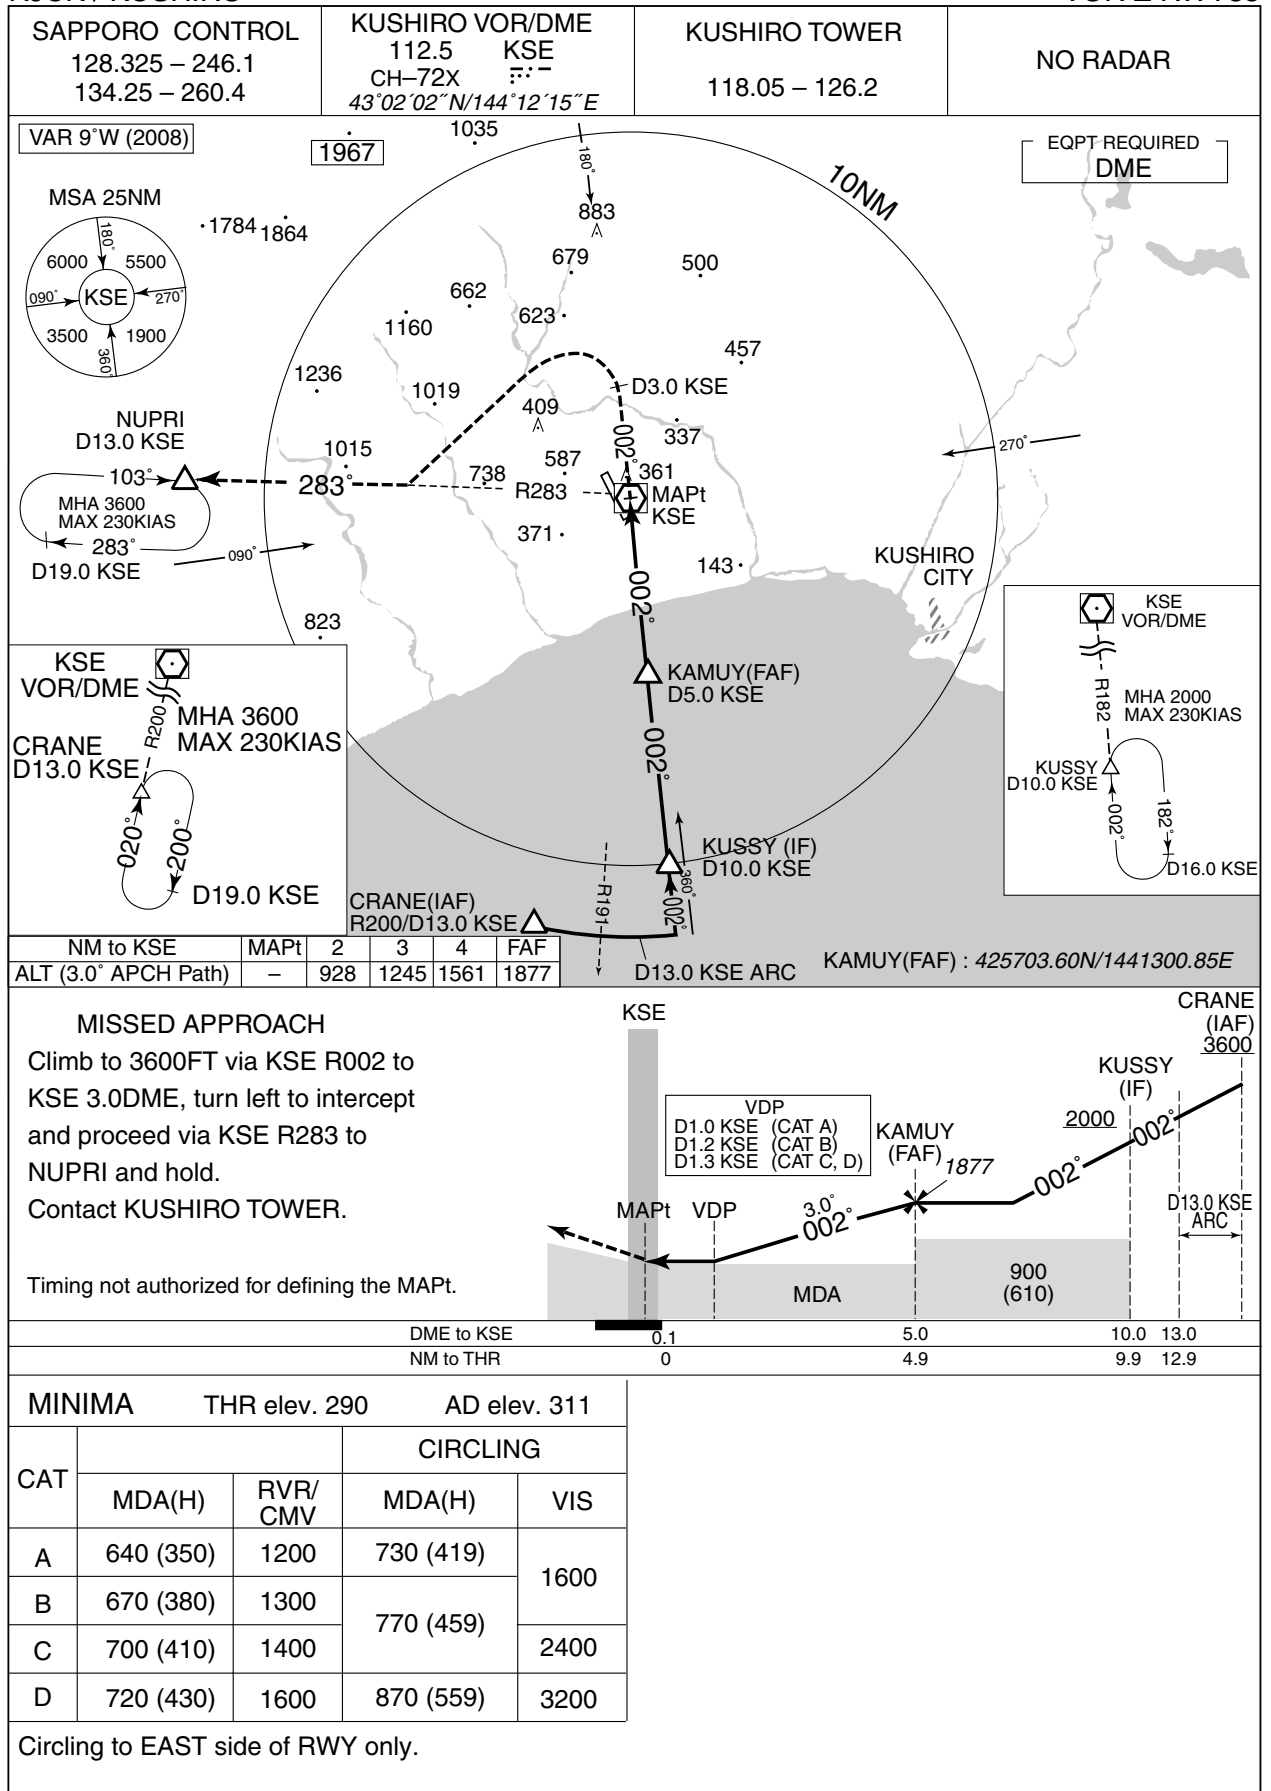

## INSTRUMENT APPROACH CHART

RJCK / KUSHIRO

VOR Y RWY35



## INSTRUMENT APPROACH CHART

RJCK / KUSHIRO

RNAV(RNP) Z RWY17



## INSTRUMENT APPROACH CHART

RJCK / KUSHIRO

RNAV(RNP) Z RWY17

RNAV(RNP) Z RWY17Coding Table

| Serial Number | Path Descriptor                    | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | VPA/RDH (°/FT) | RNP Value |
|---------------|------------------------------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|-----------|
| 001           | IF                                 | CRANE               | —        | —              | -8.9               | —             | —              | +3600         | —            | —              | —         |
| 002           | TF                                 | MARIM               | —        | 358<br>(349.1) | -8.9               | 7.1           | —              | +3300         | —            | —              | 1.0       |
| 003           | TF                                 | MILKY               | —        | 358<br>(349.0) | -8.9               | 6.0           | —              | 3300          | -165         | —              | 1.0       |
| 004           | TF                                 | CK752               | —        | 358<br>(349.0) | -8.9               | 1.4           | —              | 2864          | —            | -3.00          | 0.3       |
| 005           | RF<br>Center:<br>CKRF1<br>r=2.08NM | CK751               | —        | —              | -8.9               | 6.2           | R              | 901           | —            | -3.00          | 0.3       |
| 006           | TF                                 | RW17                | Y        | 168<br>(159.0) | -8.9               | 1.6           | —              | 378           | —            | -3.00/55       | 0.3       |
| 007           | TF                                 | CK753               | —        | 168<br>(159.0) | -8.9               | 9.8           | —              | —             | —            | —              | 1.0       |
| 008           | TF                                 | CRANE               | —        | 238<br>(229.0) | -8.9               | 7.1           | —              | 3600          | —            | —              | 1.0       |


Waypoint Coordinates

| Waypoint Identifier | Coordinates              | RF Arc Center Identifier | Coordinates              |
|---------------------|--------------------------|--------------------------|--------------------------|
| CRANE               | 424916.84N / 1440846.59E | CKRF1                    | 430352.65N / 1440747.87E |
| MARIM               | 425614.81N / 1440656.16E |                          |                          |
| MILKY               | 430208.16N / 1440522.44E |                          |                          |
| CK752               | 430328.83N / 1440501.00E |                          |                          |
| CK751               | 430437.47N / 1441026.54E |                          |                          |
| RW17                | 430305.30N / 1441114.92E |                          |                          |
| CK753               | 425355.48N / 1441602.58E |                          |                          |

INSTRUMENT APPROACH CHART

RJCK / KUSHIRO

RNAV(RNP) Y RWY17

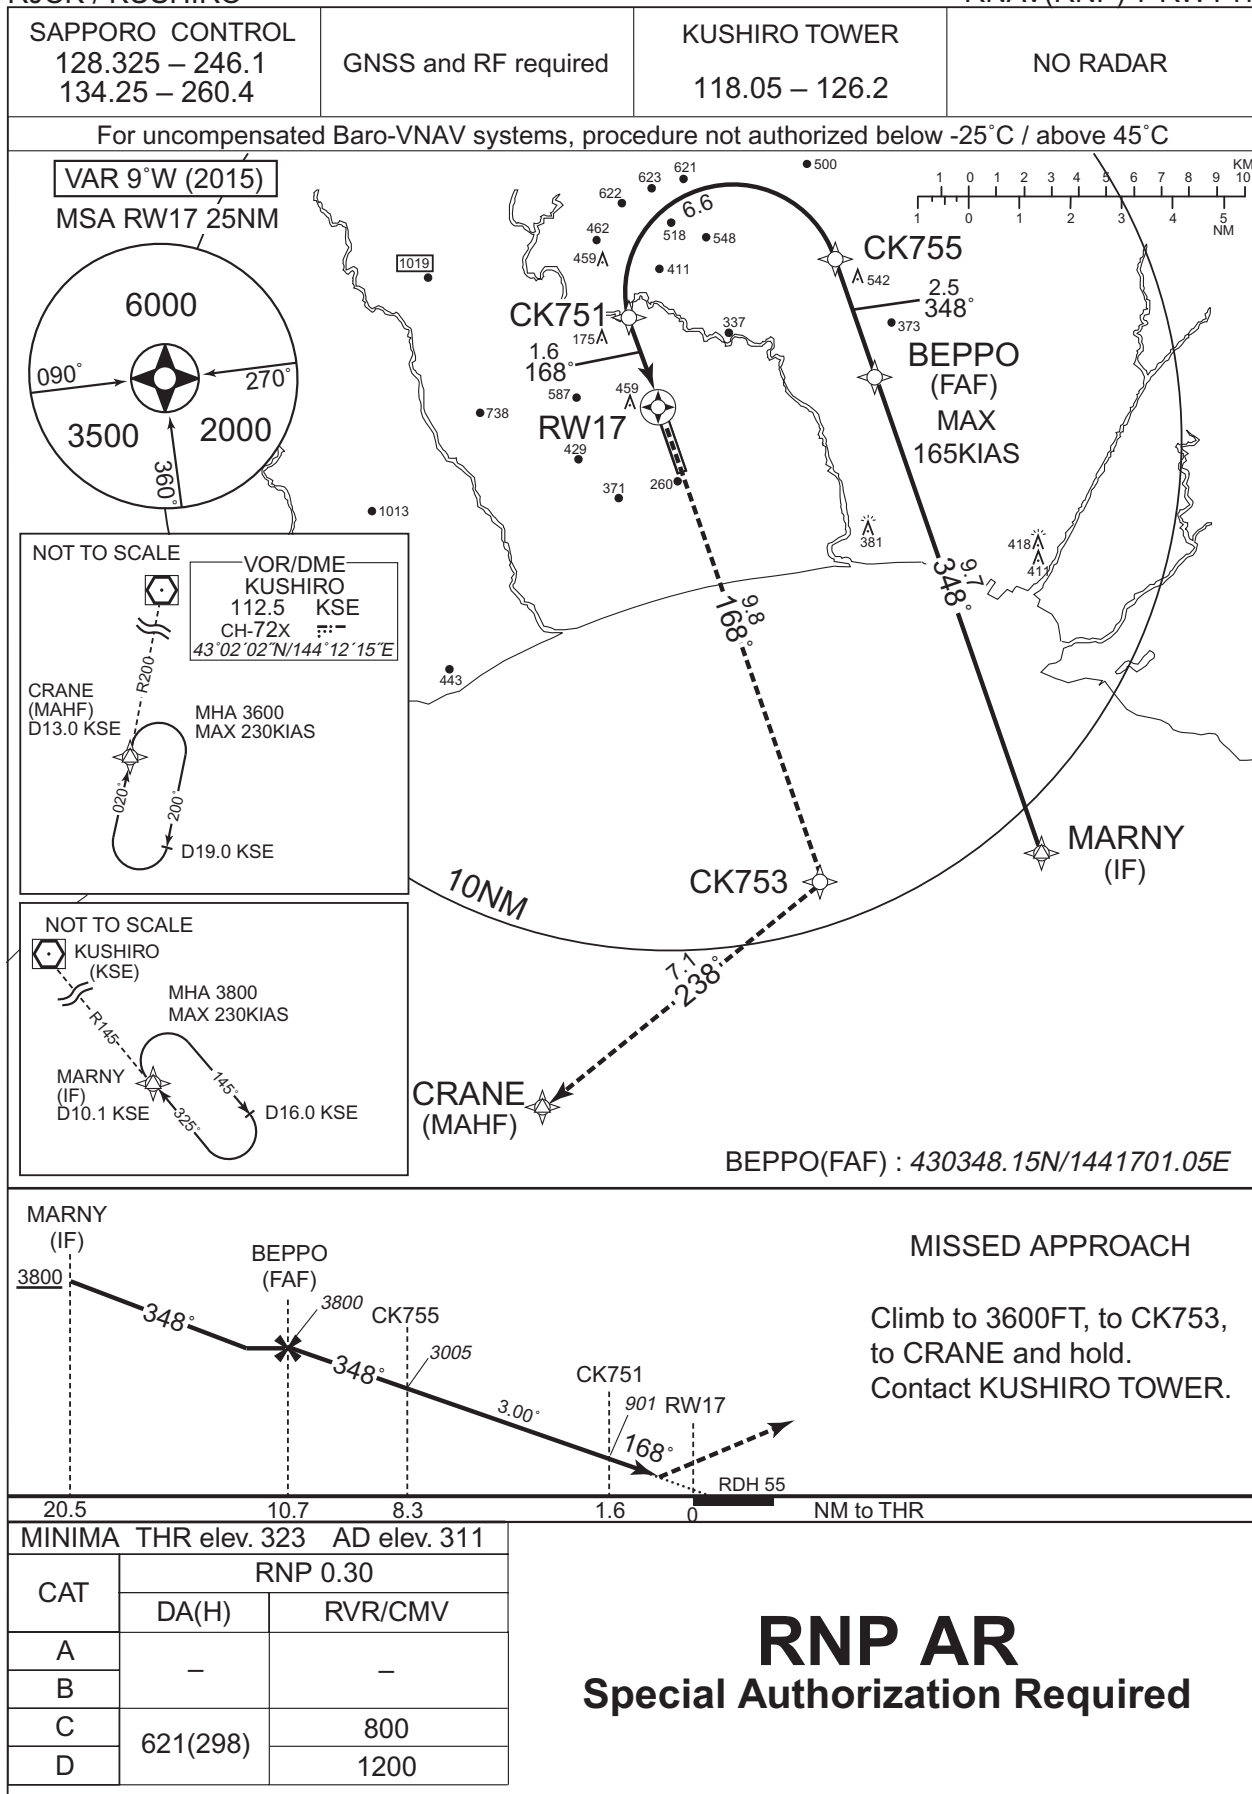

## INSTRUMENT APPROACH CHART

RJCK / KUSHIRO

RNAV(RNP) Y RWY17

RNAV(RNP) Y RWY17Coding Table

| Serial Number | Path Descriptor                    | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | VPA/RDH (°/FT) | RNP Value |
|---------------|------------------------------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|-----------|
| 001           | IF                                 | MARNY               | —        | —              | -8.9               | —             | —              | +3800         | —            | —              | —         |
| 002           | TF                                 | BEPP0               | —        | 348<br>(339.1) | -8.9               | 9.7           | —              | 3800          | -165         | —              | 1.0       |
| 003           | TF                                 | CK755               | —        | 348<br>(339.1) | -8.9               | 2.5           | —              | 3005          | —            | -3.00          | 0.3       |
| 004           | RF<br>Center:<br>CKRF2<br>r=2.10NM | CK751               | —        | —              | -8.9               | 6.6           | L              | 901           | —            | -3.00          | 0.3       |
| 005           | TF                                 | RW17                | Y        | 168<br>(159.0) | -8.9               | 1.6           | —              | 378           | —            | -3.00/55       | 0.3       |
| 006           | TF                                 | CK753               | —        | 168<br>(159.0) | -8.9               | 9.8           | —              | —             | —            | —              | 1.0       |
| 007           | TF                                 | CRANE               | —        | 238<br>(229.0) | -8.9               | 7.1           | —              | 3600          | —            | —              | 1.0       |

Waypoint Coordinates

| Waypoint Identifier | Coordinates              | RF Arc Center Identifier | Coordinates              |
|---------------------|--------------------------|--------------------------|--------------------------|
| MARNY               | 425443.27N / 1442145.22E | CKRF2                    | 430522.76N / 1441307.17E |
| BEPP0               | 430348.15N / 1441701.05E |                          |                          |
| CK755               | 430607.99N / 1441547.87E |                          |                          |
| CK751               | 430437.47N / 1441026.54E |                          |                          |
| RW17                | 430305.30N / 1441114.92E |                          |                          |
| CK753               | 425355.48N / 1441602.58E |                          |                          |
| CRANE               | 424916.84N / 1440846.59E |                          |                          |

## RJCK / KUSHIRO

RNAV(GNSS) RWY35

7/11/19

**INTENTIONALLY LEFT BLANK**



RJCK / KUSHIRO

Visual REP



※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

| Call sign                   | BRG / DIST from ARP | Remarks                |
|-----------------------------|---------------------|------------------------|
| 北斗<br>Hokuto                | 080°T / 4.6NM       | T字路交差点<br>Intersection |
| 大楽毛<br>Otanoshike           | 113°T / 4.2NM       | 製紙工場煙突群<br>Chimneys    |
| 釧路ステーション<br>Kushiro Station | 110°T / 8.8NM       | JR駅<br>Station         |
| 西庶路<br>Nishisyoro           | 215°T / 4.7NM       | JR駅<br>Station         |
| 白糖<br>Shiranuka             | 225°T / 7.2NM       | JR駅<br>Station         |

CHANGE : Map updated. BRG/DIST from ARP.

RJCK / KUSHIRO

Minimum Vectoring Altitude CHART

VAR 9°W (2007)

