


RJAH / HYAKURI

AD CHART



RJAH / HYAKURI

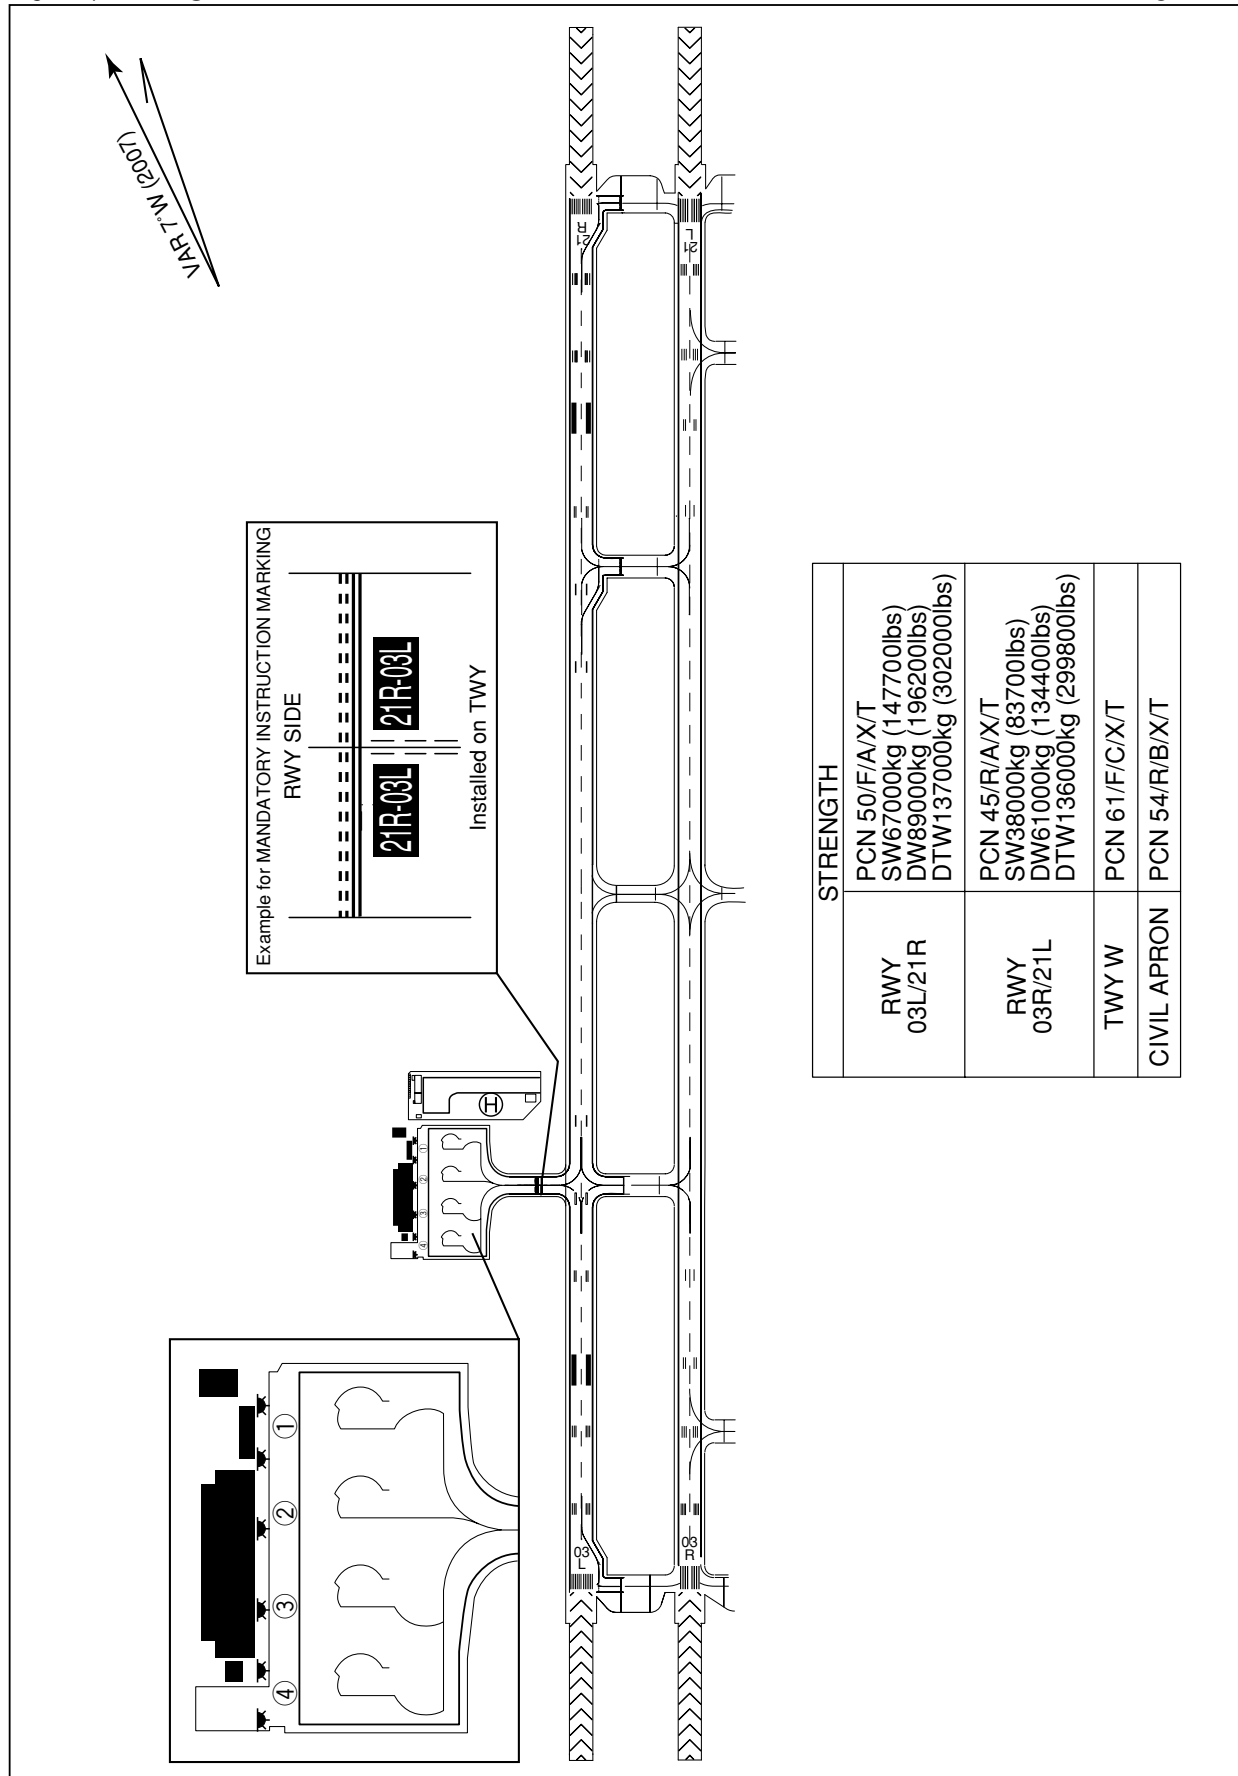

STANDARD DEPARTURE CHART - INSTRUMENT

RJAH / HYAKURI

SID and TRANSITION

OGITU TWO DEPARTURE

RWY 03R/03L : Climb RWY HDG to 600FT,...

RWY 21R/21L : Climb RWY HDG to 600FT, turn right HDG 062° to intercept and proceed...

...via HUC R032 to OGITU.

Cross HUC R032/5.5DME at or below 7000FT, cross OGITU at or below 10000FT.

Note This SID for VOR equipped aircraft only.

RWY03L : 4.1% climb gradient required up to 600FT.

OBST ALT 141FT located at 0.1NM 338° FM end of RWY03L.

IWAKI TRANSITION

From over OGITU, proceed via IXE R213 to IXE VOR/DME.

OKUJI TRANSITION

From over OGITU, via HUC R032 to 32.5DME, turn left to intercept and proceed via HUC 35.2DME counterclockwise ARC to OKUJI.

Cross OKUJI at or above 9000FT.

CHANGE : Editorial(DIST FM HUC to OGITU).



STANDARD DEPARTURE CHART - INSTRUMENT

RJAHH / HYAKURI

SID

NAKAH FOUR DEPARTURE

RWY 03R/03L : Turn left within 5.0NM....

RWY 21R/21L : Turn right or left within 6.0NM....

....climb via HUC R002(R001 for using VOR) to NAKAH.

Cross HUC R002(R001 for using VOR) /6.0DME at or below 7000FT.



CHANGE : NIKKO TRANSITION abolished. NIKKO NDB(JD) abolished.

STANDARD DEPARTURE CHART - INSTRUMENT

RJAH / HYAKURI

SID and TRANSITION

HOKTA FIVE DEPARTURE

RWY 03R/03L : Climb via RWY HDG until 1.0NM from RWY end/HUC 1.4DME,
turn right within 5.0NM....

RWY 21R/21L : Turn left within 6.0NM....

....climb via HUC R071 to HOKTA.

Cross HUC R071/19.3DME at or below 8000FT, cross HOKTA at or
above 11000FT.

Note1 : Take off RWY 21R/21L, cross HUC R130 at or below 5000FT.

Note2 : This SID for TACAN equipped aircraft only.

HOKTA EAST FIVE DEPARTURE

RWY 03R/03L : Climb via RWY HDG until 1.0NM from RWY end/HUC 1.4DME,
turn right within 5.0NM....

RWY 21R/21L : Turn left within 6.0NM....

....climb via HUC R091 to HUC 27.0DME, turn left via HUC 27.0DME
counterclockwise ARC to HOKTA.

Cross HUC R091/23.0DME at or below 8000FT, cross HOKTA at or
above 11000FT.

Note1 : Take off RWY 21R/21L, cross HUC R130 at or below 5000FT.

Note2 : This SID for TACAN equipped aircraft only.

MATSUSHIMA TRANSITION

From over HOKTA, via CVT R015 to CVT 59.0DME, MXT R195 to MXT TACAN.

Cross CVT R015/59.0DME (MXT R195/103.0DME) at assigned altitude.

Note CVT R015/59.0DME (MXT R195/103.0DME) : MXT MRA 12000FT.

DAIGO TRANSITION

From over HOKTA, via CVT R015 to DAPPE, via GOT R117 to GOT TACAN.

CHANGE : Course FM DAPPE to GOT.

STANDARD DEPARTURE CHART - INSTRUMENT

RJAH / HYAKURI

SID and TRANSITION



STANDARD DEPARTURE CHART - INSTRUMENT

RJAH / HYAKURI

SID and TRANSITION

DAPPE ONE DEPARTURE

RWY 03R/03L : Climb via RWY HDG until 1.0NM from RWY end/HUC 1.4DME,
turn right within 5.0NM....

RWY 21R/21L : Turn left within 6.0NM....

....climb via HUC R055 to DAPPE.

Cross HUC R055/31.0DME at or below 10000FT.

Note1 : Take off RWY 21R/21L, cross HUC R130 at or below 5000FT.

Note2 : This SID for TACAN equipped aircraft only.

CHOSHI TRANSITION

From over DAPPE, via CVT R015 to CVT TACAN via ANKOH.

Cross ANKOH at or above FL170.

HYAKURI TRANSITION

From over DAPPE, via CVT R015 to ANKOH, via HUC R089 to HUC VORTAC.

Cross ANKOH at or above FL170.

CHANGE: ANKOH established

STANDARD DEPARTURE CHART - INSTRUMENT

RJAH / HYAKURI

SID and TRANSITION

※For TACAN equipped ACFT only.
DAPPE ONE DEPARTURE

1.0NM FM RWY end/
D1.4 HUC

VORTAC
HYAKURI
113.3 HUC
CH-80X
36°11'13"N/140°24'49"E
200 FT

DAPPE ONE DEPARTURE

10000
D31.0 HUC

055°

DAPPE
R055/D34.7 HUC
R015/D51.6 CVT

5.0NM

5000

6.0NM

R130

HYAKURI TRANSITION

269°

CHOSHI TRANSITION

ANKOH
FL170
R015/D31.3 CVT
R089/D23.2 HUC

195°

TACAN
CHOSHI
1170 CVT
CH-83X
35°43'36"N/140°48'00"E
200FT

CHANGE: ANKOH established

STANDARD DEPARTURE CHART - INSTRUMENT



STANDARD DEPARTURE CHART - INSTRUMENT

RJAHH / HYAKURI

RNAV SID

HITAKA ONE DEPARTURE

RWY03L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	028 (019.8)	-7.8	-	-	+600	-	-	RNAV1
002	DF	LICEN	-	-	-7.8	-	-	-7000	-	-	RNAV1
003	TF	OGITU	-	032 (024.6)	-7.8	22.0	-	-10000	-	-	RNAV1

RWY21R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	208 (199.8)	-7.8	-	-	+600	-	-	RNAV1
002	DF	H1R00	-	-	-7.8	-	R	-3000	-	-	RNAV1
003	TF	LICEN	-	067 (059.5)	-7.8	8.5	-	-7000 +4000	-	-	RNAV1
004	TF	OGITU	-	032 (024.6)	-7.8	22.0	-	-10000	-	-	RNAV1

CHANGE : New PROC.

STANDARD ARRIVAL CHART -INSTRUMENT

RJAH / HYAKURI

STAR

DAIGO ARRIVAL

From over GOT TACAN, proceed via GOT R121 to JYUOH,
turn right via HUC 30.0DME clockwise ARC to intercept and
proceed via HUC R080 to TAIYO.

Cross JYUOH at or above 6000FT.


CHANGE : Course, DIST FM GOT to JYUOH.



STANDARD ARRIVAL CHART -INSTRUMENT

RJAH / HYAKURI

RNAV STAR

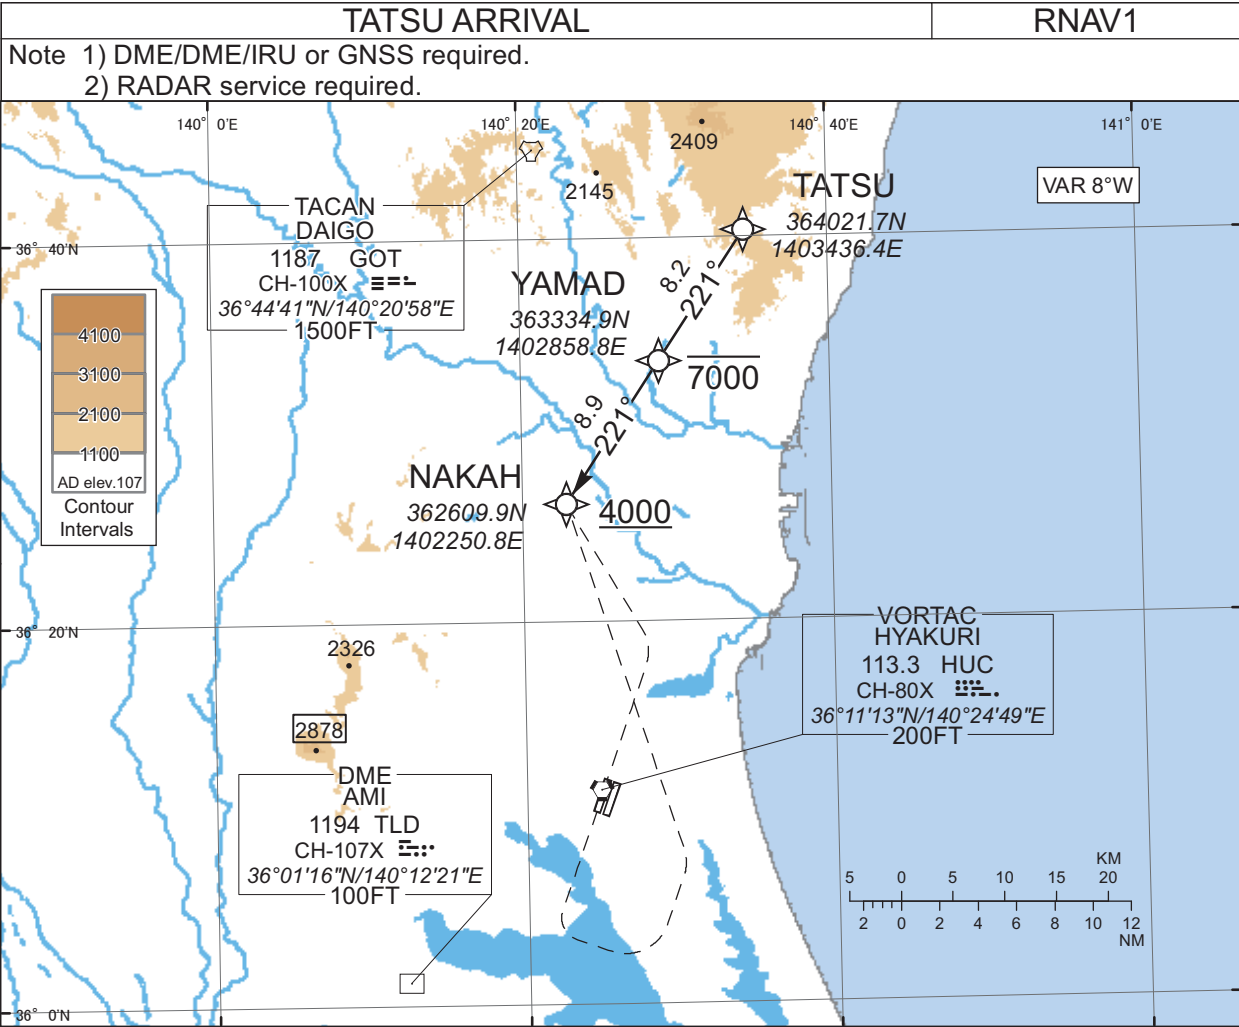

From TATSU, to YAMAD at or below 7000FT, to NAKAH at or above 4000FT.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	TATSU	-	-	-7.8	-	-	-	-	-	RNAV1
002	TF	YAMAD	-	221 (213.7)	-7.8	8.2	-	-7000	-	-	RNAV1
003	TF	NAKAH	-	221 (213.6)	-7.8	8.9	-	+4000	-	-	RNAV1

CHANGE : Description of VAR and PROC name.

RJAH / HYAKURI

ILS Z or LOC Z RWY03R


MINIMA							THR elev. 107		AD elev. 107	
CAT	CAT I		LOC		CIRCLING					
	DA(H)	RVR/ CMV	MDA(H)	RVR/ CMV	MDA(H)	VIS				
A	307 (200)	750	520 (413)	900	580 (473)	1600				
B				1000						
C					660 (553)	2400				
D						1400	3200			

CHANGE : MDA(H) for LOC.


RJAH / HYAKURI

ILS Y or LOC Y RWY03R

HYAKURI APP 120.1 - 123.875 305.7 - 362.3	ILS - LOC 109.3 IHY ILS-GP 332.0 ILS-DME CH-30X	HYAKURI TWR 118.025- 126.2 236.8 - 323.8 119.5G - 275.8G	RADAR AVBL
---	--	---	------------

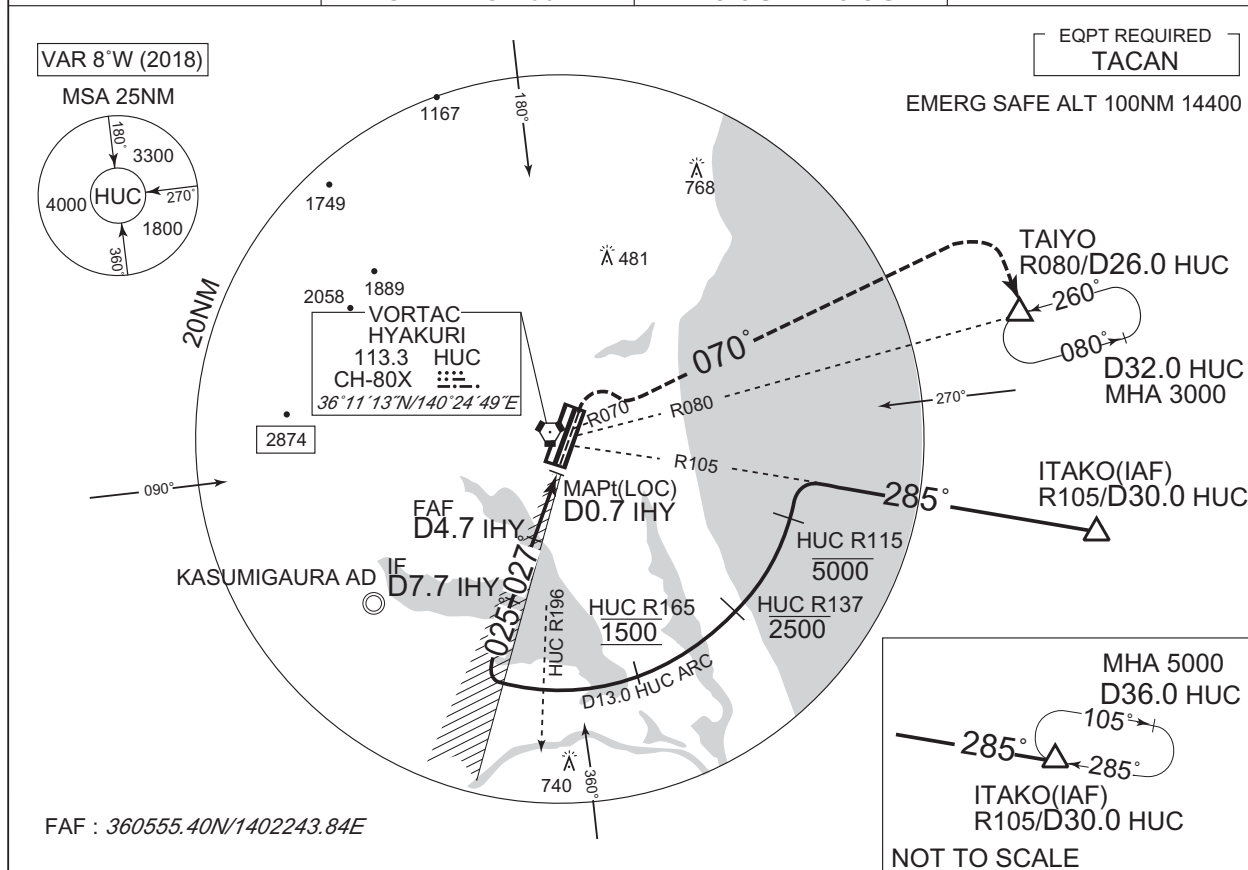

MISSED APPROACH
Climb on HDG027° to 600FT,
turn right climb to 3000FT via
HUC R070, via HUC 26.0DME
clockwise ARC to TAIYO and
hold.
Contact HYAKURI APP.

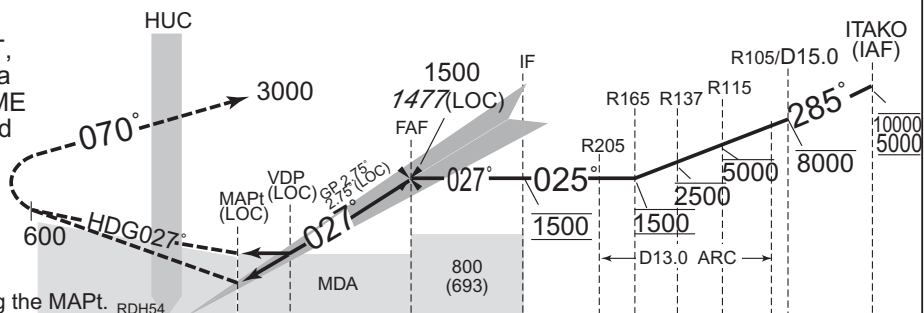

	DME to IHY	0.7	1.4	4.7	7.7
	NM to THR	0.5	1.2	4.5	7.5

CHANGE : MDA(H) for LOC.

MINIMA		THR elev. 107		AD elev. 107		
CAT	CAT I		LOC		CIRCLING	
	DA(H)	RVR/ CMV	MDA(H)	RVR/ CMV	MDA(H)	VIS
A	307 (200)	750	520 (413)	900	580 (473)	1600
B				1000		
C					1400	660 (553)
D				3200		

INSTRUMENT APPROACH CHART



INSTRUMENT APPROACH CHART

RJAHA / HYAKURI

ILS W or LOC W RWY03R

HYAKURI APP
120.1 - 123.875
305.7 - 362.3ILS - LOC
109.3 IHY 332.0
ILS-GP 332.0
ILS-DME CH-30XHYAKURI TWR
118.025- 126.2
236.8 - 323.8
119.5G - 275.8G


RADAR AVBL

VAR 8°W (2018)


MSA 25NM

EQPT REQUIRED
TACAN

EMERG SAFE ALT 100NM 14400

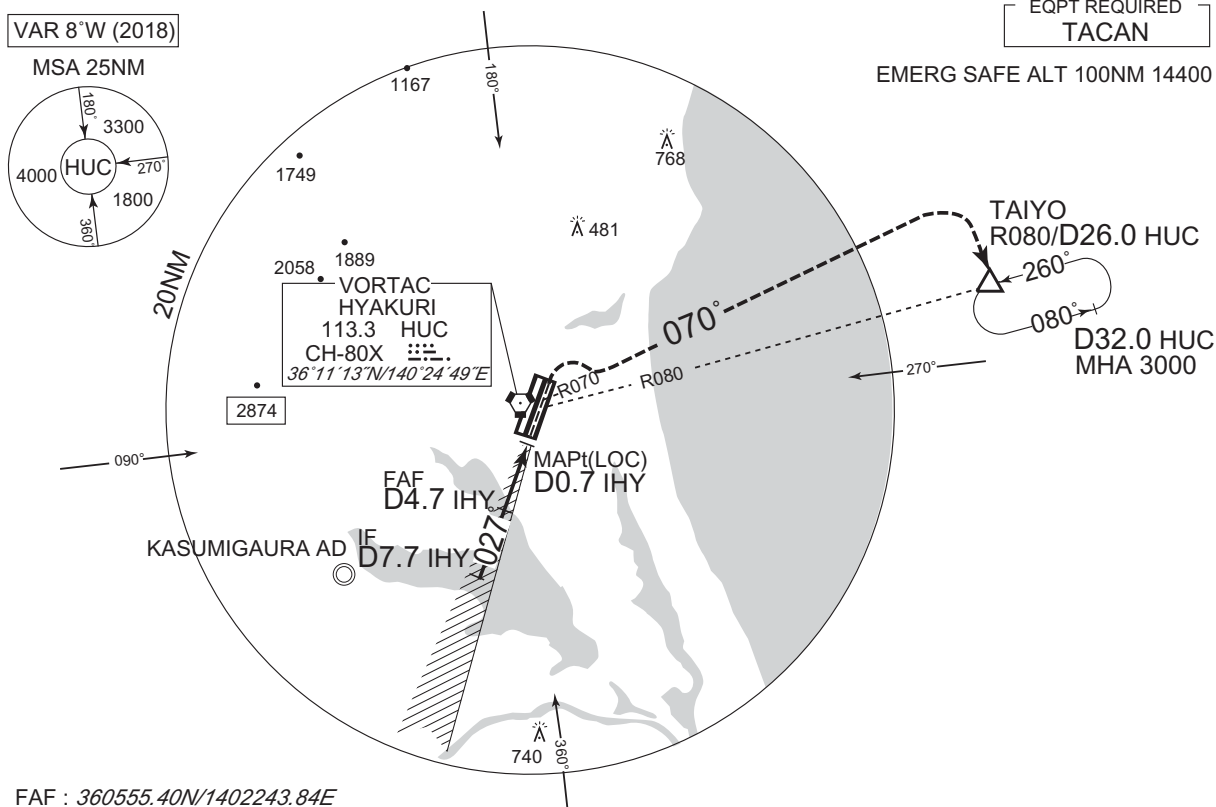

MISSED APPROACH
Climb on HDG027° to 600FT,
turn right climb to 3000FT
via HUC R070, via HUC 26.0DME
clockwise ARC to TAIYO and hold.
Contact HYAKURI APP.

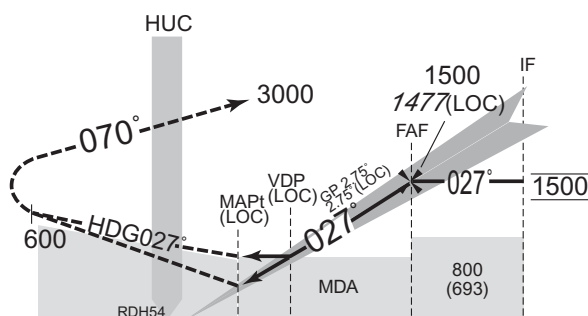

Timing not authorized for defining the MAPt.

DME to IHY	0.7	1.4	4.7	7.7	
NM to THR	0	0.5	1.2	4.5	7.5

CHANGE : MDA(H) for LOC.

MINIMA		THR elev. 107		AD elev. 107		
CAT	CAT I	LOC		CIRCLING		
	DA(H)	RVR/ CMV	MDA(H)	RVR/ CMV	MDA(H)	VIS
A	307 (200)	750	520 (413)	900	580 (473)	1600
B				1000		
C				1400	660 (553)	2400
D						3200

INSTRUMENT APPROACH CHART

RJAH / HYAKURI

VOR RWY03R




INSTRUMENT APPROACH CHART

RJAH / HYAKURI

VOR RWY03L

HYAKURI APP 120.1 - 123.875 305.7 - 362.3	HYAKURI VORTAC 113.3 HUC CH-80X 36°11'13"N/140°24'49"E	HYAKURI TWR 118.025- 126.2 236.8 - 323.8 119.5G - 275.8G	RADAR AVBL
---	---	---	------------

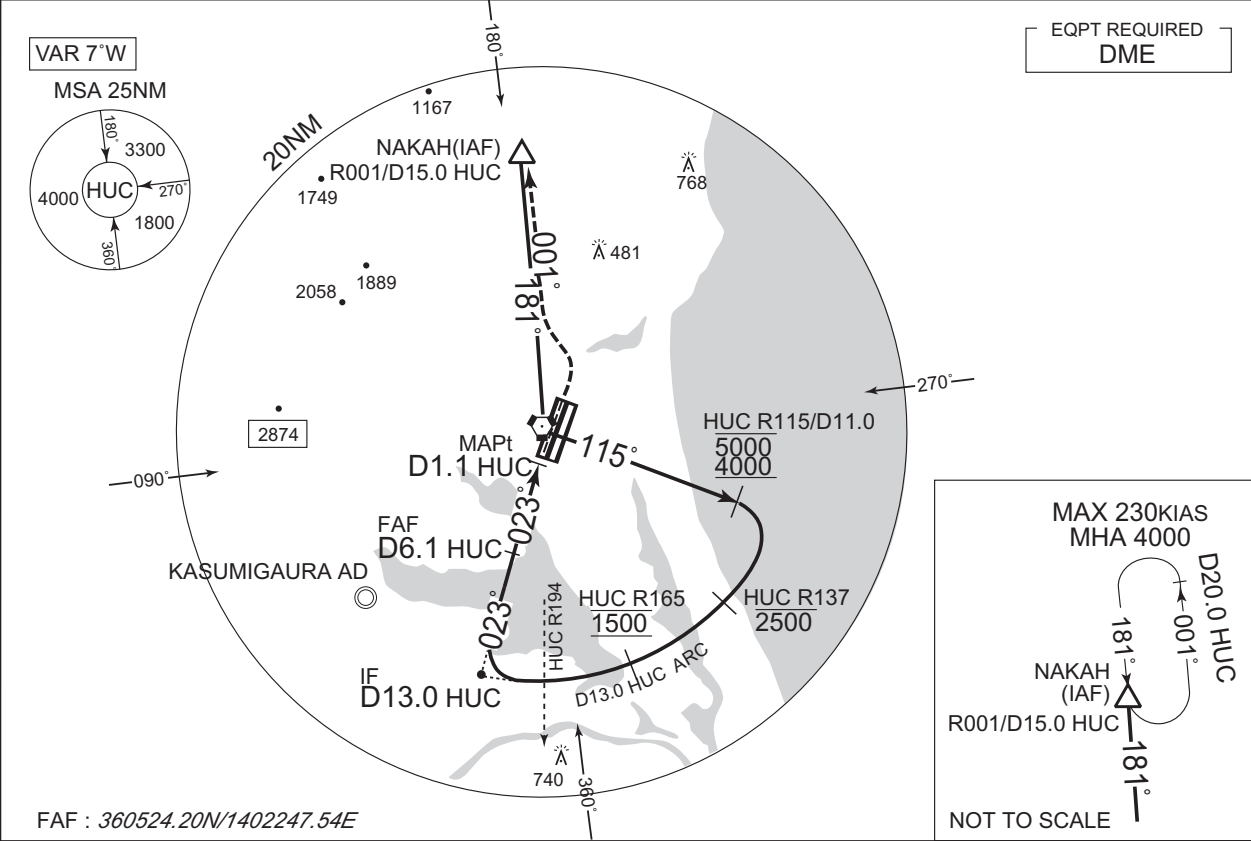

MISSED APPROACH		NAKAH (IAF) 7000 4000	HUC	R115/D11.0 5000 4000
Turn left, climb to 4000FT via HUC R001 to NAKAH and hold. Contact HYAKURI APP.		181°	115°	
Timing not authorized for defining the MAPt.		4000	1500	1500
		MAPt	VDP 2.15°	IF
		MDA	700 (593)	D13.0 ARC
		DME to HUC	1.1 2.4 5.7 6.1 13.0	
		NM to THR	0 1.3 4.6 5.0 11.9	

CHANGE : Description of VAR.

MINIMA		THR elev. 107	AD elev. 107
CAT			CIRCLING
	MDA(H)	RVR/CMV	MDA(H) VIS
A	520 (413)	1200	580 (473) 1600
B		1300	
C		1400	2400
D		1600	660 (553) 3200

RJAH / HYAKURI

VOR RWY21L

VAR 7°W

MSA 25NM

HUC

MAX 230KIAS

MHA 4000

20NM

NAKAH(IAF)

R001/D15.0 HUC

D15.0 HUC

IF

D11.0 HUC

FAF

D5.5 HUC

MAPt

D1.0 HUC

KASUMIGAURA AD


EQPT REQUIRED

DME

FAF : 361601.00N/1402813.67E

Turn right, climb on HDG 046° to intercept and proceed via HUC R001 to NAKAH and hold at 4000FT. Contact HYAKURI APP.


Timing not authorized for defining the MAPt.

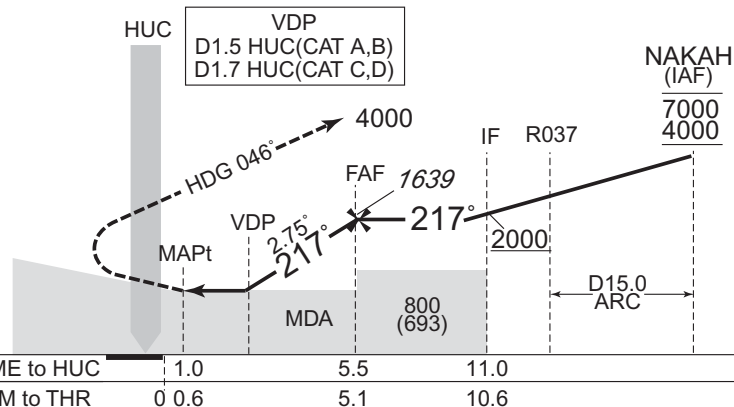


MINIMA		THR elev. 107	AD elev. 107	
CAT			CIRCLING	
	MDA(H)	RVR/ CMV	MDA(H)	VIS
A	480 (373)	900	580 (473)	1600
B	490 (383)	1000		
C	520 (413)			2400
D	540 (433)	1400	660 (553)	3200

CHANGE : Description of VAR. OBST added(790FT).

INSTRUMENT APPROACH CHART

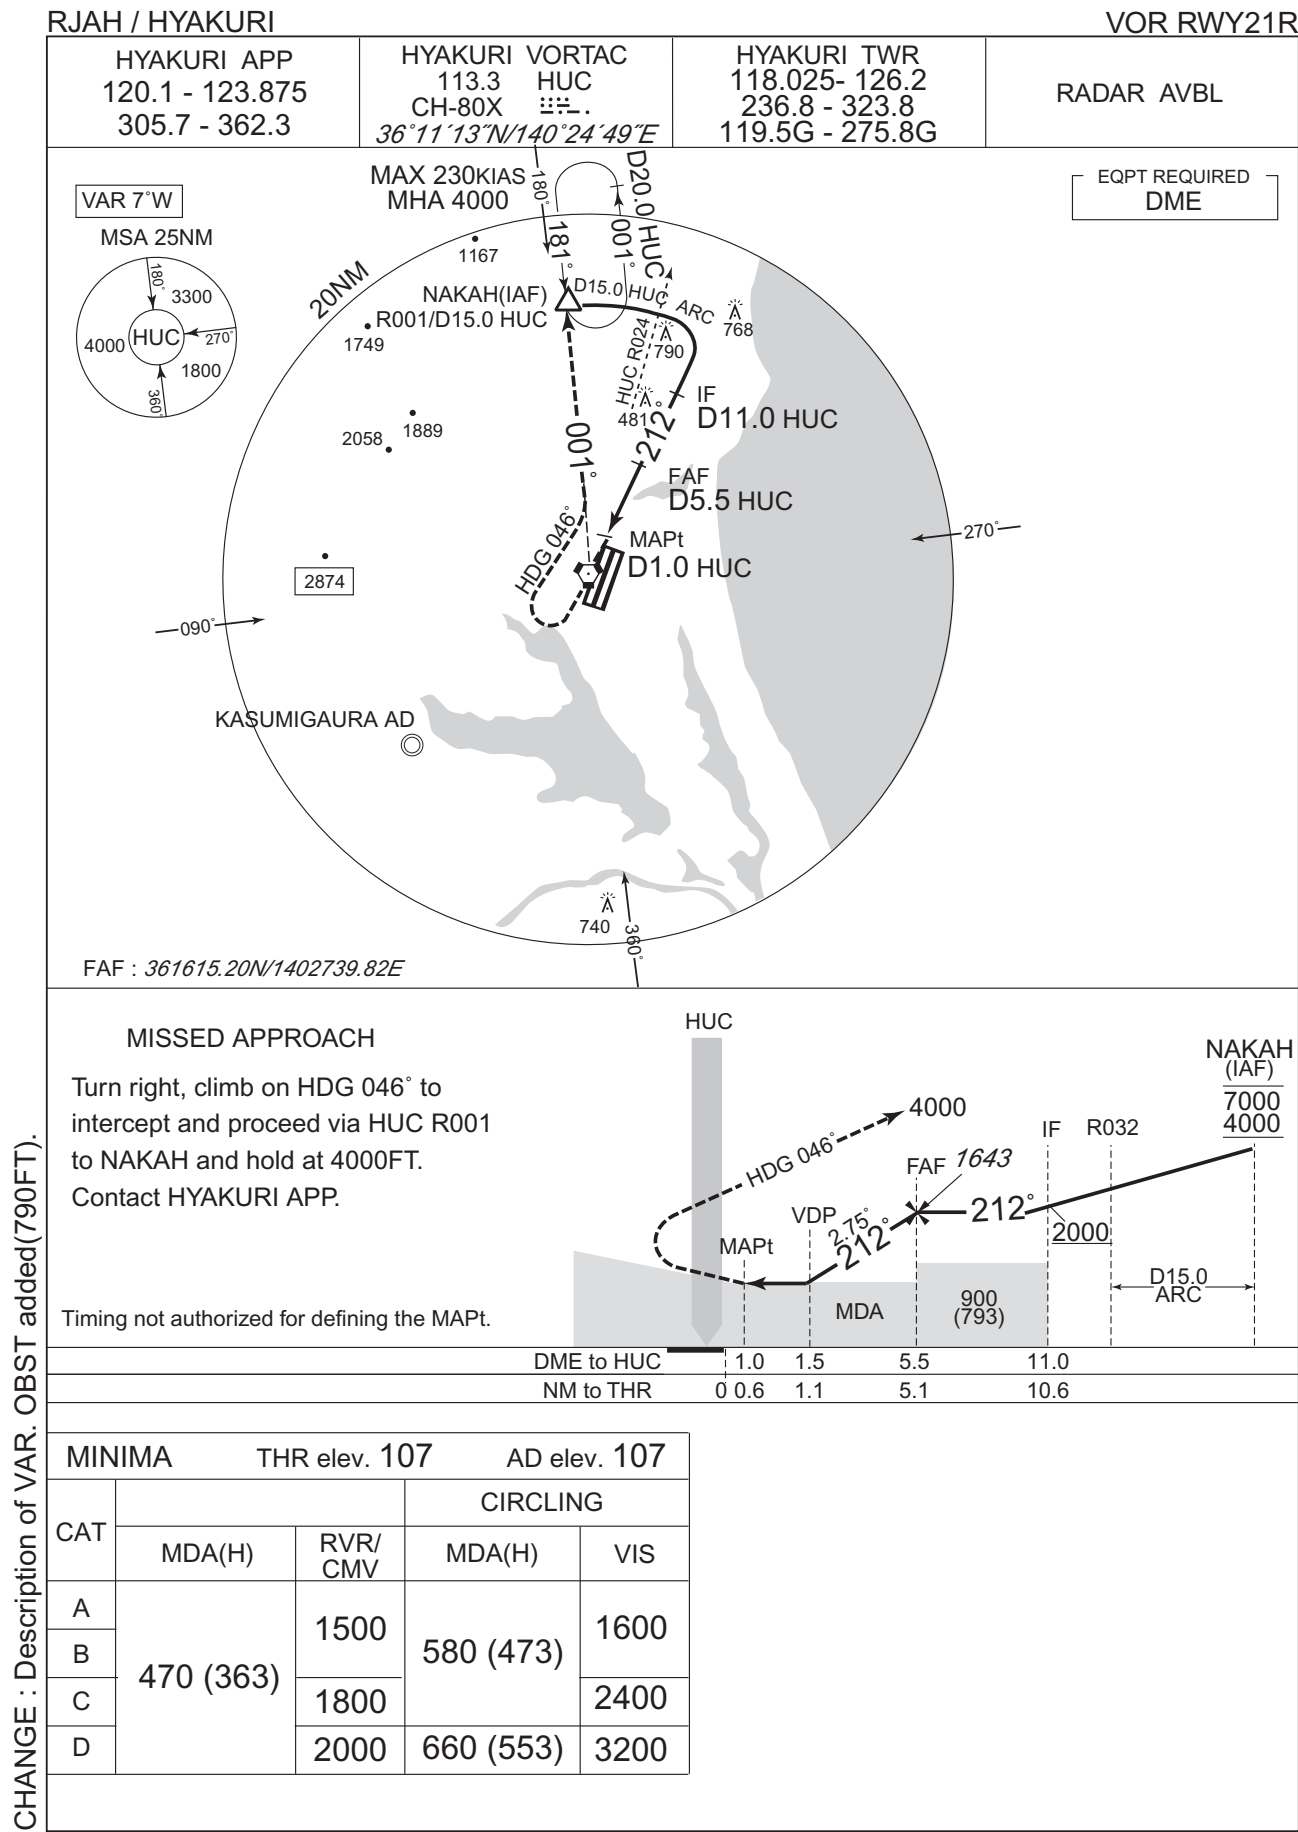


INSTRUMENT APPROACH CHART

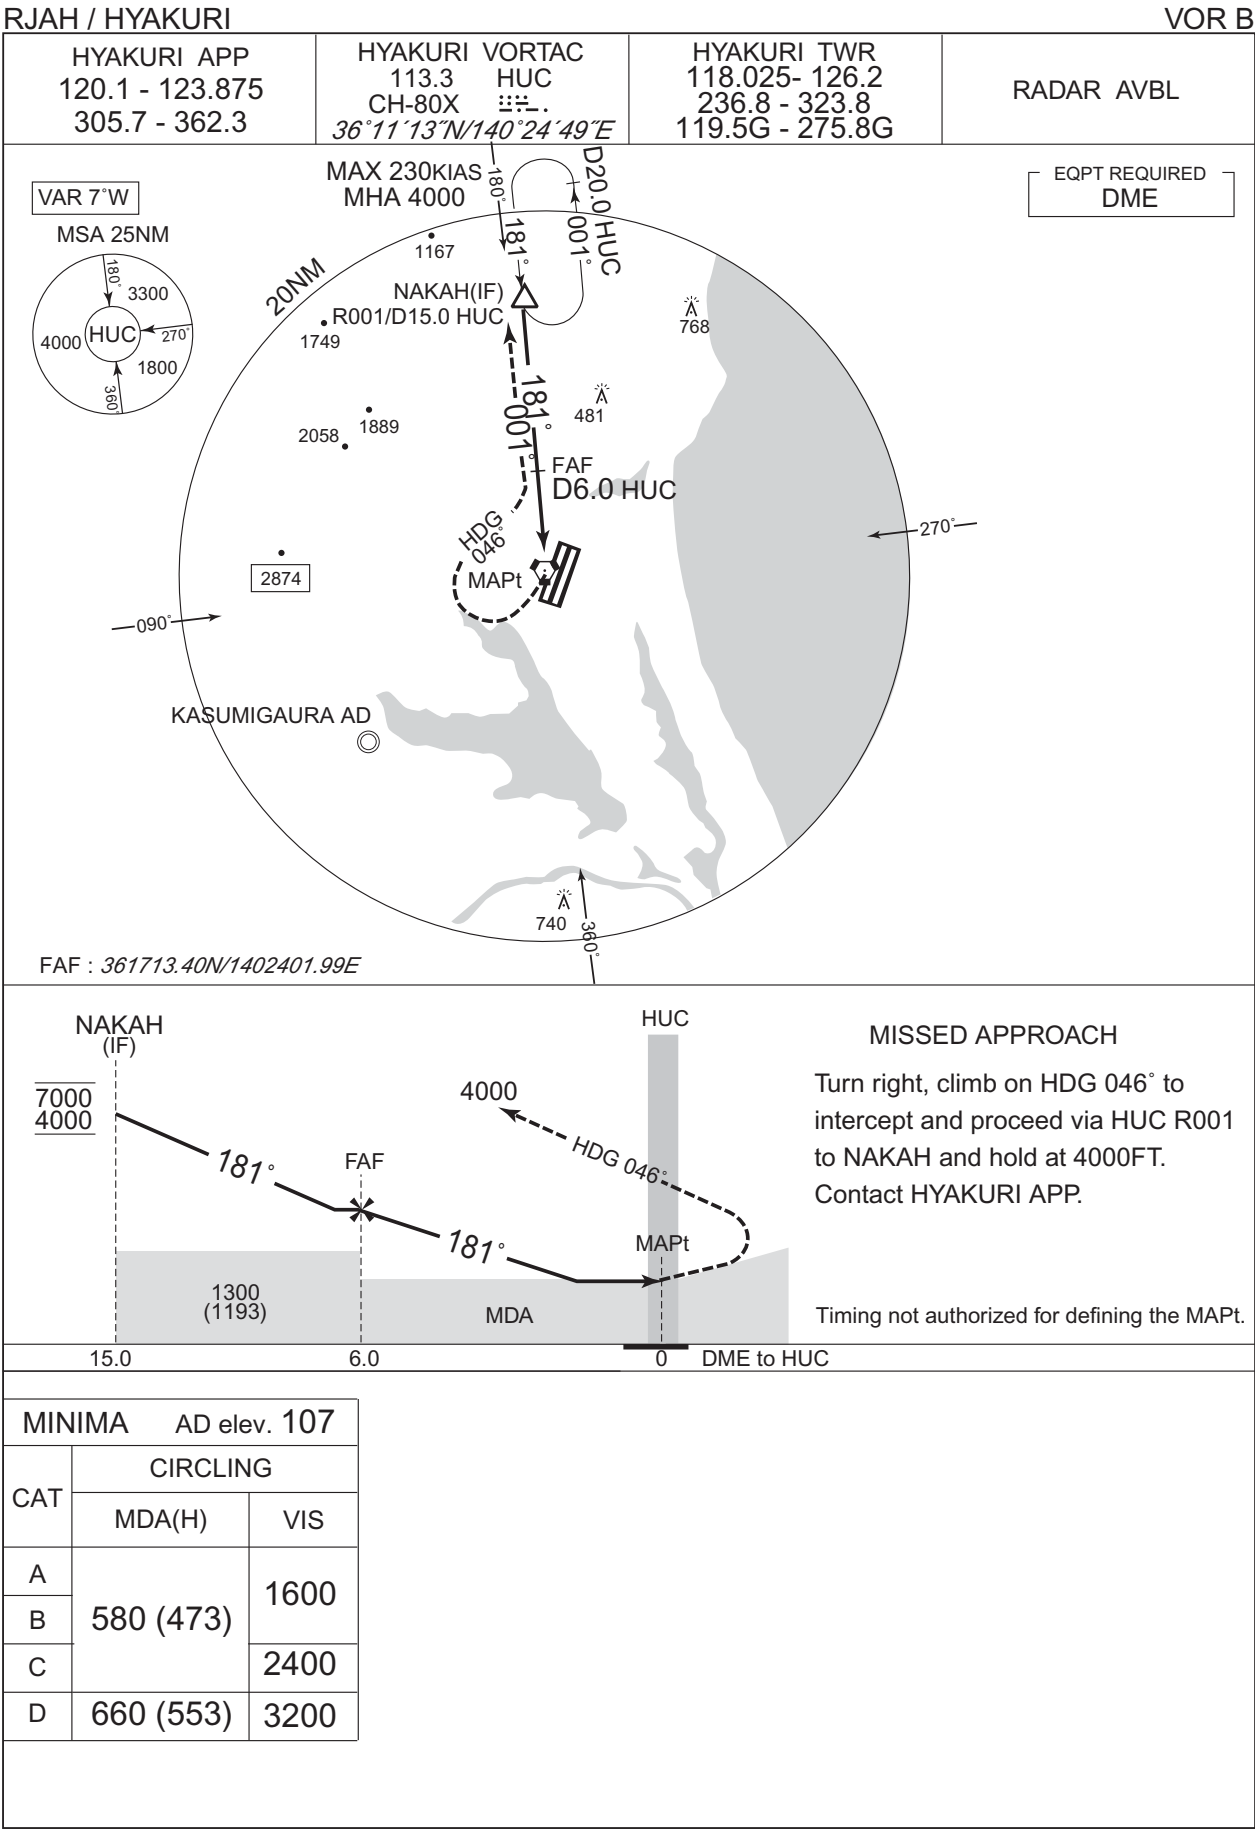


RJAH / HYAKURI

HYAKURI APP
120.1 - 123.875
305.7 - 362.3

HYAKURI VORTAC
113.3 HUC 
CH-80X
36°11'13"N/140°24'49"E


HYAKURI TWR
118.025- 126.2
236.8 - 323.8
119.5G - 275.8G

RADAR AVBL




- EQPT REQUIRED

MSA 25NM



EMERG SAFE ALT 100NM 14400

2.1DME prior to HUC TACAN, right climbing turn to 3000FT via HUC R070, via HUC 26.0DME clockwise ARC to TAIYO and hold. Contact HYAKURI APP.

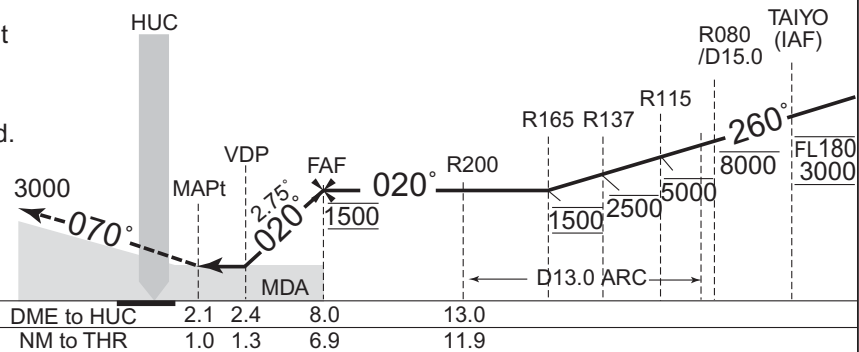

MINIMA		THR elev. 107	AD elev. 107	
CAT			CIRCLING	
	MDA(H)	RVR/ CMV	MDA(H)	VIS
A	540 (433)	1000	580 (473)	1600
B		1200		
C			660 (553)	2400
D				1600

Civil Aviation Bureau, Japan (EFF:2 NOV 2023)

INSTRUMENT APPROACH CHART

RJAH / HYAKURI

TACAN Y RWY03R




CHANGE : DME to HUC at VDP. NM to THR at VDP.


INSTRUMENT APPROACH CHART

RJAH / HYAKURI

TACAN Z RWY03L

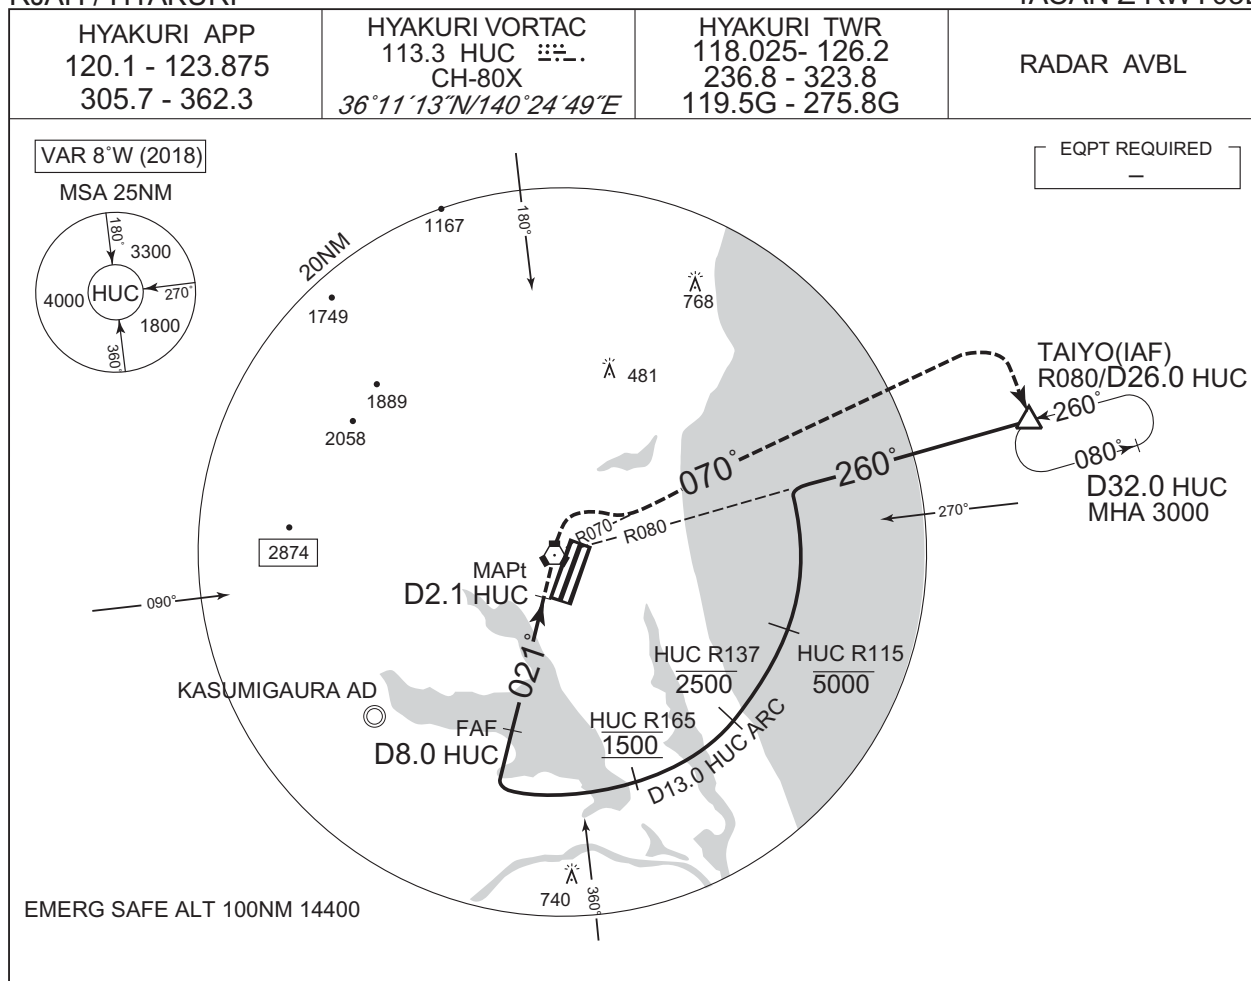

MISSED APPROACH
 2.1DME prior to HUC TACAN, right climbing turn to 3000FT via HUC R070, via HUC 26.0DME clockwise ARC to TAIYO and hold. Contact HYAKURI APP.

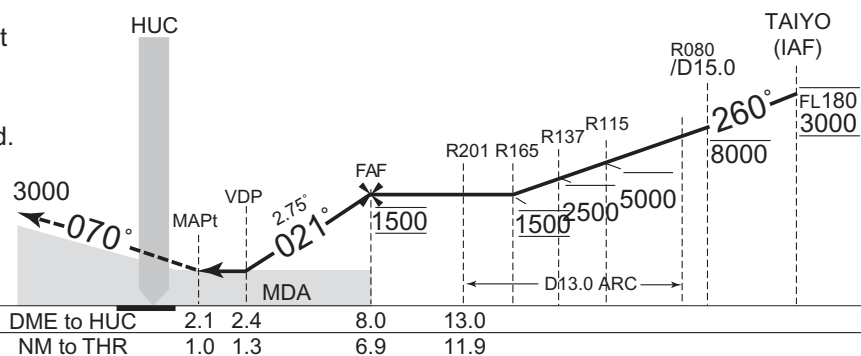

MINIMA THR elev. 107 AD elev. 107


CAT			CIRCLING	
	MDA(H)	RVR/CMV	MDA(H)	VIS
A	540 (433)	1400	580 (473)	1600
B		1500		
C		1600	660 (553)	2400
D		1800		

CHANGE : DME to HUC at VDP. NM to THR at VDP.

INSTRUMENT APPROACH CHART

RJAH / HYAKURI

TACAN Y RWY03L

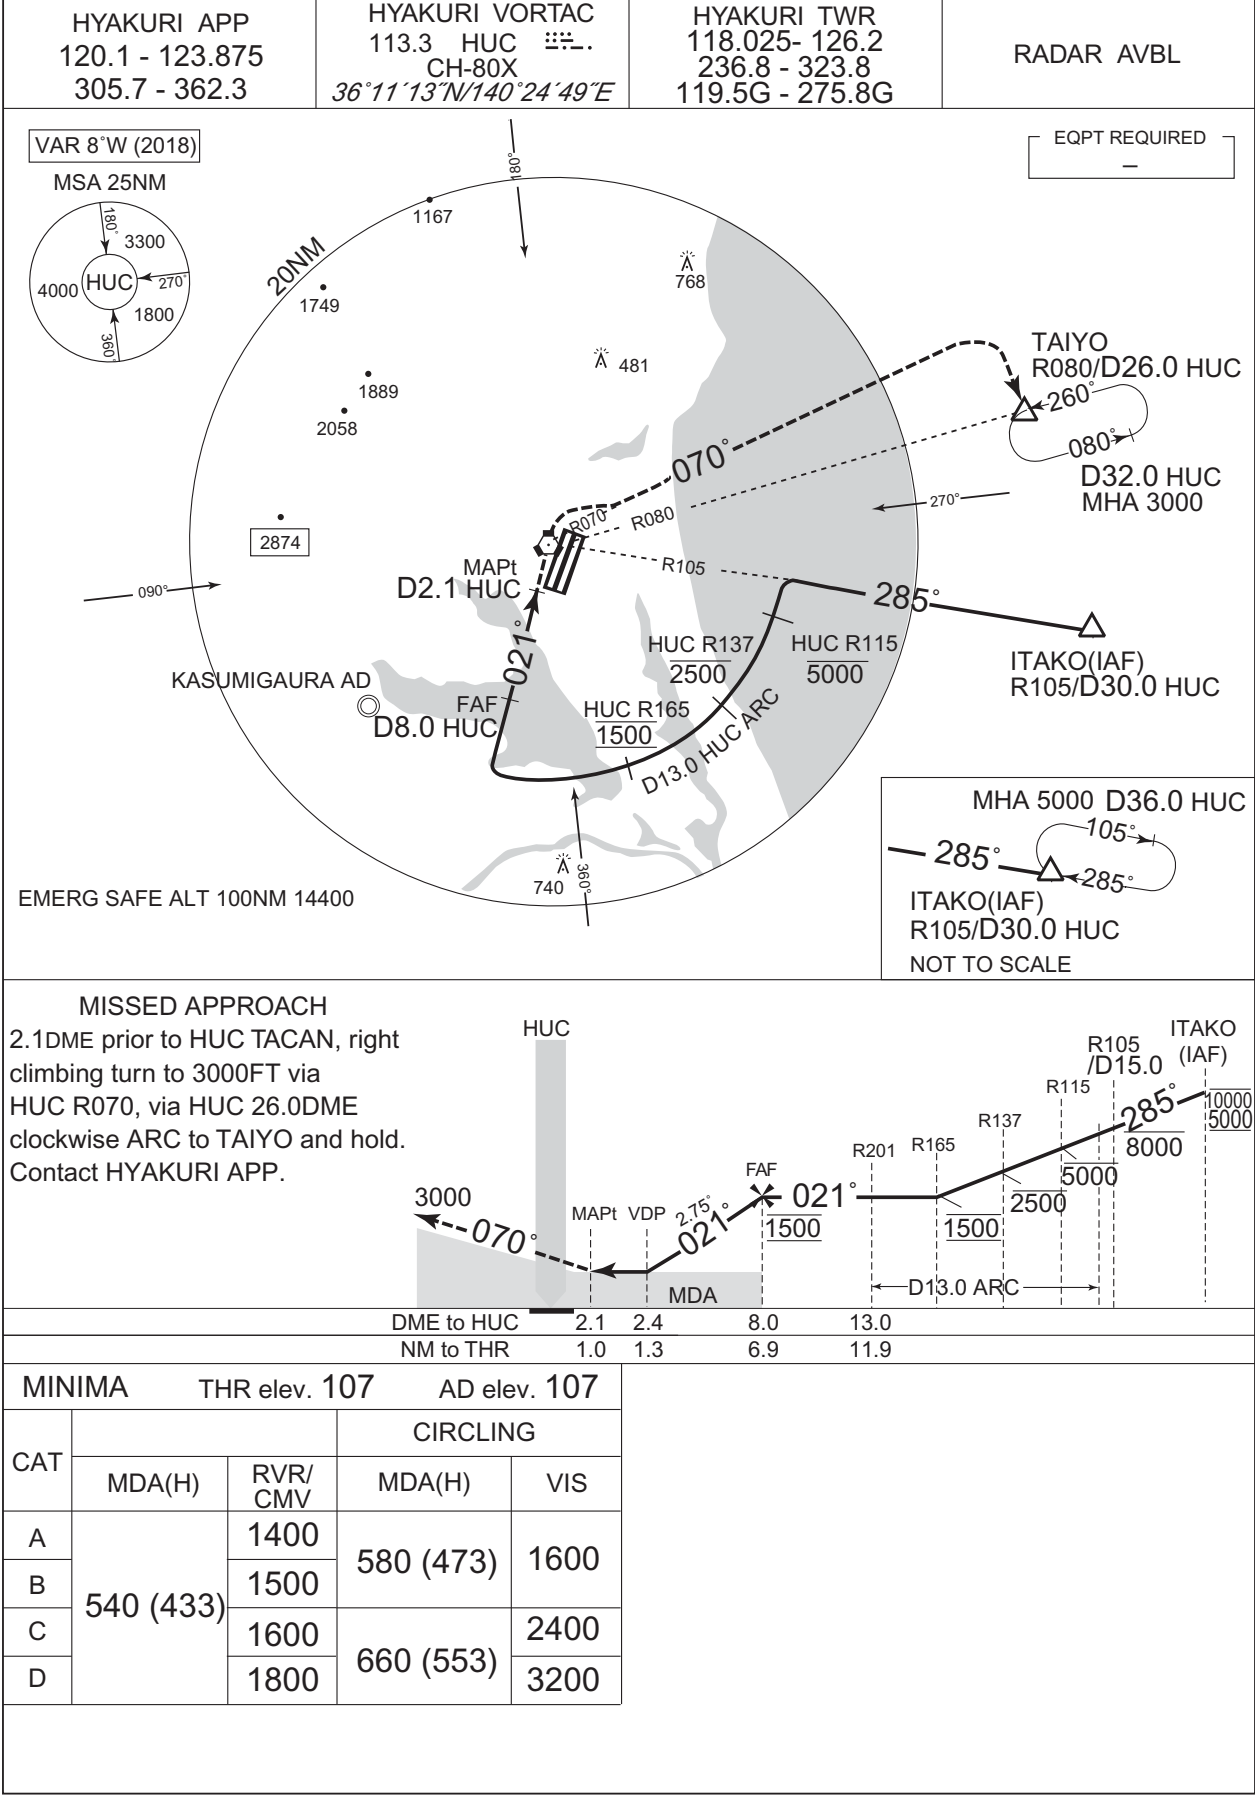

CHANGE : DME to HUC at VDP. NM to THR at VDP.

INSTRUMENT APPROACH CHART

RJAH / HYAKURI


TACAN Z RWY21L

HYAKURI APP 120.1 - 123.875 305.7 - 362.3	HYAKURI VORTAC 113.3 HUC Ⅲ CH-80X 36°11'13"N/140°24'49"E	HYAKURI TWR 118.025- 126.2 236.8 - 323.8 119.5G - 275.8G	RADAR AVBL
---	---	---	------------



MISSED APPROACH

1.0DME prior to HUC TACAN, left climbing turn to 3000FT via HUC R070, via HUC 26.0DME clockwise ARC to TAIYO and hold.
Contact HYAKURI APP.

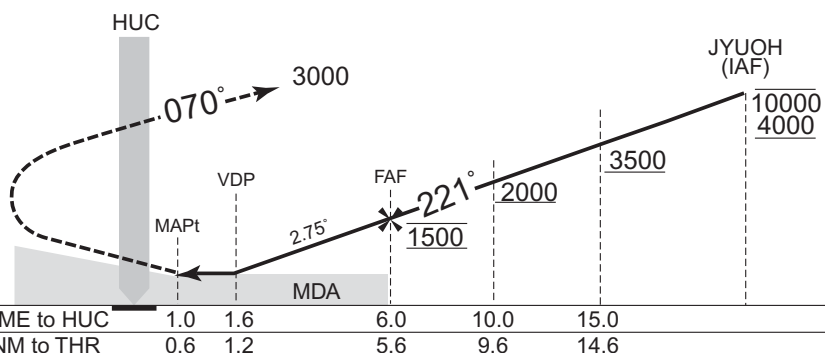


MINIMA THR elev. 107 AD elev. 107

CAT			CIRCLING	
	MDA(H)	RVR/ CMV	MDA(H)	VIS
A	500 (393)	900	580 (473)	1600
B		1000		660 (553)
C			1400	
D				

CHANGE : DME to HUC at VDP. NM to THR at VDP.

INSTRUMENT APPROACH CHART

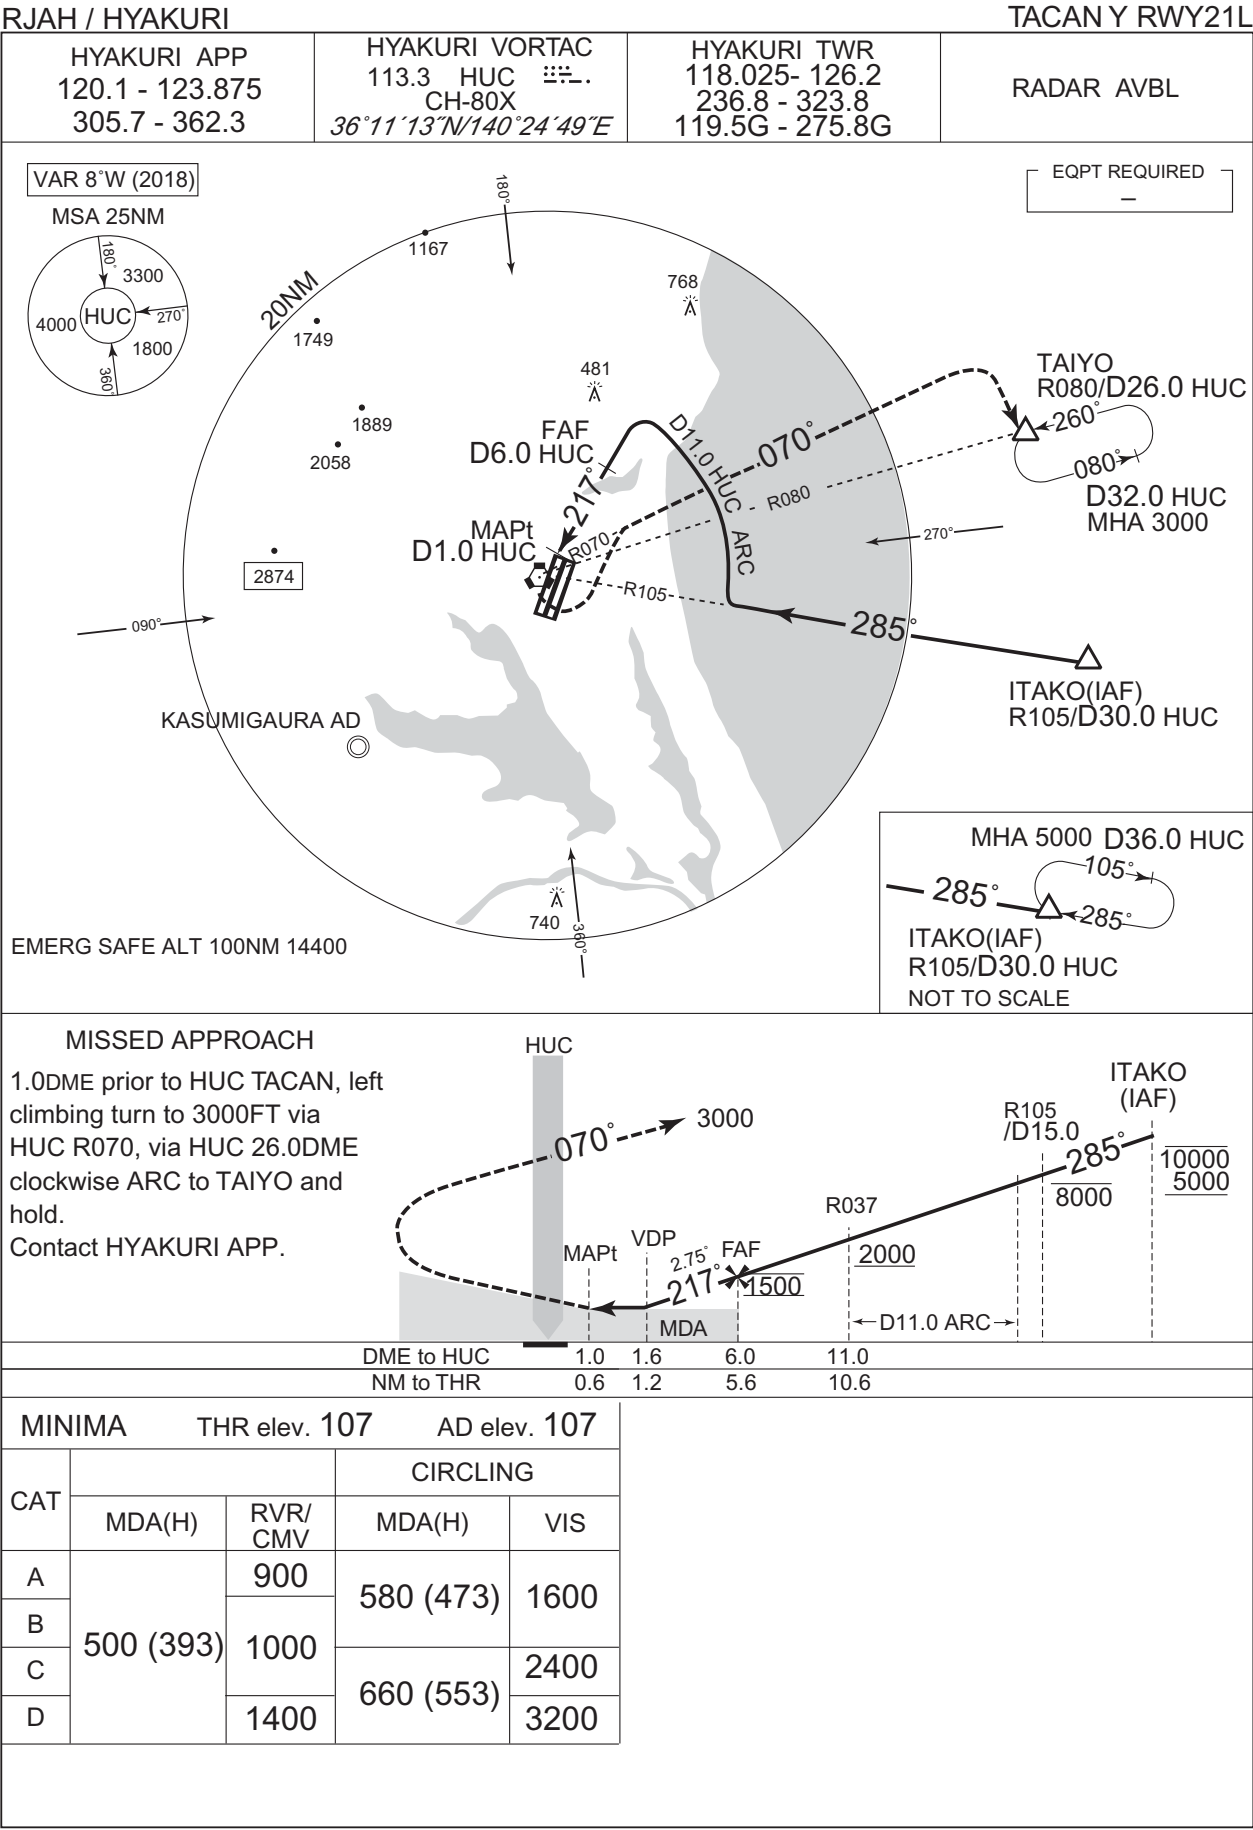

INSTRUMENT APPROACH CHART

RJAH / HYAKURI


TACAN Z RWY21R

HYAKURI APP
120.1 - 123.875
305.7 - 362.3

HYAKURI VORTAC
113.3 HUC 36°11'13"N/140°24'49"E
CH-80X

HYAKURI TWR
118.025- 126.2
236.8 - 323.8
119.5G - 275.8G

RADAR AVBL

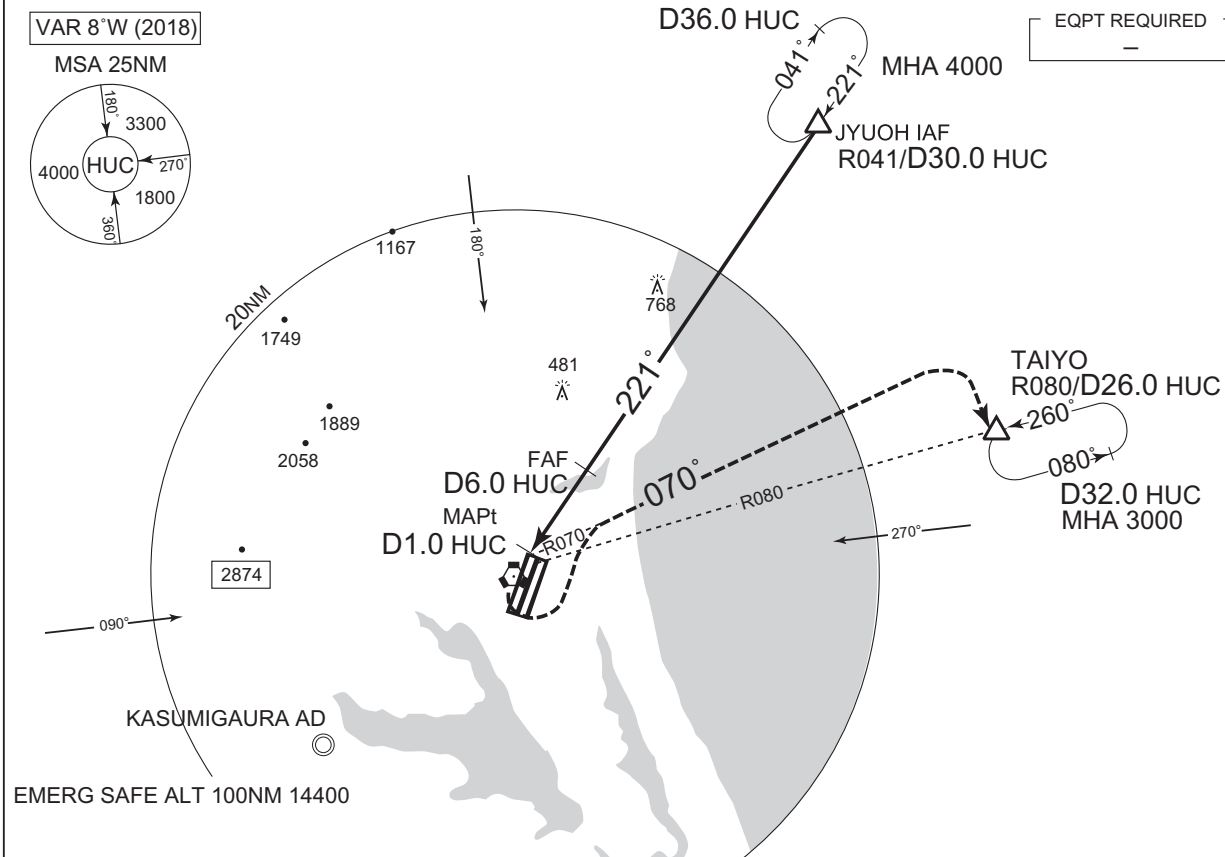

MISSED APPROACH

1.0DME prior to HUC TACAN, left climbing turn to 3000FT via HUC R070, via HUC 26.0DME clockwise ARC to TAIYO and hold.
Contact HYAKURI APP.



MINIMA THR elev. 107 AD elev. 107

CAT			CIRCLING	
	MDA(H)	RVR/ CMV	MDA(H)	VIS
A	500 (393)	1500	580 (473)	1600
B				
C		1800	660 (553)	2400
D		2000		3200

CHANGE : DME to HUC at VDP. NM to THR at VDP.

INSTRUMENT APPROACH CHART

RJAH / HYAKURI TACAN Y RWY21R



CHANGE : DME to HUC at VDP. NM to THR at VDP.

INSTRUMENT APPROACH CHART


RJAH / HYAKURI

TACAN A

HYAKURI APP
120.1 - 123.875
305.7 - 362.3HYAKURI VORTAC
113.3 HUC 113.3
CH-80X
36°11'13"N/140°24'49"EHYAKURI TWR
118.025- 126.2
236.8 - 323.8
119.5G - 275.8G

RADAR AVBL

VAR 8°W (2018)

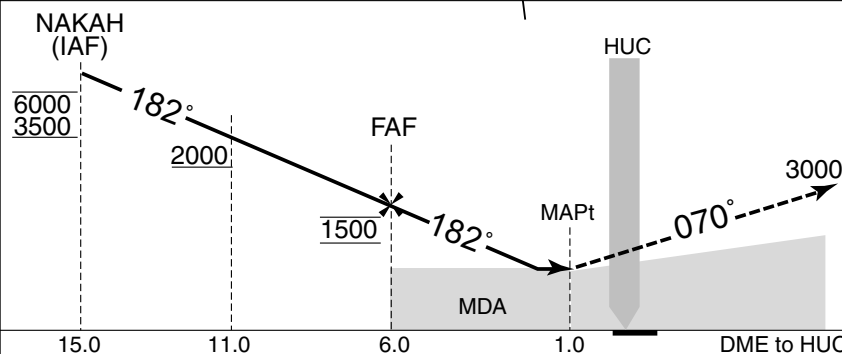EQPT REQUIRED
—

MISSED APPROACH
1.0DME prior to HUC TACAN, left climbing turn to 3000FT via HUC R070, via HUC 26.0DME clockwise ARC to TAIYO and hold.
Contact HYAKURI APP.

MINIMA


AD elev. 107

CAT	CIRCLING	
	MDA(H)	VIS
A	580 (473)	1600
B		
C	660 (553)	2400
D		3200

INSTRUMENT APPROACH CHART

RJAH / HYAKURI

RNP RWY03L

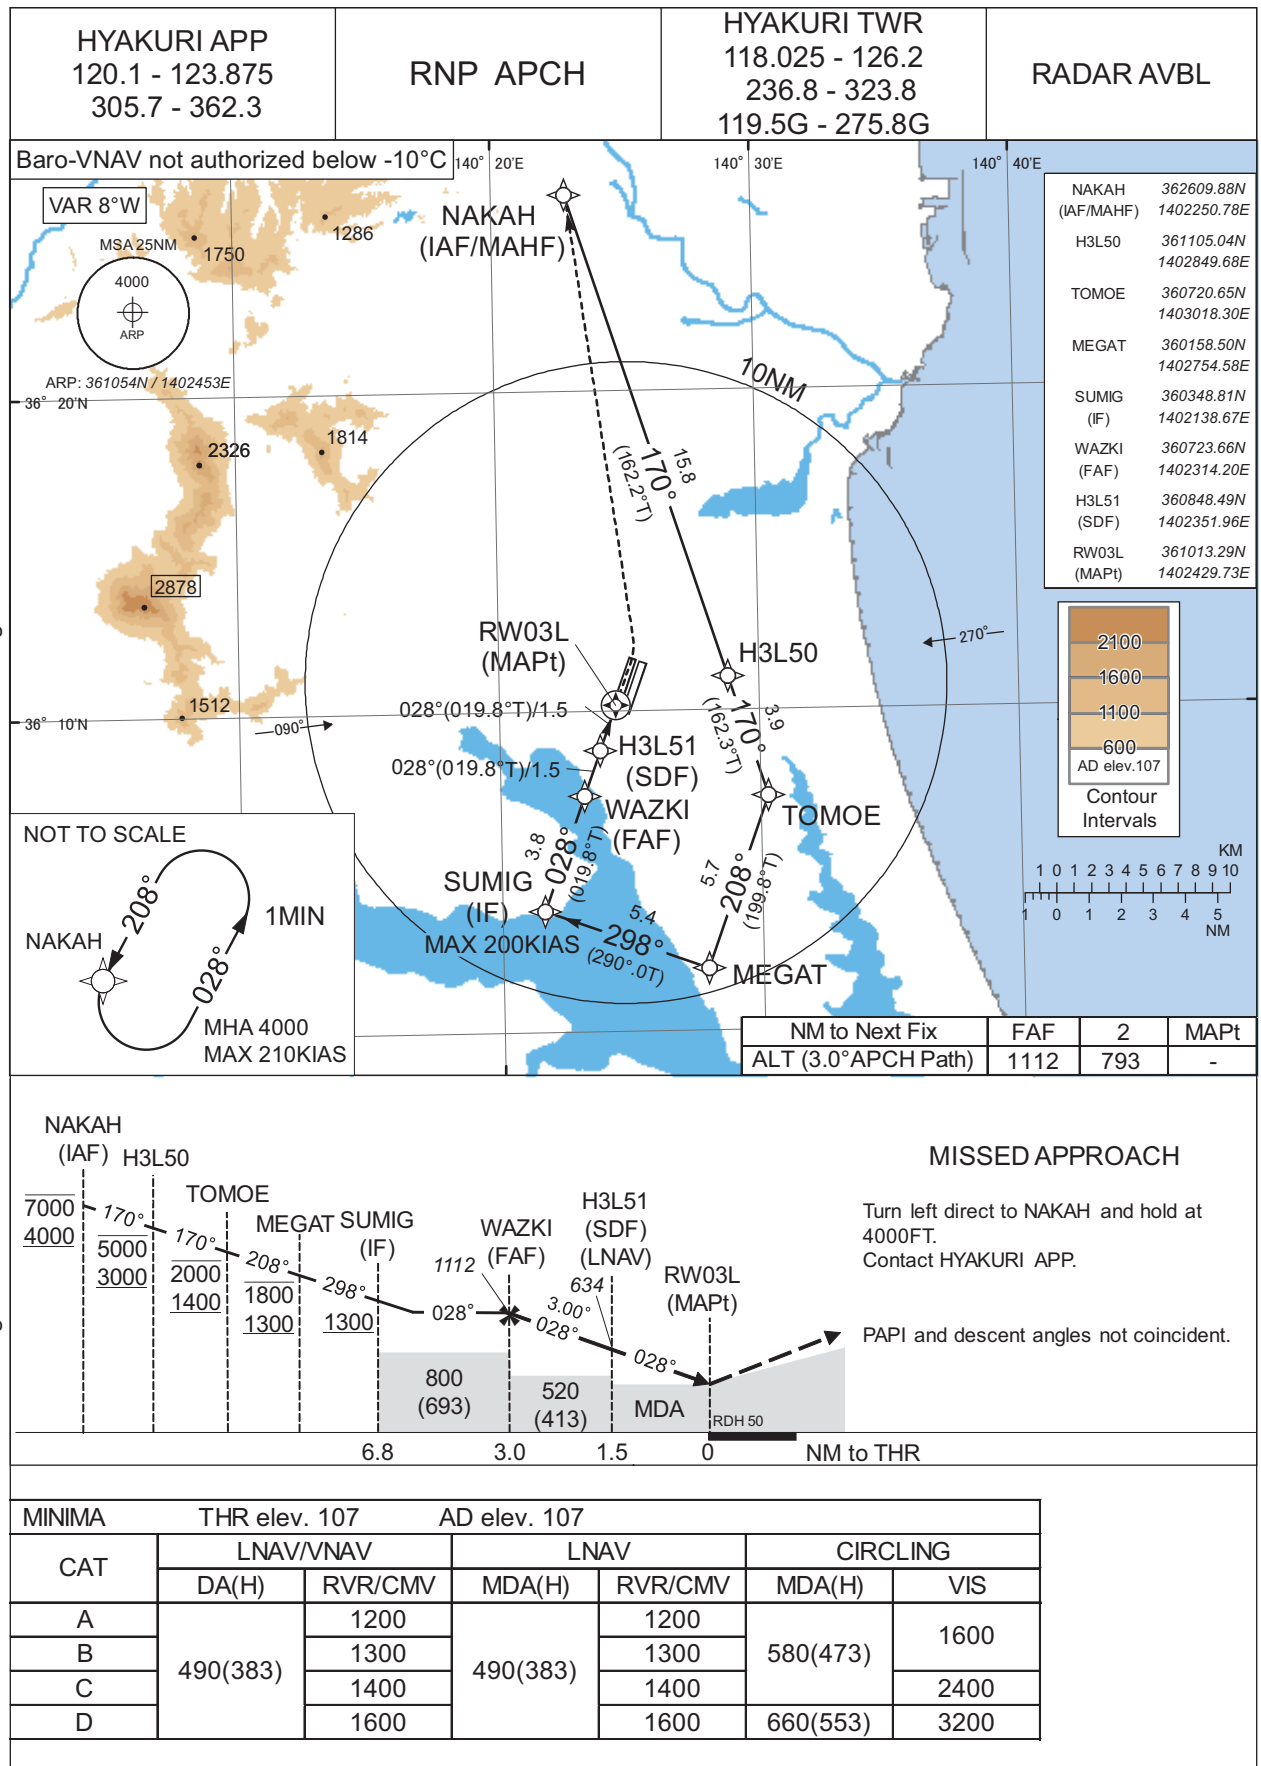

CHANGE : Missed APCH PROC for using VORTAC abolished. RNAV HLDG established. HLDG for using NAVAID abolished.

INSTRUMENT APPROACH CHART

RJAH / HYAKURI

RNP RWY21R

HYAKURI APP 120.1 - 123.875 305.7 - 362.3	RNP APCH	HYAKURI TWR 118.025 - 126.2 236.8 - 323.8 119.5G - 275.8G	RADAR AVBL
---	----------	--	------------



MISSED APPROACH

Turn right direct to NAKAH and hold at 4000FT.
Contact HYAKURI APP.

PAPI and descent angles not coincident.



CAT	THR elev. 107		AD elev. 107			
	LNAV/VNAV		LNAV		CIRCLING	
	DA(H)	RVR/CMV	MDA(H)	RVR/CMV	MDA(H)	VIS
A	500(393)	1500	500(393)	1500	580(473)	1600
B		1800		1800		2400
C	520(413)	2000	520(413)	2000	660(553)	3200

RJAH / HYAKURI

Minimum Vectoring Altitude CHART

VAR 7°W (2010)



- ① 2500
- ② 1500
- ③ 2200
- ④ 3000
- ⑤ 3500

CENTER : 361108N/1402547E (RADAR SITE)