



RJCJ / CHITOSE SID

TOKACHI ONE DEPARTURE

RWY 36R/36L : Climb via RWY HDG to 500ft or above, turn right climb via

HDG 130 DEG to intercept and proceed via....

RWY 18R/18L: Climb via RWY HDG to 500ft or above, turn left climb via


HDG 130 DEG to intercept and proceed via....

... CHE R-088 to BOKSO or CHE R-097 to RAKNO.

Cross CHE R-088/12DME or CHE R-097/12DME

at or below 5,000ft.

Cross CHE R-088/22DME or CHE R-097/22DME between 9,000ft and 11,000ft.

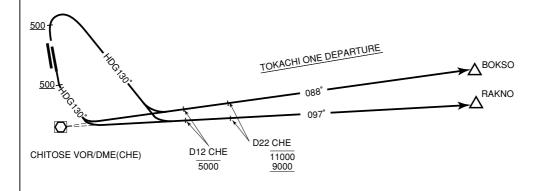

RJCJ / CHITOSE SID

TOBBY SEVEN DEPARTURE

RWY 36R/36L: Climb via RWY HDG to 500ft or above, turn right to CHE VOR/DME within CHE 10DME (5NM FM RWY

end), then via CHE R-185 to TOBBY.

Cross 4DME prior to CHE VOR/DME (MKE R-329) at or above 3,000ft.


Cross CHE R-185/6DME at or above 6,000ft.

Cross CHE R-185/11DME at or above 7,000ft.

RWY 18R/18L: Climb direct to CHE VOR/DME, then via CHE R-185 to TOBBY.

Cross CHE R-185/27DME at or below 11,000ft.

Note: Aircraft unable to comply with the flight restriction, inform ATC for alternate procedure before departure.

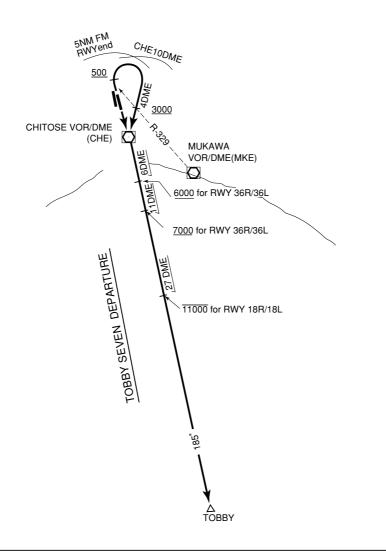

RJCJ / CHITOSE SID

TEKKO NINE DEPARTURE


RWY 36R/36L: Climb via RWY HDG to 500ft or above, turn right to CHE VOR/DME within CHE 10DME (5NM FM RWY end).

Cross 4DME prior to CHE VOR/DME (MKE R-329) at or

above 3.000ft....

RWY 18R/18L : Climb direct to CHE VOR/DME....

....Turn right via CHE R-256 to TEKKO.

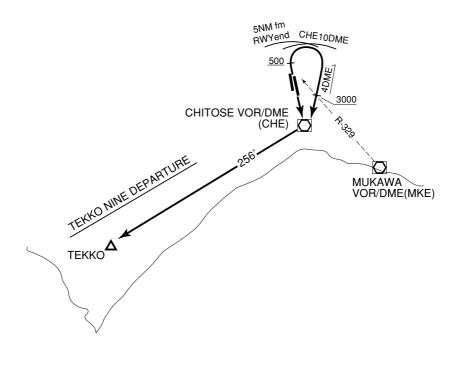

RJCJ / CHITOSE SID

HAKODATE FOUR DEPARTURE

RWY 36R/36L: Climb via RWY HDG to 500ft or above, turn right to CHE

VOR/DME within CHE 10DME (5NM FM RWY end).


Cross 4DME prior to CHE VOR/DME (MKE R-329) at or

above 3,000ft....

RWY 18R/18L: Climb direct to CHE VOR/DME....

....then via CHE R-224 to HWE VOR/DME.

HAKODATE FOUR DEPARTURE

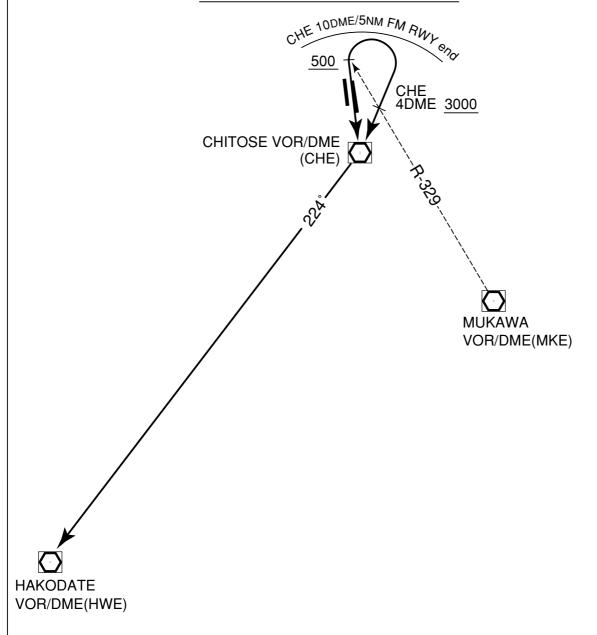

RJCJ / CHITOSE SID

CHITOSE REVERSAL TWO DEPARTURE

RWY 36R/36L: Climb via ZYT R-360, turn right to intercept and proceed via ZYT R-030 to ZYT TACAN within ZYT 25DME.

Cross ZYT R-360 / 15DME at or above 10,000 ft. Cross ZYT R-030 / 5DME at specified altitude.

RWY 18R/18L: Climb via RWY HDG to 500 ft or above, turn left climb via

ZYT R-090 within ZYT 10DME, turn left to intercept and pro-

ceed via ZYT R-060 to ZYT TACAN within ZYT 30DME.


Cross ZYT R-090 / 15DME at or below 11,000 ft.

Cross ZYT R-060 / 5DME at specified altitude.

Note: When take off RWY36L, following climb gradient should be maintained until passing 200ft.

Speed (Knots)	60	120	180	240	300	360
Rate (Feet/Min)	190	380	570	760	950	1140

CHITOSE REVERSAL TWO DEPARTURE

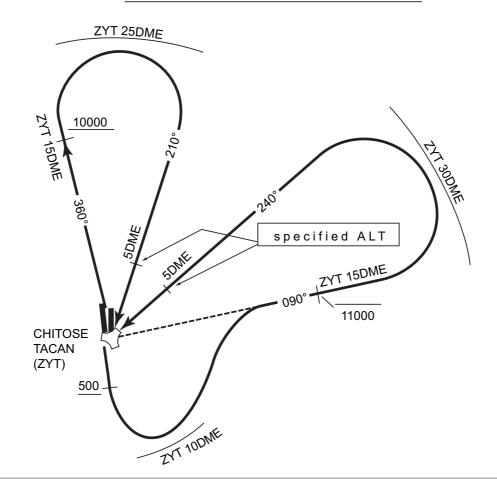

RJCJ / CHITOSE SID

CHITOSE THREE DEPARTURE

RWY 36R/36L: Climb via RWY HDG to 500ft or above, turn right to CHE

VOR/DME (ZYT TACAN) within CHE 10DME (ZYT

6DME/5NM FM RWY end).


Cross 4DME prior to CHE VOR/DME (ZYT TACAN/MKE R-

329) at or above 3,000ft.

RWY 18R/18L: Climb direct to CHE VOR/DME (ZYT TACAN).

Note: When take off RWY36L (in case of using ZYT TACAN only), following climb gradient should be maintained until passing 200ft.

Speed (Knots)	60	120	180	240	300	360
Rate (Feet/Min)	190	380	570	760	950	1140

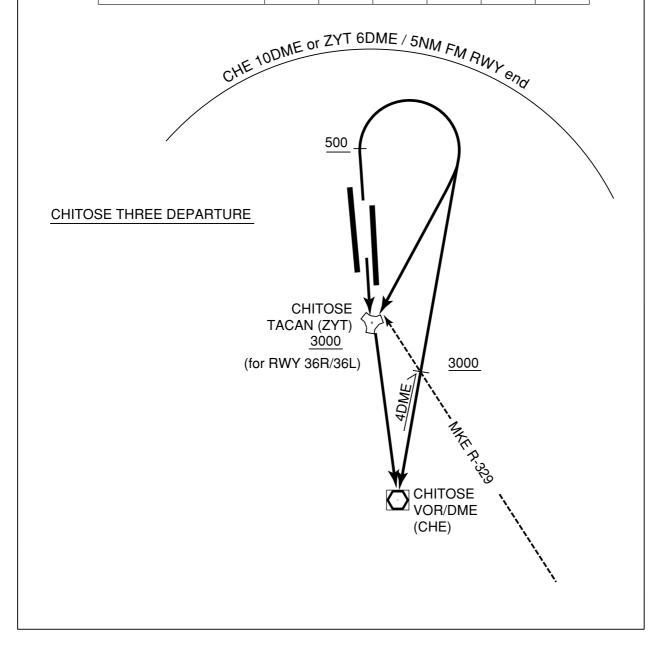

RJCJ / CHITOSE SID


MUKAWA FIVE DEPARTURE

RWY 36R/36L: Climb via RWY HDG to 500ft or above, turn right within 4NM,climb via MKE R-336 to MKE VOR/DME, then via MKE R-202 to TOBBY.

> Cross MKE R-336/12DME at or above 3,000ft. Cross MKE VOR/DME at or below 11,000ft.

RWY 18R/18L: Climb via RWY HDG to 500ft or above, turn left, climb via MKE R-321 to MKE VOR/DME, then via MKE R-202 to TOBBY.

Cross MKE R-321/10DME at or above 3,000ft.

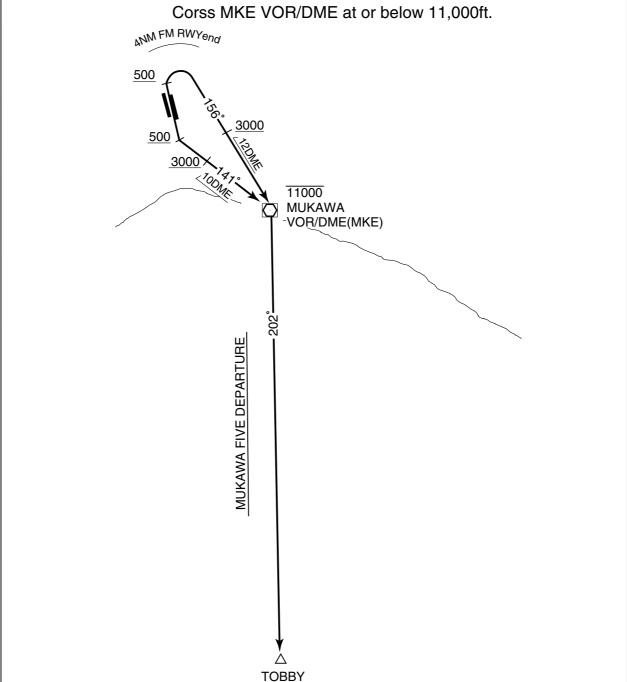

RJCJ / CHITOSE SID


KURIS FOUR DEPARTURE

RWY 36R/36L:

RWY 18R/18L: Climb via RWY HDG to 500ft or above, turn left within

4NM,...

....climb via CHE R-011 to KURIS.

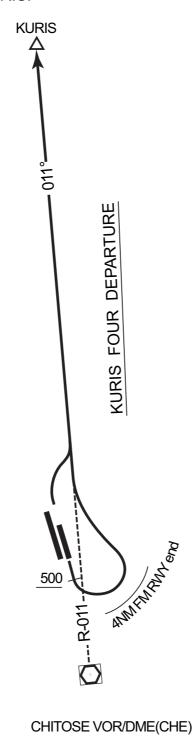

RJCJ / CHITOSE SID

SAVIT ONE DEPARTURE

RWY 36R/36L: Climb via RWY HDG to 500ft or above, turn right to CHE


VOR/DME within CHE 10DME (5NM FM RWY end). Cross 4DME prior to CHE VOR/DME (MKE R-329) at or

above 3,000ft....

RWY 18R/18L: Climb direct to CHE VOR/DME....


....then via CHE R-224 to SAVIT.

SAVIT ONE DEPARTURE

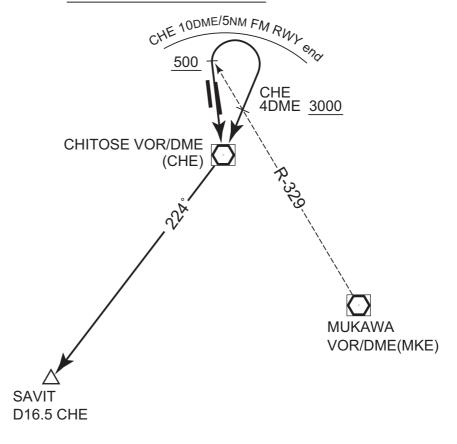

RJCJ / CHITOSE

RNAV TRANSITION PANSY TRANSITION/BUTOS TRANSITION RNAV 1 Note 1) DME/DME/IRU or GNSS required. Critical DME 2) RADAR service required. DME GAP Inappropriate See AD1.1.6.10.3 Inappropriate NAVAIDs for RNAV1

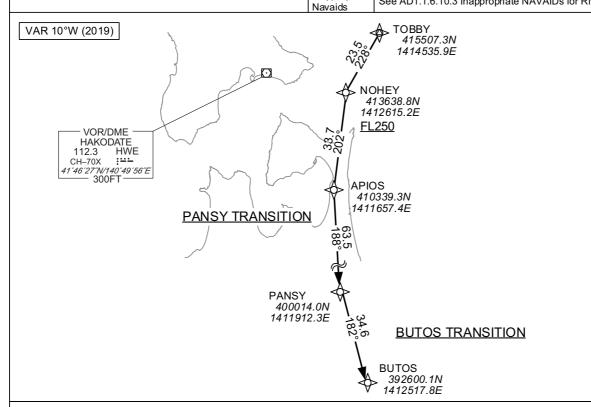

PANSY TRANSITION

From TOBBY, to NOHEY at or above FL250, to APIOS, to PANSY.


	,				,						
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	TOBBY	-	_	-9.5	_	1	1	_	-	RNAV1
002	TF	NOHEY	_	228 (218.1)	-9.5	23.5	-	+FL250	_	_	RNAV1
003	TF	APIOS	_	202 (192.0)	-9.5	33.7	-	ı	_	ı	RNAV1
004	TF	PANSY		188 (178.4)	-9.5	63.5		_	_	_	RNAV1

BUTOS TRANSITION

From TOBBY, to NOHEY at or above FL250, to APIOS, to PANSY, to BUTOS.

110H 10B1, to NOTICE 1 at 01 above 1 2200, to 74 100, to 174101, to B0100.											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	TOBBY	_	_	-9.5	-	_	_	_	_	RNAV1
002	TF	NOHEY	_	228 (218.1)	-9.5	23.5	1	+FL250	_	1	RNAV1
003	TF	APIOS	_	202 (192.0)	-9.5	33.7	_	-	_	-	RNAV1
004	TF	PANSY	_	188 (178.4)	-9.5	63.5	_	_	_	_	RNAV1
005	TF	BUTOS	_	182 (172.2)	-9.5	34.6	_	_	_	_	RNAV1

RJCJ / CHITOSE RNAV TRANSITION

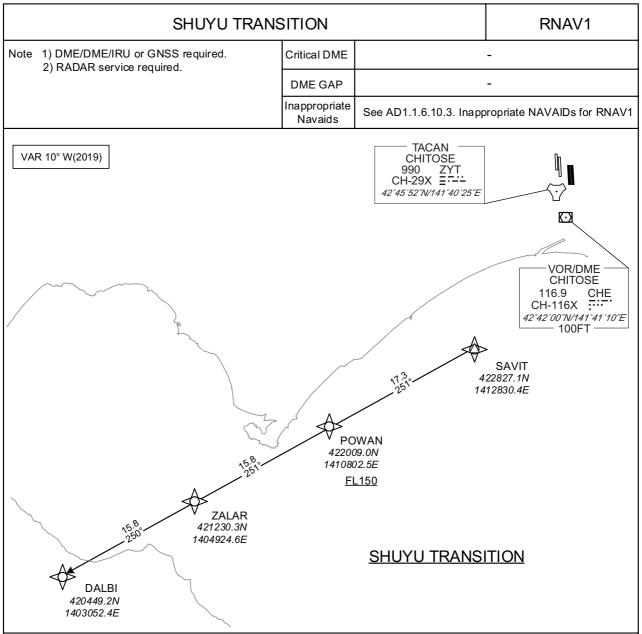

SHUYU TRANSITION

From SAVIT, to POWAN at or above FL150, to ZALAR, to DALBI.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	SAVIT	-	-	-9.5	-	-	-	-	-	RNAV1
002	TF	POWAN	-	251 (241.3)	-9.5	17.3	-	+FL150	-	-	RNAV1
003	TF	ZALAR	-	251 (241.1)	-9.5	15.8	-	-	-	-	RNAV1
004	TF	DALBI	-	250 (240.9)	-9.5	15.8	-	-	-	-	RNAV1

RNAV TRANSITION RJCJ / CHITOSE FUNKA TRANSITION RNAV1 Note 1) DME/DME/IRU or GNSS required. Critical DME MRE: 12.0NM to FUNKA - FUNKA 2) RADAR service required. DME GAP Inappropriate See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1 Navaids VAR 10° W(2019) TACAN CHITOSE 990 ZYT CH-29X =---42°45′52″N/141°40′25″E VOR/DME CHITOSE 116.9 CHE CH-116X :··· 42°42′00″N/141°41′10″E 100FT TEKKO 423007.1N 22.3 1410431.0E FUNKA 422100.9N 1403658.6E 76.8 205° **FUNKA TRANSITION** DALBI 420449.2N 1403052.4E

FUNKA TRANSITION

From TEKKO, to FUNKA, to DALBI.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	TEKKO	1	-	-9.5	1	1	-	ı	1	RNAV1
002	TF	FUNKA	-	256 (246.0)	-9.5	22.3	-	-	-	-	RNAV1
003	TF	DALBI	1	205 (195.6)	-9.5	16.8	1	1	1	ı	RNAV1

RJCJ / CHITOSE STAR


STARs for RWY36


KOMAI WEST ARRIVAL

From over NAVER, via CHE R-201 to intercept and proceed via MKE R-241 to KOMAI.

KOMAI EAST ARRIVAL

From over MKE VOR/DME, via MKE R-180 to MKE R-180/8DME, turn right, proceed via HDG 270 DEG to intercept MKE R-221, then turn right to intercept CHE R-181 to KOMAI.

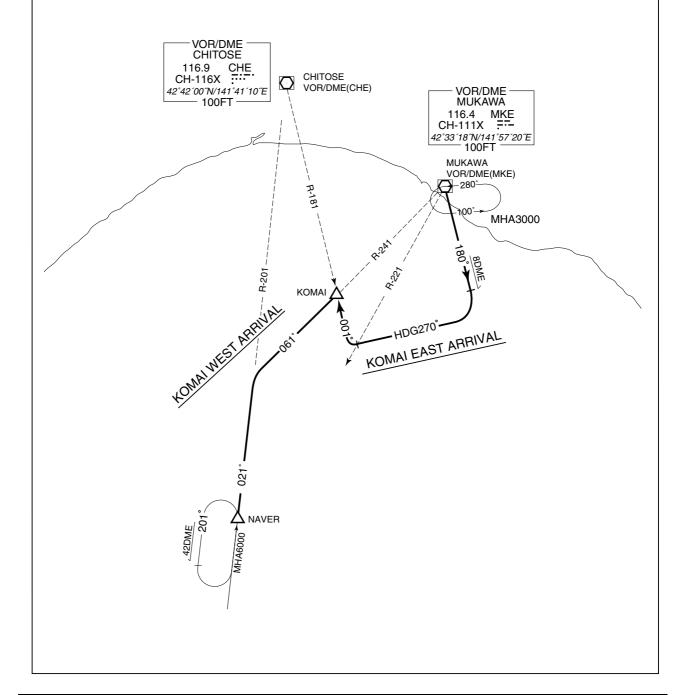

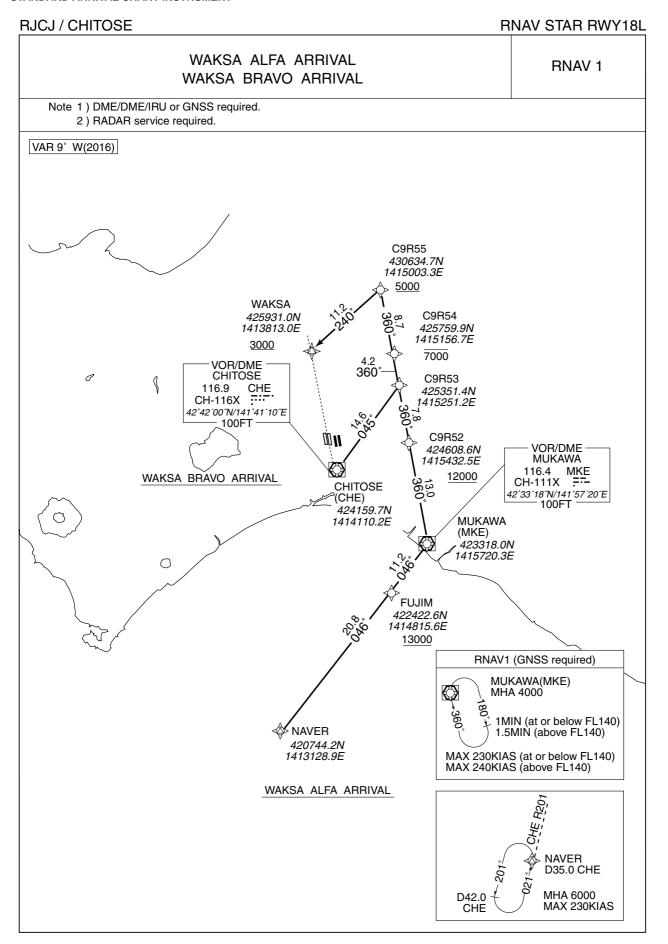

RJCJ / CHITOSE

RNAV STAR RWY18L

WAKSA ALFA ARRIVAL

From NAVER, to FUJIM at or above 13000FT, to MKE, to C9R52 at or above 12000FT, to C9R53, to C9R54 at or below 7000FT, to C9R55 at or above 5000FT, to WAKSA at or above 3000FT.

Critical DME	SPE: C9R55 - WAKSA MKE: 10.0NM to MKE - 3.0NM to MKE 10.0NM to C9R52 - 8.0NM to C9R52
DME GAP	3.0NM to MKE - 10.0NM to C9R52
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	NAVER	_	_	-9.3	_	_	_	_	_	RNAV1
002	TF	FUJIM	_	046 (036.6)	-9.3	20.8	_	+13000	_	_	RNAV1
003	TF	MKE	_	046 (036.8)	-9.3	11.2	_	_	_	_	RNAV1
004	TF	C9R52	_	360 (350.9)	-9.3	13.0	_	+12000	_	_	RNAV1
005	TF	C9R53		360 (350.9)	-9.3	7.8	_	1	1	_	RNAV1
006	TF	C9R54	_	360 (350.9)	-9.3	4.2	_	-7000	_	_	RNAV1
007	TF	C9R55	_	360 (350.9)	-9.3	8.7	_	+5000	_	_	RNAV1
800	TF	WAKSA	_	240 (230.8)	-9.3	11.2	_	+3000	_	_	RNAV1

Path	Waypoint Identifier	Inbound Course 'M('T)	Magnetic Variation	Limo	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	MUKAWA (MKE)	360 (350.9)	-9.3	1.0(-14000) 1.5(+14001)	R	4000	_	-230(-14000) -240(+14001)	RNAV1

RJCJ / CHITOSE

RNAV STAR RWY18L

WAKSA BRAVO ARRIVAL

From CHE, to C9R53, to C9R54 at or below 7000FT, to C9R55 at or above 5000FT, to WAKSA at or above 3000FT.

Critical DME	SPE: C9R55 - WAKSA
DME GAP	CHE - 11.0NM to C9R53
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation		Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	CHE	_	_	-9.3	_	_	_	_	_	RNAV1
002	TF	C9R53	_	045 (035.8)	-9.3	14.6	_	_	_	_	RNAV1
003	TF	C9R54	_	360 (350.9)	-9.3	4.2	_	-7000	1	_	RNAV1
004	TF	C9R55	_	360 (350.9)	-9.3	8.7	_	+5000	_	_	RNAV1
005	TF	WAKSA	_	240 (230.8)	-9.3	11.2	_	+3000	1	_	RNAV1

