


AD CHART

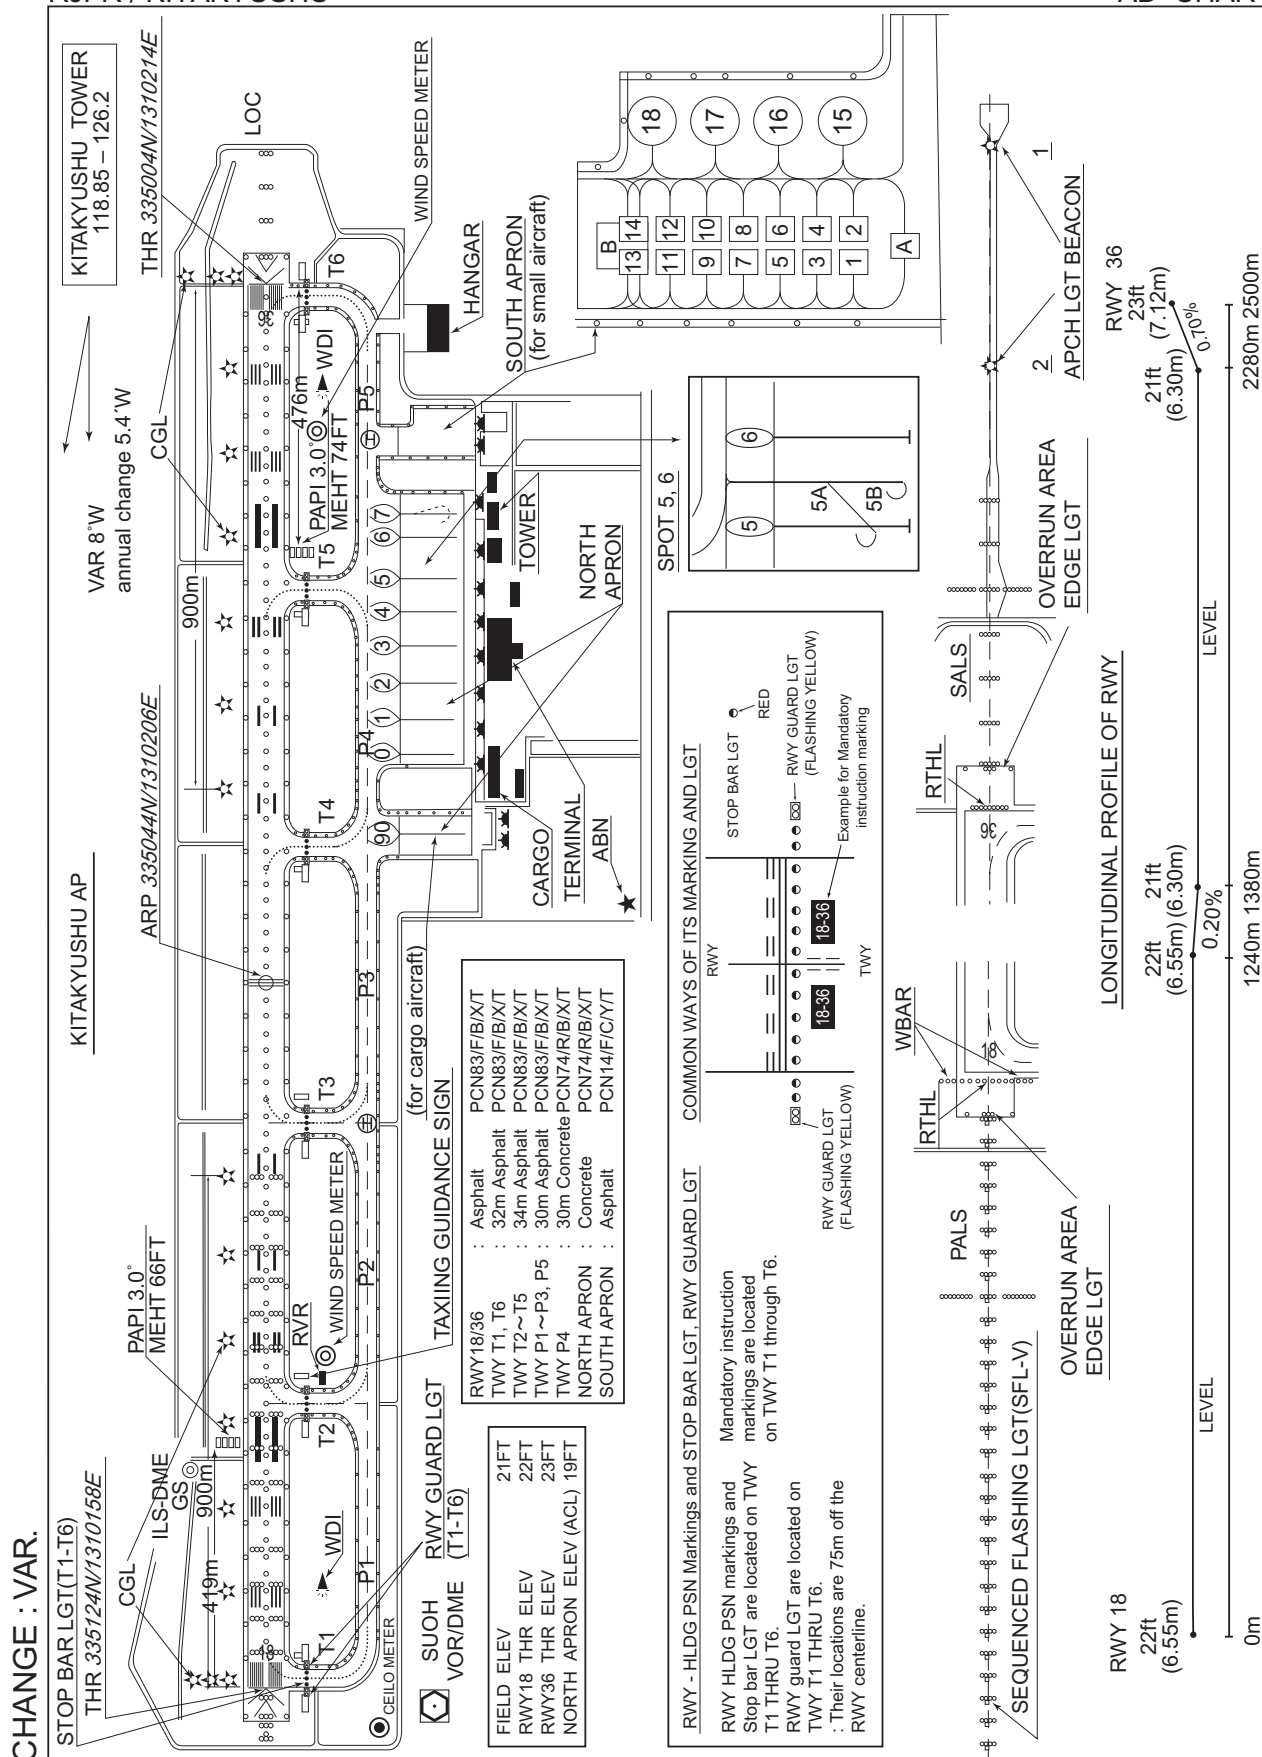

STANDARD DEPARTURE CHART - INSTRUMENT

RJFR / KITAKYUSHU

SID

ASARI THREE DEPARTURE

RWY 18 : Climb RWY HDG to 500FT, turn left HDG039°,...

RWY 36 : Climb RWY HDG to 500FT, turn right HDG129°, ...

...to intercept and proceed via SWE R084 to ASARI.

Cross SWE 8.0DME at or above 3000FT.

Note RWY18 : 5.8% climb gradient required up to 500FT due to airspace restrictions only.

RWY36 : 4.0% climb gradient required up to 500FT due to airspace restrictions only.



STANDARD DEPARTURE CHART - INSTRUMENT

RJFR / KITAKYUSHU

TRANSITION

MATSUYAMA TRANSITION

From over ASARI, via SWE R084 to intercept and proceed via UBE R133 to HIMEH,
via UBE R133 to intercept and proceed via MYE R257 to MYE VOR/DME.



CHANGE : Radial FM SWE.


STANDARD DEPARTURE CHART - INSTRUMENT

RJFR / KITAKYUSHU

TRANSITION

MUSASHI TRANSITION

From over ASARI, via SWE R084 to intercept and proceed via UBE R133 to HIMEH, via TFE R346 to TFE VOR/DME.

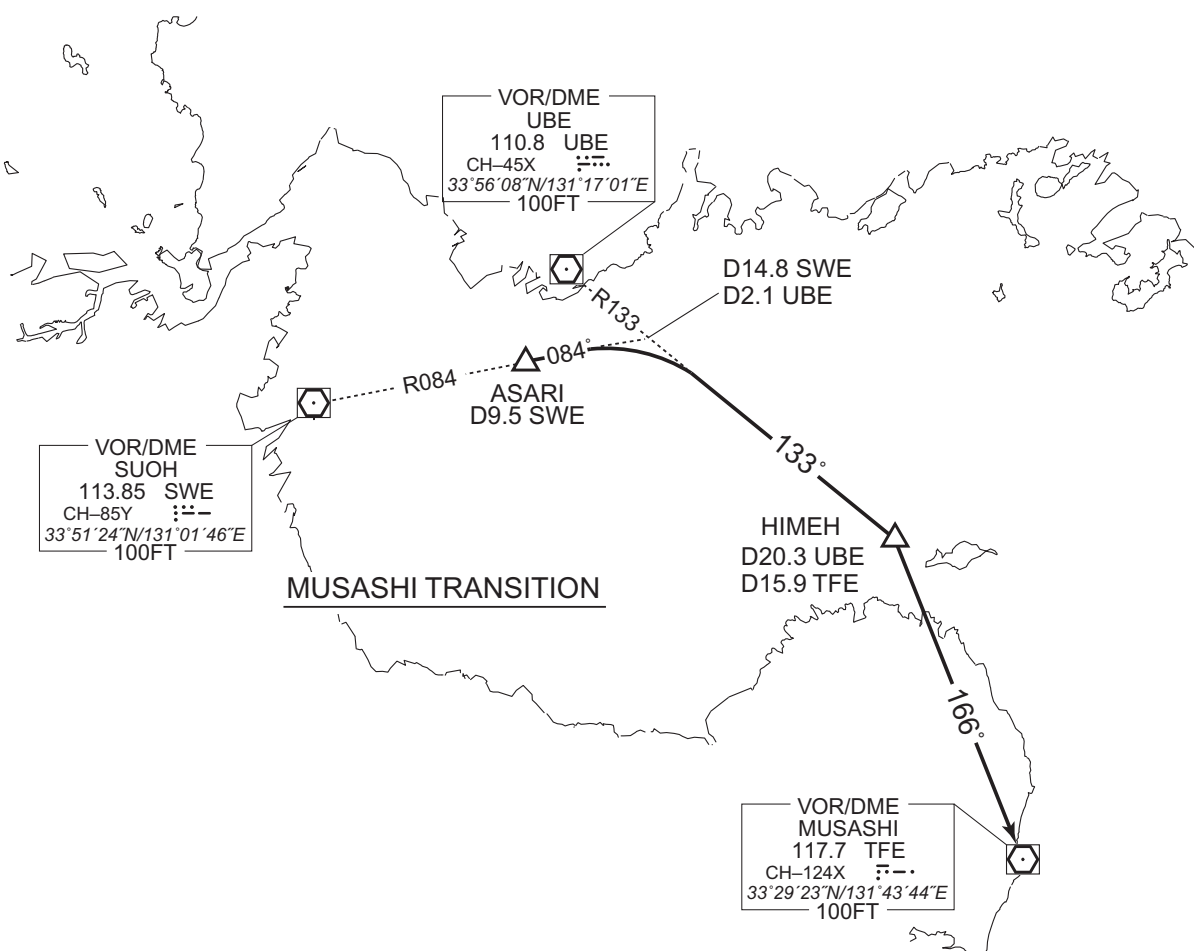

STANDARD DEPARTURE CHART - INSTRUMENT

RJFR / KITAKYUSHU

SID

ONGHA TWO DEPARTURE

RWY 18 : Climb RWY HDG to 500FT, turn left,...

RWY 36 : Climb RWY HDG to 500FT, turn right,...

...direct to SWE VOR/DME, proceed via SWE R259 to ONGHA.

Cross SWE VOR/DME at or above 3000FT.

Note RWY18 : 5.8% climb gradient required up to 500FT due to airspace restrictions only.

RWY36 : 4.0% climb gradient required up to 500FT due to airspace restrictions only.




CHANGE : PROC renamed. Radial FM SWE.

STANDARD DEPARTURE CHART-INSTRUMENT

RJFR / KITAKYUSHU

RNAV SID and TRANSITION

KOHEI ONE DEPARTURE DOUGO TRANSITION		RNAV1
<p>Note 1) DME/DME/IRU or GNSS required.</p> <p>※ The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off roll.</p> <p>2) RADAR service required.</p>	Critical DME	<p>RWY18 : SWE : 2.0NM from DER - 12.0NM to KOHEI UBE : 16.0NM to KOHEI - KOHEI</p> <p>RWY36 : UBE : 12.0NM to KOHEI - KOHEI</p>
	DME GAP	<p>RWY18 : DER - 2.0NM from DER RWY36 : DER - 12.0NM to KOHEI</p>
	Inappropriate NavAids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

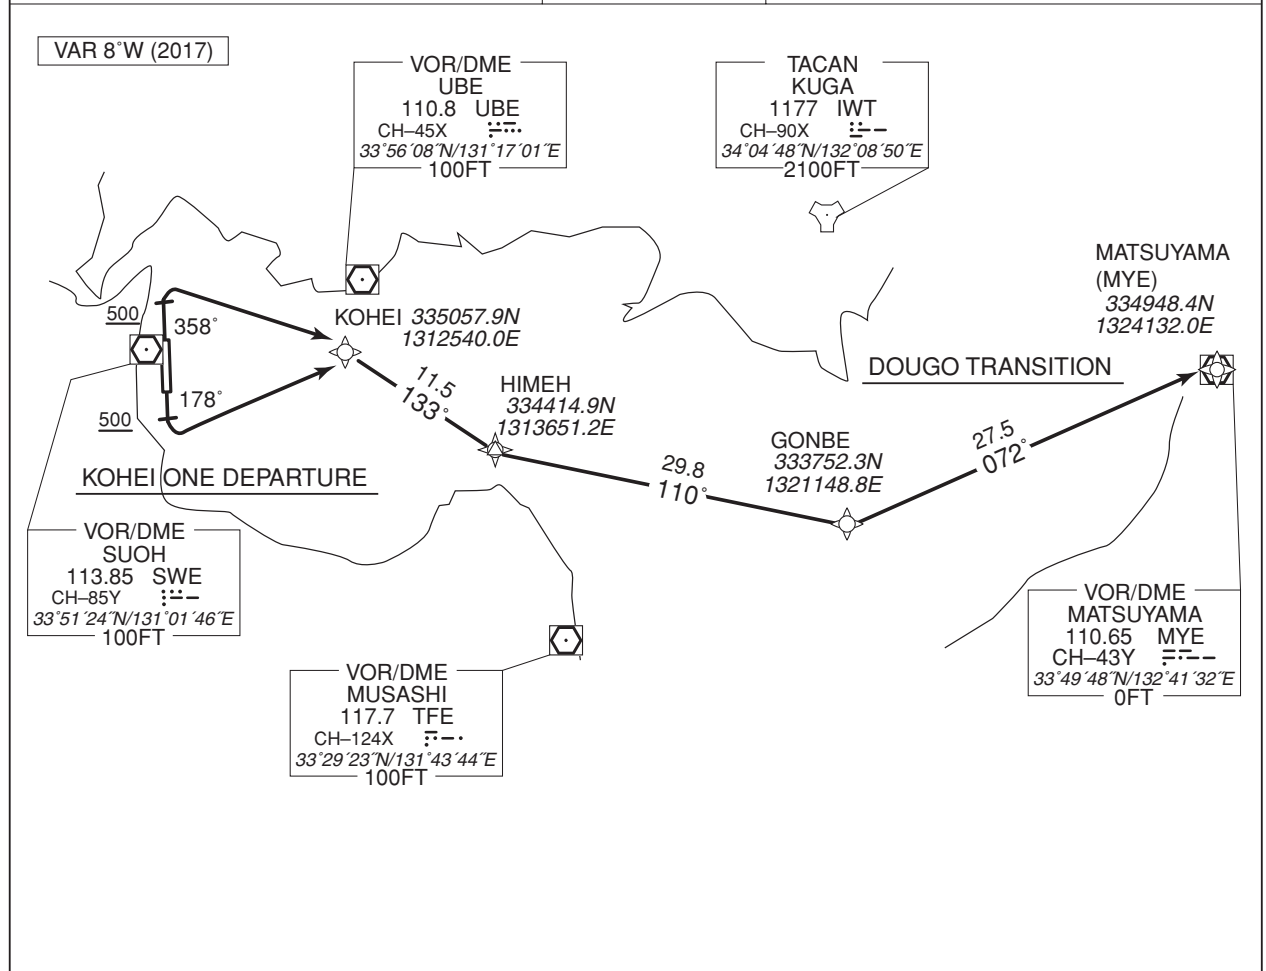

KOHEI ONE DEPARTURE

RWY18 : Climb on HDG178° at or above 500FT, turn left direct to KOHEI.

RWY36 : Climb on HDG358° at or above 500FT, turn right direct to KOHEI.

Note RWY18: 5.8% climb gradient required up to 500FT due to airspace restrictions only.

RWY36: 4.0% climb gradient required up to 500FT due to airspace restrictions only.

DOUGO TRANSITION

From KOHEI, to HIMEH, to GONBE, to MYE.

STANDARD DEPARTURE CHART-INSTRUMENT

RJFR / KITAKYUSHU

RNAV SID and TRANSITION

KOHEI ONE DEPARTURE

RWY18

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	178 (170.4)	-7.5	—	—	+500	—	—	RNAV1
002	DF	KOHEI	—	—	-7.5	—	L	—	—	—	RNAV1

RWY36

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	358 (350.4)	-7.5	—	—	+500	—	—	RNAV1
002	DF	KOHEI	—	—	-7.5	—	R	—	—	—	RNAV1

DOUGO TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	KOHEI	—	—	-7.5	—	—	—	—	—	RNAV1
002	TF	HIMEH	—	133 (125.8)	-7.5	11.5	—	—	—	—	RNAV1
003	TF	GONBE	—	110 (102.2)	-7.5	29.8	—	—	—	—	RNAV1
004	TF	MYE	—	072 (064.1)	-7.5	27.5	—	—	—	—	RNAV1

STANDARD DEPARTURE CHART-INSTRUMENT

RJFR / KITAKYUSHU

RNAV TRANSITION

FIATO TRANSITION			RNAV1
Note 1) DME/DME/IRU or GNSS required. 2) RADAR service required.	Critical DME	-	
	DME GAP	-	
	Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1	

VAR 8°W (2017)

FIATO TRANSITION


From KOHEI, to HIMEH, to ALFET at or above FL160, to MILAN, to FIATO.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	KOHEI	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	HIMEH	-	133 (125.8)	-7.5	11.5	-	-	-	-	RNAV1
003	TF	ALFET	-	109 (102.2)	-7.5	19.8	-	+FL160	-	-	RNAV1
004	TF	MILAN	-	072 (065.1)	-7.5	37.3	-	-	-	-	RNAV1
005	TF	FIATO	-	082 (075.2)	-7.5	19.7	-	-	-	-	RNAV1

INSTRUMENT APPROACH CHART


RJFR / KITAKYUSHU

ILS Z or LOC Z RWY 18

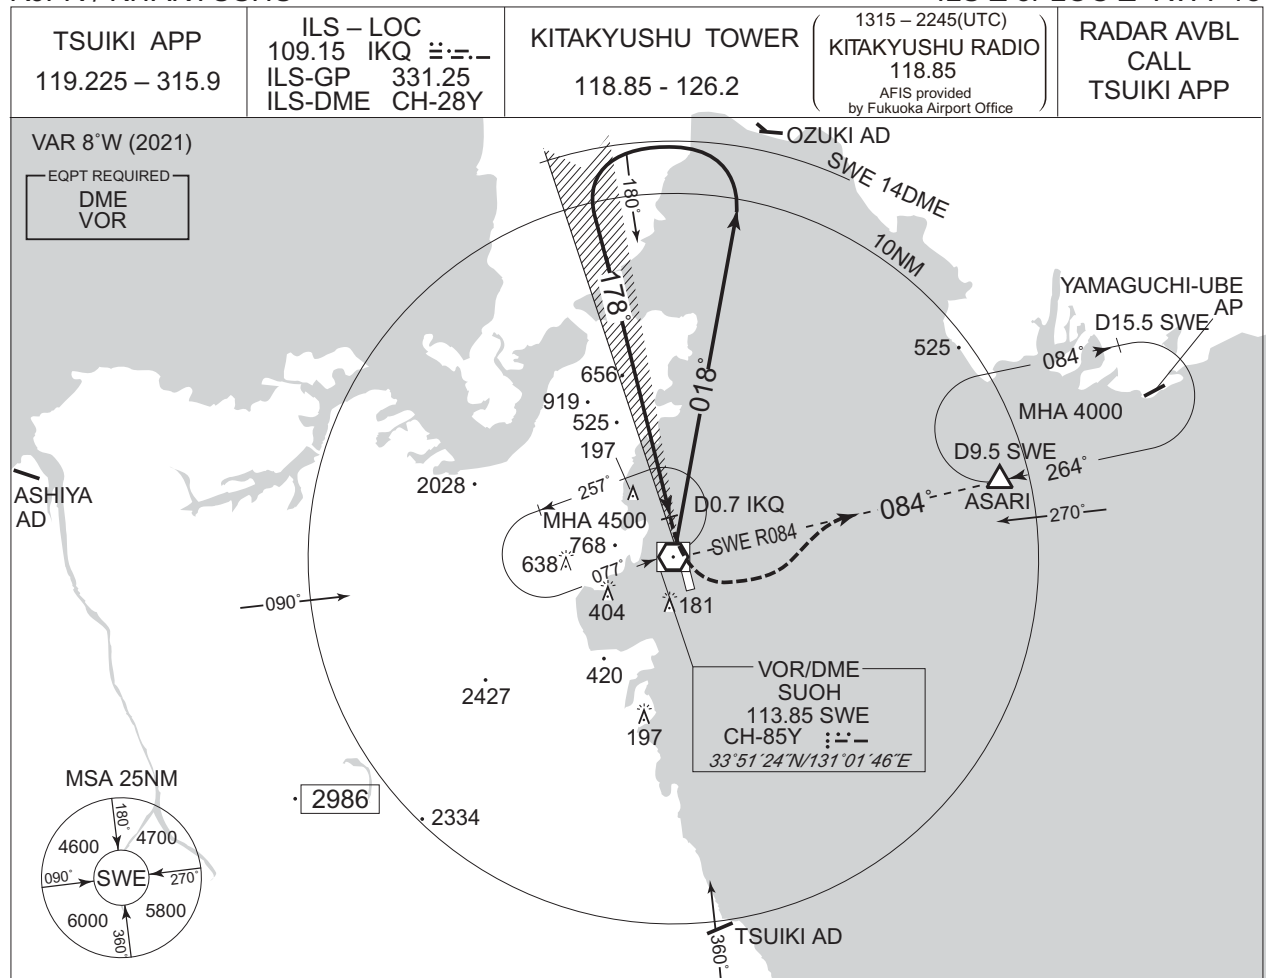

MISSED APPROACH
 At DA, turn left and climb to 4000FT via SWE R084 to ASARI and hold. Contact TSUIKI APP.

Remain within SWE 14DME

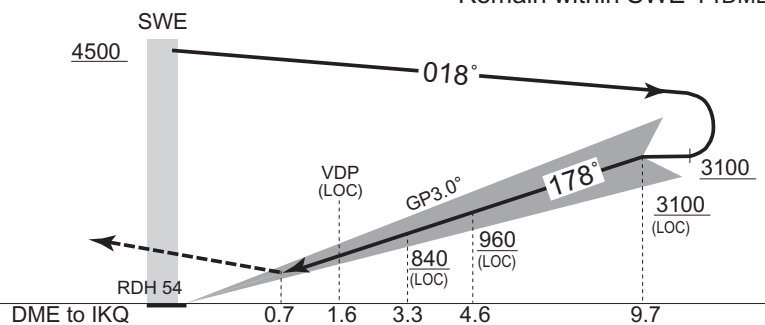

MINIMA		THR elev. 22		AD elev. 21	
CAT	CAT I		LOC		CIRCLING
	DA(H)	RVR/CMV	MDA(H)	RVR/CMV	MDA(H) VIS
A	222 (200)	550	500 (479)	1000	1600
B				1200	
C				1600	2400
D					3200


Circling to East side of RWY only.

CHANGE: VAR. PROC course.

INSTRUMENT APPROACH CHART

RJFR / KITAKYUSHU


LOC Y RWY 18

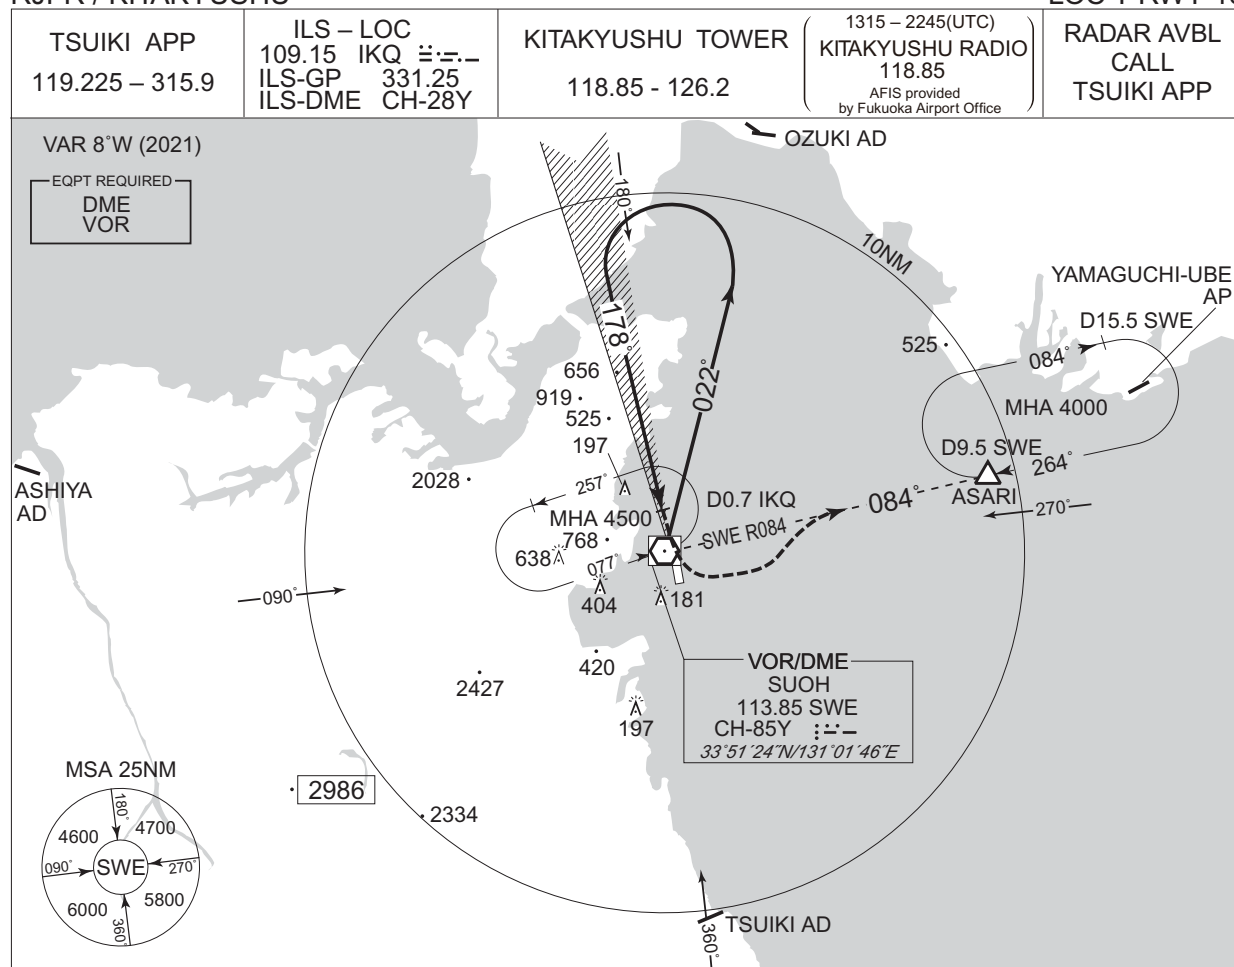

MISSED APPROACH

At IKQ 0.7DME, turn left and climb to 4000FT via SWE R084 to ASARI and hold.
Contact TSUIKI APP.

Remain within SWE 10DME

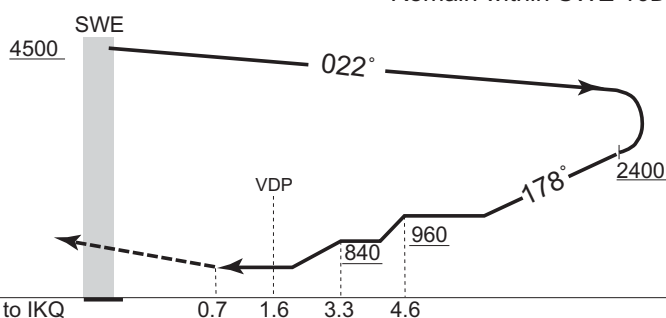

CHANGE: VAR. PROC course.


MINIMA		THR elev. 22	AD elev. 21	
CAT	CIRCLING			
	MDA(H)	RVR/CMV	MDA(H)	VIS
A	500 (479)	1000	500 (479)	1600
B		1200		2400
C		1600		3200
D				

Circling to East side of RWY only.

INSTRUMENT APPROACH CHART

RJFR / KITAKYUSHU


VOR RWY 18

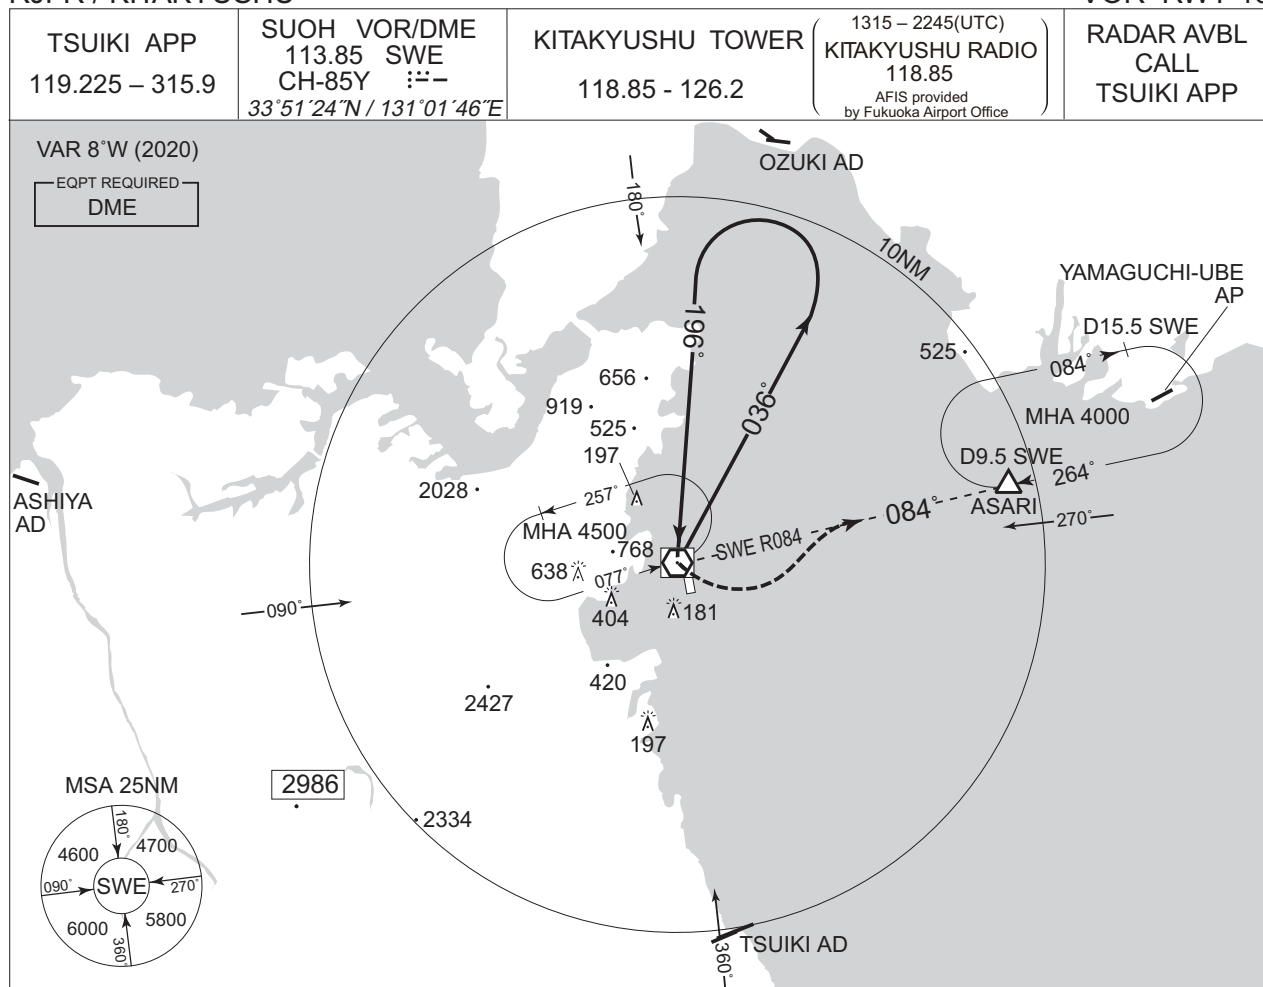

CHANGE : Call sign(REMOTE→RADIO). AFIS unit added.

MISSED APPROACH
At SWE VOR/DME, turn left and climb to 4000FT via SWE R084 to ASARI and hold. Contact TSUIKI APP.

Remain within SWE 10DME

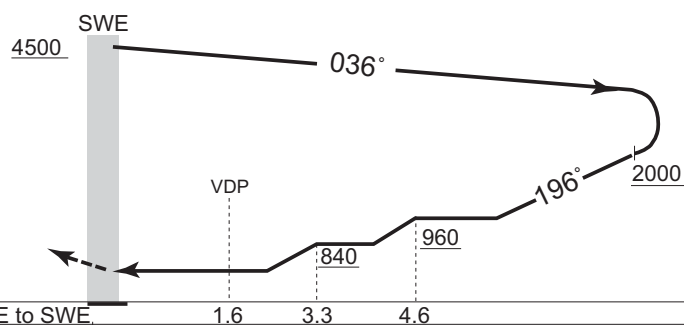

MINIMA		THR elev. 22	AD elev. 21	
CAT			CIRCLING	
	MDA(H)	RVR/ CMV	MDA(H)	VIS
A	500 (479)	1000	500 (479)	1600
B		1200		2400
C				
D		1600	580 (559)	3200

Circling to East side of RWY only.

RJFR / KITAKYUSHU

TSUIKI APP

119.225 – 315.9

SUOH VOR/DME

113.85 SWE

CH-85Y

33°51'24"N / 131°01'46"E

KITAKYUSHU TOWER

118.85 - 126.2

1315 – 2245(UTC)

KITAKYUSHU RADIO

118.85

AFIS provided by Fukuoka Airport Office

RADAR AVBL

CALL

TSUIKI APP

VAR 8°W (2020)

EQPT REQUIRED

DME

MSA 25NM

180°

090°

270°

360°

SWE

4600

4700

6000

5800

MISSED APPROACH

At 1.0DME prior to SWE VOR/DME, turn left and climb to 4000FT via SWE R084 to ASARI and hold. Contact TSUIKI APP.

SWE

ASARI 4000

264°

1.0

9.5

DME to SWE

MINIMA		AD elev. 21	
CAT	CIRCLING		
	MDA(H)	VIS	
A	1000 (979)	1600	
B		2400	
C			3200
D			


Circling to East side of RWY only.

INSTRUMENT APPROACH CHART

RJFR / KITAKYUSHU

VOR B


TSUIKI APP 119.225 – 315.9	SUOH VOR/DME 113.85 SWE CH-85Y 33°51'24"N / 131°01'46"E	KITAKYUSHU TOWER 118.85 - 126.2	1315 – 2245(UTC) KITAKYUSHU RADIO 118.85 AFIS provided by Fukuoka Airport Office	RADAR AVBL CALL TSUIKI APP
-------------------------------	--	------------------------------------	--	----------------------------------

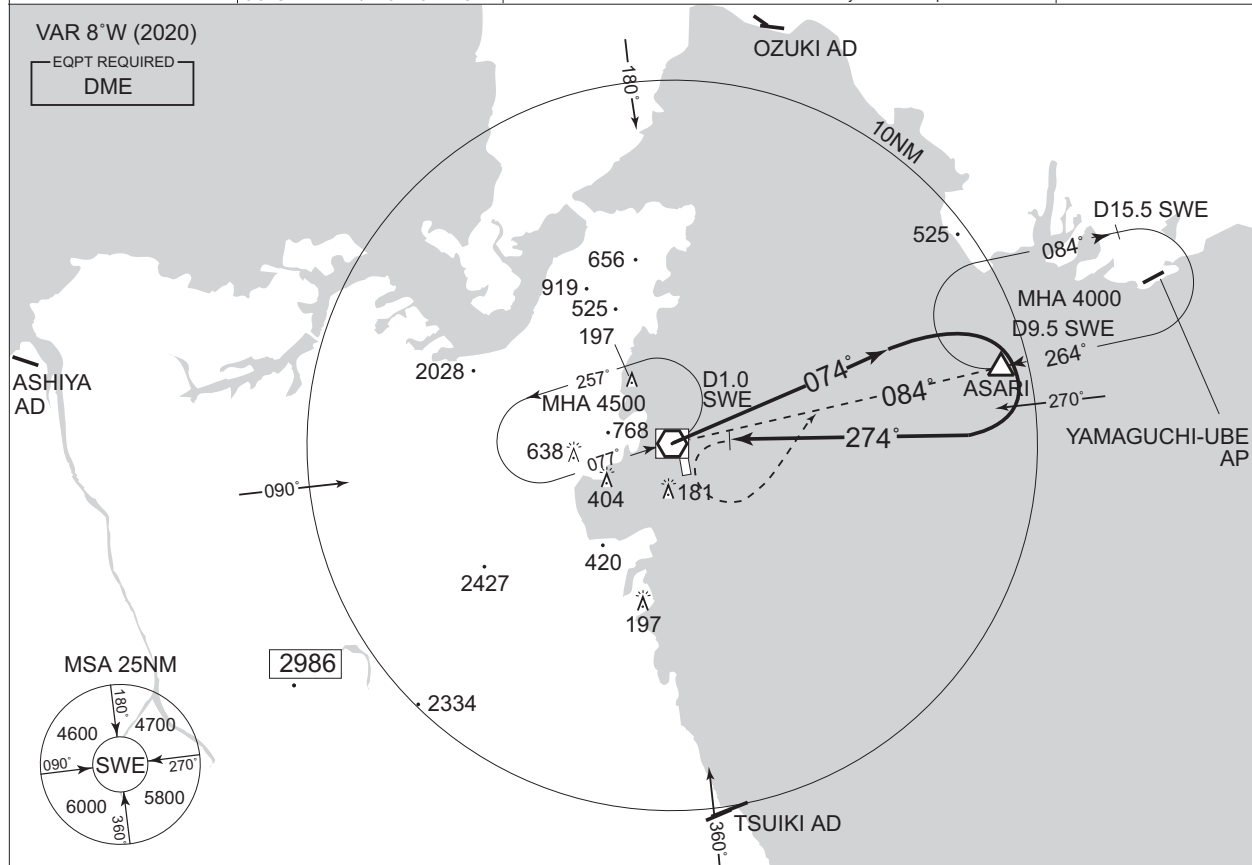

CHANGE : Call sign(REMOTE→RADIO). AFIS unit added.

MISSED APPROACH
At 1.0DME prior to SWE VOR/DME,
turn left and climb to 4000FT
via SWE R084 to ASARI and hold.
Contact TSUIKI APP.

Remain within SWE 10DME

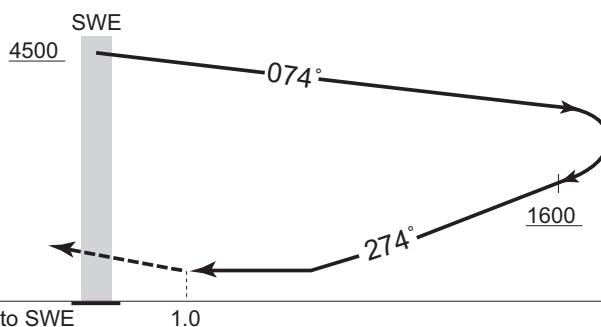

MINIMA		AD elev. 21
CAT	CIRCLING	
	MDA(H)	VIS
A	500 (479)	1600
B		2400
C		3200
D	580 (559)	3200

Circling to East side of RWY only.


INSTRUMENT APPROACH CHART

RJFR / KITAKYUSHU

RNP RWY18(AR)


TSUIKI APP 119.225 - 315.9	RNP AR RF required.	KITAKYUSHU TOWER 118.85 - 126.2	1315 - 2245(UTC) KITAKYUSHU RADIO 118.85 AFIS provided by Fukuoka Airport Office	RADAR AVBL CALL TSUIKI APP
-------------------------------	------------------------	------------------------------------	--	----------------------------------

For uncompensated Baro-VNAV systems, procedure not authorized below -5°C / above 45°C

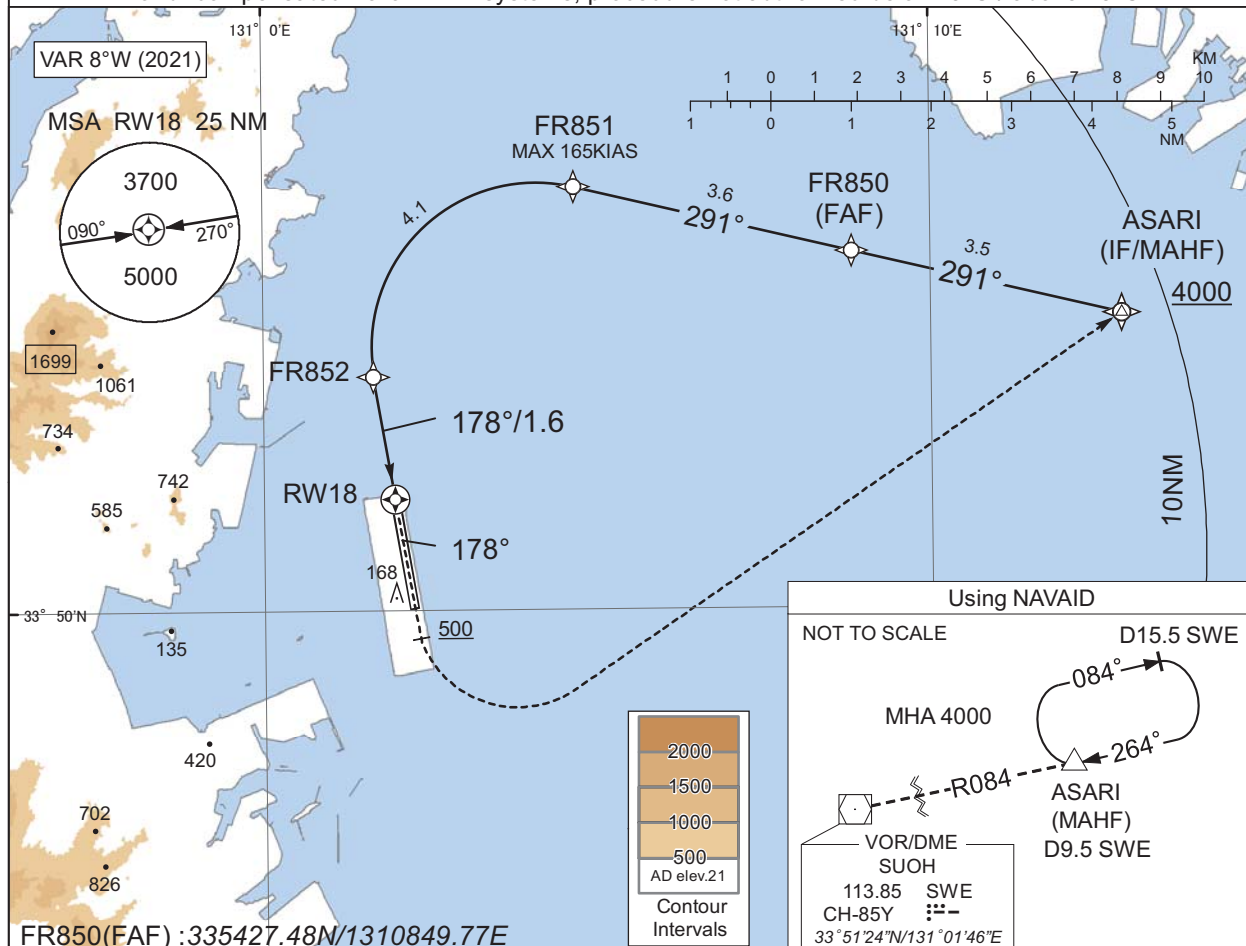

MISSED APPROACH

From RW18 on track 178°, at or above 500FT turn left, direct to ASARI and hold at 4000FT. Contact TSUIKI APP.

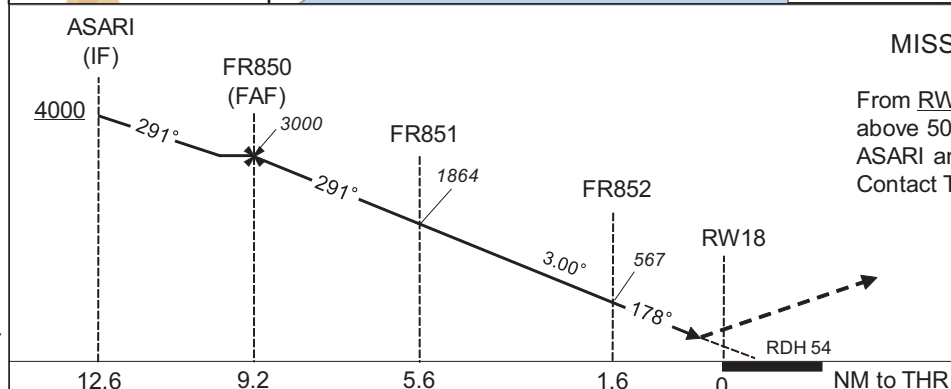

Missed APCH climb gradient MNM 5.0%

MINIMA	THR elev. 22	AD elev. 21
CAT	RNP 0.30	
	DA(H)	RVR/CMV
A	-	-
B	-	-
C	322(300)	1000
D		1400

MINIMA with Missed APCH climb gradient of 2.5% are not established.

Authorization Required

INSTRUMENT APPROACH CHART

RJFR / KITAKYUSHU

RNP RWY18(AR)

Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	ASARI	-	-	-7.9	-	-	+4000	-	-	-
002	TF	FR850	-	291 (283.6)	-7.9	3.5	-	3000	-	-	1.0
003	TF	FR851	-	291 (283.5)	-7.9	3.6	-	1864	-165	-3.00	0.3
004	RF Center: FRRF1 r=2.06NM	FR852	-	-	-7.9	4.1	L	567	-	-3.00	0.3
005	TF	RW18	Y	178 (170.4)	-7.9	1.6	-	76	-	-3.00/54	0.3
006	FA	-	-	178 (170.4)	-7.9	-	-	+500	-	-	1.0
007	DF	ASARI	-	-	-7.9	-	L	4000	-	-	1.0

Waypoint Coordinates


Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
ASARI	335338.98N / 1311252.32E	FRRF1	335316.61N / 1310405.62E
FR850	335427.48N / 1310849.77E		
FR851	335517.24N / 1310440.15E		
FR852	335255.76N / 1310139.03E		
RW18	335123.92N / 1310157.83E		

CHANGE : PROC renamed.

INSTRUMENT APPROACH CHART


RJFR / KITAKYUSHU

RNP RWY36(AR)

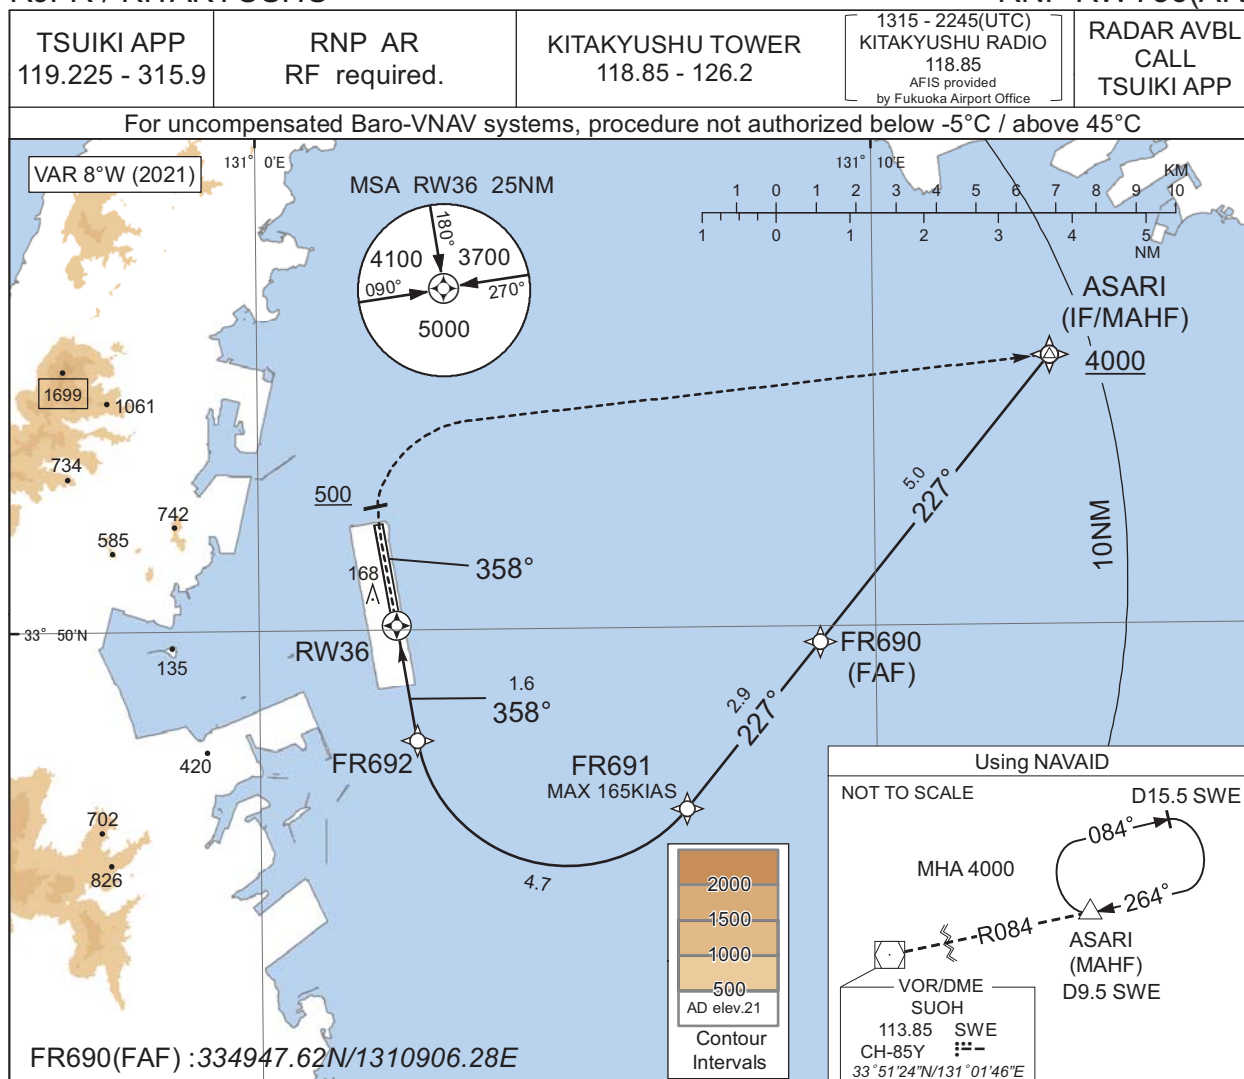

MISSED APPROACH

From RW36 on track 358°, at or above 500FT turn right, direct to ASARI and hold at 4000FT.
Contact TSUIKI APP.

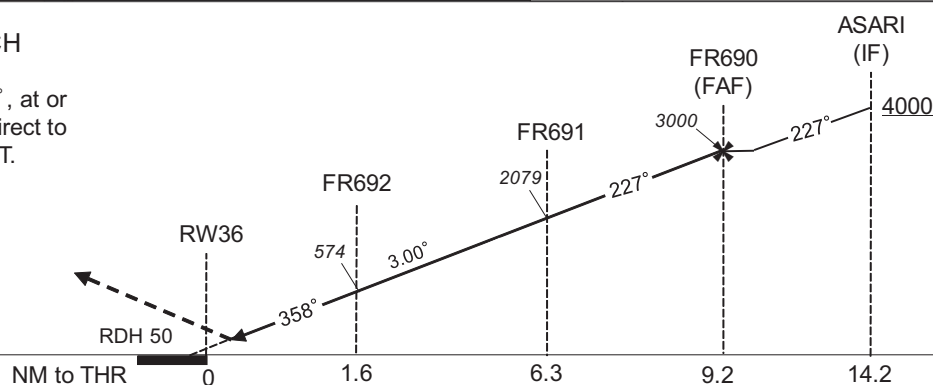

Missed APCH climb gradient MNM 5.0%

MINIMA	THR elev. 23	AD elev. 21
CAT	RNP 0.30	
	DA(H)	CMV
A	-	-
B	-	-
C	329(306)	1400
D		1600

MINIMA with Missed APCH climb gradient of 2.5% are not established.

Authorization Required

INSTRUMENT APPROACH CHART

RJFR / KITAKYUSHU

RNP RWY36(AR)

Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	ASARI	-	-	-7.9	-	-	+4000	-	-	-
002	TF	FR690	-	227 (219.1)	-7.9	5.0	-	3000	-	-	1.0
003	TF	FR691	-	227 (219.0)	-7.9	2.9	-	2079	-165	-3.00	0.3
004	RF Center: FRRF2 r=2.06NM	FR692	-	-	-7.9	4.7	R	574	-	-3.00	0.3
005	TF	RW36	Y	358 (350.4)	-7.9	1.6	-	73	-	-3.00/50	0.3
006	FA	-	-	358 (350.4)	-7.9	-	-	+500	-	-	1.0
007	DF	ASARI	-	-	-7.9	-	R	4000	-	-	1.0


Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
ASARI	335338.98N / 1311252.32E	FRRF2	334851.32N / 1310459.78E
FR690	334947.62N / 1310906.28E		
FR691	334733.05N / 1310655.02E		
FR692	334830.46N / 1310233.32E		
RW36	335004.08N / 1310214.17E		

CHANGE : PROC renamed.

RJFR / KITAKYUSHU

Visual REP

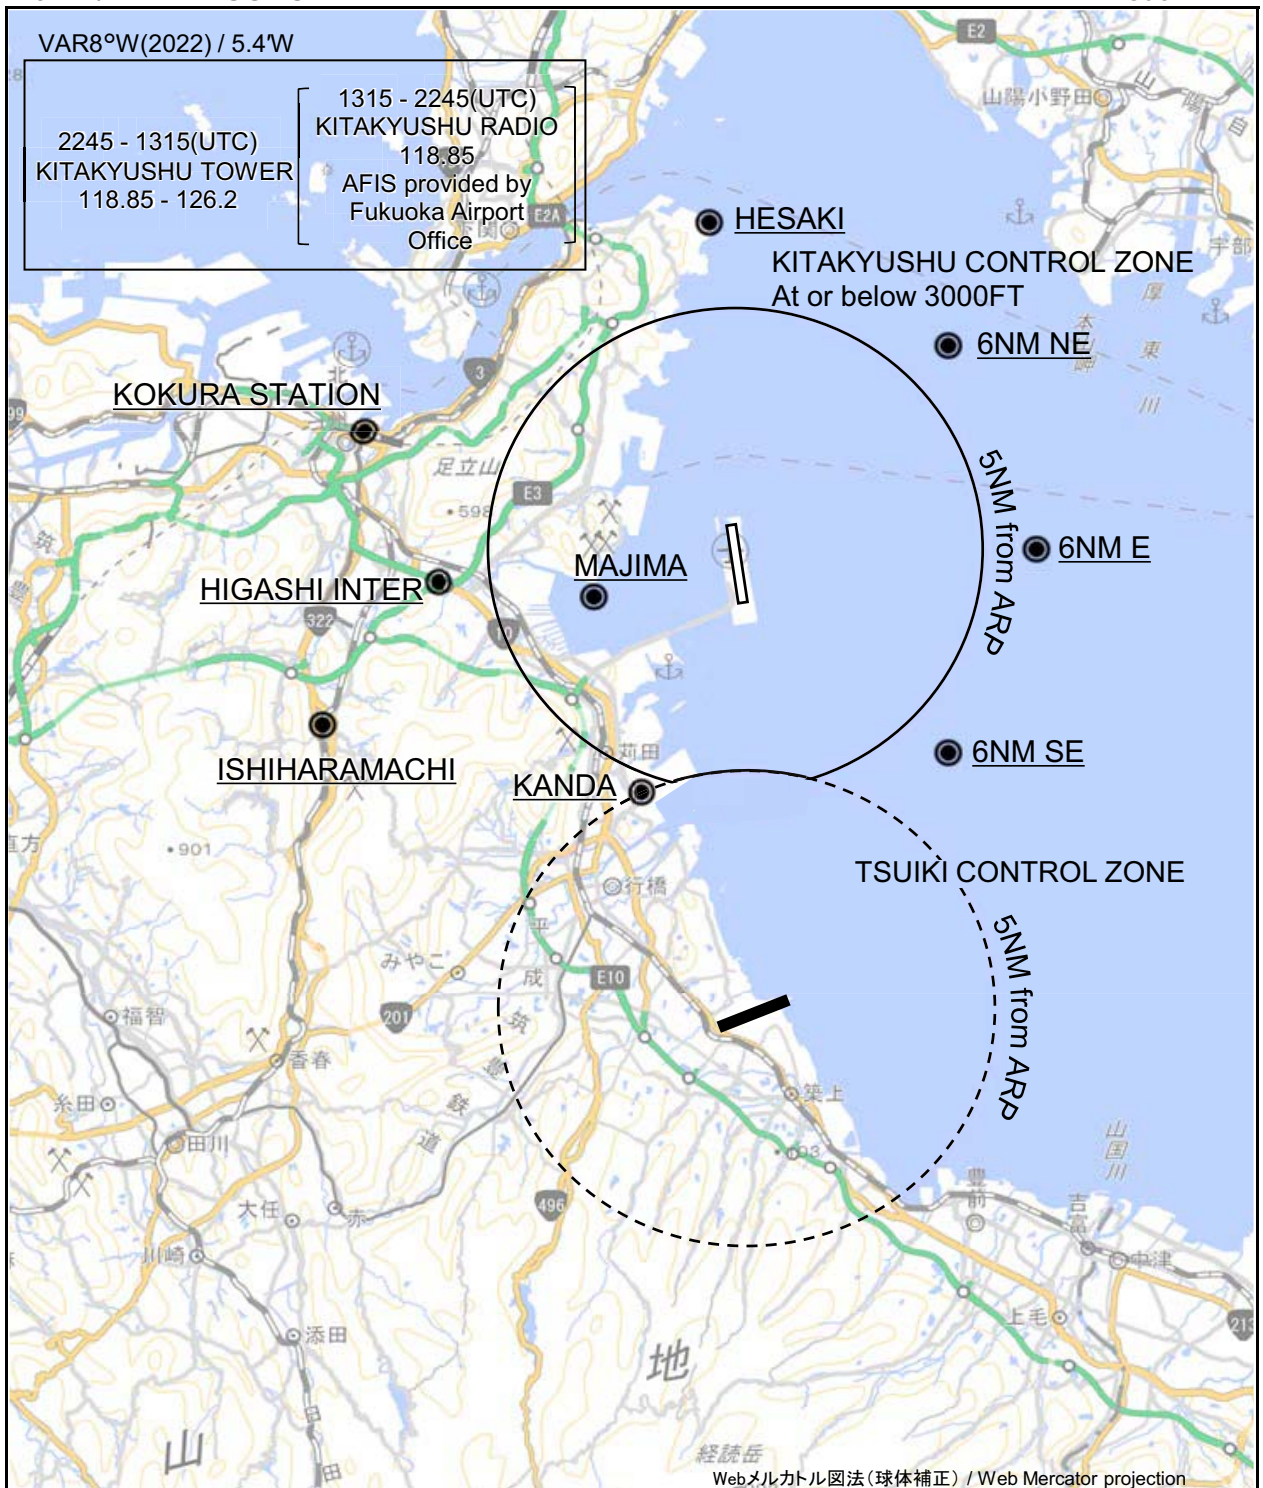


※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

RJFR / KITAKYUSHU

Visual REP

Call sign	BRG / DIST from ARP	Remarks
部崎 Hesaki	355°T / 6.8NM	灯台 Lighthouse
6NM NE	045°T / 6.0NM	海上 Over the sea
6NM E	090°T / 6.0NM	海上 Over the sea
6NM SE	135°T / 6.0NM	海上 Over the sea
苅田 Kanda	202°T / 5.5NM	日産自動車九州工場 Automobile manufacturing plant
石原町 Ishiharamachi	247°T / 9.2NM	JR石原町駅 Station
間島 Majima	252°T / 3.1NM	島 Island
東インター Higashi Inter	263°T / 6.2NM	小倉東I.C.(九州自動車道) Interchange
小倉ステーション Kokura Station	288°T / 8.0NM	JR小倉駅 Station


CHANGE : BRG/DIST from ARP. Remarks(Kanda).

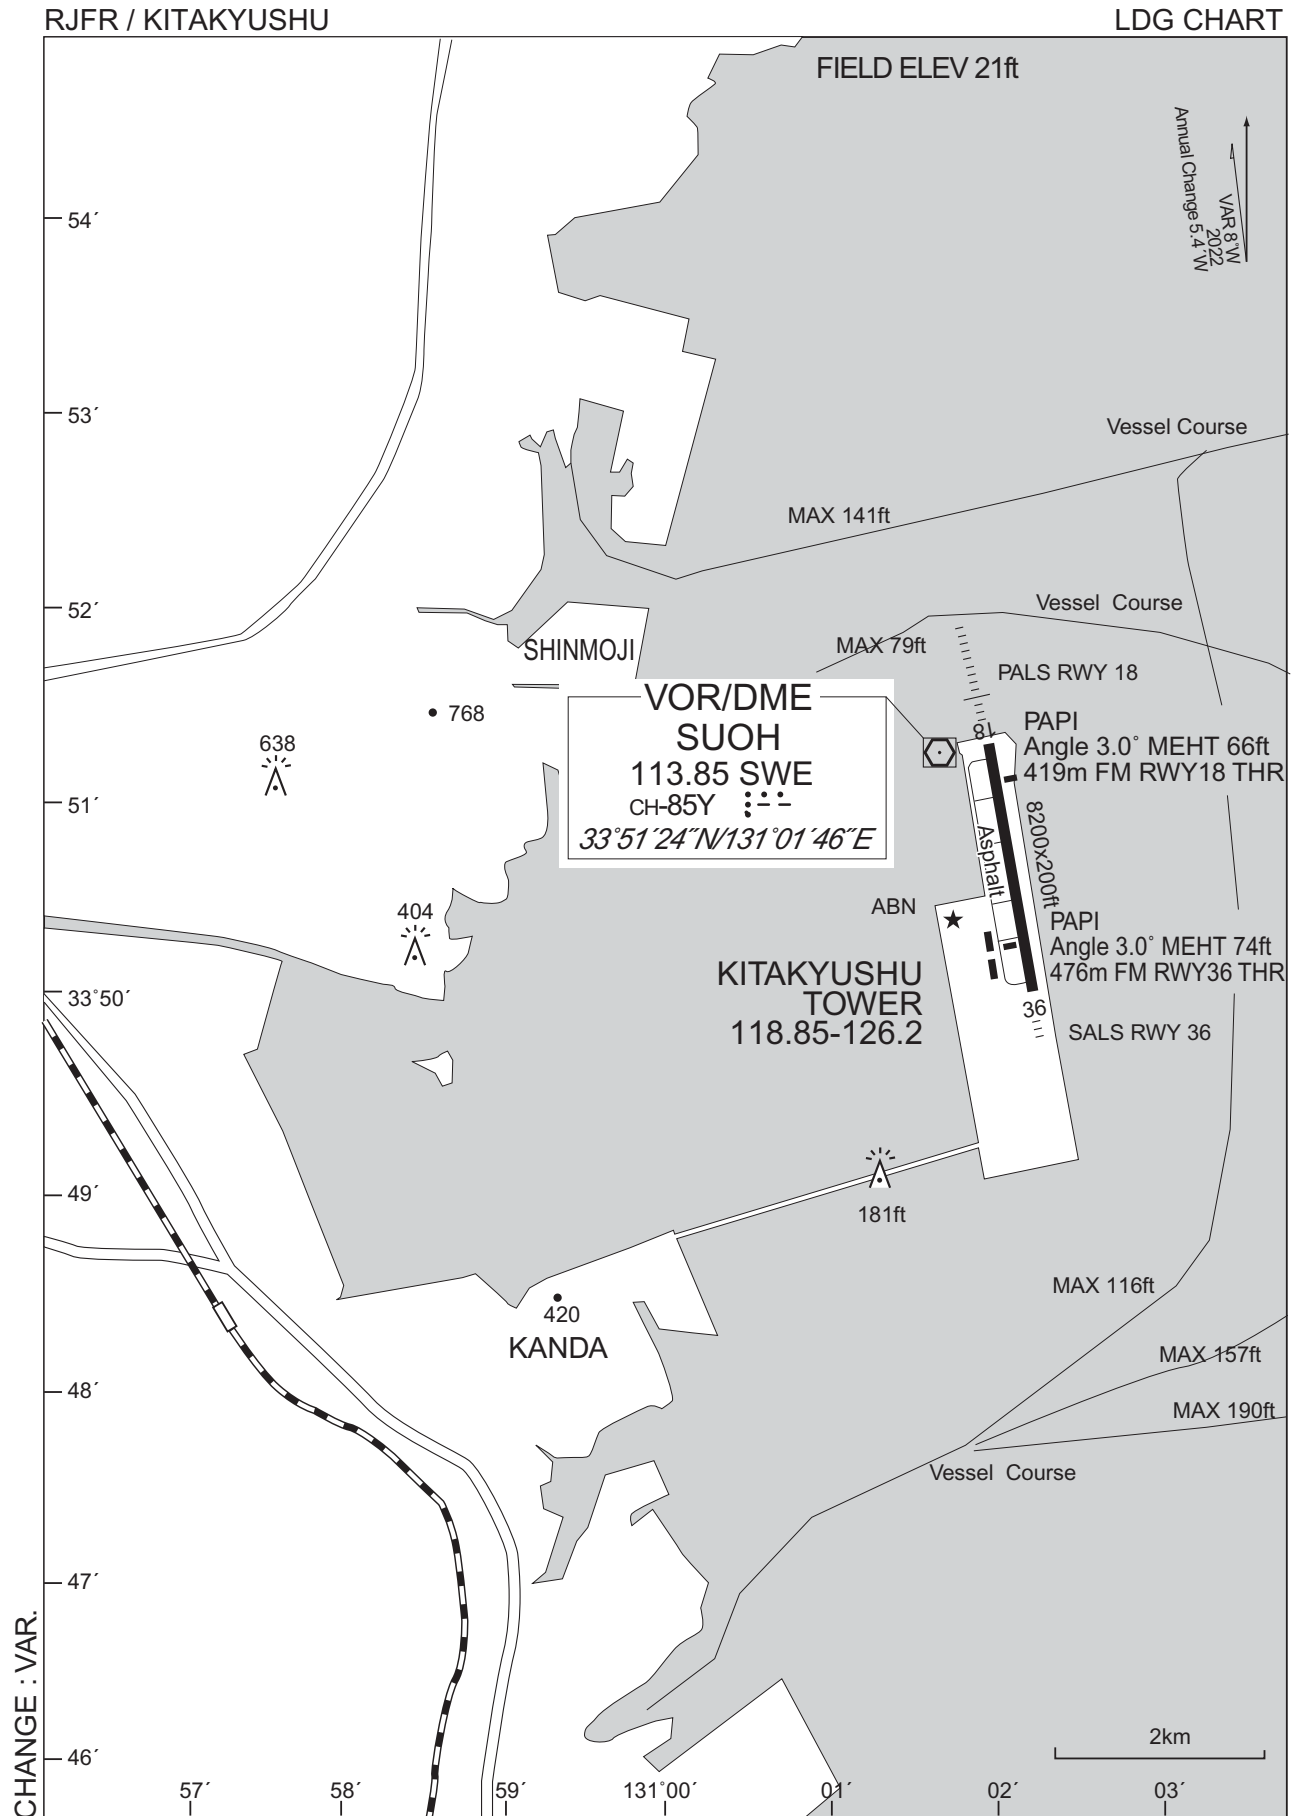

RJFR / KITAKYUSHU

Minimum Vectoring Altitude CHART

VAR 8°W (2022)

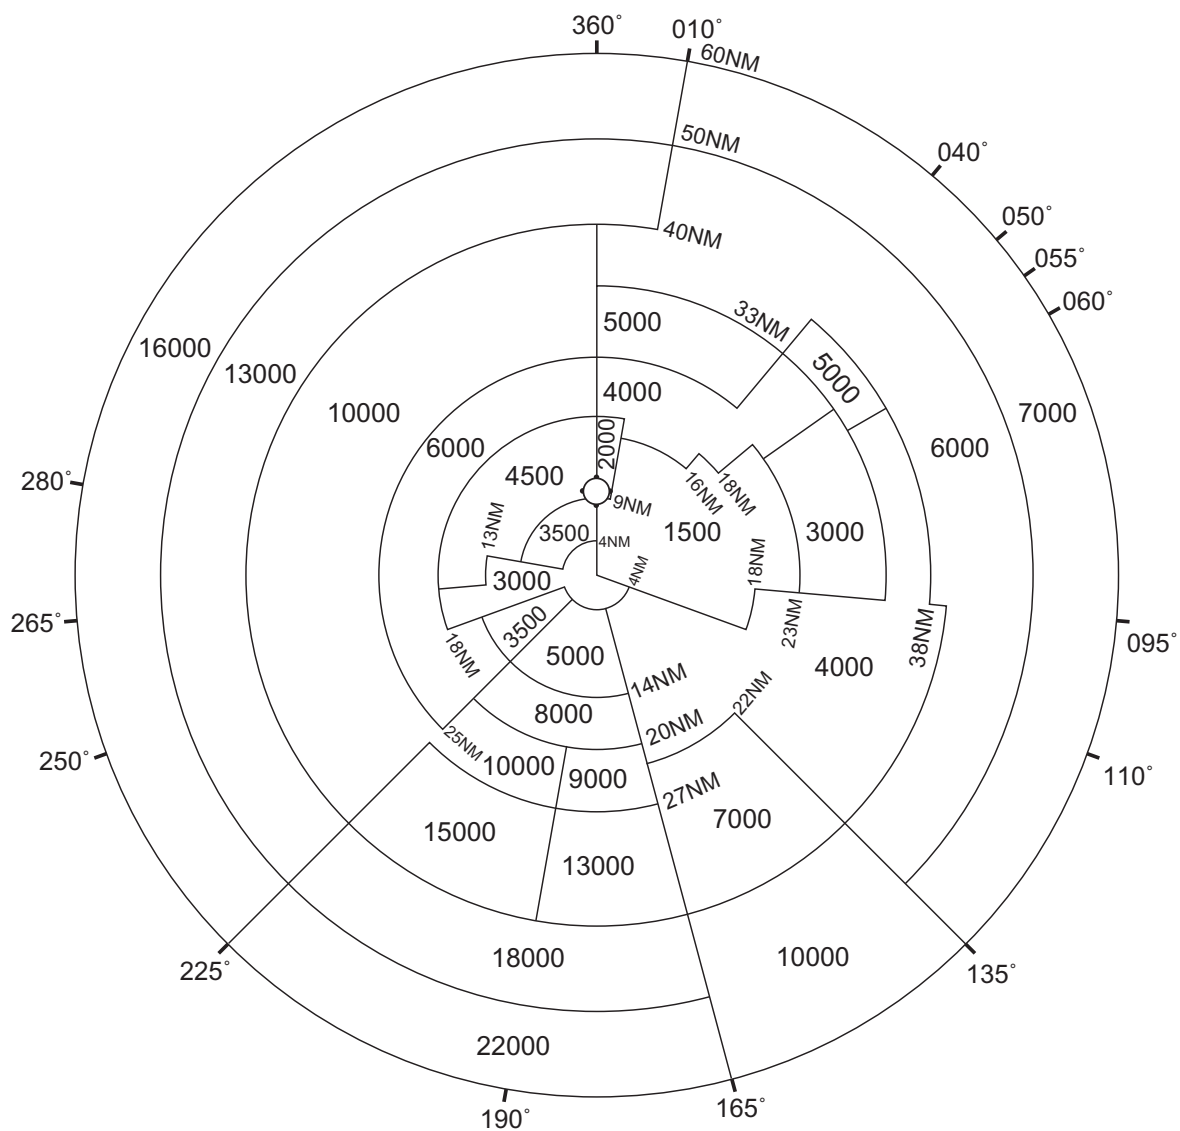

CENTER : 334041N/1310204E (RJFZ RADAR SITE)

CHANGE : VAR.