

RJCO / SAPPORO

AD CHART



**INTENTIONALLY LEFT BLANK**

STANDARD DEPARTURE CHART - INSTRUMENT

RJCO / SAPPORO

SID

KURIS THREE DEPARTURE

RWY 14: Turn left,....

RWY 32: Turn right,....

....Climb via HDG 057° to intercept and proceed via SPE R103 to KURIS.

Cross KURIS at or above 5000FT.

SAPPORO REVERSAL FOUR DEPARTURE

RWY 14: Turn left,....

RWY 32: ....

....Climb to SPE VOR/DME, via SPE R335, turn left to intercept and proceed via SPE R310 to SPE VOR/DME within SPE 15.0DME.

Cross SPE R335/6.0DME at or below 6000FT,  
cross SPE R310/6.0DME at or above 10000FT.

SAPPORO THREE DEPARTURE

RWY 14: Turn left,....

RWY 32: ....

....Climb to SPE VOR/DME.

RUMOI TRANSITION

From over SPE VOR/DME, climb via SPE R040 to RUMOI.

Cross SPE R040/8.0DME at or above 4000FT, cross RUMOI at assigned altitude.

BEEBA TRANSITION

From over SPE VOR/DME, climb via SPE R069 to BEEBA.

Cross BEEBA at assigned altitude.

MOIWA TRANSITION

From over SPE VOR/DME, climb via SPE R325 to 3000FT or above, turn left to intercept and proceed via SPE R203 to MOIWA.

Cross MOIWA at or above 7000FT.

Note: Do not start left turn to MOIWA before SPE VOR/DME.

STANDARD DEPARTURE CHART - INSTRUMENT

RJCO / SAPPORO

SID



SAPPORO REVERSAL FOUR DEPARTURE



STANDARD DEPARTURE CHART - INSTRUMENT

RJCO / SAPPORO

SID

KURIS REVERSAL FOUR DEPARTURE

RWY 14 : Turn left,....

RWY 32 : ....

....climb direct to SPE VOR/DME, via SPE R325 until passing 3000 FT, turn left to intercept and proceed via SPE R305 to SPE VOR/DME within SPE 10.0DME, via SPE R103 to KURIS.

Cross SPE R103/10.0DME at or above 6000FT,  
cross KURIS at or above 7000FT.



## STANDARD DEPARTURE CHART - INSTRUMENT

RJCO / SAPPORO


RNAV SID

## BANKE ONE DEPARTURE

Basic RNP1

Note GNSS required.

VAR 10° W(2020)

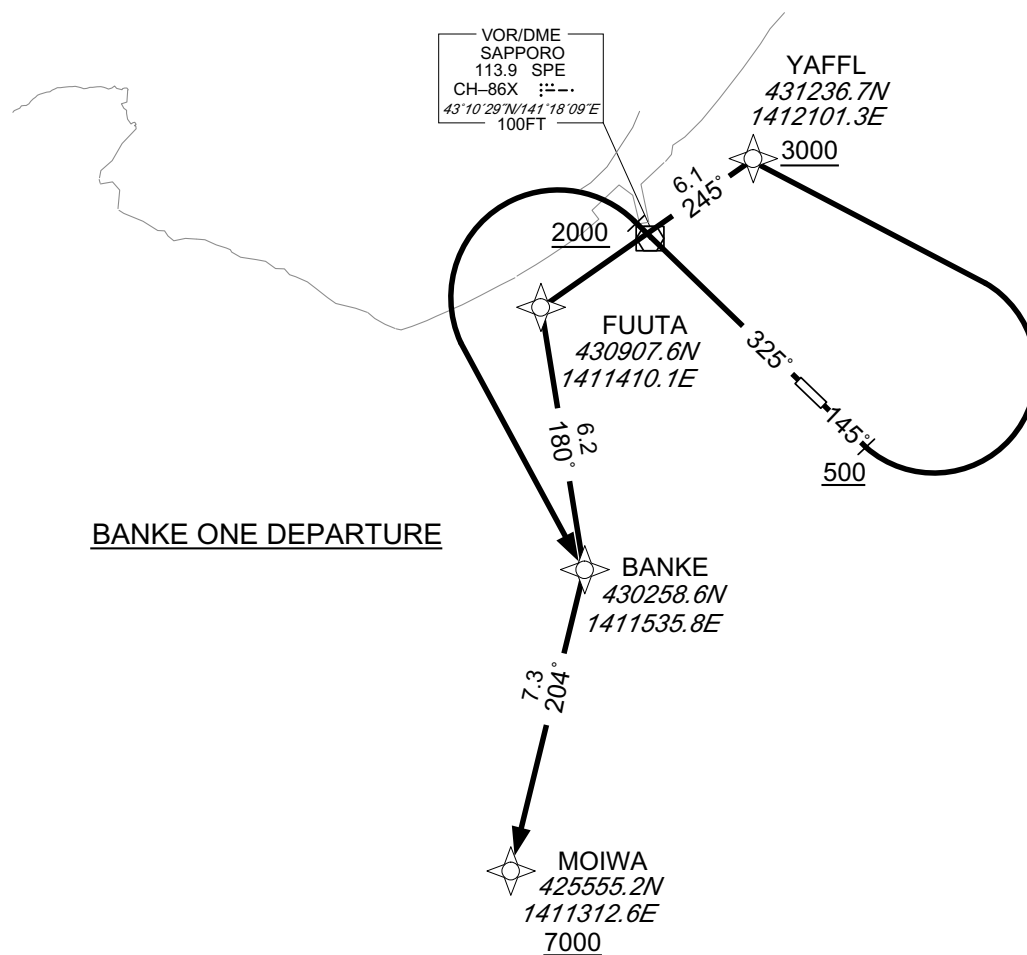BANKE ONE DEPARTURE

RWY14 : Climb on HDG145° at or above 500FT, turn left direct to YAFFL at or above 3000FT, to FUUTA, to BANKE, to MOIWA at or above 7000FT.

RWY32 : Climb on HDG325° at or above 2000FT, turn left direct to BANKE, to MOIWA at or above 7000FT.

Note RWY14 : 6.0% climb gradient required up to 2200FT.

OBST ALT 2822FT located at 7.8NM 266° FM end of RWY14.

RWY32 : 6.0% climb gradient required up to 4000FT.

OBST ALT 3585FT located at 8.4NM 261° FM end of RWY32.

CHANGE : FIX symbol(MOIWA) .

## STANDARD DEPARTURE CHART - INSTRUMENT

RJCO / SAPPORO

RNAV SID

BANKE ONE DEPARTURE

## RWY14

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	145 (134.8)	-9.7	—	—	+500	—	—	Basic RNP1
002	DF	YAFFL	—	—	-9.7	—	L	+3000	—	—	Basic RNP1
003	TF	FUUTA	—	245 (235.2)	-9.7	6.1	—	—	—	—	Basic RNP1
004	TF	BANKE	—	180 (170.4)	-9.7	6.2	—	—	—	—	Basic RNP1
005	TF	MOIWA	—	204 (193.9)	-9.7	7.3	—	+7000	—	—	Basic RNP1

## RWY32

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	325 (314.8)	-9.7	—	—	+2000	—	—	Basic RNP1
002	DF	BANKE	—	—	-9.7	—	L	—	—	—	Basic RNP1
003	TF	MOIWA	—	204 (193.9)	-9.7	7.3	—	+7000	—	—	Basic RNP1

CHANGE : New PROC .

## STANDARD DEPARTURE CHART - INSTRUMENT

RJCO / SAPPORO


RNAV SID

## TOBET EAST ONE DEPARTURE

Basic RNP1

Note GNSS required.

VAR 10° W(2020)

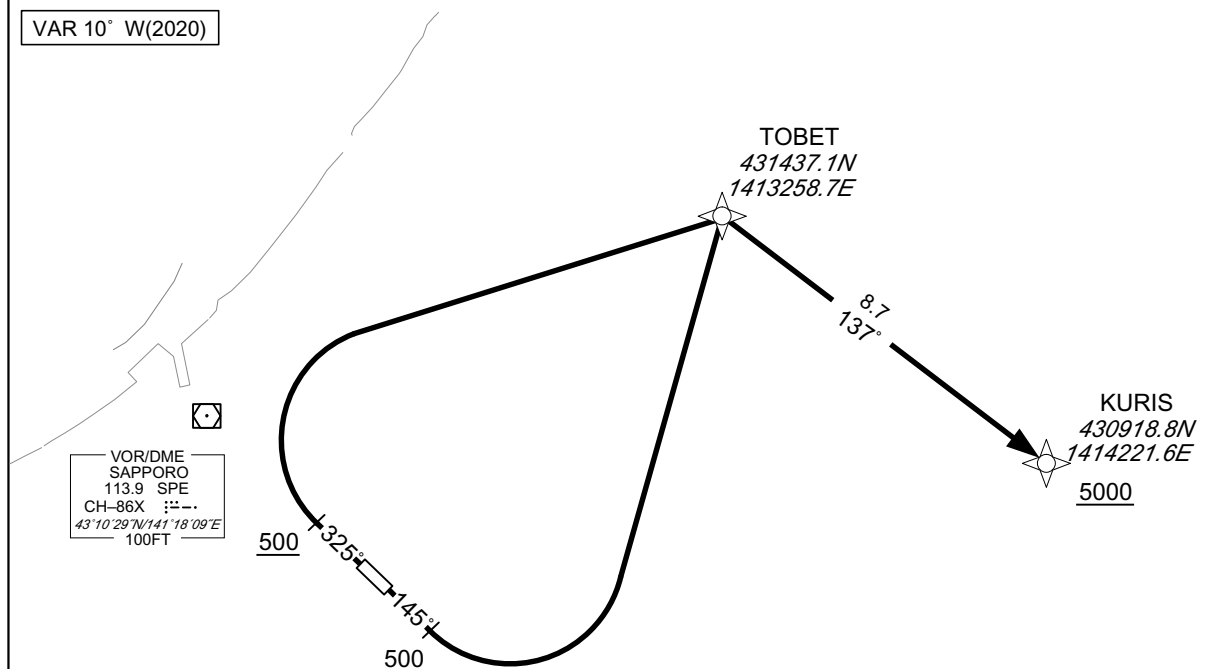

## TOBET EAST ONE DEPARTURE

## TOBET EAST ONE DEPARTURE

RWY14 : Climb on HDG145° at or above 500FT, turn left direct to TOBET, to KURIS at or above 5000FT.

RWY32 : Climb on HDG325° at or above 500FT, turn right direct to TOBET, to KURIS at or above 5000FT.

Note RWY14 : 6.0% climb gradient required up to 500FT.

RWY32 : 6.0% climb gradient required up to 500FT.

## RWY14

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	145 (134.8)	-9.7	—	—	+500	—	—	Basic RNP1
002	DF	TOBET	—	—	-9.7	—	L	—	—	—	Basic RNP1
003	TF	KURIS	—	137 (127.7)	-9.7	8.7	—	+5000	—	—	Basic RNP1

## RWY32

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	325 (314.8)	-9.7	—	—	+500	—	—	Basic RNP1
002	DF	TOBET	—	—	-9.7	—	R	—	—	—	Basic RNP1
003	TF	KURIS	—	137 (127.7)	-9.7	8.7	—	+5000	—	—	Basic RNP1

CHANGE : FIX symbol(KURIS) .



## STANDARD DEPARTURE CHART - INSTRUMENT

RJCO / SAPPORO

RNAV SID



CHANGE : FIX symbol(RUMOI) .

**INTENTIONALLY LEFT BLANK**

STANDARD ARRIVAL CHART-INSTRUMENT

RJCO / SAPPORO

RNAV STAR RWY14

MOIWA NORTH ARRIVAL RUMOI NORTH ARRIVAL KURIS NORTH ARRIVAL	Basic RNP1
---	------------

Note GNSS required.



## STANDARD ARRIVAL CHART-INSTRUMENT

RJCO / SAPPORO

RNAV STAR RWY14

MOIWA NORTH ARRIVAL

From MOIWA, to KIROL at or above 6000FT, to NIKAN at or above 4000FT.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	MOIWA	-	-	-9.9	-	-	-	-	-	Basic RNP1
002	TF	KIROL	-	348 (338.3)	-9.9	14.6	-	+6000	-	-	Basic RNP1
003	TF	NIKAN	-	348 (338.2)	-9.9	4.4	-	+4000	-	-	Basic RNP1

RUMOI NORTH ARRIVAL

From RUMOI, to MAMAT at or above 6000FT, to MORAI at or above 3500FT, to SOBEE at or above 2800FT.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	RUMOI	-	-	-9.9	-	-	-	-	-	Basic RNP1
002	TF	MAMAT	-	236 (226.3)	-9.9	20.9	-	+6000	-	-	Basic RNP1
003	TF	MORAI	-	236 (226.0)	-9.9	5.1	-	+3500	-	-	Basic RNP1
004	TF	SOBEE	-	236 (226.0)	-9.9	4.1	-	+2800	-	-	Basic RNP1

KURIS NORTH ARRIVAL

From KURIS, to SOBEE at or above 2800FT.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	KURIS	-	-	-9.9	-	-	-	-	-	Basic RNP1
002	TF	SOBEE	-	309 (299.6)	-9.9	23.9	-	+2800	-	-	Basic RNP1

CHANGE : VAR.

STANDARD ARRIVAL CHART-INSTRUMENT

RJCO / SAPPORO


RNAV STAR RWY32

MOIWA SOUTH ARRIVAL  
RUMOI SOUTH ARRIVAL  
KURIS SOUTH ARRIVAL

Basic RNP1

Note GNSS required.

VAR 10°W (2022)



RUMOI SOUTH ARRIVAL

RUMOI  
434157.6N  
1414344.5E

MAMAT  
432729.9N  
1412256.9E

6000

SOBEE  
432103.9N  
1411346.9E  
3500

KURIS SOUTH ARRIVAL

OHKAM  
430906.5N  
1412758.8E

YACHA  
431303.0N  
1413319.5E  
3000

KURIS  
430918.8N  
1414221.6E

JODAI  
430519.5N  
1413226.7E  
1800  
MAX 180KIAS

VOR/DME  
SAPPORO  
113.9 SPE  
CH-86X  
43°10'29"N/141°18'09"E  
100FT

MOIWA SOUTH ARRIVAL

BELMI  
430533.8N  
1411532.0E  
4700

OLYMP  
430358.7N  
1410953.4E  
6000

JOZAN  
425949.0N  
1410749.1E

MOIWA  
425555.2N  
1411312.6E

JIIMA  
430211.6N  
1412059.1E

CLAKY  
425942.2N  
1412500.3E  
3200  
MAX 180KIAS

CHANGE : VAR. Course FM MOIWA to JOZAN. Course FM YACHA to OHKAM. RNAV HLDG established(SOBEE).

## STANDARD ARRIVAL CHART-INSTRUMENT

RJCO / SAPPORO

RNAV STAR RWY32

MOIWA SOUTH ARRIVAL

From MOIWA, to JOZAN, to OLYMP at or above 6000FT, to BELMI at or above 4700FT, to JIIMA at or above 4000FT, to CLAKY at or above 3200FT.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	MOIWA	-	-	-9.9	-	-	-	-	-	Basic RNP1
002	TF	JOZAN	-	325 (314.7)	-9.9	5.5	-	-	-	-	Basic RNP1
003	TF	OLYMP	-	030 (020.0)	-9.9	4.4	-	+6000	-	-	Basic RNP1
004	TF	BELMI	-	079 (068.9)	-9.9	4.4	-	+4700	-	-	Basic RNP1
005	TF	JIIMA	-	140 (130.2)	-9.9	5.2	-	+4000	-	-	Basic RNP1
006	TF	CLAKY	-	140 (130.3)	-9.9	3.9	-	+3200	-180	-	Basic RNP1

RUMOI SOUTH ARRIVAL

From RUMOI, to MAMAT at or above 6000FT, to SOBEE at or above 3500FT, to JODAI at or above 1800FT.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	RUMOI	-	-	-9.9	-	-	-	-	-	Basic RNP1
002	TF	MAMAT	-	236 (226.3)	-9.9	20.9	-	+6000	-	-	Basic RNP1
003	TF	SOBEE	-	236 (226.0)	-9.9	9.3	-	+3500	-	-	Basic RNP1
004	TF	JODAI	-	149 (139.1)	-9.9	20.8	-	+1800	-180	-	Basic RNP1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	SOBEE	173 (163.3)	-9.9	1.0(-14000)	L	3500	FL140	-210(-14000)	Basic RNP1

KURIS SOUTH ARRIVAL

From KURIS, to YACHA at or above 3000FT, to OHKAM, to JODAI at or above 1800FT.


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	KURIS	-	-	-9.9	-	-	-	-	-	Basic RNP1
002	TF	YACHA	-	309 (299.6)	-9.9	7.6	-	+3000	-	-	Basic RNP1
003	TF	OHKAM	-	235 (224.7)	-9.9	5.5	-	-	-	-	Basic RNP1
004	TF	JODAI	-	149 (139.2)	-9.9	5.0	-	+1800	-180	-	Basic RNP1

CHANGE : VAR. Course FM MOIWA to JOZAN. Course FM YACHA to OHKAM. RNAV HLDG established(SOBEE).

INSTRUMENT APPROACH CHART

RJCO / SAPPORO


VOR RWY14

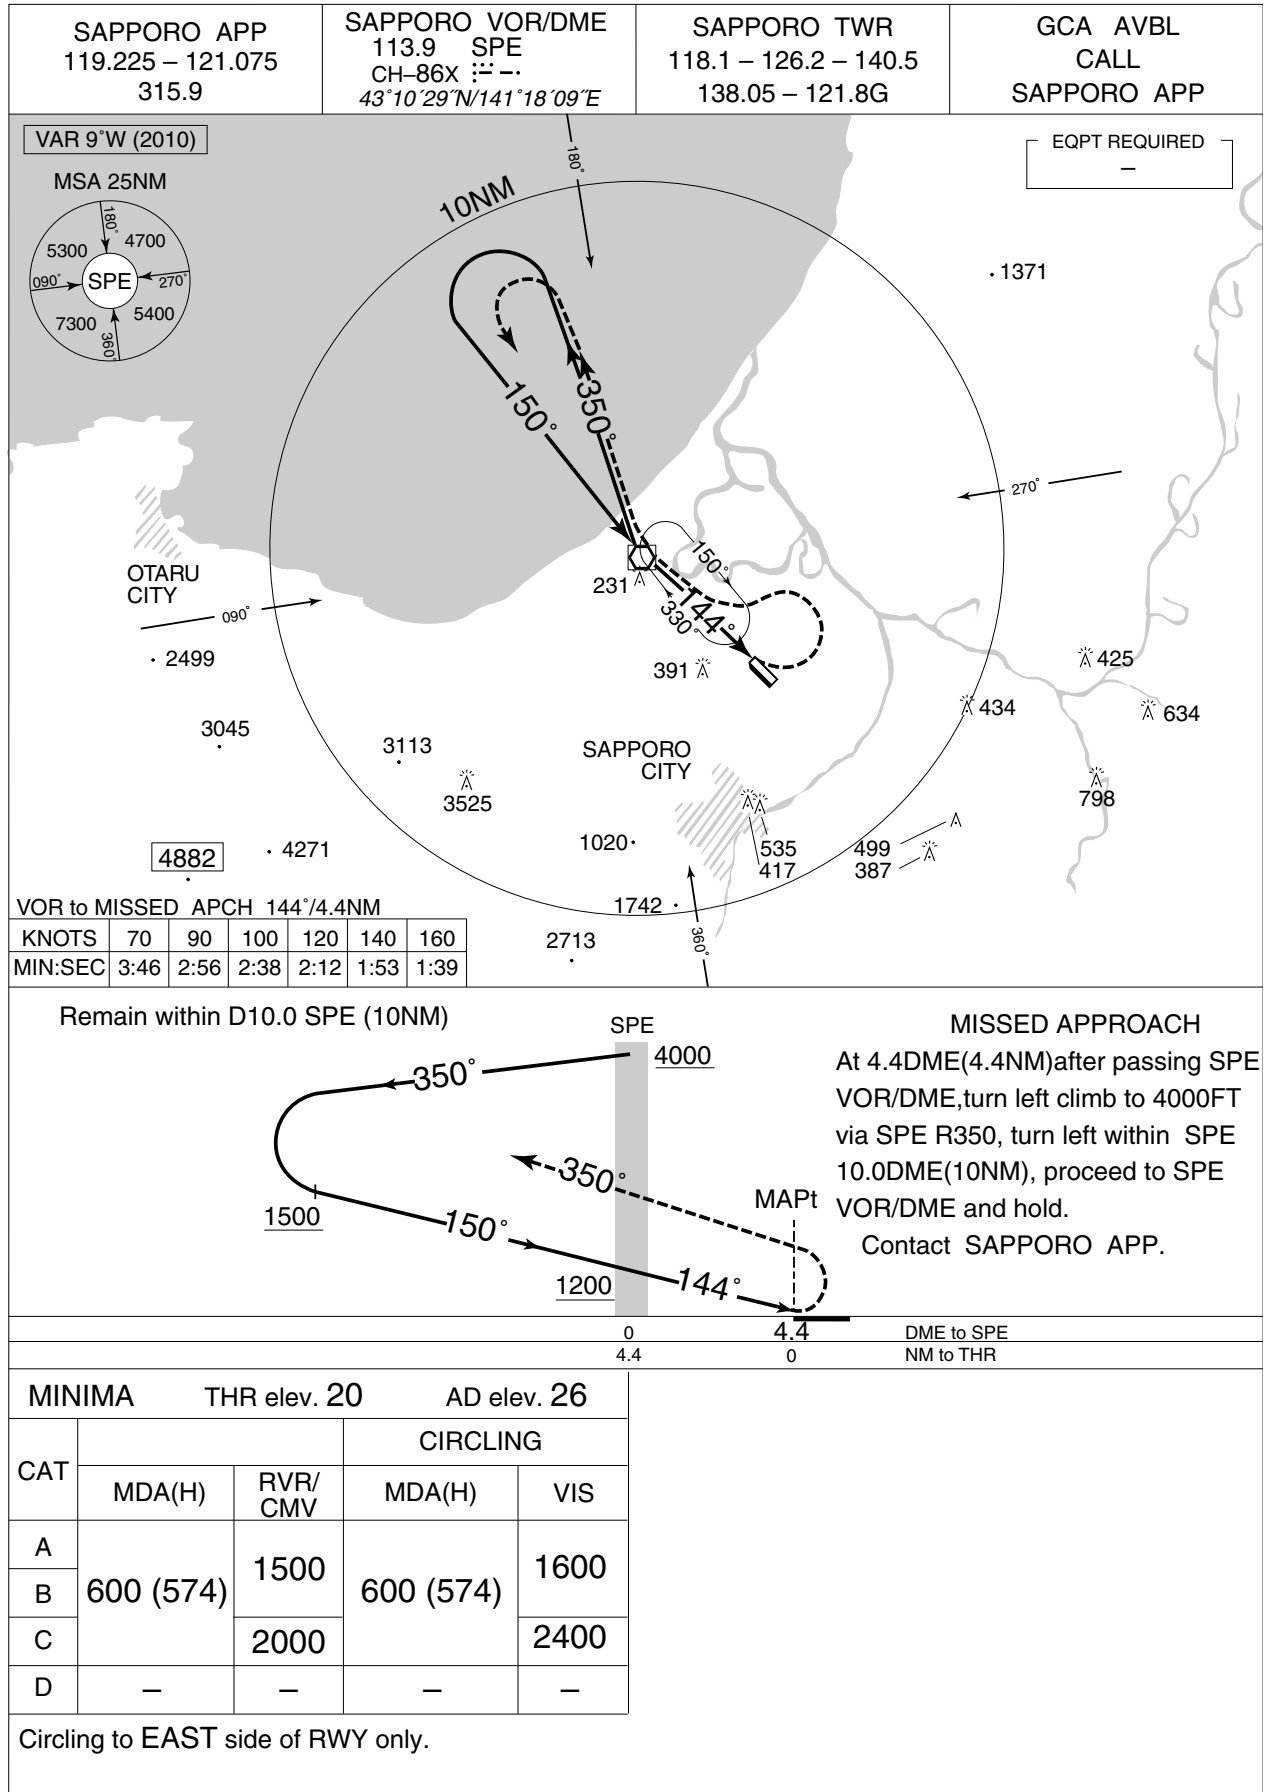


## INSTRUMENT APPROACH CHART

RJCO / SAPPORO

VOR RWY32

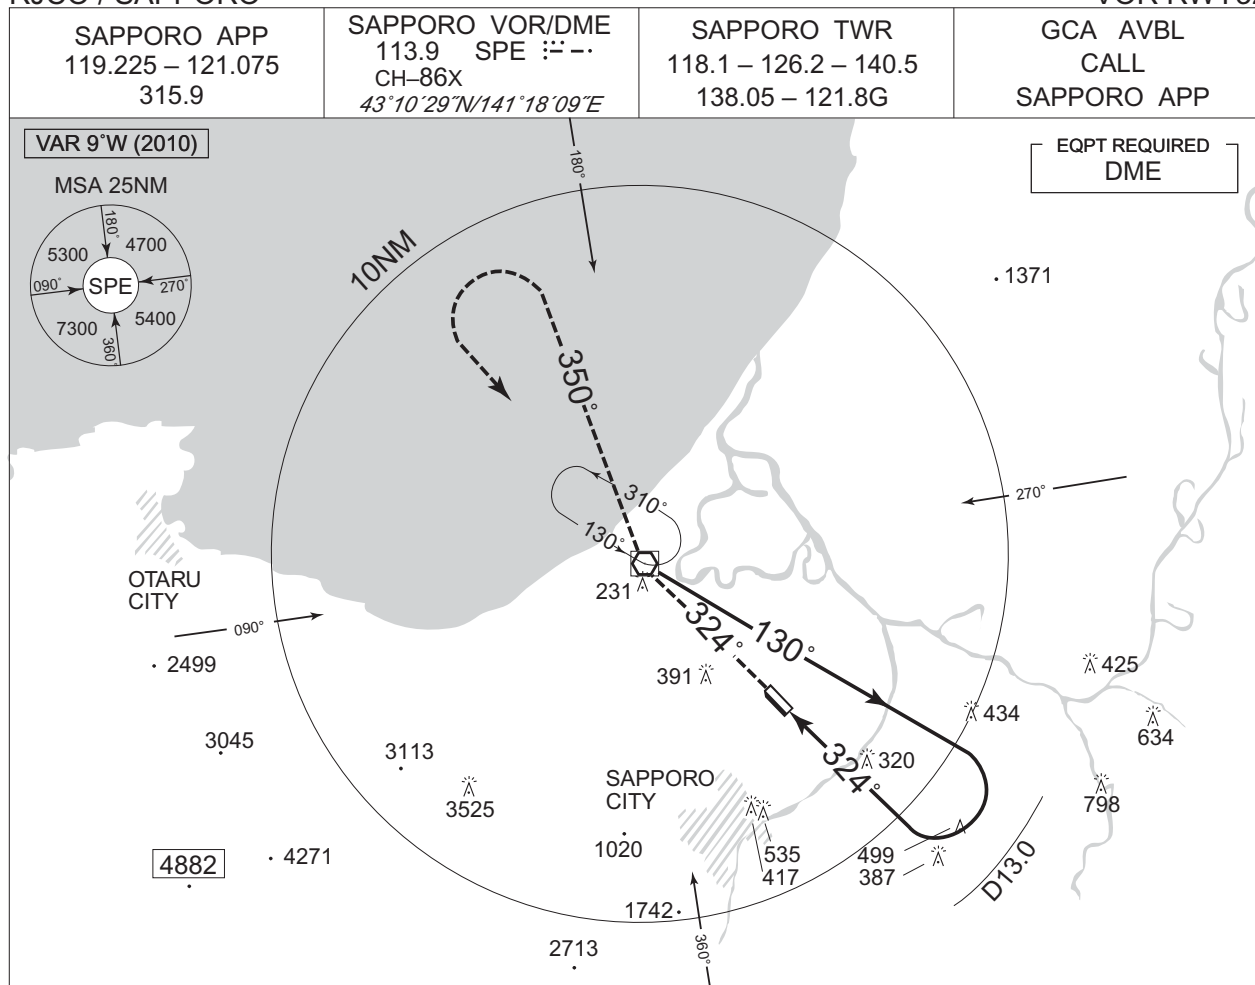**MISSED APPROACH**

At 5.3DME prior to SPE VOR/DME  
climb to 4000FT via SPE R144  
then SPE R350, turn left  
within SPE 10.0DME, proceed to  
SPE VOR/DME and hold.  
Contact SAPPORO APP.

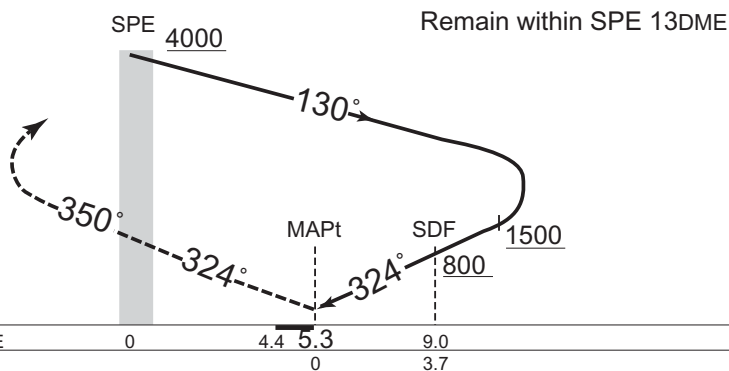

MINIMA		THR elev. 27	AD elev. 26
CAT	CIRCLING		
	MDA(H)	RVR/CMV	VIS
A	620 (594)	1500	1600
B		2000	2400
C			
D	—	—	—


Circling to EAST side of RWY only.



## INSTRUMENT APPROACH CHART

RJCO / SAPPORO

RNAV(GNSS) Z RWY14

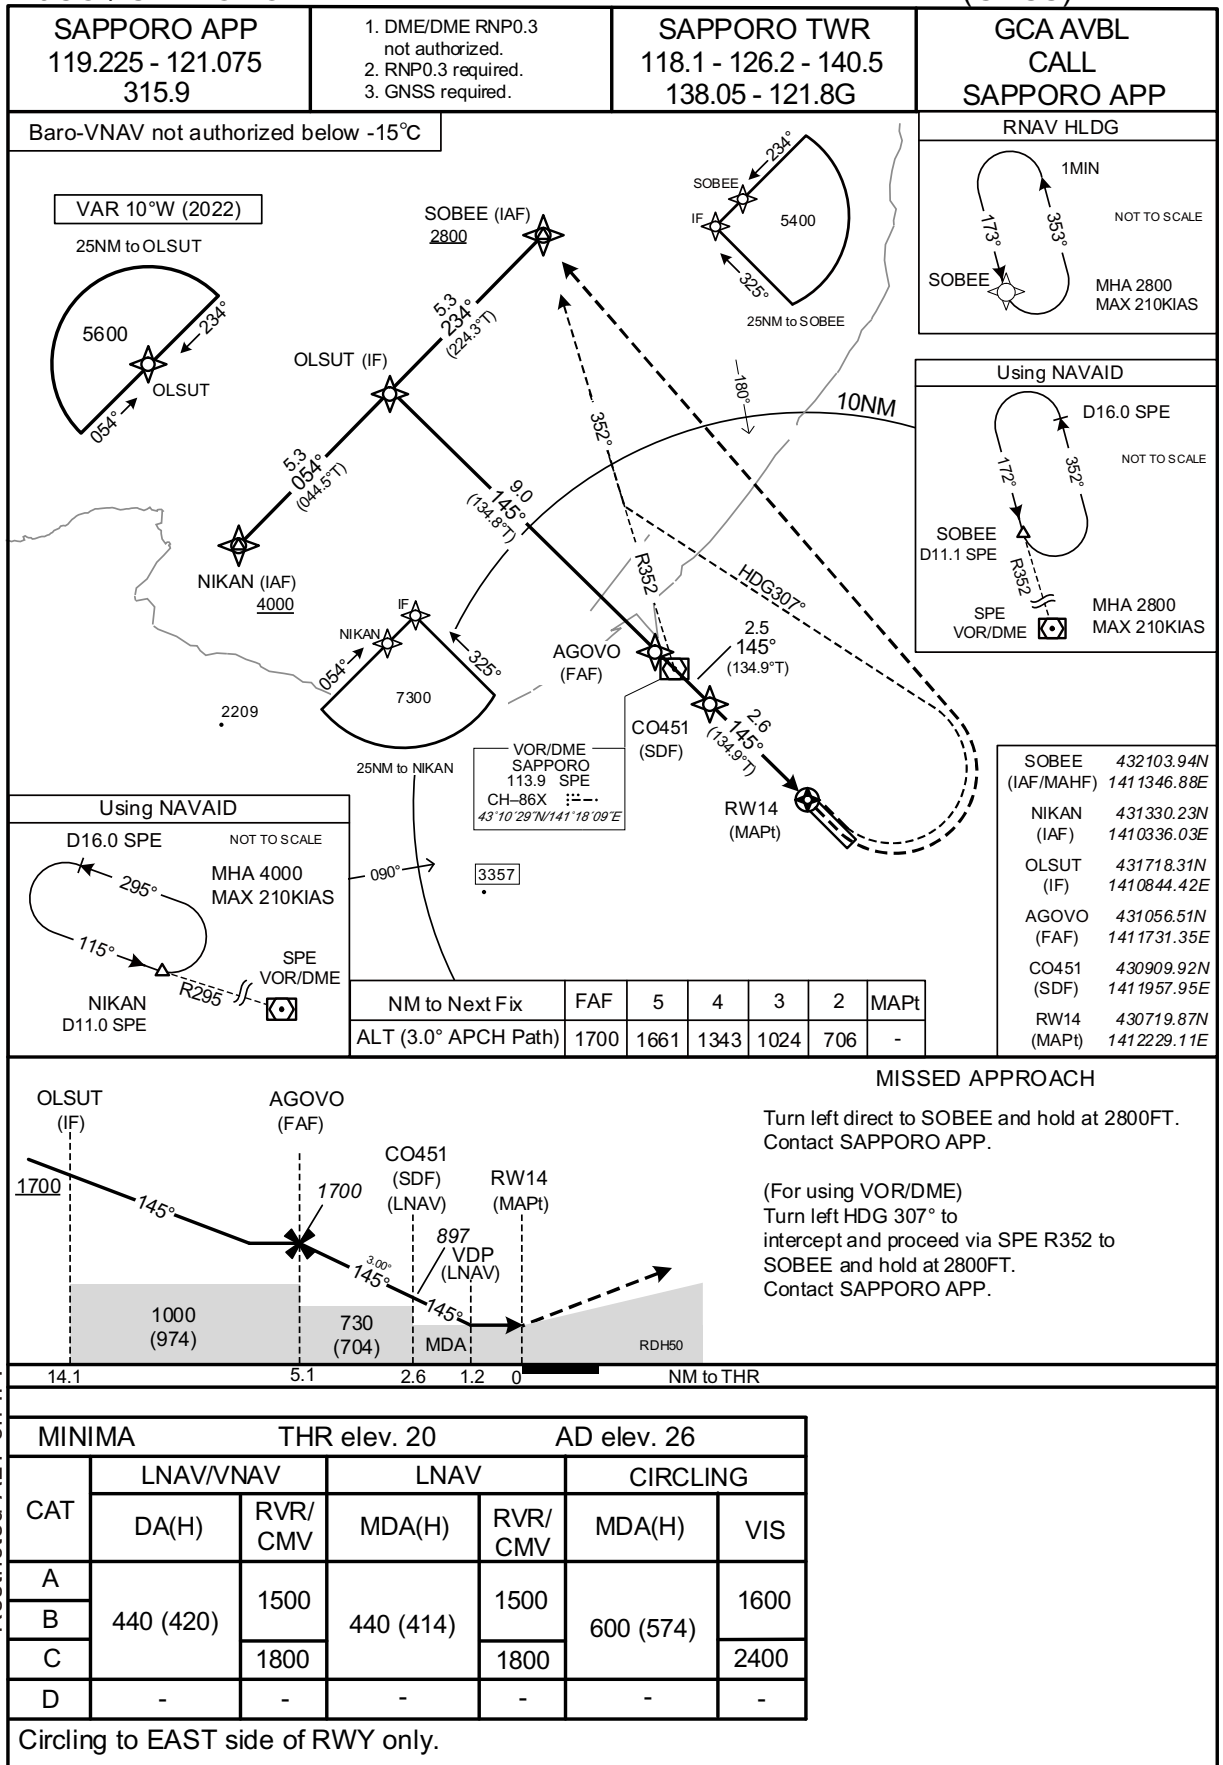CHANGE : VAR. PROC renamed. PROC course. OLSUT, AGOVO, CO451, RW14 established. ZUKKN, VINCE, CO450, CO45X abolished.  
Restricted ALT on IF.

## RJCO / SAPPORO



SAPPORO APP  
119.225 - 121.075  
315.9

1. DME/DME RNP 0.3 not authorized.  
2. RNP 0.3 required.  
3. GNSS required.

MSAS CH75888  
M14A

SAPPORO TWR  
118.1 - 126.2 - 140.5  
138.05 - 121.8G

GCA AVBL  
CALL  
SAPPORO APP

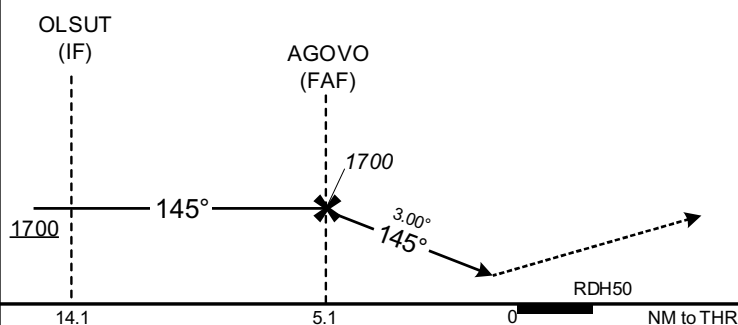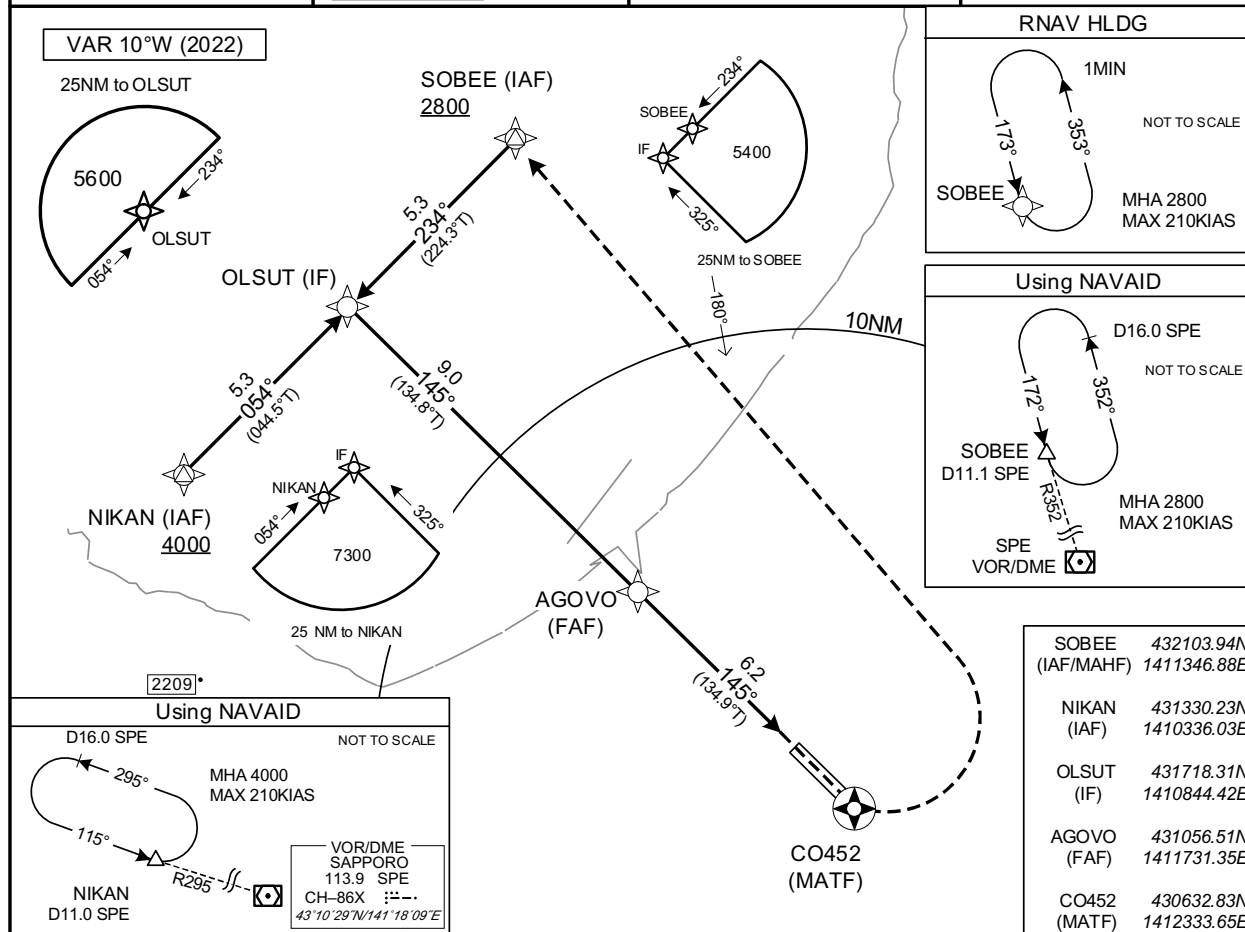

Direct to CO452, turn left direct to SOBEE  
and hold at 2800FT.  
Contact SAPPORO APP.

Missed APCH climb gradient MNM 5.0%

MINIMA		THR elev.20		AD elev.26	
CAT	LPV		CIRCLING		
	DA(H)	RVR/ CMV	MDA(H)	VIS	
A	342(322)	1500	600(574)	1600	
B					
C		1800			
D	—	—	—	—	

MINIMA with Missed APCH climb gradient of 2.5% are not established.  
Circling to EAST side of RWY only.

CHANGE : New PROC.

## INSTRUMENT APPROACH CHART

RJCO / SAPPORO

RNAV(GNSS) Y RWY14

## FAS DATA BLOCK

Operation type	0	LTP/FTP ellipsoidal height	+00374
SBAS service provider identifier	2	FPAP Latitude	430641.1115N
Airport identifier	RJCO	FPAP Longitude	1412322.2875E
Runway	14	Threshold crossing height	00015.0
Approach performance designator	0	TCH units selector	1
Route indicator	Y	Glide path angle	03.00
Reference path data selector	0	Course width at threshold	105.00
Reference path ID	M14A	∠ length offset	0192
LTP/FTP latitude	430719.8510N	HAL	40.00
LTP/FTP longitude	1412229.1365E	VAL	50.00
CRC reminder	DE9BC9B1		

## Required additional data


LTP/FTP orthometric height	5.7
----------------------------	-----

CHANGE : New PROC.

## INSTRUMENT APPROACH CHART

RJCO / SAPPORO

RNAV(GNSS) RWY32

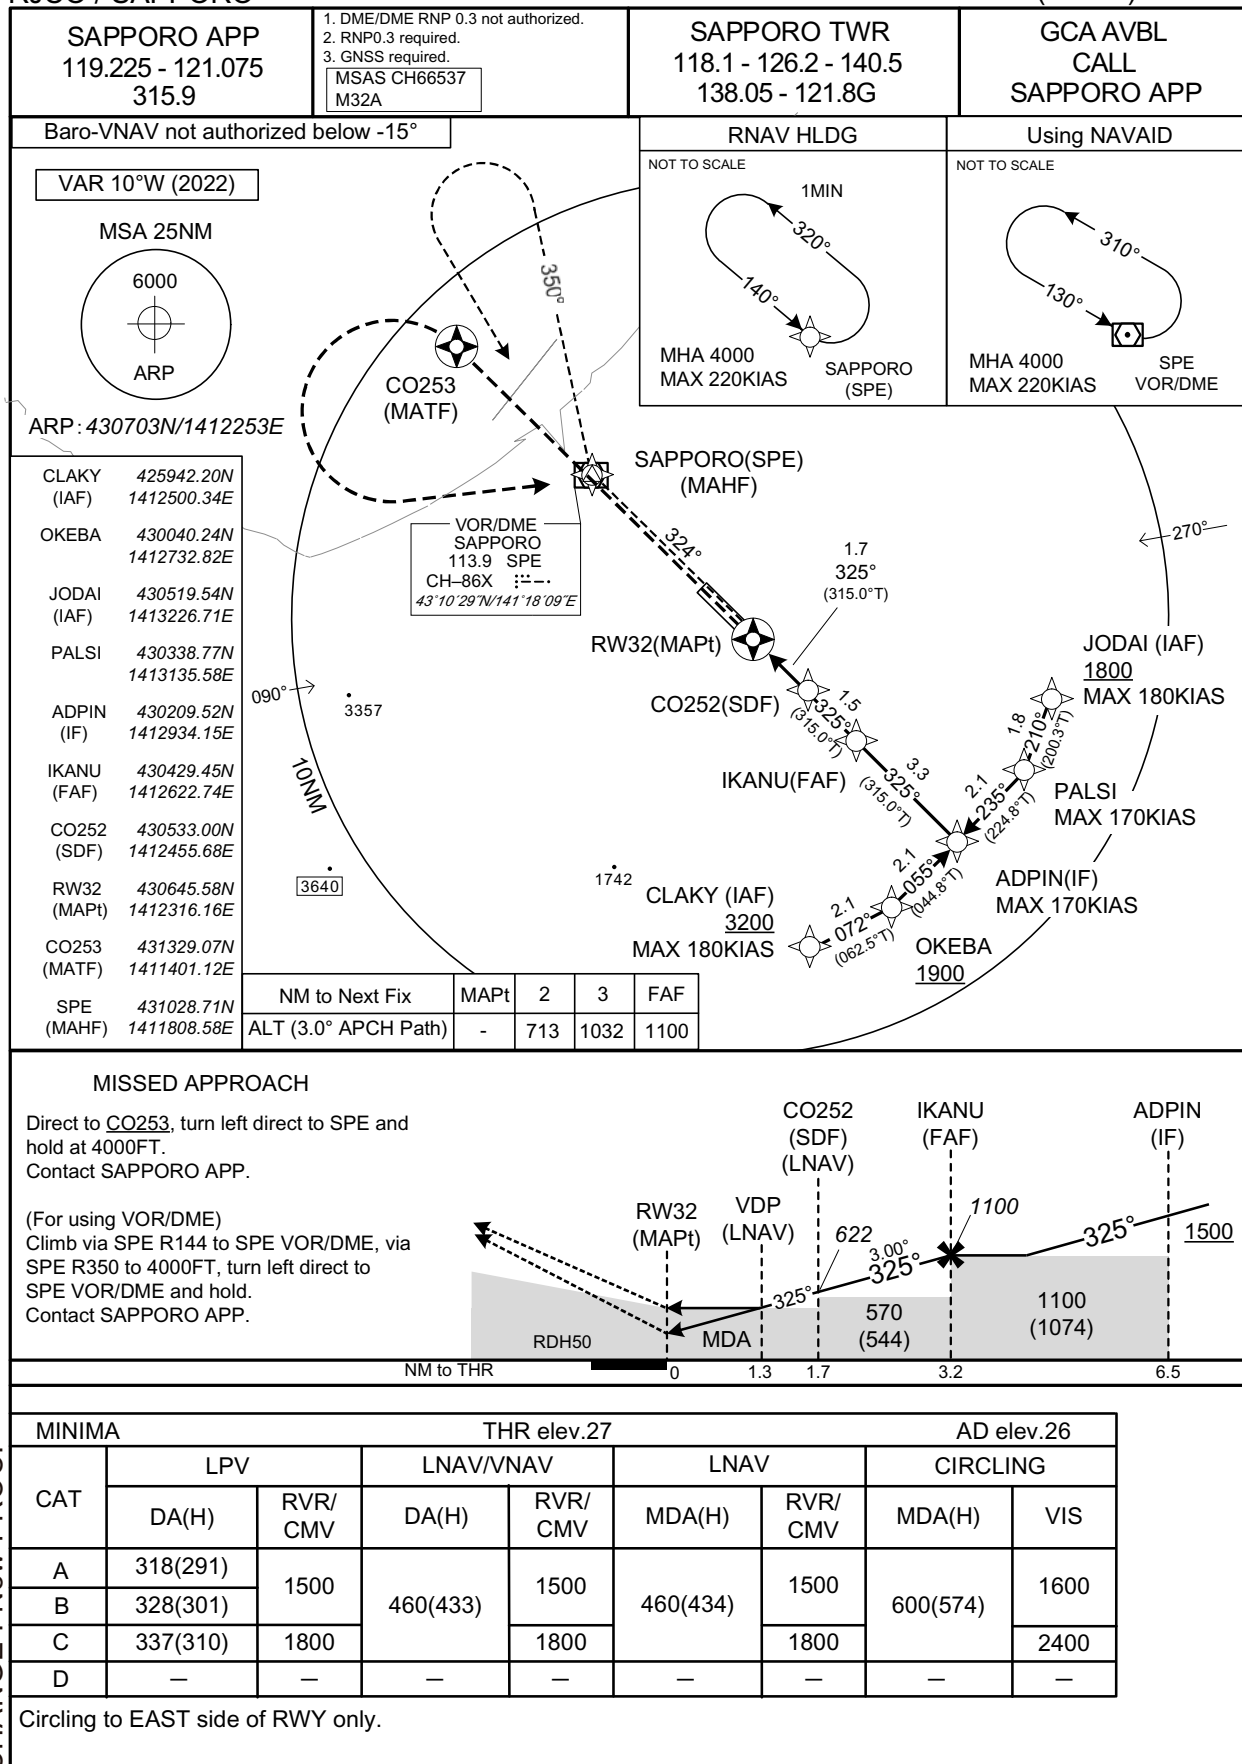

## INSTRUMENT APPROACH CHART

RJCO / SAPPORO

RNAV(GNSS) RWY32


## FAS DATA BLOCK

Operation type	0	LTP/FTP ellipsoidal height	+00394
SBAS service provider identifier	2	FPAP Latitude	430724.3050N
Airport identifier	RJCO	FPAP Longitude	1412223.0240E
Runway	32	Threshold crossing height	00015.0
Approach performance designator	0	TCH units selector	1
Route indicator		Glide path angle	03.00
Reference path data selector	0	Course width at threshold	105.00
Reference path ID	M32A	∠ length offset	0192
LTP/FTP latitude	430645.5665N	HAL	40.00
LTP/FTP longitude	1412316.1770E	VAL	50.00
CRC reminder	56210C49		

## Required additional data

LTP/FTP orthometric height	7.7
----------------------------	-----

CHANGE : New PROC.

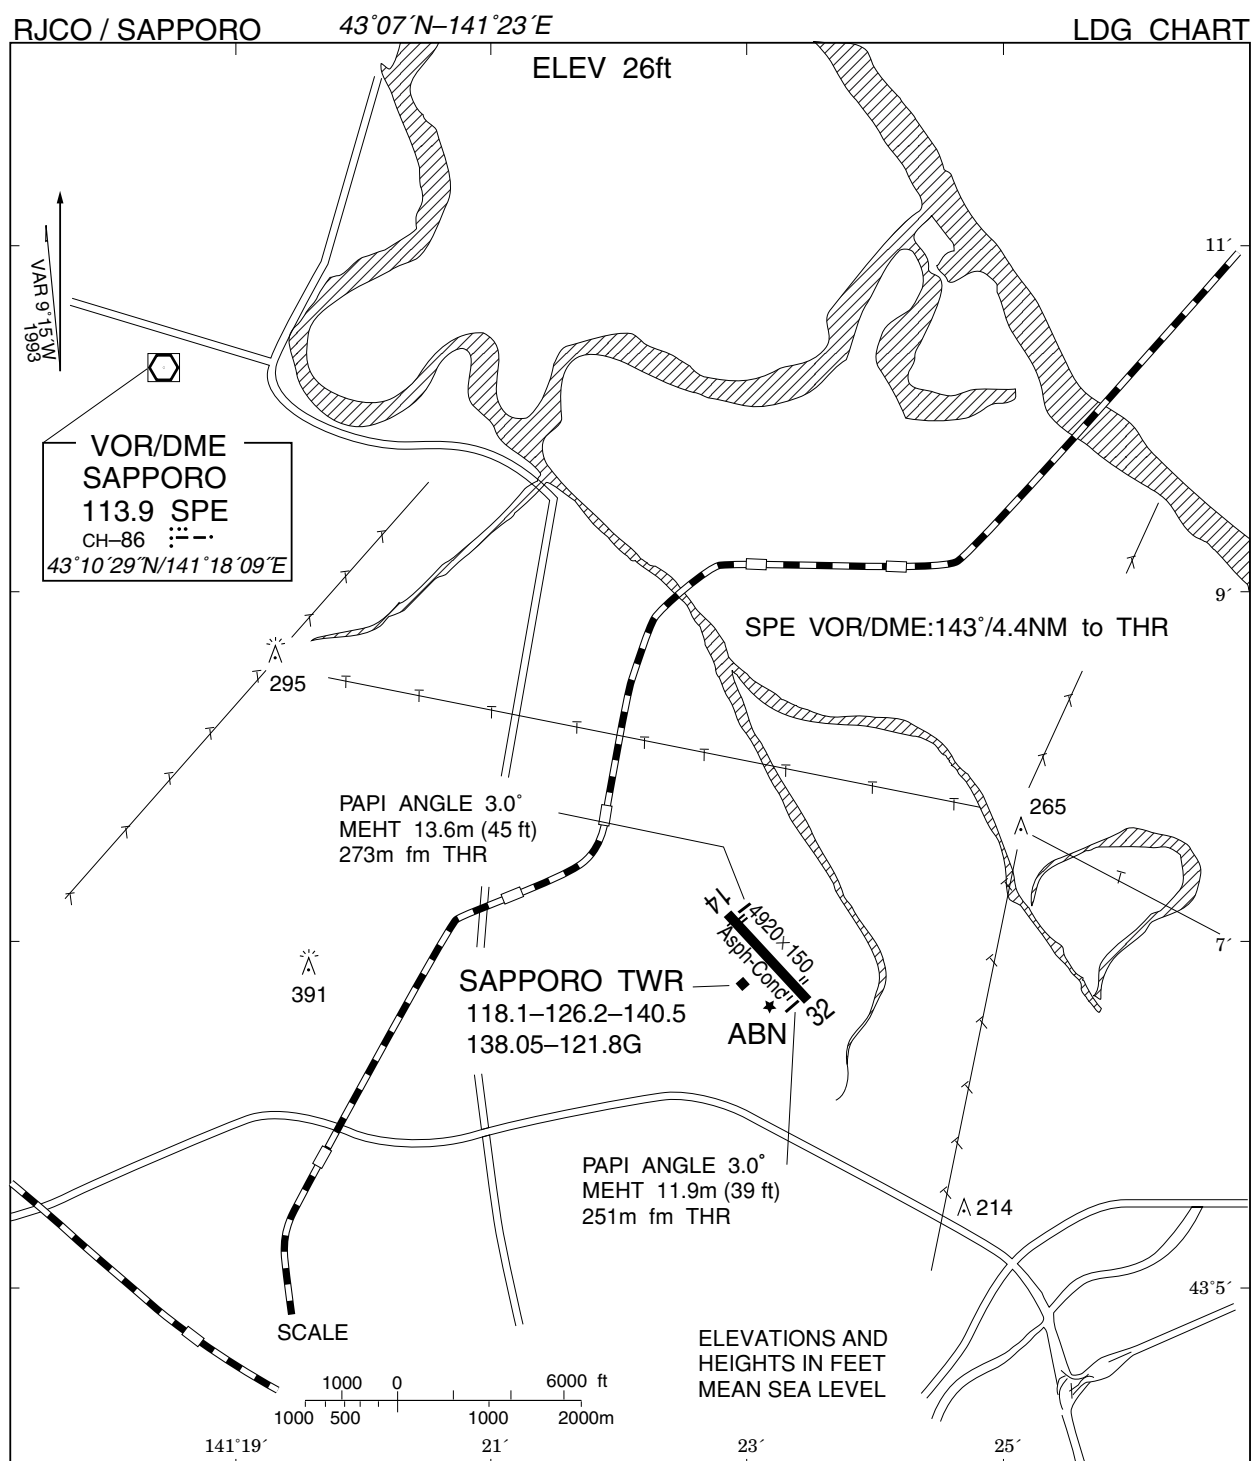

RJCO / SAPPORO

Minimum Vectoring Altitude CHART

VAR 9°W (2013)

