

## AD 2 AERODROMES

## ROYN AD 2.1 AERODROME LOCATION INDICATOR AND NAME

## ROYN - YONAGUNI

## ROYN AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA

|   |                                                                                                    |                                                                                                                                                                                                                                                                    |
|---|----------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | ARP coordinates and site at AD                                                                     | 242803N/1225847E<br>075°/1.00km from RWY 08 THR                                                                                                                                                                                                                    |
| 2 | Direction and distance from (city)                                                                 | 124km W from ISHIGAKI City                                                                                                                                                                                                                                         |
| 3 | Elevation/ Reference temperature                                                                   | 49ft / 32.7°C(2001 - 2005)                                                                                                                                                                                                                                         |
| 4 | Geoid undulation at AD ELEV<br>PSN                                                                 | 76ft                                                                                                                                                                                                                                                               |
| 5 | MAG VAR/ Annual change                                                                             | 5°W(2022) / 7°W                                                                                                                                                                                                                                                    |
| 6 | AD Administration, address,<br>telephone, telefax, telex, AFS,<br>e-mail and/or Web-site addresses | OKINAWA PREF. Public AP.<br>4350, Aza-Yonaguni, Yonaguni-cho, Yaeyama-gun, Okinawa Pref<br>Tel 0980-87-8375, 0980-87-3266<br>Fax 0980-87-2913,<br>E-mail:aa063002@pref.okinawa.lg.jp<br>Web: <a href="http://www.pref.okinawa.jp/">http://www.pref.okinawa.jp/</a> |
| 7 | Types of traffic permitted (IFR/<br>VFR)                                                           | IFR/VFR                                                                                                                                                                                                                                                            |
| 8 | Remarks                                                                                            | Nil                                                                                                                                                                                                                                                                |

## ROYN AD 2.3 OPERATIONAL HOURS

|    |                           |                                                                                  |
|----|---------------------------|----------------------------------------------------------------------------------|
| 1  | AD Administration         | 2300 - 1030                                                                      |
| 2  | Customs and immigration   | On request<br>Customs: 0980-87-2804<br>Immigration: 0980-82-2333                 |
| 3  | Health and sanitation     | Quarantine (human): On request (0980-82-4940)<br>Quarantine (animal, plant): Nil |
| 4  | AIS Briefing Office       | Nil                                                                              |
| 5  | ATS Reporting Office(ARO) | Nil                                                                              |
| 6  | MET Briefing Office       | H24 (NAHA)                                                                       |
| 7  | ATS                       | 2300 - 1030<br>Remarks: AFIS provided by Naha Airport Office.                    |
| 8  | Fuelling                  | Nil                                                                              |
| 9  | Handling                  | 2300 - 1030                                                                      |
| 10 | Security                  | 2300 - 1030                                                                      |
| 11 | De-icing                  | Nil                                                                              |
| 12 | Remarks                   | Nil                                                                              |

**ROYN AD 2.4 HANDLING SERVICES AND FACILITIES**

|   |                                         |                       |
|---|-----------------------------------------|-----------------------|
| 1 | Cargo-handling facilities               | Ask AD Administration |
| 2 | Fuel/ oil types                         | Nil                   |
| 3 | Fuelling facilities/ capacity           | Nil                   |
| 4 | De-icing facilities                     | Nil                   |
| 5 | Hangar space for visiting aircraft      | Nil                   |
| 6 | Repair facilities for visiting aircraft | Nil                   |
| 7 | Remarks                                 | Nil                   |

**ROYN AD 2.5 PASSENGER FACILITIES**

|   |                      |                              |
|---|----------------------|------------------------------|
| 1 | Hotels               | Hotels in Yonaguni-cho       |
| 2 | Restaurants          | Restaurants in Yonaguni-cho  |
| 3 | Transportation       | Busses and Taxis             |
| 4 | Medical facilities   | Clinic in Yonaguni-cho 4.0km |
| 5 | Bank and Post Office | Post Office in Yonaguni-cho  |
| 6 | Tourist Office       | Nil                          |
| 7 | Remarks              | Nil                          |

**ROYN AD 2.6 RESCUE AND FIRE FIGHTING SERVICES**

|   |                                             |                                  |
|---|---------------------------------------------|----------------------------------|
| 1 | AD category for fire fighting               | CAT 6                            |
| 2 | Rescue equipment                            | Chemical fire fighting truck x 2 |
| 3 | Capability for removal of disabled aircraft | Incapable                        |
| 4 | Remarks                                     | Nil                              |

**ROYN AD 2.7 SEASONAL AVAILABILITY-CLEARING**

|   |                             |                |
|---|-----------------------------|----------------|
| 1 | Types of clearing equipment | Not Applicable |
| 2 | Clearance priorities        | Not Applicable |
| 3 | Remarks                     | Nil            |

## ROYN AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS DATA

|   |                                     |                                                                         |
|---|-------------------------------------|-------------------------------------------------------------------------|
| 1 | Apron surface and strength          | Surface: Asphalt-concrete<br>Strength: PCR 1048/F/A/X/T                 |
| 2 | Taxiway width, surface and strength | Width: 23m<br>Surface: Asphalt-concrete<br>Strength: PCR 474/F/A/X/T    |
| 3 | ACL and elevation                   | Not Available                                                           |
| 4 | VOR checkpoints                     | Not Available                                                           |
| 5 | INS checkpoints                     | Spot NR<br>S-1 : 242756.96N/1225845.44E<br>S-2 : 242757.51N/1225847.70E |
| 6 | Remarks                             | Nil                                                                     |

## ROYN AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS

|   |                                                                                                                |                                                                                                                                                                                                                                                     |
|---|----------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | Use of aircraft stand ID signs, TWY guide lines and Visual docking/ parking guidance system of aircraft stands | Nil                                                                                                                                                                                                                                                 |
| 2 | RWY and TWY markings and LGT                                                                                   | RWY: RWY08/26<br>(Marking): RWY designation, RWY CL, RWY THR, RWY middle point, TDZ, RWY side stripes, Aiming point<br>(LGT): RCLL, REDL, RENL, RTHL<br>TWY:<br>(Marking): TWY CL, RWY HLDG PSN, TWY side stripe<br>(LGT): TWY edge LGT, TWY CL LGT |
| 3 | Stop bars                                                                                                      | Nil                                                                                                                                                                                                                                                 |
| 4 | Remarks                                                                                                        | (Marking): Overrun area, Apron TWY CL<br>(LGT): Apron flood LGT                                                                                                                                                                                     |

**ROYN AD 2.10 AERODROME OBSTACLES**

In Area2 See Obstacle data

In Area3 To be developed

**ROYN AD 2.11 METEOROLOGICAL INFORMATION PROVIDED**

|    |                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                            |
|----|------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1  | Associated MET Office                                                  | NAHA                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 2  | Hours of service<br>MET Office outside hours                           | H24 (NAHA)                                                                                                                                                                                                                                                                                                                                                                                                                 |
| 3  | Office responsible for TAF preparation<br>Periods of validity          | Nil                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 4  | Trend forecast<br>Interval of issuance                                 | Nil                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 5  | Briefing/ consultation provided                                        | Briefing is available upon inquiry at NAHA                                                                                                                                                                                                                                                                                                                                                                                 |
| 6  | Flight documentation<br>Language(s) used                               | C<br>En                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 7  | Charts and other information available for<br>briefing or consultation | S <sub>6</sub> , U <sub>85</sub> , U <sub>7</sub> , U <sub>5</sub> , U <sub>3</sub> , U <sub>25</sub> , U <sub>2</sub> /T <sub>r</sub> , P <sub>S</sub> , P <sub>5</sub> , P <sub>3</sub> , P <sub>25</sub> , P <sub>SWE</sub> , P <sub>SWF</sub> , P <sub>SWG</sub> ,<br>P <sub>SWI</sub> , P <sub>SWM</sub> , P <sub>SW</sub> (domestic), E, C, W <sub>E</sub> , W <sub>F</sub> , W <sub>G</sub> , W <sub>I</sub> , W, N |
| 8  | Supplementary equipment<br>available for providing information         | Nil                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 9  | ATS units provided with information                                    | RADIO                                                                                                                                                                                                                                                                                                                                                                                                                      |
| 10 | Additional information(limitation of service, etc.)                    | Nil                                                                                                                                                                                                                                                                                                                                                                                                                        |

## ROYN AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

| Designations<br>RWY NR | TRUE BRG | Dimensions of<br>RWY(M) | Strength(PCR) and<br>surface of RWY | THR coordinates<br>THR geoid undulation | THR elevation and<br>highest elevation of TDZ<br>of precision APP RWY |
|------------------------|----------|-------------------------|-------------------------------------|-----------------------------------------|-----------------------------------------------------------------------|
| 1                      | 2        | 3                       | 4                                   | 5                                       | 6                                                                     |
| 08                     | 075.27°  | 2000×45                 | PCR 474/F/A/X/T<br>Asphalt-concrete | 242754.37N<br>1225812.86E<br>76ft       | THR ELEV: 71.9FT                                                      |
| 26                     | 255.27°  | 2000×45                 | PCR 474/F/A/X/T<br>Asphalt-concrete | 242810.89N<br>1225921.54E<br>76ft       | THR ELEV: 41.6FT                                                      |

| Slope of RWY     | Strip<br>Dimensions(M) | RESA(Overrun)<br>Dimensions(M) | Remarks                  |
|------------------|------------------------|--------------------------------|--------------------------|
| 7                | 10                     | 11                             | 14                       |
| See below figure | 2120×150<br>2120×150   | 91×156<br>200×156              | RWY Grooving : 30m×2000m |

**LONGITUDINAL PROFILE OF RUNWAY**

RWY 08  
71.9ft

0.700%

47.8ft

LEVEL

47.8ft

0.500%

RWY 26  
41.6ft

0m 1050m 1625m 2000m

## ROYN AD 2.13 DECLARED DISTANCES

| RWY Designator | TORA<br>(m) | TODA<br>(m) | ASDA<br>(m) | LDA<br>(m) | Remarks |
|----------------|-------------|-------------|-------------|------------|---------|
| 1              | 2           | 3           | 4           | 5          | 6       |
| 08             | 2000        | 2000        | 2000        | 2000       | Nil     |
| 26             | 2000        | 2000        | 2000        | 2000       | Nil     |

## ROYN AD 2.14 APPROACH AND RUNWAY LIGHTING

| RWY<br>Designator                                                                                                           | APCH<br>LGT<br>type<br>LEN<br>INTST | RTHL<br>Color<br>WBAR | PAPI<br>(VASIS)<br>Angle<br>DIST FM<br>THR<br>MEHT | RTZL<br>LEN | RCLL<br>LEN<br>Spacing<br>Color<br>INTST | REDL<br>LEN<br>Spacing<br>Color<br>INTST | RENL<br>Color<br>WBAR | STWL<br>LEN<br>Color |
|-----------------------------------------------------------------------------------------------------------------------------|-------------------------------------|-----------------------|----------------------------------------------------|-------------|------------------------------------------|------------------------------------------|-----------------------|----------------------|
| 1                                                                                                                           | 2                                   | 3                     | 4                                                  | 5           | 6                                        | 7                                        | 8                     | 9                    |
| 08                                                                                                                          | -                                   | Green<br>-            | PAPI<br>3.0° /LEFT<br>356.1m<br>49ft               | -           | 2,000m<br>30m<br>Coded color<br>LIH      | 2,000m<br>60m<br>Coded color<br>LIH      | Red                   | Nil(*2)              |
| 26                                                                                                                          | SALS<br>(*1)<br>420m<br>LIH         | Green<br>-            | PAPI<br>3.0°/LEFT<br>276.6m<br>49ft                | -           | 2,000m<br>30m<br>Coded color<br>LIH      | 2,000m<br>60m<br>Coded color<br>LIH      | Red                   | Nil(*2)              |
| Remarks                                                                                                                     |                                     |                       |                                                    |             |                                          |                                          |                       |                      |
| 10                                                                                                                          |                                     |                       |                                                    |             |                                          |                                          |                       |                      |
| SALS with RAI(LEN:360m)(*1)<br>Overrun area edge LGT(LEN:60m Color:Red)(*2)<br>RWY THR ID LGT for RWY 08 THR (Color: White) |                                     |                       |                                                    |             |                                          |                                          |                       |                      |

## ROYN AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

|   |                                                          |                                                      |
|---|----------------------------------------------------------|------------------------------------------------------|
| 1 | ABN/IBN location, characteristics and hours of operation | ABN: 242756N/1225853E, White/Green EV4.3sec, HO      |
| 2 | LDI location and LGT<br>Anemometer location and LGT      | LDI : Nil<br>Anemometer : AVBL                       |
| 3 | TWY edge and centerline lighting                         | TWY edge and center line lights installed, see AD2.9 |
| 4 | Secondary power supply/ switch-over time                 | Within 15sec: All Lights                             |
| 5 | Remarks                                                  | Nil                                                  |

## ROYN AD 2.16 HELICOPTER LANDING AREA

|     |
|-----|
| Nil |
|-----|

## ROYN AD 2.17 ATS AIRSPACE


| Designation and lateral limits |                                             | Vertical limits (ft) | Airspace classification | ATS unit call sign Language | Remarks |
|--------------------------------|---------------------------------------------|----------------------|-------------------------|-----------------------------|---------|
| 1                              |                                             | 2                    | 3                       | 4                           | 6       |
| Yonaguni Information Zone      | Area within a radius of 5nm of Yonaguni ARP | -----<br>3000        | -                       | Yonaguni Radio En           | Nil     |

## ROYN AD 2.18 ATS COMMUNICATION FACILITIES


| Service designation | Call sign      | Frequency | Hours of operation | Remarks                          |
|---------------------|----------------|-----------|--------------------|----------------------------------|
| 1                   | 2              | 3         | 4                  | 5                                |
| AFIS                | Yonaguni Radio | 118.5MHz  | 2300 - 1030        | Operated by Naha Airport Office. |

## ROYN AD 2.19 RADIO NAVIGATION AND LANDING AIDS

| Type of aid (VOR declination) | ID  | Frequency        | Hours of operation | Position of transmitting antenna coordinates | Elevation of DME transmitting antenna | Remarks                                                                                                                              |
|-------------------------------|-----|------------------|--------------------|----------------------------------------------|---------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| 1                             | 2   | 3                | 4                  | 5                                            | 6                                     | 7                                                                                                                                    |
| VOR (5°W/2019)                | YNE | 115.05MHz        | H24                | 242753.72N/1225951.86E                       |                                       | Unusable:                                                                                                                            |
| DME                           | YNE | 1058MHz (CH-97Y) | H24                | 242753.72N/1225951.86E                       | 314.6ft                               | 140° -170° beyond 20nm BLW 4000ft.                                                                                                   |
| LOC 26                        | IYN | 108.55MHz        | 2300-1030          | 242752.42N/1225804.79E                       |                                       | LOC 26: 235m (771ft) away FM RWY 08 THR, BRG (MAG) 260.21°                                                                           |
| LOC-DME 26                    | IYN | 1109MHz (CH-22Y) | 2300-1030          | 242750.22N/1225805.42E                       |                                       | DME 26: 235m (771ft) inside FM RWY 08 THR, 70m (230ft) S of RCL. ELEV 25.9m (85ft). Unusable: beyond 30° south (90Hz) side of course |
| MSAS                          |     | 1575.42MHz       | H24                |                                              |                                       | Transmitting antennas are satellite based.                                                                                           |

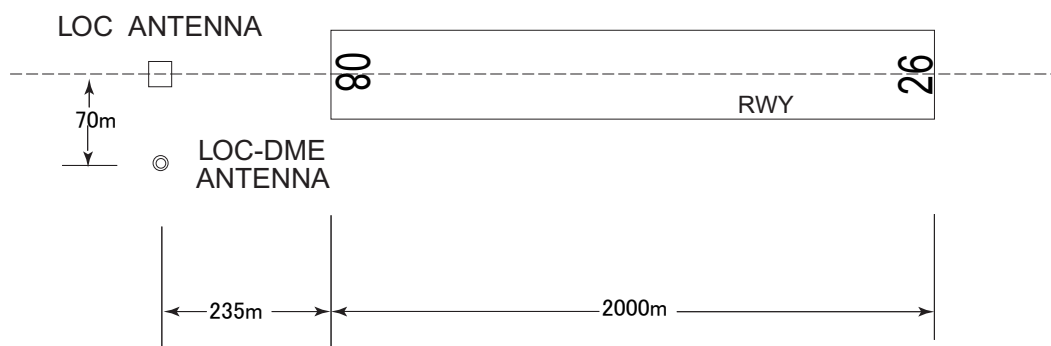LOC and LOC-DME for RWY26

REMARKS : 1. LOC beam BRG(MAG) 260.21°  
 2. ELEV of LOC-DME 25.9m(85ft)

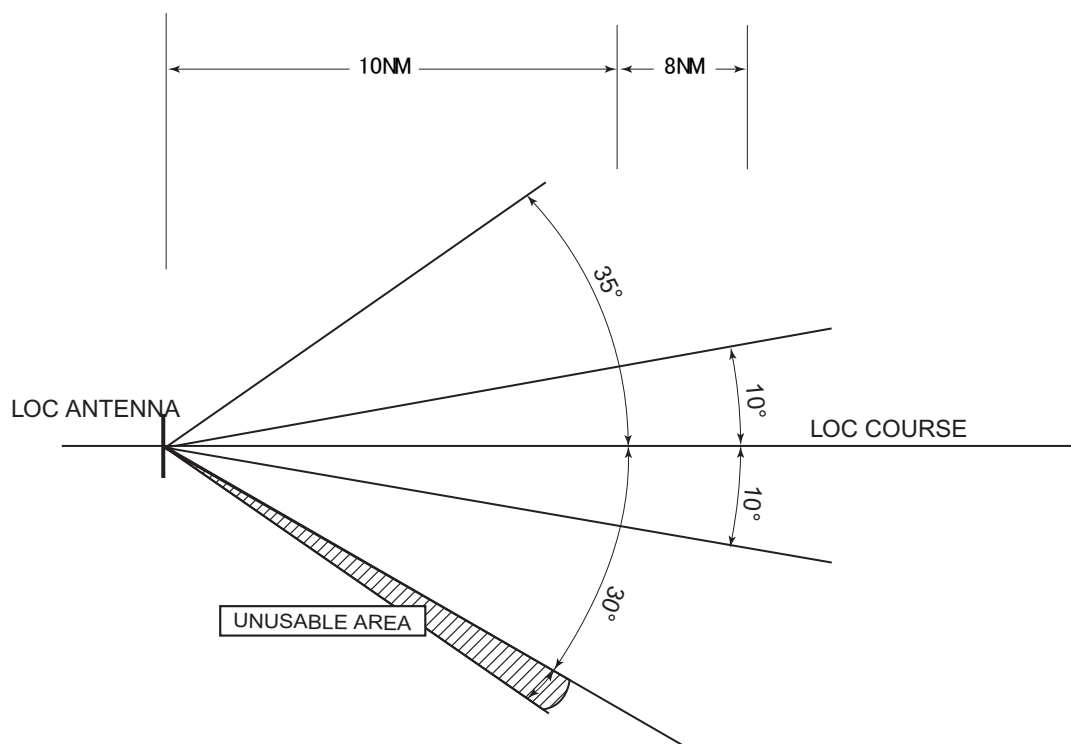

UNUSABLE :BEYOND 30DEG SOUTH (90Hz) SIDE OF COURSE.



---

## ROYN AD 2.20 LOCAL TRAFFIC REGULATIONS

### 1. Airport regulations

On use of YONAGUNI airport, aircraft operator is required to notify Okinawa Pref. in advance.

### 2. Taxiing to and from stands

Nil

### 3. Parking area for small aircraft(General aviation)

Nil

### 4. Parking area for helicopters

Nil

### 5. Apron - taxiing during winter conditions

Nil

### 6. Taxiing - limitations

Nil

### 7. School and training flights - technical test flights - use of runways

Nil

### 8. Helicopter traffic - limitation

Nil

### 9. Removal of disabled aircraft from runways

Nil

## ROYN AD 2.21 NOISE ABATEMENT PROCEDURES

Ask AD administration

ROYN AD 2.22 FLIGHT PROCEDURES

TAKE OFF MINIMA

|                                                    | RWY | ACFT<br>CAT | REDL & RCLL                            | REDL or RCLL or<br>RCL Marking         | NIL<br>(DAYTIME ONLY)                  |
|----------------------------------------------------|-----|-------------|----------------------------------------|----------------------------------------|----------------------------------------|
|                                                    |     |             | CEIL-VIS                               | CEIL-VIS                               | CEIL-VIS                               |
| Multi-Engine<br>ACFT-with<br>TKOF ALTN<br>AP Filed | 08  | A,B,C,D     | 0-400m                                 | 0-400m                                 | 0-500m                                 |
|                                                    | 26  |             | 900-2400m*<br>300-2400m**<br>0-400m*** | 900-2400m*<br>300-2400m**<br>0-400m*** | 900-2400m*<br>300-2400m**<br>0-500m*** |
| OTHER                                              | 08  | A,B,C,D     | AVBL LDG MINIMA                        |                                        |                                        |
|                                                    | 26  |             |                                        |                                        |                                        |

\* Applicable to Conventional Departure in case of not climbing with 9.0%.  
\*\*Applicable to RNAV Departure in case of not climbing with 7.2%.  
\*\*\*Applicable to Conventional Departure in case of climbing with 9.0% gradient up to 900FT.  
\*\*\*Applicable to RNAV Departure in case of climbing with 7.2% gradient up to 600FT.


ROYN AD 2.23 ADDITIONAL INFORMATION

Ask AD administration

ROYN AD 2.24 CHARTS RELATED TO AN AERODROME

- Aerodrome/Heliport Chart  
Standard Departure Chart - Instrument (TAKZO, ABASA)  
Standard Departure Chart - Instrument (AYAKA-RNAV)  
Standard Arrival Chart - Instrument (ABASA-RNAV)  
Instrument Approach Chart (LOC RWY26)  
Instrument Approach Chart (VOR RWY26)  
Instrument Approach Chart (RNP RWY08(AR))  
Instrument Approach Chart (RNP Z RWY26(AR))  
Instrument Approach Chart (RNP Y RWY26)  
Other Chart (Visual REP)  
Other Chart (MVA CHART)

CHANGE : Description of strength of pavement.

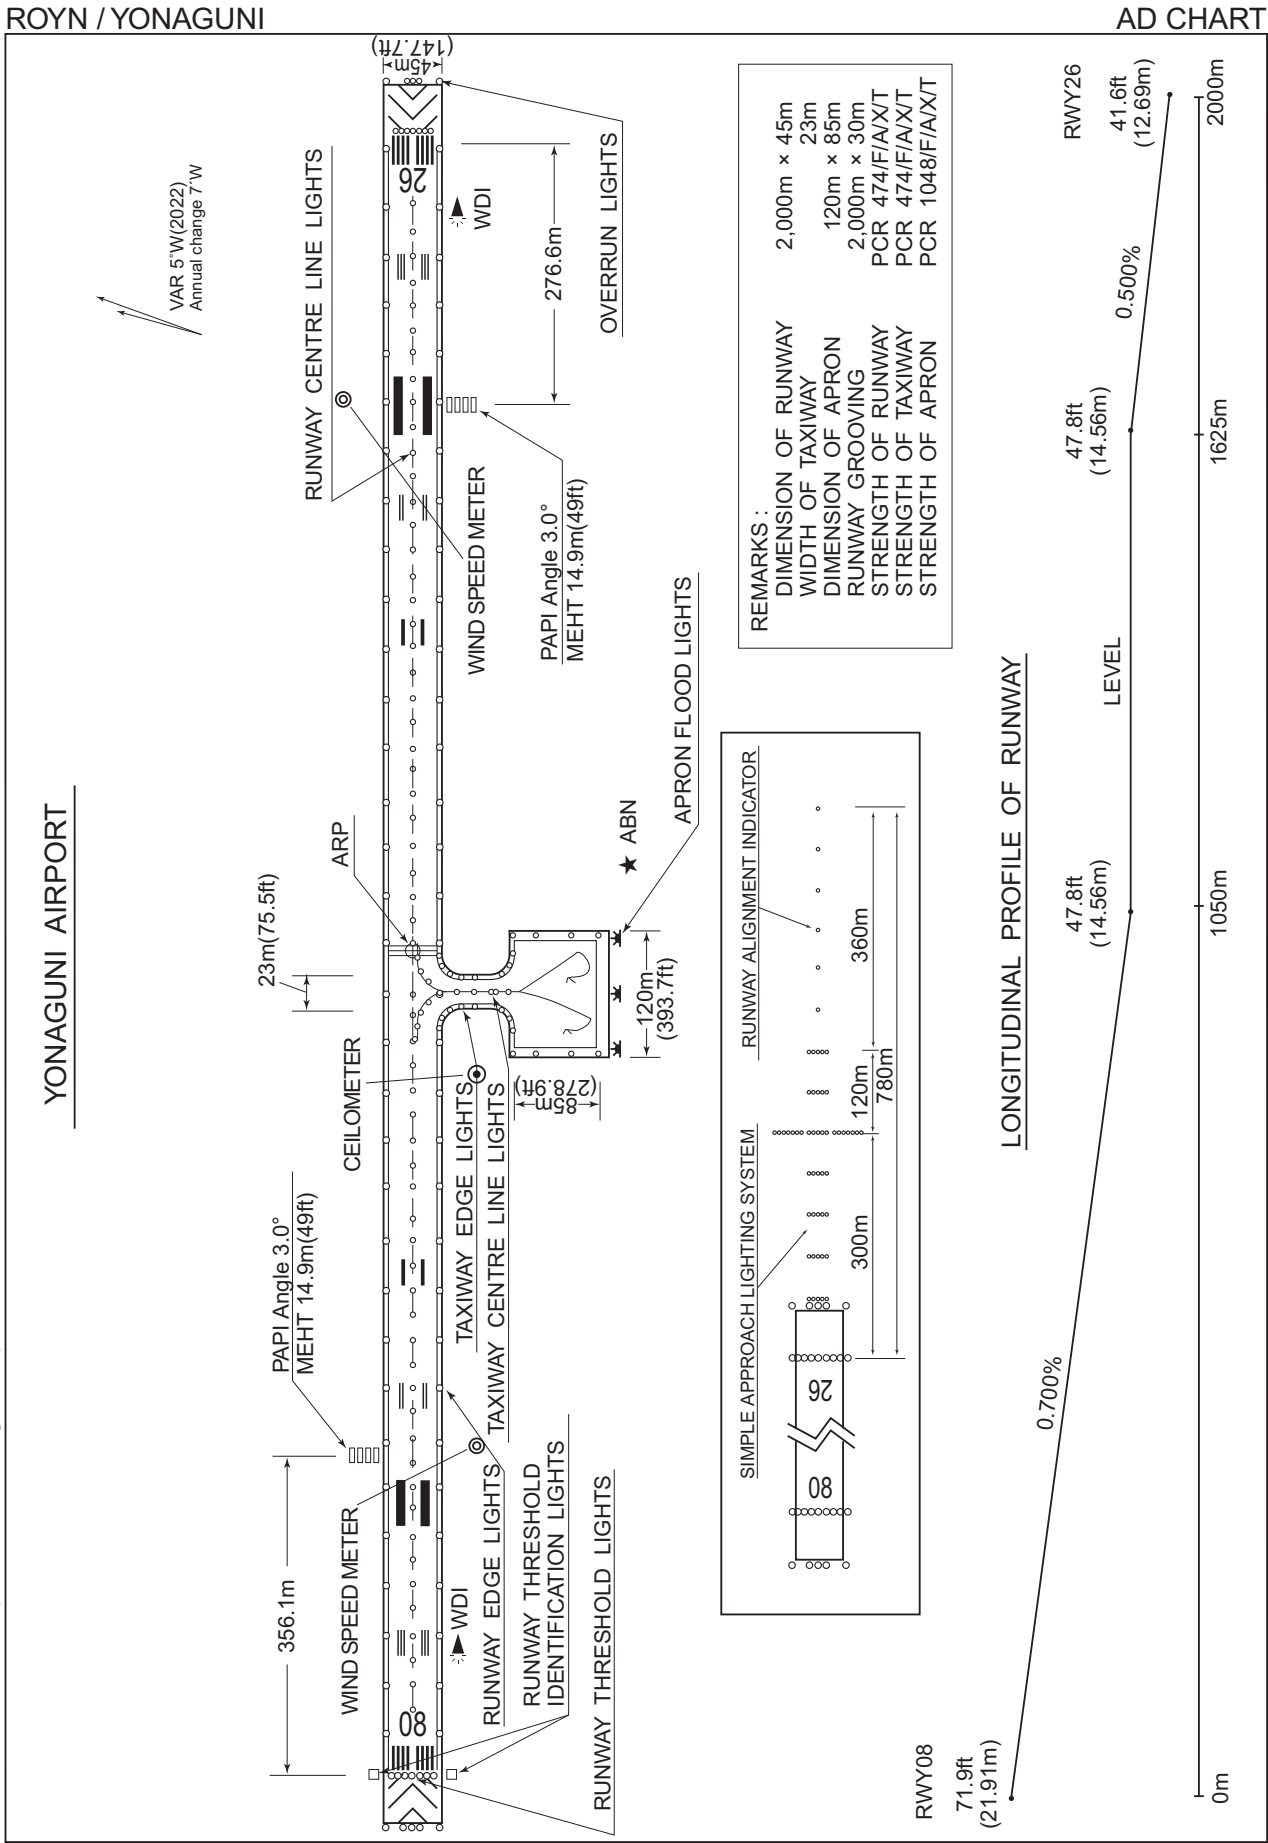

## STANDARD DEPARTURE CHART -INSTRUMENT

ROYN / YONAGUNI

SID

TAKZO TWO DEPARTURE

RWY 08 : Climb RWY HDG until 3NM from RWY end/YNE 2.7DME, turn left,...

RWY 26 : Climb RWY HDG until 700FT, turn right,...

...climb via YNE R022 to TAKZO.

Note RWY08 : 6.7% climb gradient required up to 700FT.

OBST ALT 89FT located at 0.1NM 126° FM end of RWY08.

RWY26 : No turn before DER.

In case of climbing with 9.0 % gradient up to 900FT, another TKOF WX MINIMA is applicable.

OBST ALT 358FT located at 0.6NM 236° FM end of RWY26,

OBST ALT 912FT located at 2.1NM 115° FM end of RWY26.

ABASA TWO DEPARTURE

RWY 08 : Climb RWY HDG until 3NM from RWY end/YNE 2.7DME, turn right,...

RWY 26 : Climb RWY HDG until 700FT, turn right,...

...climb via YNE R101 to ABASA.

Note RWY08 : 6.7% climb gradient required up to 700FT.


OBST ALT 89FT located at 0.1NM 126° FM end of RWY08.

RWY26 : No turn before DER.

In case of climbing with 9.0 % gradient up to 900FT, another TKOF WX MINIMA is applicable.


OBST ALT 358FT located at 0.6NM 236° FM end of RWY26,

OBST ALT 912FT located at 2.1NM 115° FM end of RWY26.

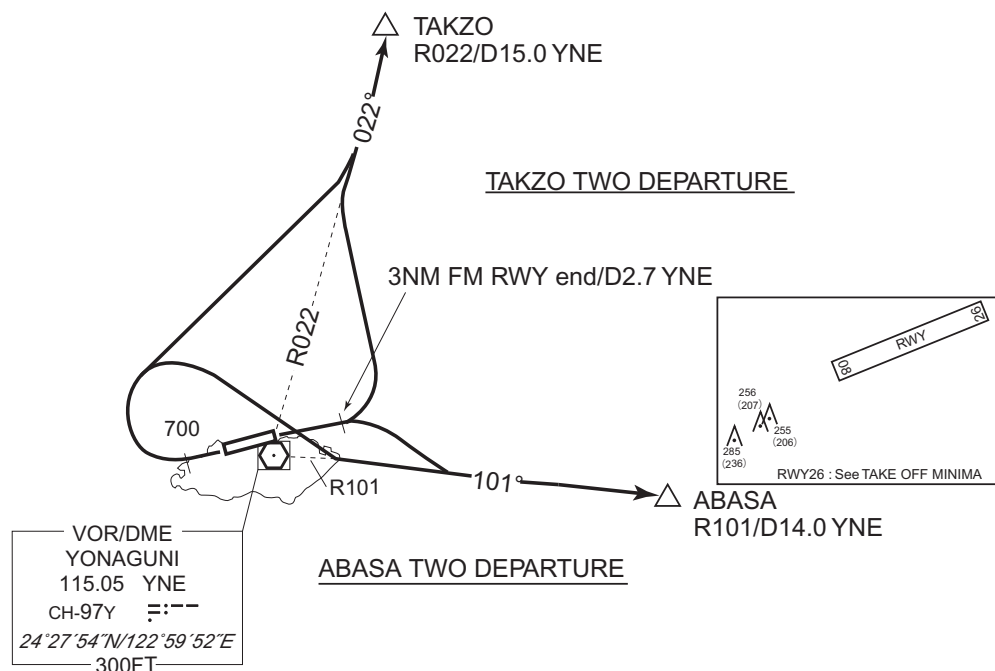

CHANGE : PROC renamed. Radial FM YNE. Note RWY08 added. OBST chart added.

STANDARD DEPARTURE CHART -INSTRUMENT

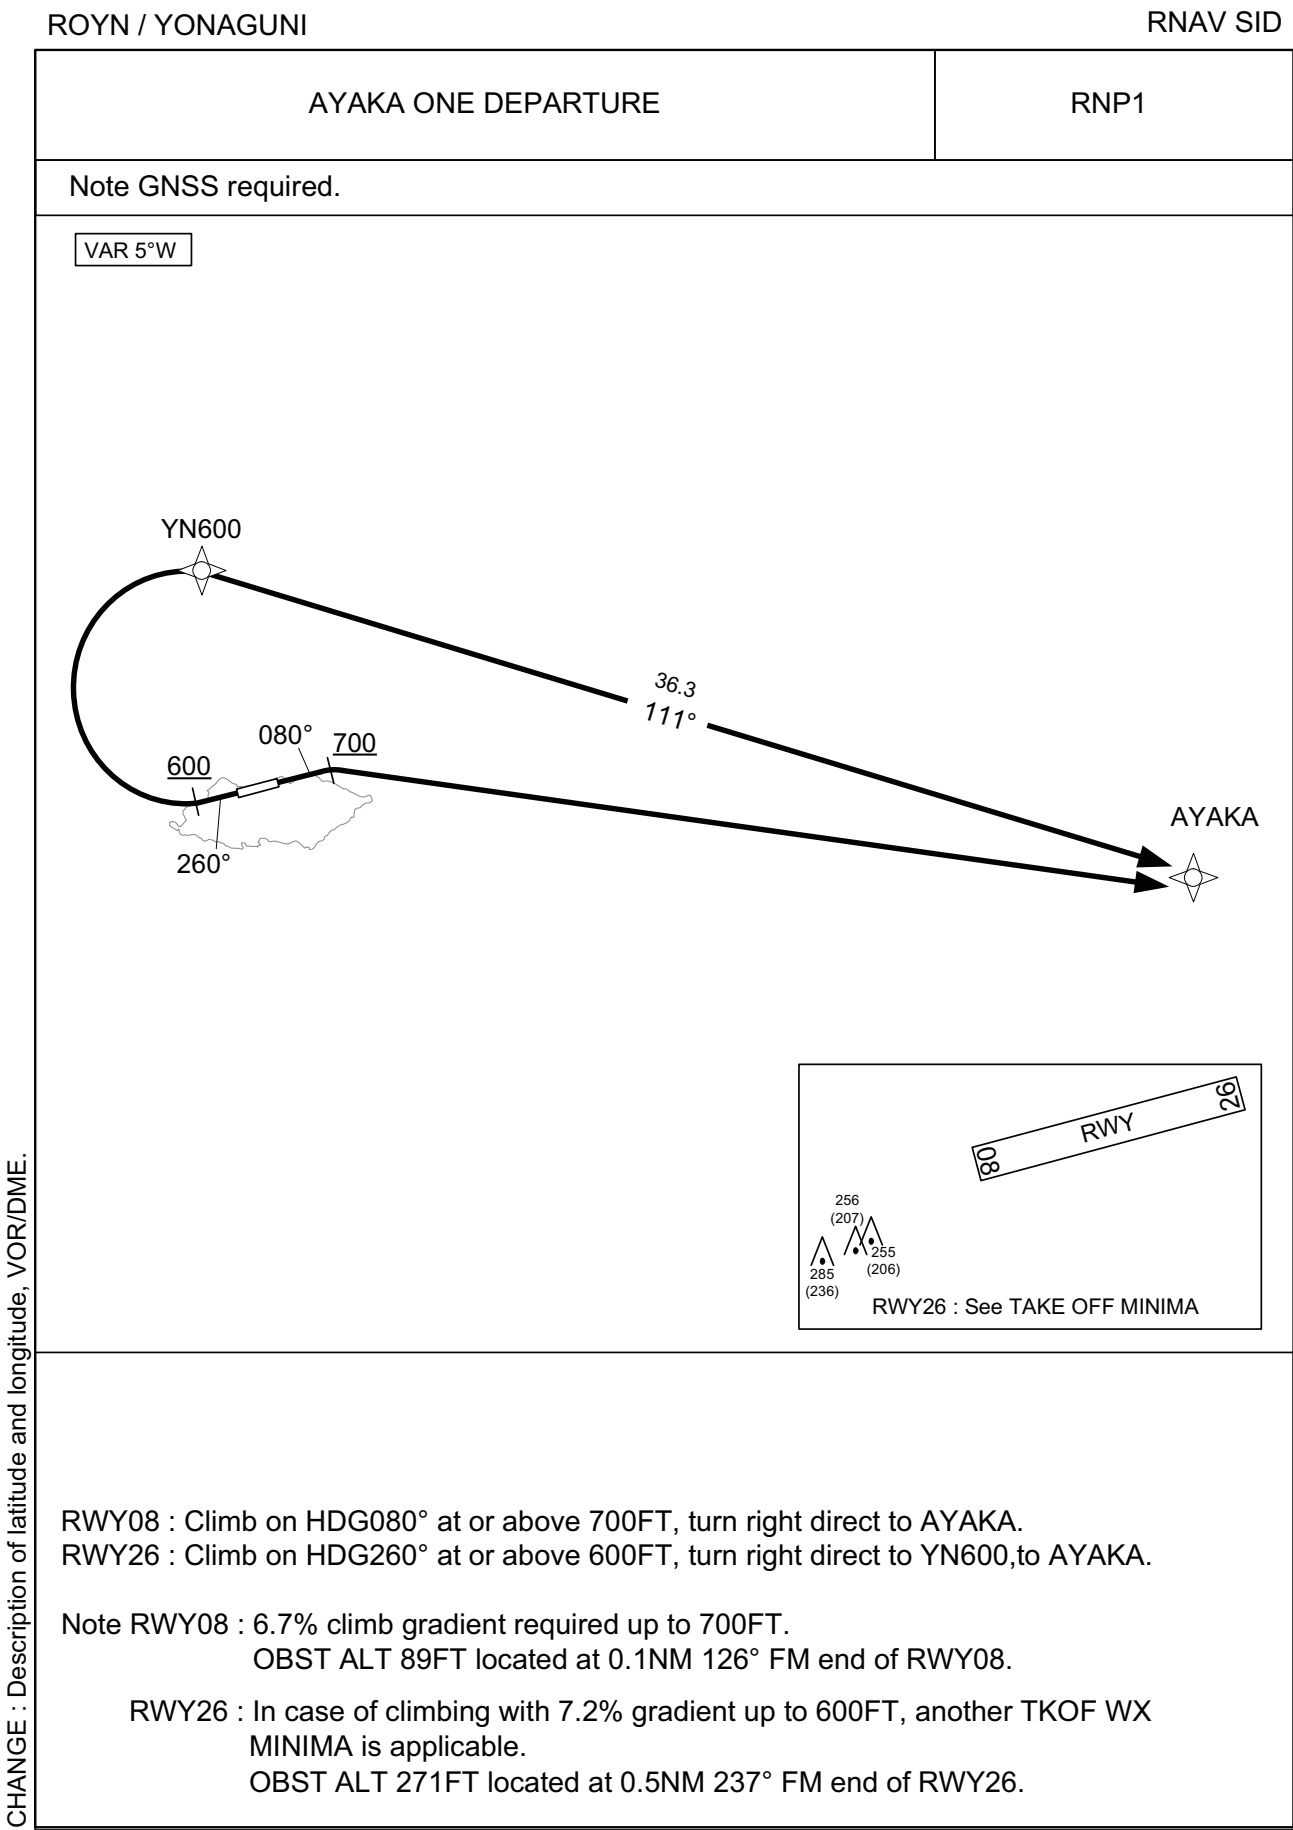

STANDARD DEPARTURE CHART -INSTRUMENT

ROYN / YONAGUNI

RNAV SID

AYAKA ONE DEPARTURE

RWY08

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | -                   | -        | 080<br>(075.2) | -4.6               | -             | -              | +700          | -            | -              | RNP1                     |
| 002           | DF              | AYAKA               | -        | -              | -4.6               | -             | R              | -             | -            | -              | RNP1                     |

RWY26

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | -                   | -        | 260<br>(255.2) | -4.6               | -             | -              | +600          | -            | -              | RNP1                     |
| 002           | DF              | YN600               | -        | -              | -4.6               | -             | R              | -             | -            | -              | RNP1                     |
| 003           | TF              | AYAKA               | -        | 111<br>(106.1) | -4.6               | 36.3          | -              | -             | -            | -              | RNP1                     |

Waypoint Coordinates


| Waypoint Identifier | Coordinates            |
|---------------------|------------------------|
| YN600               | 243424.5N / 1225712.2E |
| AYAKA               | 242414.9N / 1233531.4E |

CHANGE : Waypoint Coordinates added.

STANDARD ARRIVAL CHART-INSTRUMENT

ROYN / YONAGUNI

RNAV STAR

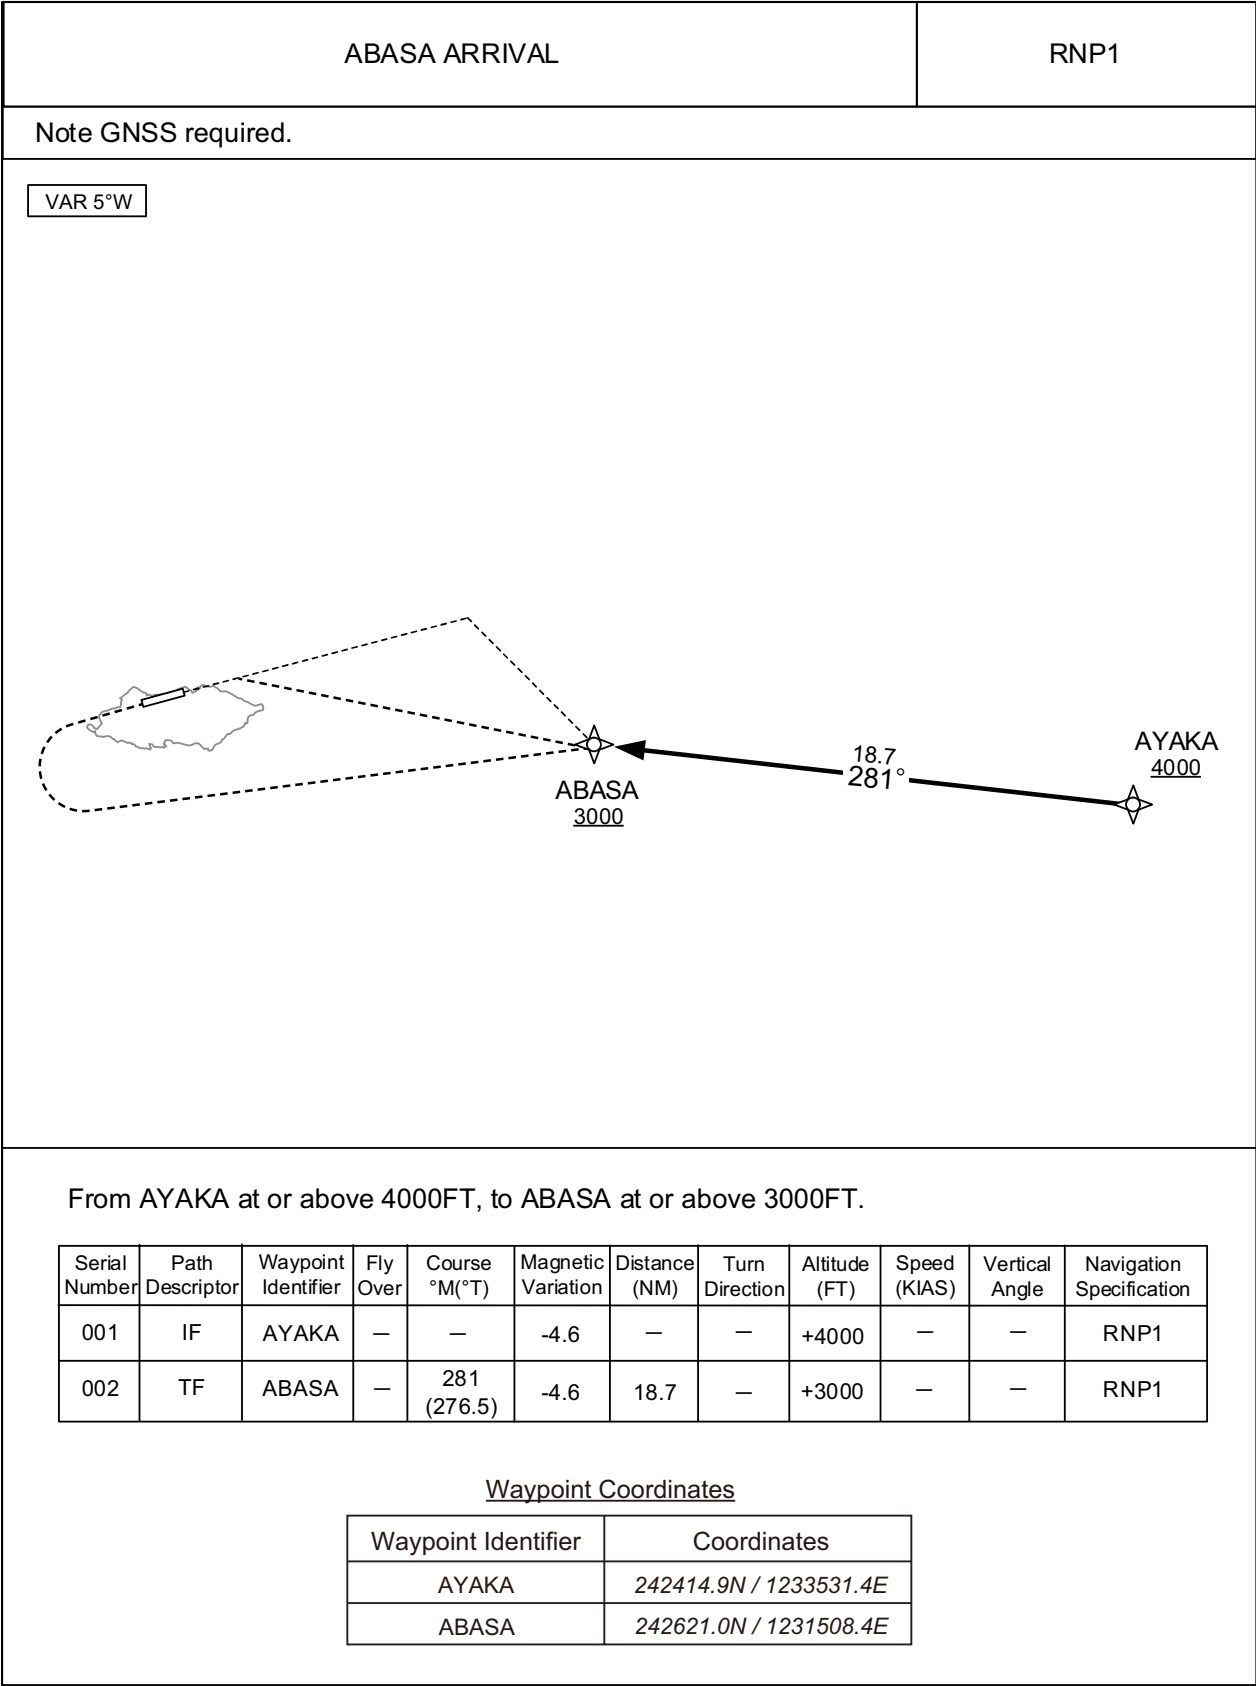


CHANGE : Waypoint Coordinates added.

**INTENTIONALLY LEFT BLANK**




INSTRUMENT APPROACH CHART

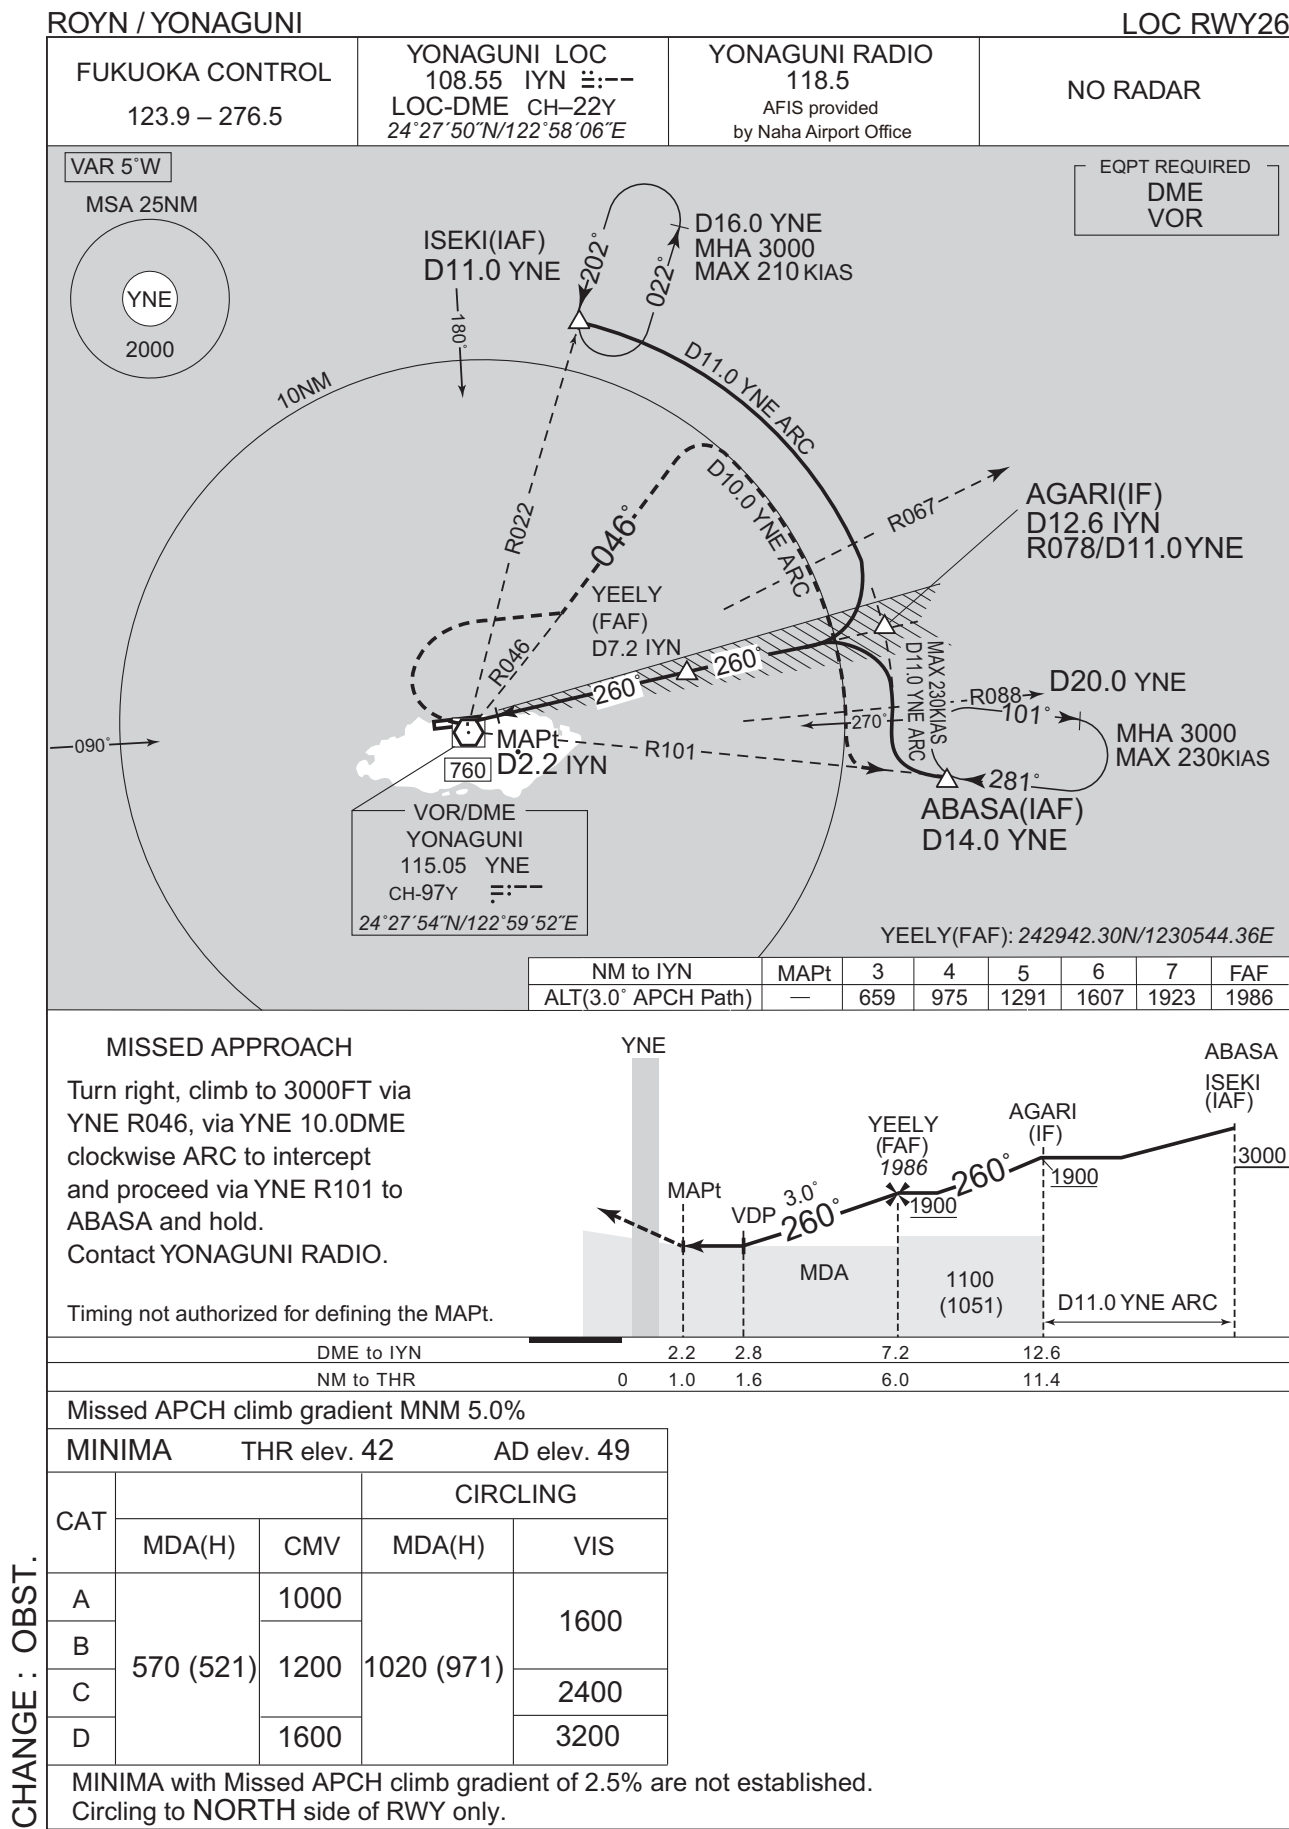


INSTRUMENT APPROACH CHART

ROYN / YONAGUNI VOR RWY26

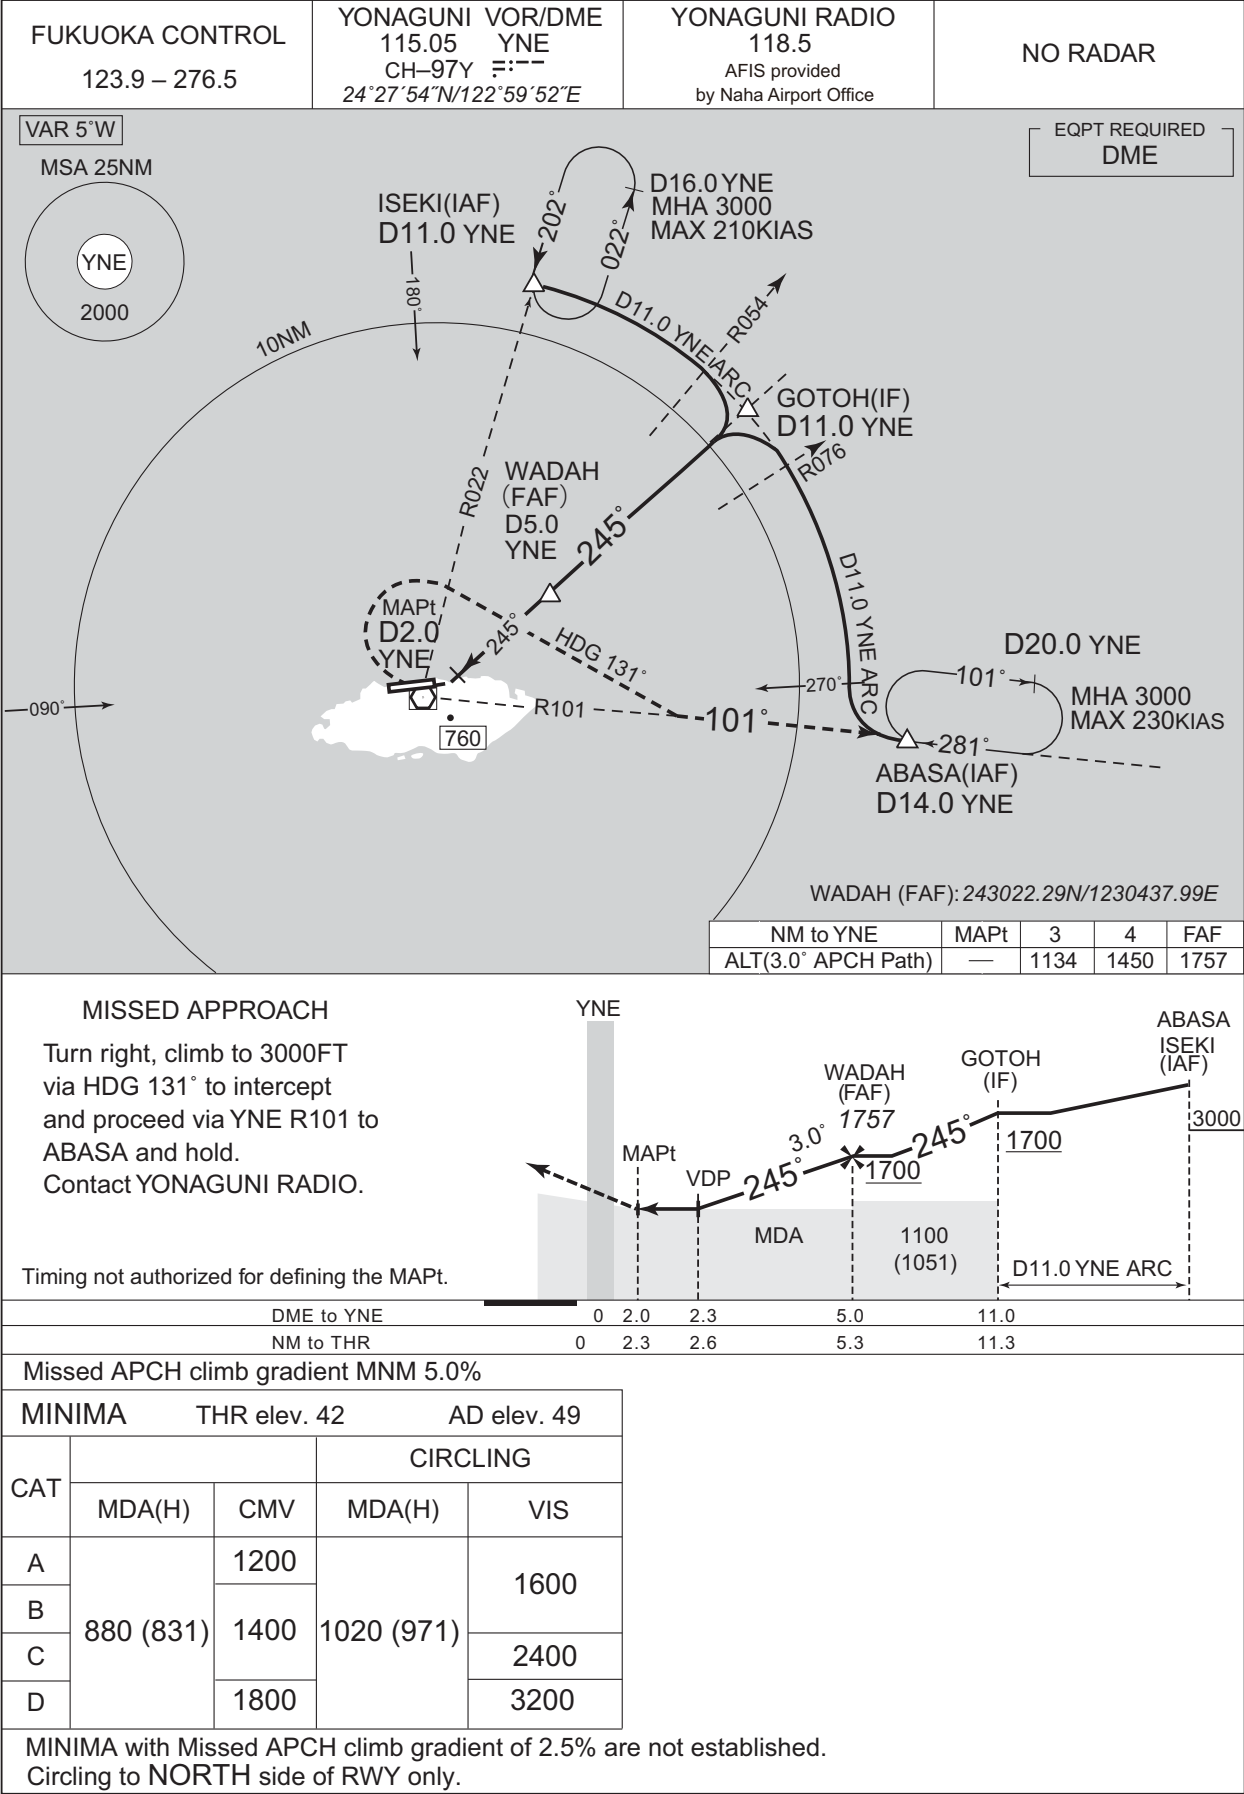

ROYN / YONAGUNI

RNP RWY08(AR)

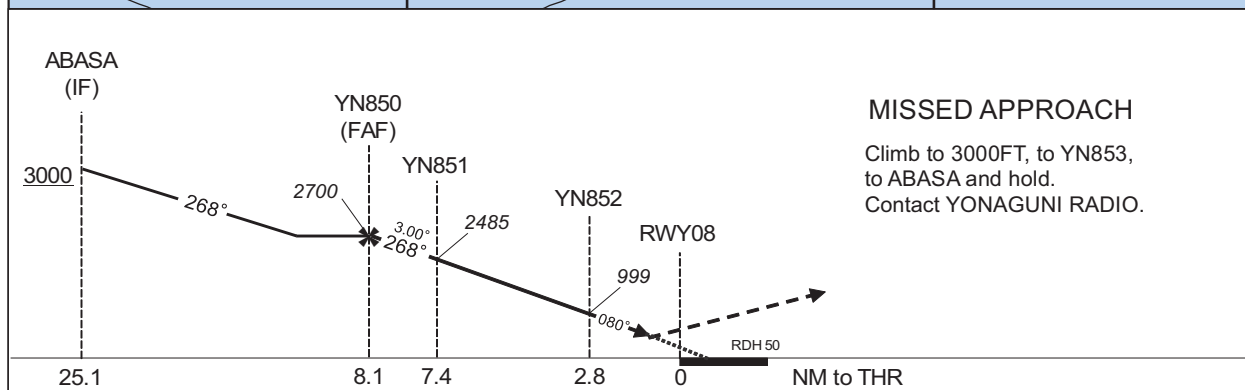

| Missed APCH climb gradient MNM 5.0% |              |             |
|-------------------------------------|--------------|-------------|
| MINIMA                              | THR elev. 72 | AD elev. 49 |
| CAT                                 | RNP 0.30     |             |
|                                     | DA(H)        | CMV         |
| A                                   | -            | -           |
| B                                   |              |             |
| C                                   | 840(768)     | 2000        |
| D                                   | -            | -           |

## Authorization Required

MINIMA with Missed APCH climb gradient of 2.5% are not established.

INSTRUMENT APPROACH CHART

ROYN / YONAGUNI

RNP RWY08(AR)

Coding Table

| Serial Number | Path Descriptor                 | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | VPA/ RDH (°/FT) | RNP Value |
|---------------|---------------------------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|-----------------|-----------|
| 001           | IF                              | ABASA               | -        | -             | -5.1               | -             | -              | +3000         | -            | -               | -         |
| 002           | TF                              | YN850               | -        | 268 (262.9)   | -5.1               | 17.0          | -              | 2700          | -            | -               | 0.3       |
| 003           | TF                              | YN851               | -        | 268 (262.8)   | -5.1               | 0.7           | -              | 2485          | -            | -3.00           | 0.3       |
| 004           | RF<br>Center: YNRF1<br>r=1.55NM | YN852               | -        | -             | -5.1               | 4.7           | R              | 999           | -            | -3.00           | 0.3       |
| 005           | TF                              | RW08                | Y        | 080 (075.2)   | -5.1               | 2.8           | -              | 122           | -            | -3.00/50        | 0.3       |
| 006           | TF                              | YN853               | -        | 080 (075.2)   | -5.1               | 4.9           | -              | -             | -            | -               | 1.0       |
| 007           | TF                              | ABASA               | -        | 110 (104.7)   | -5.1               | 11.0          | -              | 3000          | -            | -               | 1.0       |

| Path | Waypoint Identifier | Inbound Course °M(°T) | Magnetic Variation | Outbound Time (MIN) | Turn Direction | Minimum Altitude (FT) | Maximum Altitude (FT) | Speed (KIAS)  | RNP Value |
|------|---------------------|-----------------------|--------------------|---------------------|----------------|-----------------------|-----------------------|---------------|-----------|
| Hold | ABASA               | 281 (276.4)           | -5.1               | 1.0 (-14000)        | R              | 3000                  | FL140                 | -230 (-14000) | 1.0       |


Waypoint Coordinates

| Waypoint Identifier | Coordinates              | RF Arc Center Identifier | Coordinates              |
|---------------------|--------------------------|--------------------------|--------------------------|
| ABASA               | 242621.02N / 1231508.36E | YNRF1                    | 242541.86N / 1225543.37E |
| YN850               | 242414.35N / 1225640.22E |                          |                          |
| YN851               | 242409.26N / 1225556.12E |                          |                          |
| YN852               | 242712.12N / 1225517.42E |                          |                          |
| RW08                | 242754.37N / 1225812.86E |                          |                          |
| YN853               | 242909.68N / 1230326.27E |                          |                          |

CHANGE : New PROC.


INSTRUMENT APPROACH CHART

ROYN / YONAGUNI RNP Z RWY26(AR)

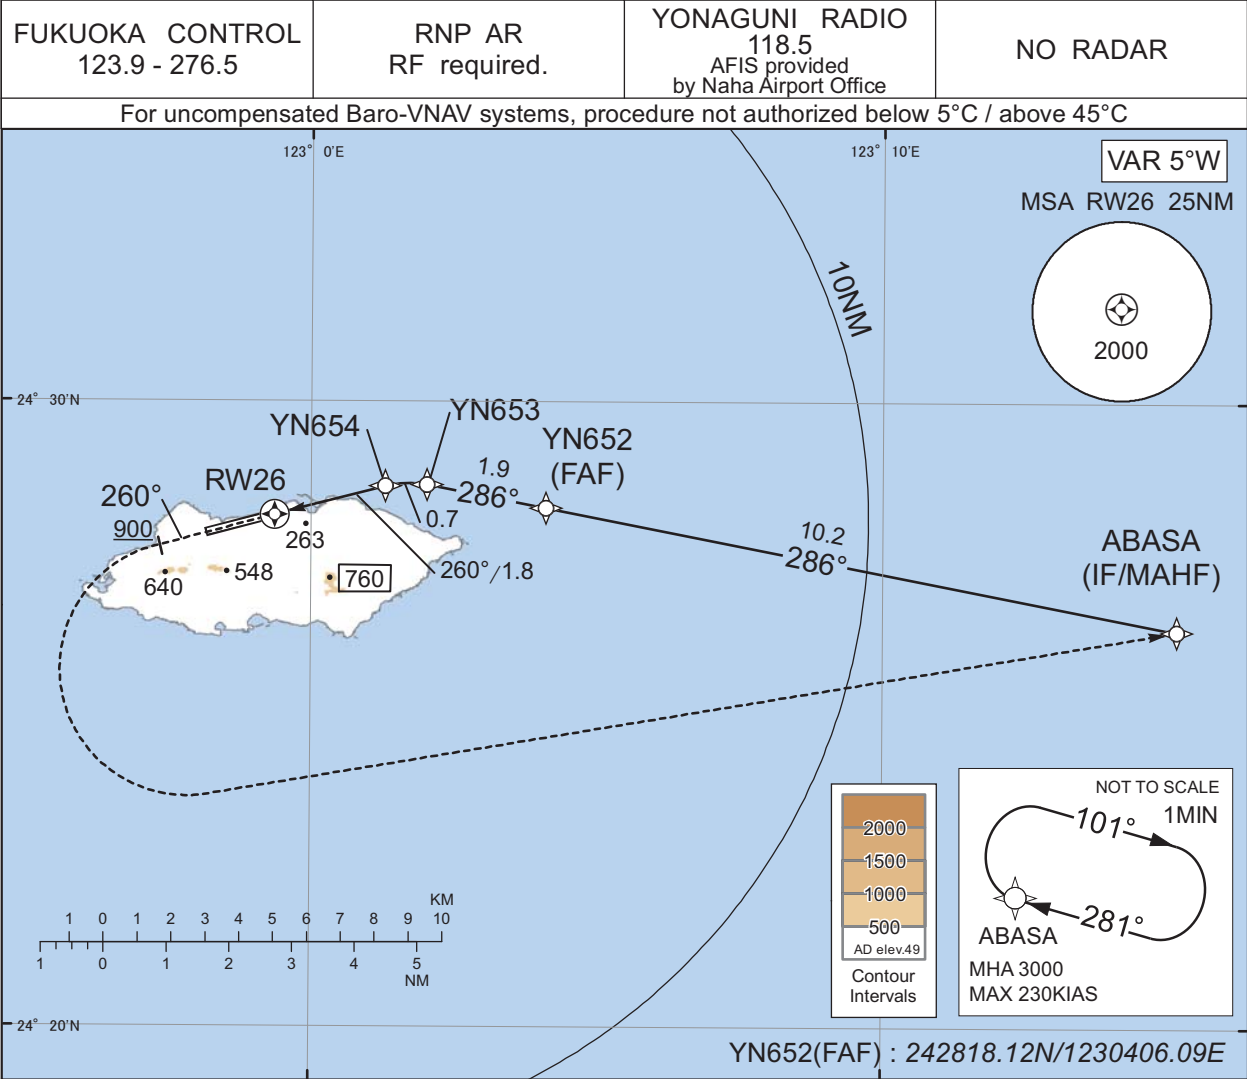

MISSED APPROACH

From RW26 on track 260°, at or above 900FT turn left, direct to ABASA and hold at 3000FT. Contact YONAGUNI RADIO.

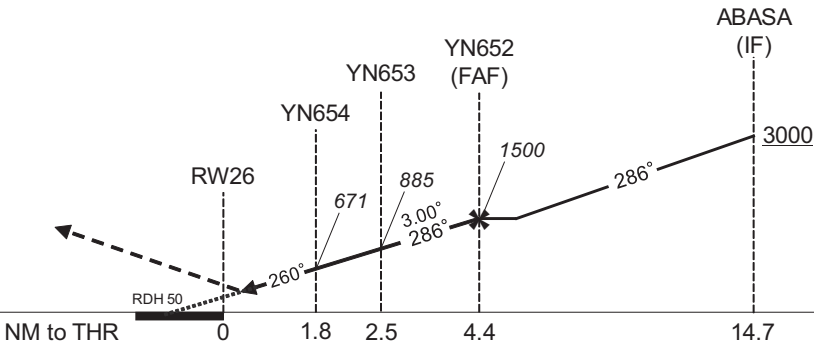

|                                     |              |             |
|-------------------------------------|--------------|-------------|
| Missed APCH climb gradient MNM 5.0% |              |             |
| MINIMA                              | THR elev. 42 | AD elev. 49 |
| CAT                                 | RNP 0.30     |             |
|                                     | DA(H)        | CMV         |
| A                                   | -            | -           |
| B                                   | -            | -           |
| C                                   | 512(470)     | 1200        |
| D                                   | -            | -           |

MINIMA with Missed APCH climb gradient of 2.5% are not established.

Authorization Required

INSTRUMENT APPROACH CHART

ROYN / YONAGUNI

RNP Z RWY26(AR)


| Coding Table  |                                    |                     |          |               |                    |               |                |               |              |                 |           |
|---------------|------------------------------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|-----------------|-----------|
| Serial Number | Path Descriptor                    | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | VPA/ RDH (°/FT) | RNP Value |
| 001           | IF                                 | ABASA               | -        | -             | -5.1               | -             | -              | +3000         | -            | -               | -         |
| 002           | TF                                 | YN652               | -        | 286 (281.0)   | -5.1               | 10.2          | -              | 1500          | -            | -               | 0.3       |
| 003           | TF                                 | YN653               | -        | 286 (281.0)   | -5.1               | 1.9           | -              | 885           | -            | -3.00           | 0.3       |
| 004           | RF<br>Center:<br>YNRF2<br>r=1.50NM | YN654               | -        | -             | -5.1               | 0.7           | L              | 671           | -            | -3.00           | 0.3       |
| 005           | TF                                 | RW26                | Y        | 260 (255.2)   | -5.1               | 1.8           | -              | 92            | -            | -3.00/50        | 0.3       |
| 006           | FA                                 | -                   | -        | 260 (255.2)   | -5.1               | -             | -              | +900          | -            | -               | 1.0       |
| 007           | DF                                 | ABASA               | -        | -             | -5.1               | -             | L              | 3000          | -            | -               | 1.0       |

| Path | Waypoint Identifier | Inbound Course °M(°T) | Magnetic Variation | Outbound Time (MIN) | Turn Direction | Minimum Altitude (FT) | Maximum Altitude (FT) | Speed (KIAS)  | RNP Value |
|------|---------------------|-----------------------|--------------------|---------------------|----------------|-----------------------|-----------------------|---------------|-----------|
| Hold | ABASA               | 281 (276.4)           | -5.1               | 1.0 (-14000)        | R              | 3000                  | FL140                 | -230 (-14000) | 1.0       |

| Waypoint Coordinates |  |  |  |  |  |  |  |  |  |  |  |
| Waypoint Identifier |  | Coordinates |  | RF Arc Center Identifier |  | Coordinates |  |  |  |  |  |
| ABASA |  | 242621.02N / 1231508.36E |  | YNRF2 |  | 242711.40N / 1230142.58E |  |  |  |  |  |
| YN652 |  | 242818.12N / 1230406.09E |  |  |  |  |  |  |  |  |  |
| YN653 |  | 242840.10N / 1230201.20E |  |  |  |  |  |  |  |  |  |
| YN654 |  | 242838.77N / 1230117.53E |  |  |  |  |  |  |  |  |  |
| RW26 |  | 242810.89N / 1225921.54E |  |  |  |  |  |  |  |  |  |

CHANGE : New PROC.

INSTRUMENT APPROACH CHART

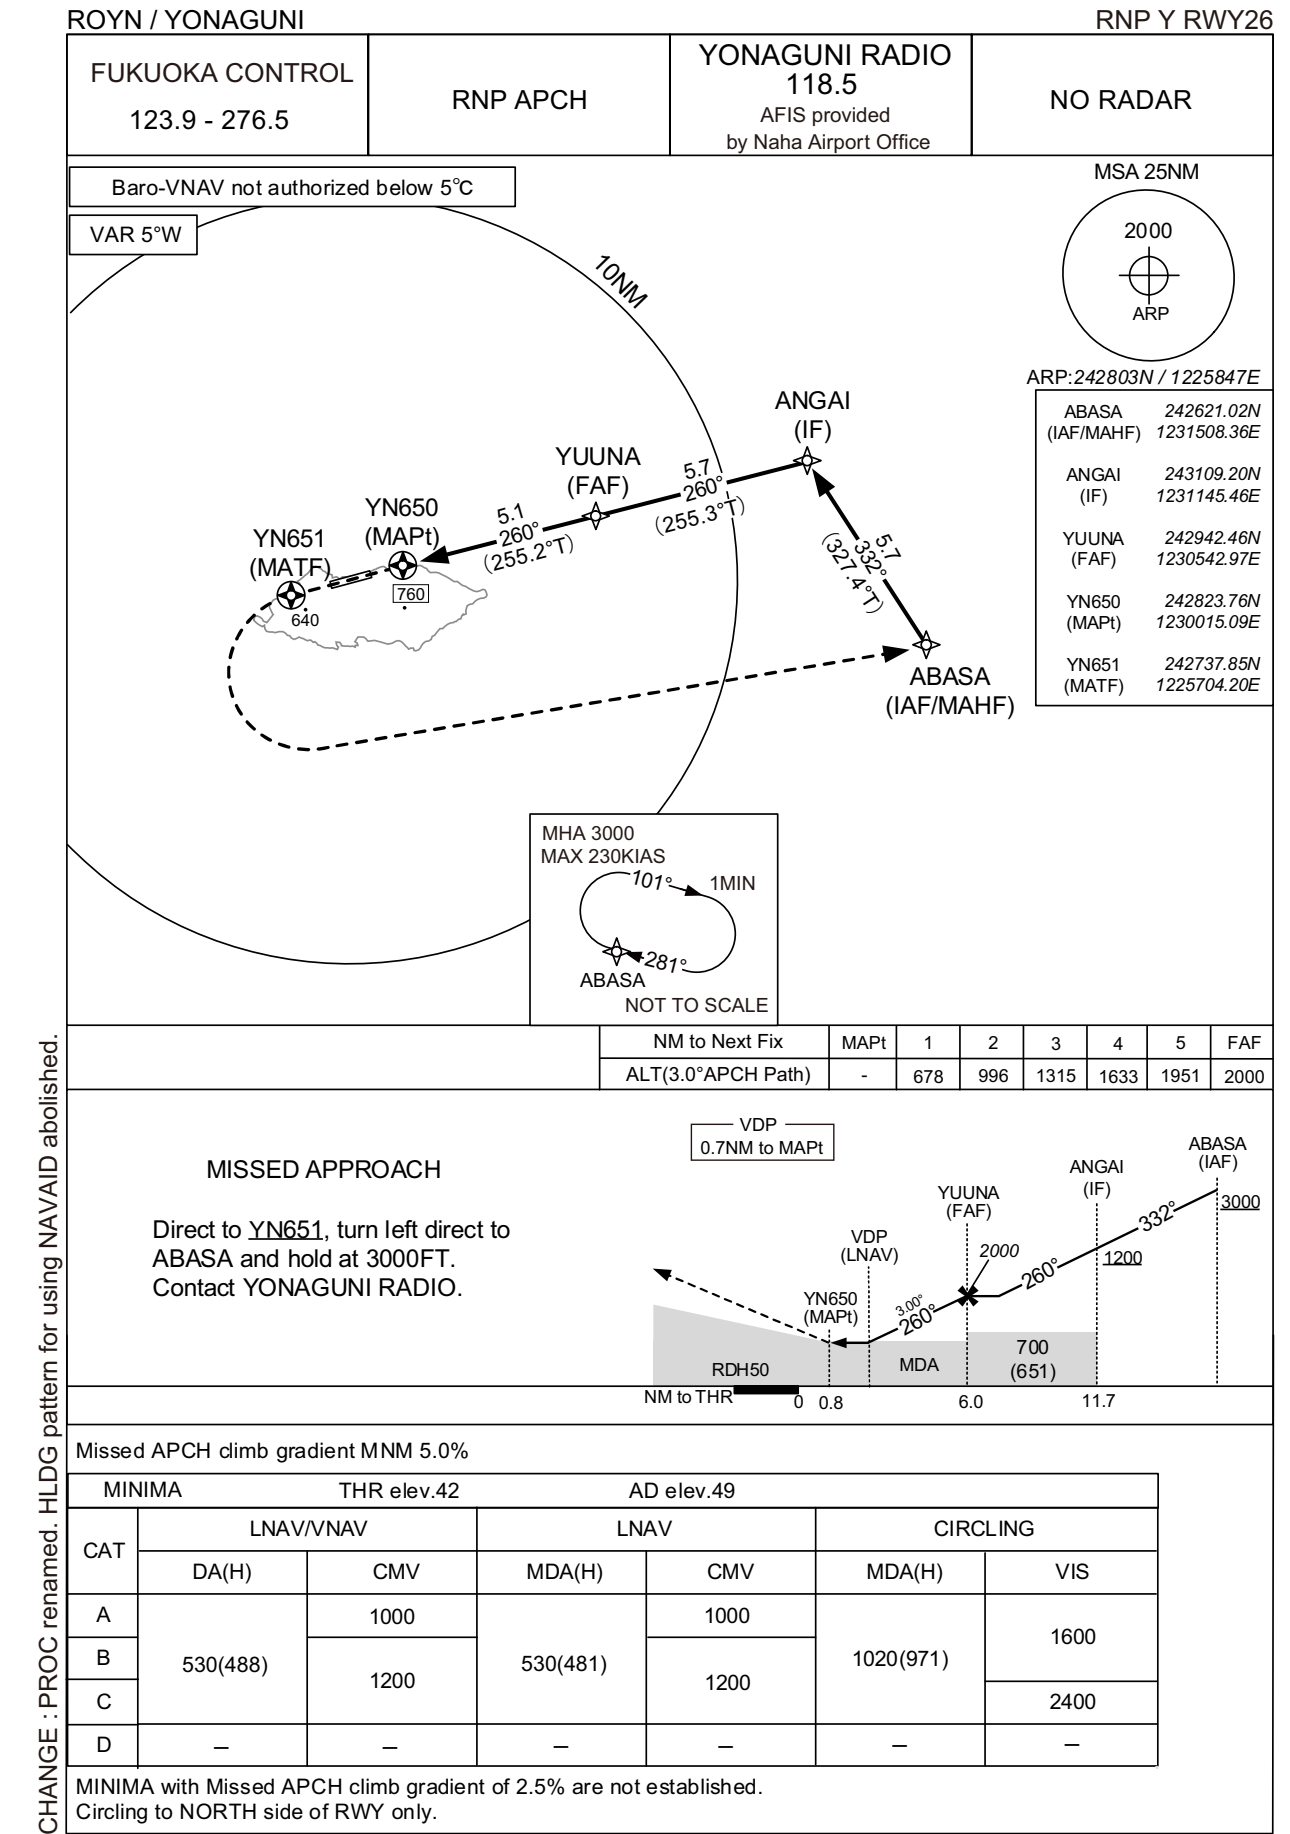


CHANGE.:PROC renamed. HLDG pattern for using NAVAID abolished.

**INTENTIONALLY LEFT BLANK**



ROYN / YONAGUNI

Visual REP

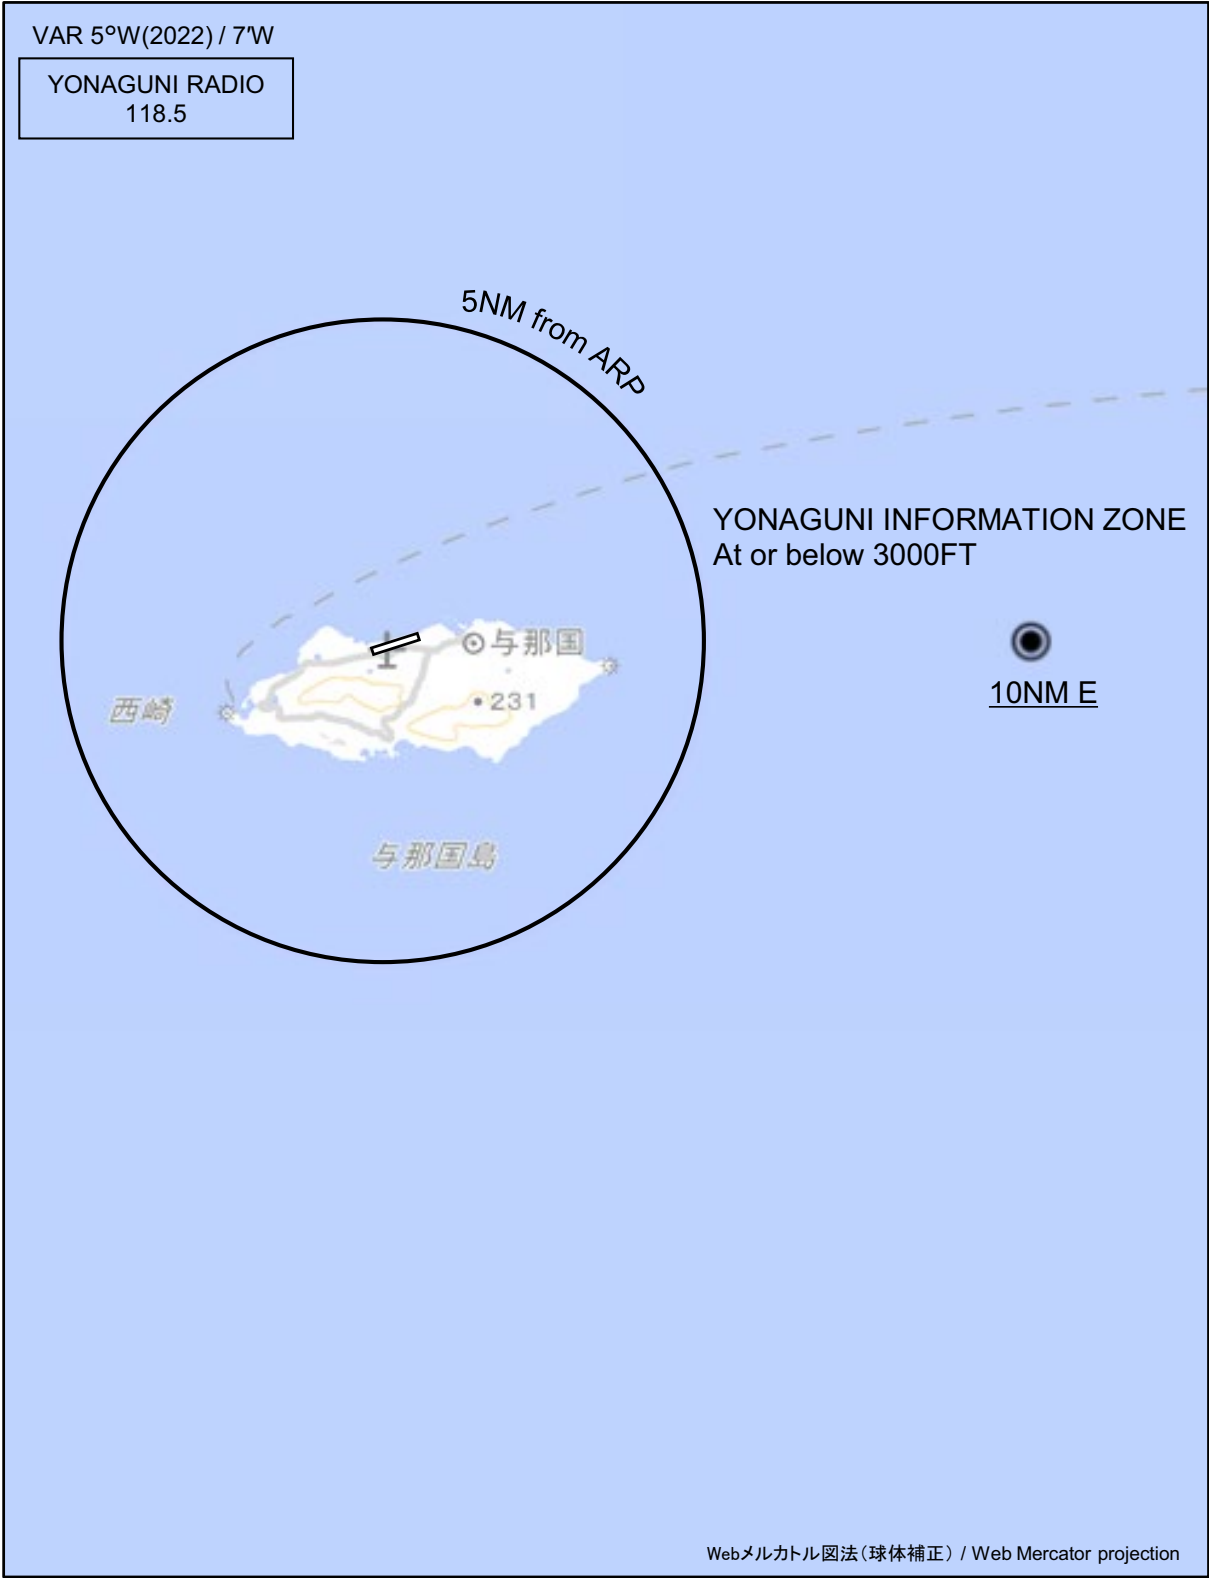

CHANGE : Map updated. BRG/DIST from ARP.

※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

| Call sign | BRG / DIST from ARP | Remarks            |
|-----------|---------------------|--------------------|
| 10NM E    | 090°T / 10.0NM      | 海上<br>Over the sea |

ROYN / YONAGUNI

Minimum Vectoring Altitude CHART

