


RJCK / KUSHIRO


AD CHART

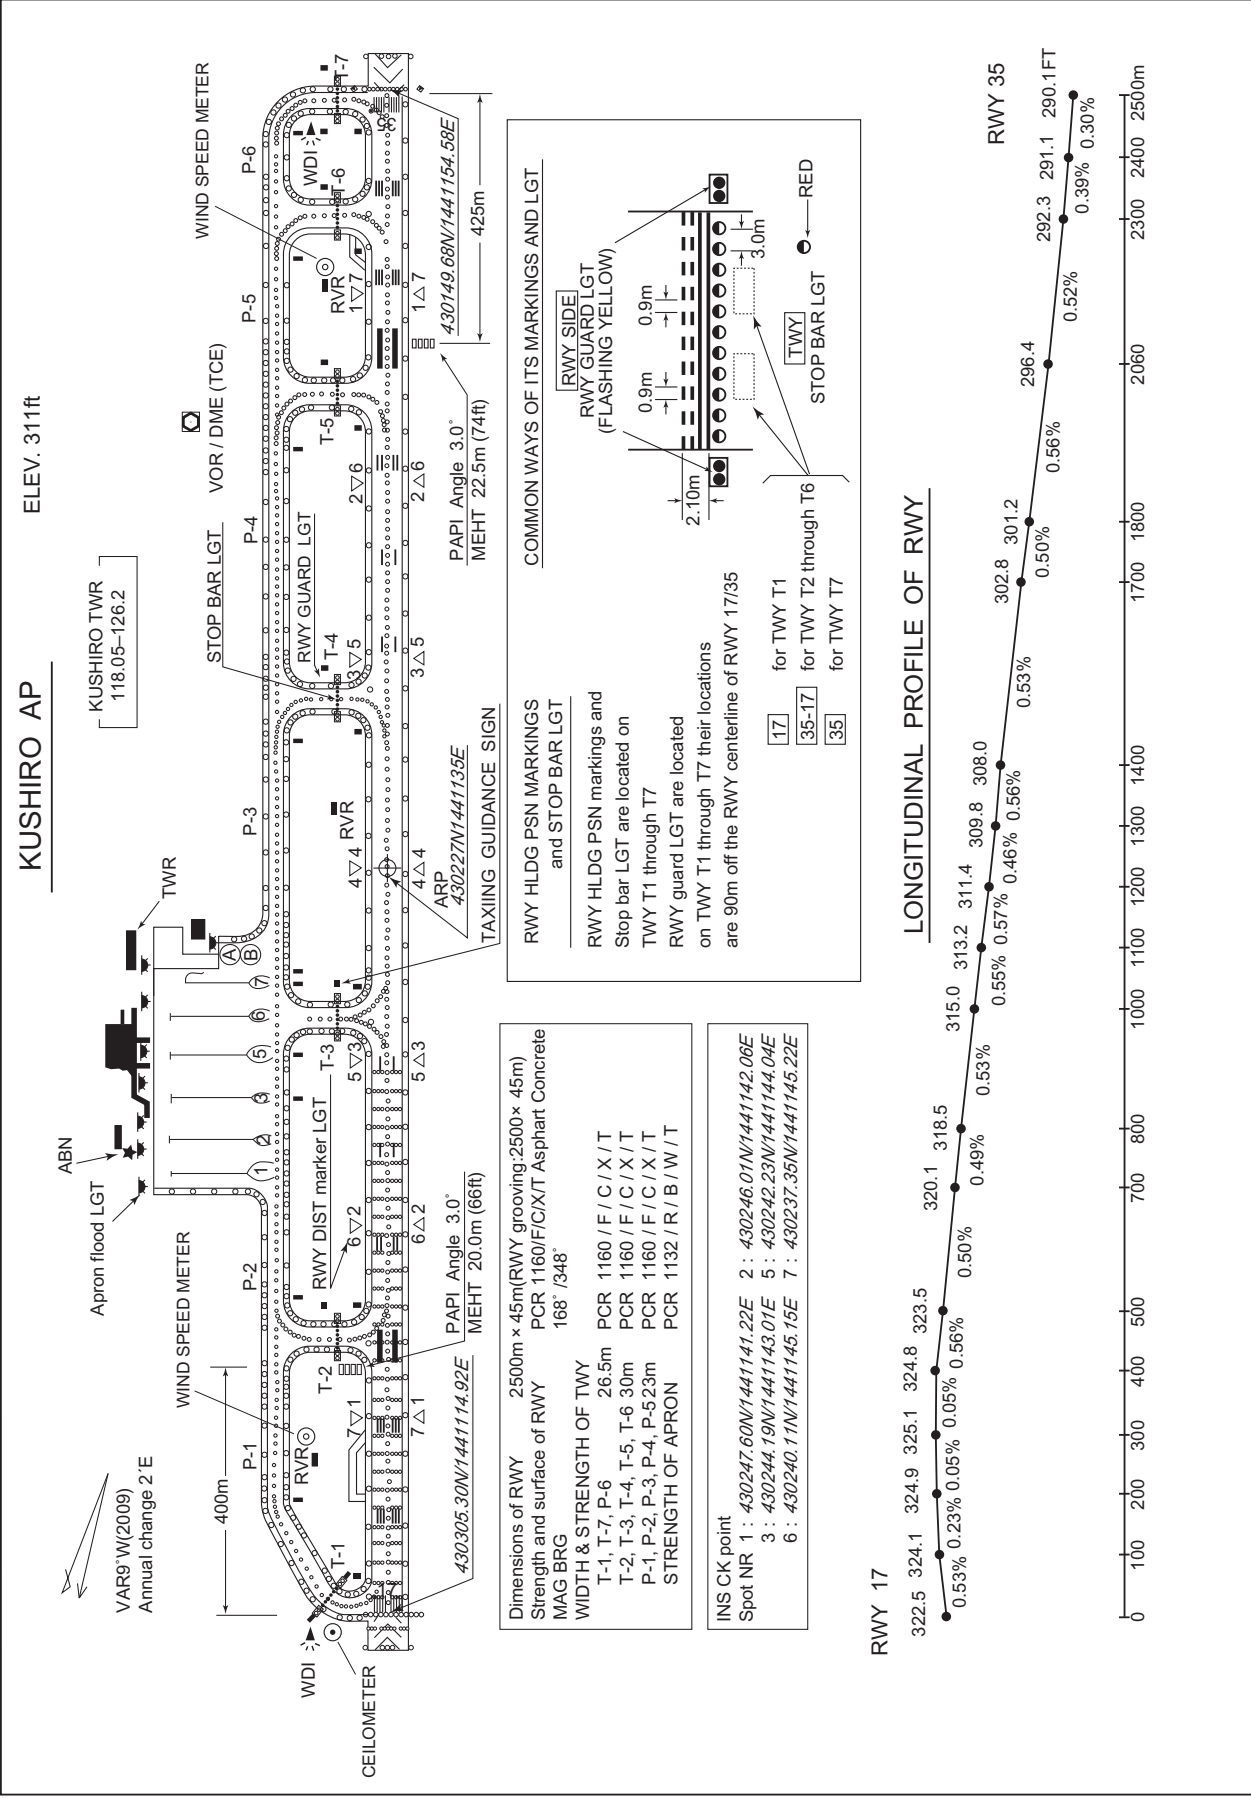

**INTENTIONALLY LEFT BLANK**

RJCK/KUSHIRO

PRECISION APPROACH TERRAIN CHART – ICAO

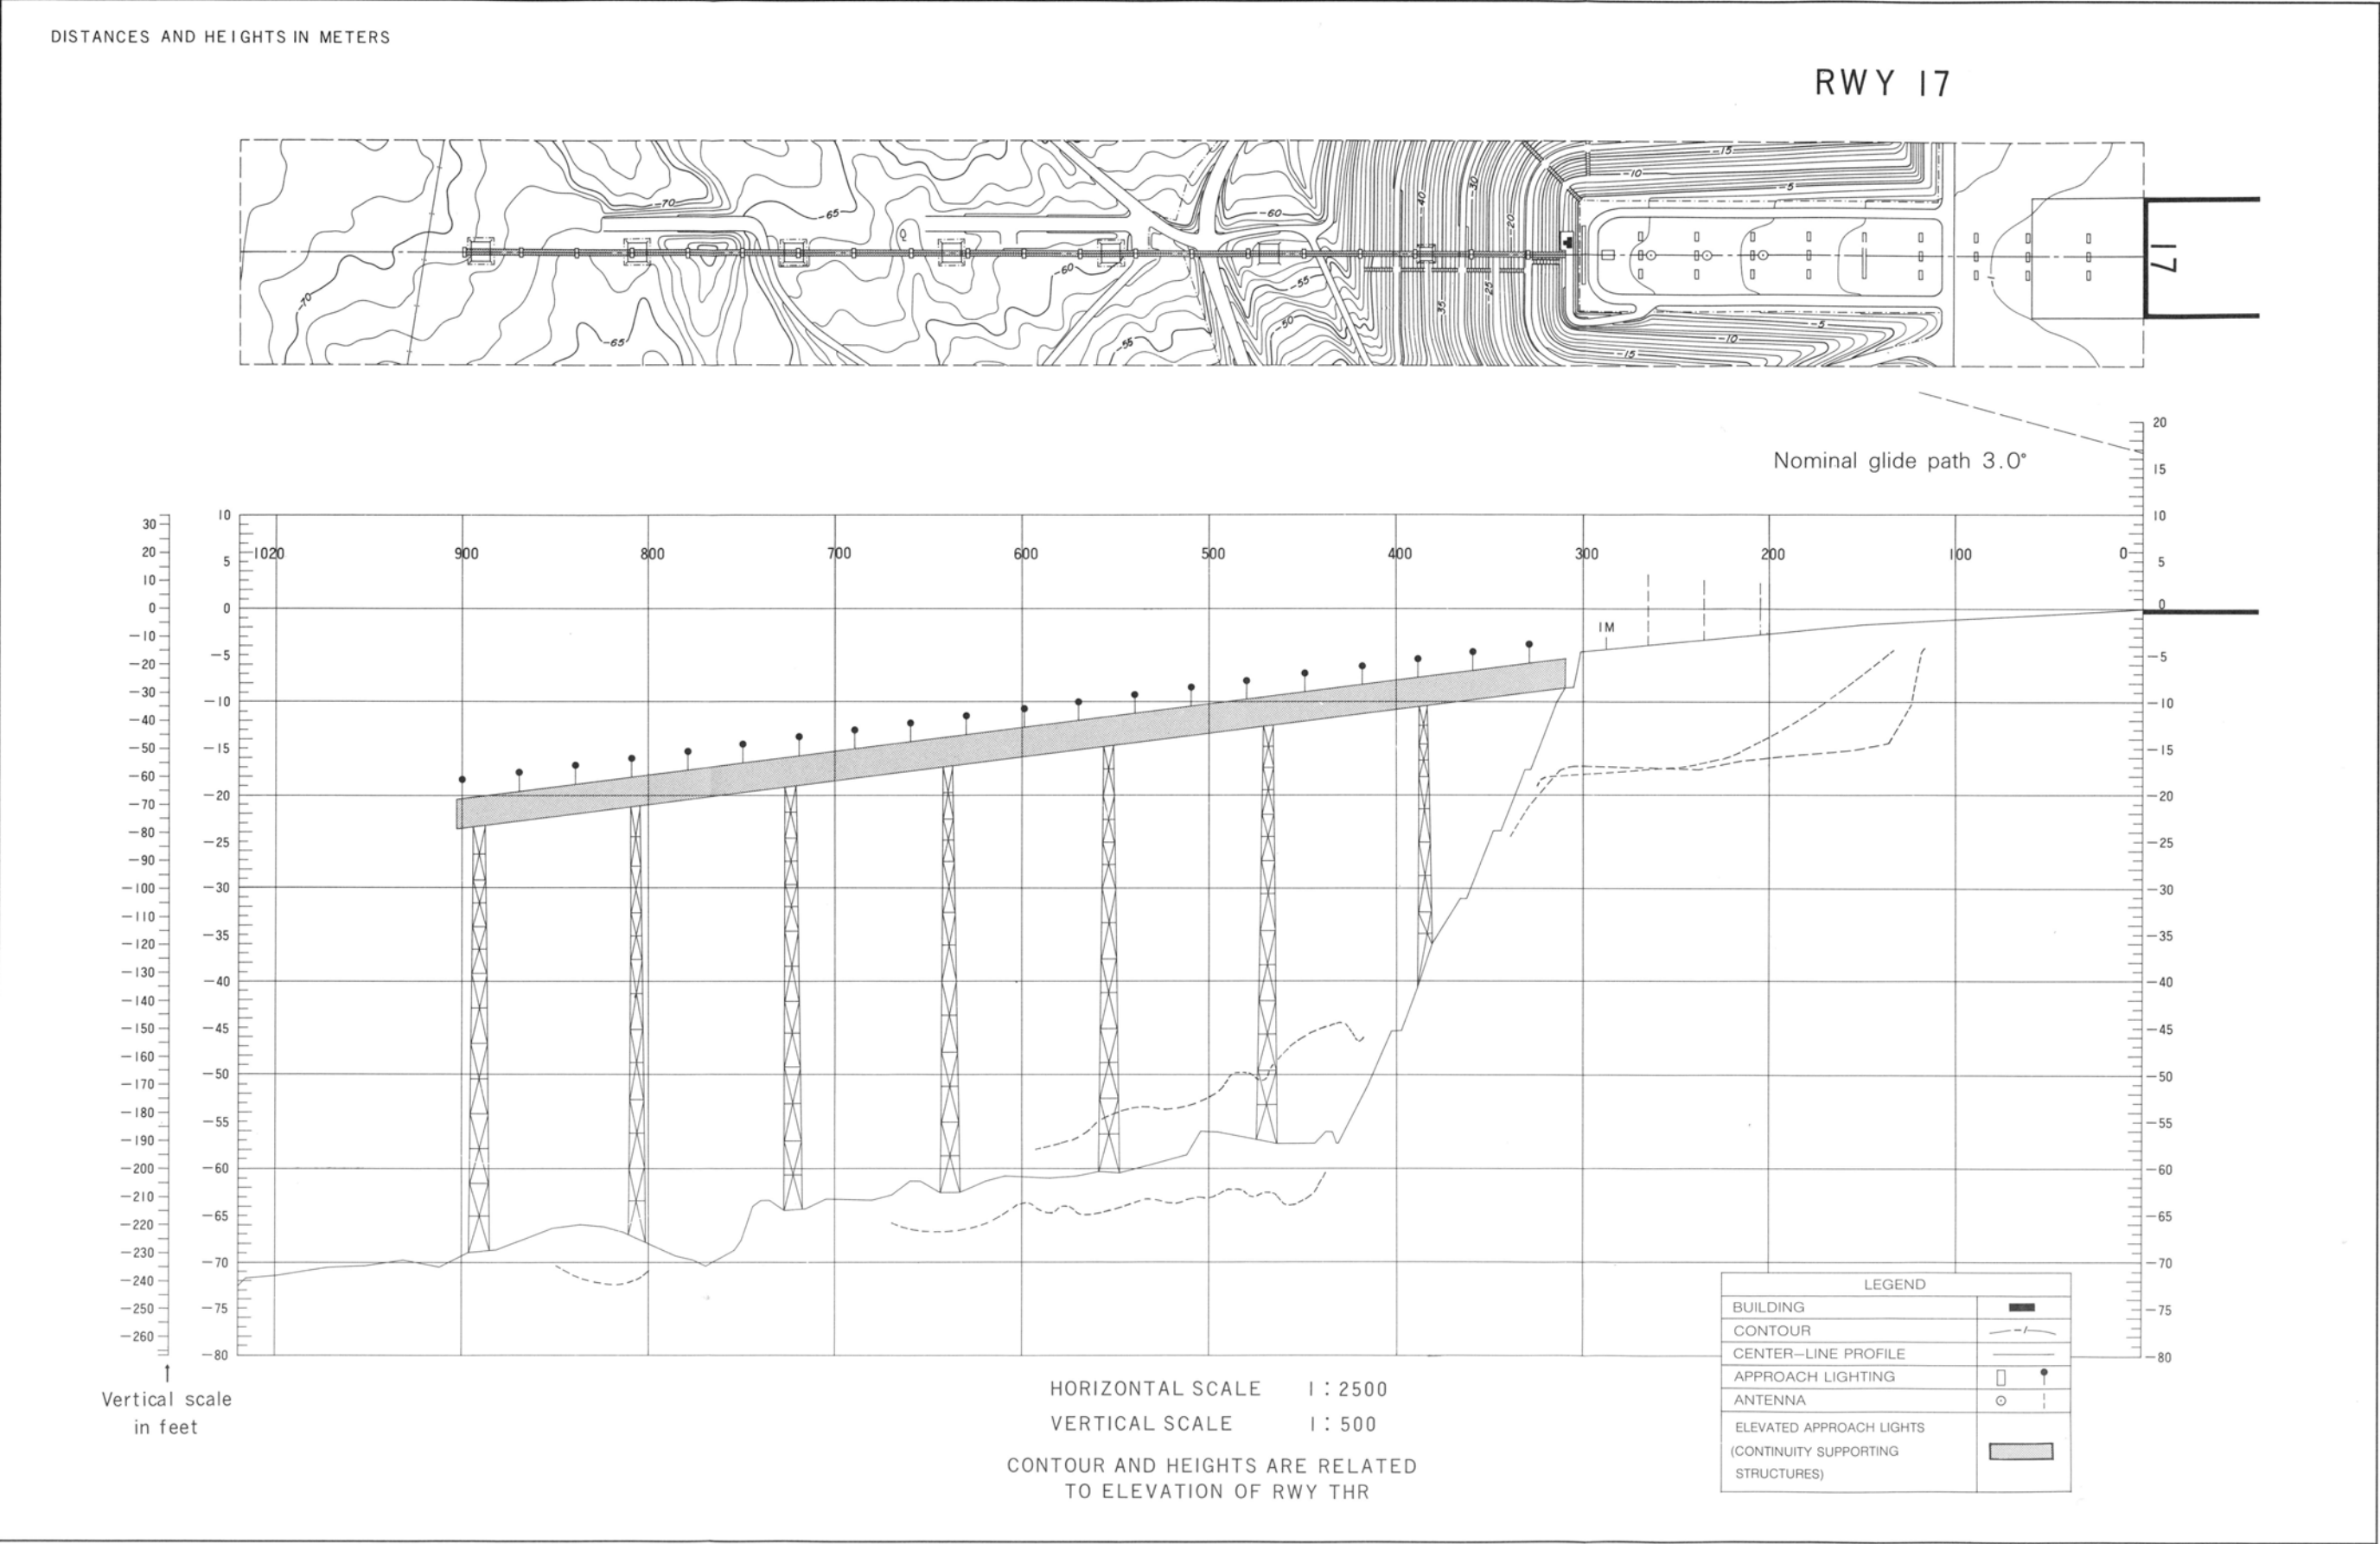

STANDARD DEPARTURE CHART -INSTRUMENT

RJCK / KUSHIRO

SID

KUSHIRO REVERSAL FIVE DEPARTURE


RWY17 : Climb RWY HDG to 1000FT, turn right...

RWY35 : Climb RWY HDG to 1000FT, turn left HDG155°...

...to intercept and proceed via TCE R200 to 3000FT, turn left, direct to  
TCE VOR/DME.

Cross TCE VOR/DME at or above 5000FT.

Note : No turn before DER.

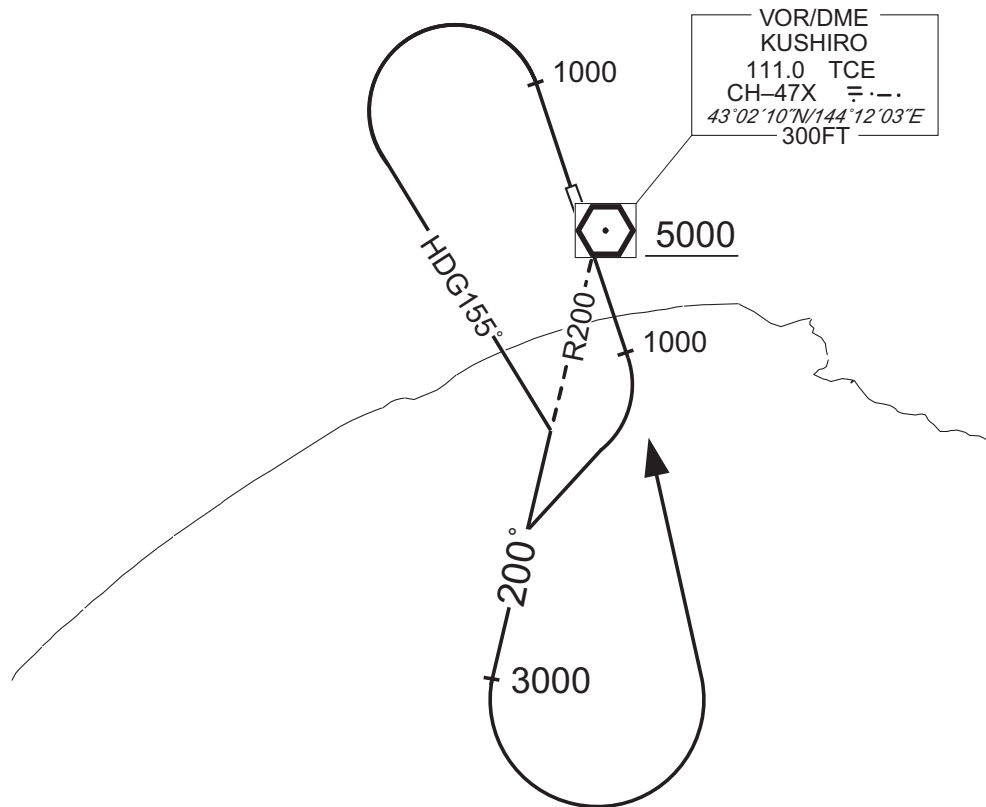


CHANGE : PROC abolished(ALICE THREE DEPARTURE, ERIMO FOUR DEPARTURE, OBIHIRO THREE DEPARTURE, YUDOH TWO DEPARTURE, EATAK ONE DEPARTURE).  
PROC renamed. KUSHIRO VOR/DME relocated(KSE→TCE).

STANDARD DEPARTURE CHART -INSTRUMENT

|                      |          |
|----------------------|----------|
| RJCK / KUSHIRO       | RNAV SID |
| TANCHO ONE DEPARTURE | RNP1     |

Note GNSS required.

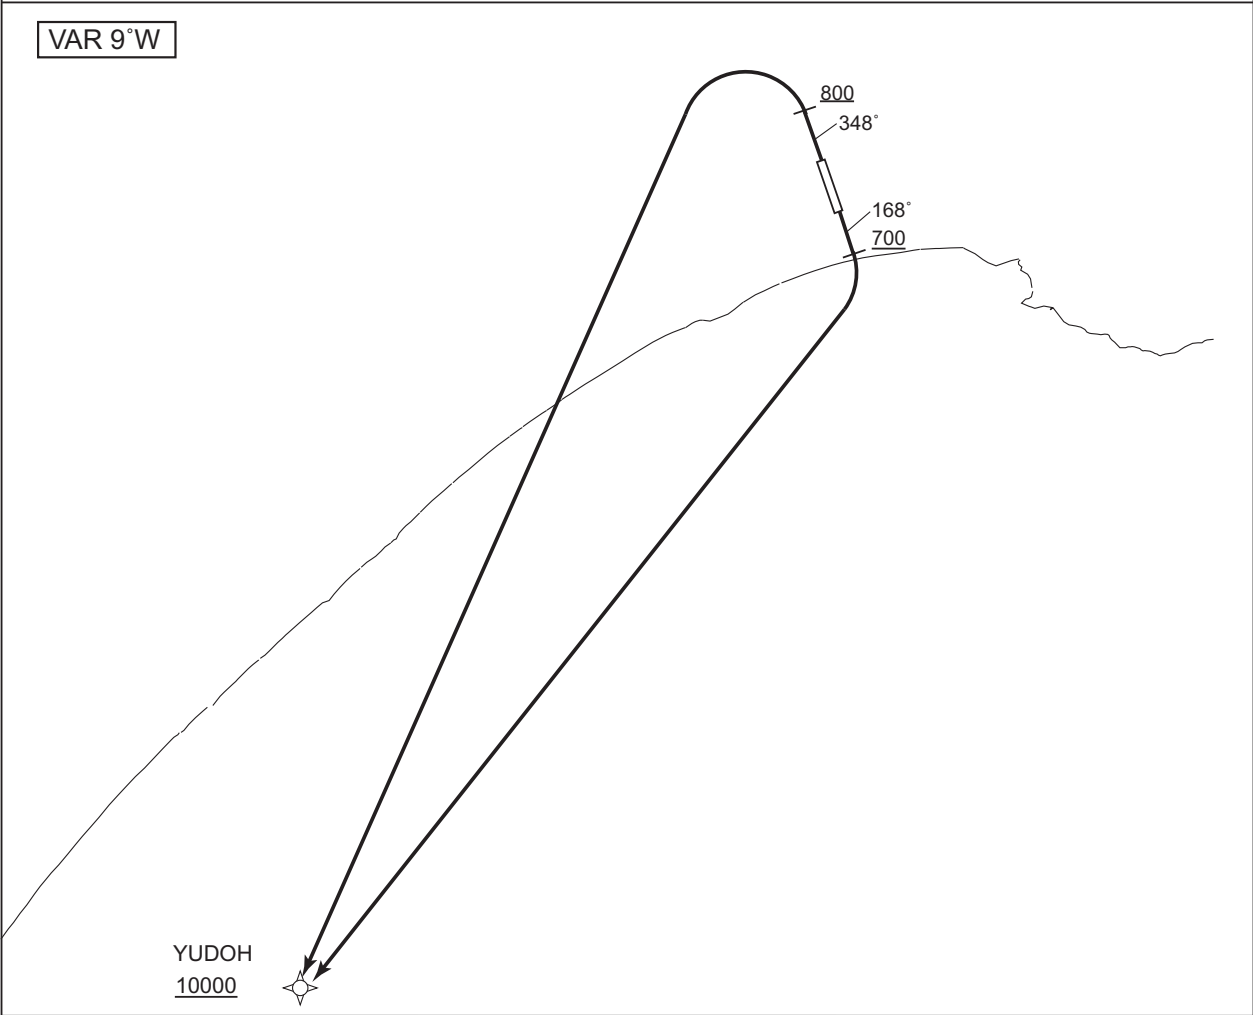

RWY17 : Climb on HDG168° at or above 700FT, turn right direct to YUDOH at or above 10000FT.  
RWY35 : Climb on HDG348° at or above 800FT, turn left direct to YUDOH at or above 10000FT.

RWY17

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | —                   | —        | 168 (159.0)   | -9.2               | —             | —              | +700          | —            | —              | RNP1                     |
| 002           | DF              | YUDOH               | —        | —             | -9.2               | —             | R              | +10000        | —            | —              | RNP1                     |

RWY35


| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | —                   | —        | 348 (339.0)   | -9.2               | —             | —              | +800          | —            | —              | RNP1                     |
| 002           | DF              | YUDOH               | —        | —             | -9.2               | —             | L              | +10000        | —            | —              | RNP1                     |

Waypoint Coordinates

| Waypoint Identifier | Coordinates            |
|---------------------|------------------------|
| YUDOH               | 423005.4N / 1434446.5E |

CHANGE : Waypoint Coordinates added.

STANDARD DEPARTURE CHART -INSTRUMENT

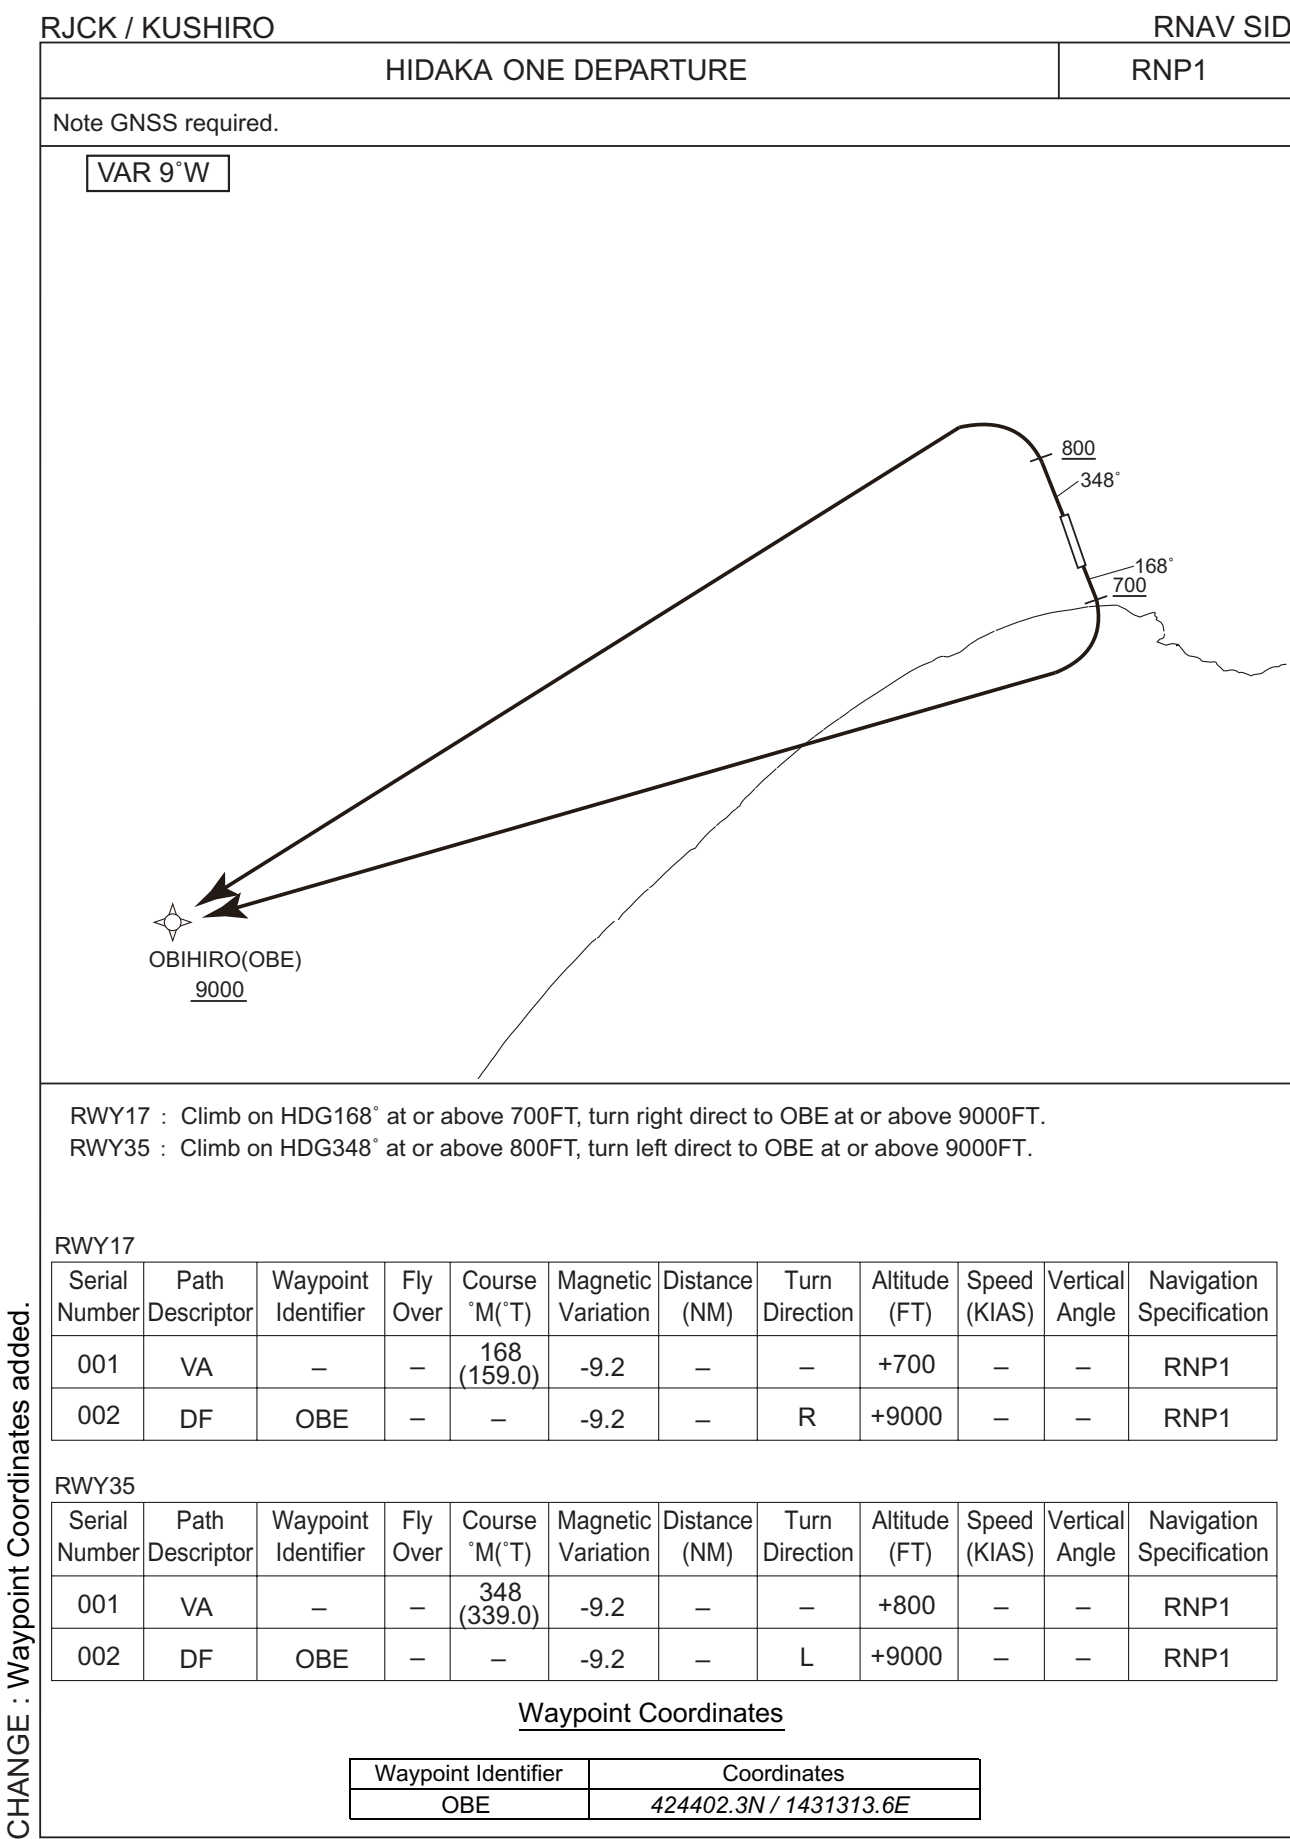

CHANGE : Waypoint Coordinates added.

STANDARD DEPARTURE CHART -INSTRUMENT

RJCK / KUSHIRO


RNAV SID

RUGMO ONE DEPARTURE

RNP1

Note GNSS required.

VAR 9°W

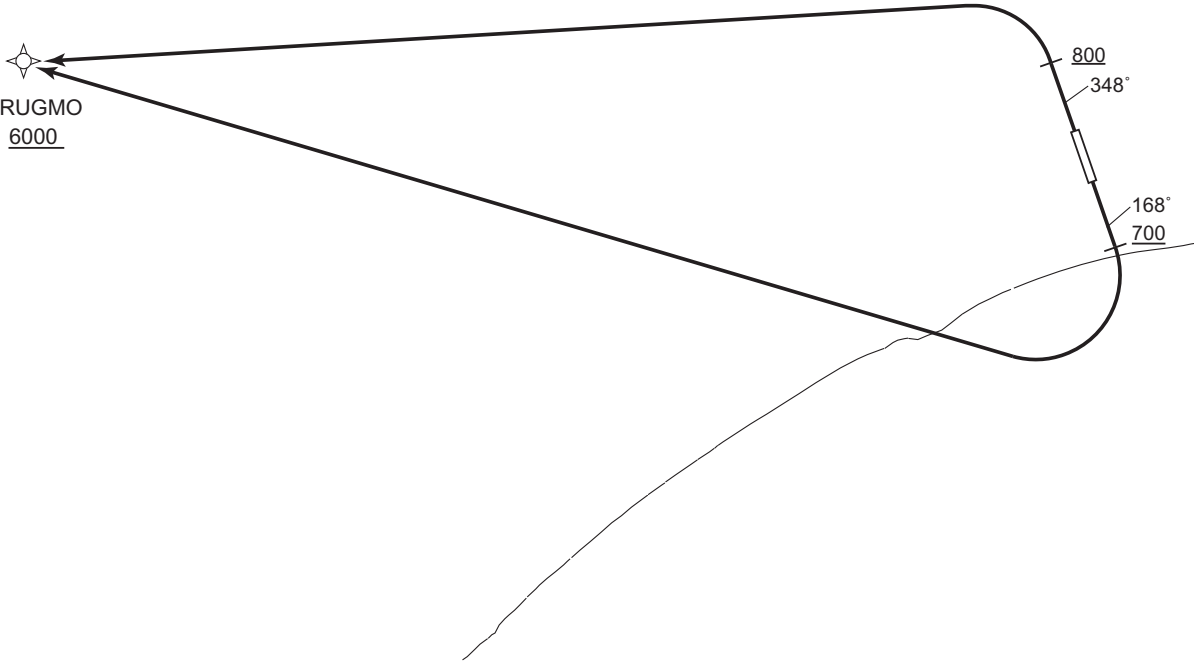

RUGMO 6000

RWY17 : Climb on HDG168° at or above 700FT, turn right direct to RUGMO at or above 6000FT.

RWY35 : Climb on HDG348° at or above 800FT, turn left direct to RUGMO at or above 6000FT.

RWY17

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | —                   | —        | 168 (159.0)   | -9.2               | —             | —              | +700          | —            | —              | RNP1                     |
| 002           | DF              | RUGMO               | —        | —             | -9.2               | —             | R              | +6000         | —            | —              | RNP1                     |

RWY35

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | —                   | —        | 348 (339.0)   | -9.2               | —             | —              | +800          | —            | —              | RNP1                     |
| 002           | DF              | RUGMO               | —        | —             | -9.2               | —             | L              | +6000         | —            | —              | RNP1                     |

Waypoint Coordinates


| Waypoint Identifier | Coordinates            |
|---------------------|------------------------|
| RUGMO               | 430433.6N / 1432949.1E |

CHANGE : Waypoint Coordinates added.

STANDARD DEPARTURE CHART -INSTRUMENT

RJCK / KUSHIRO

RNAV SID

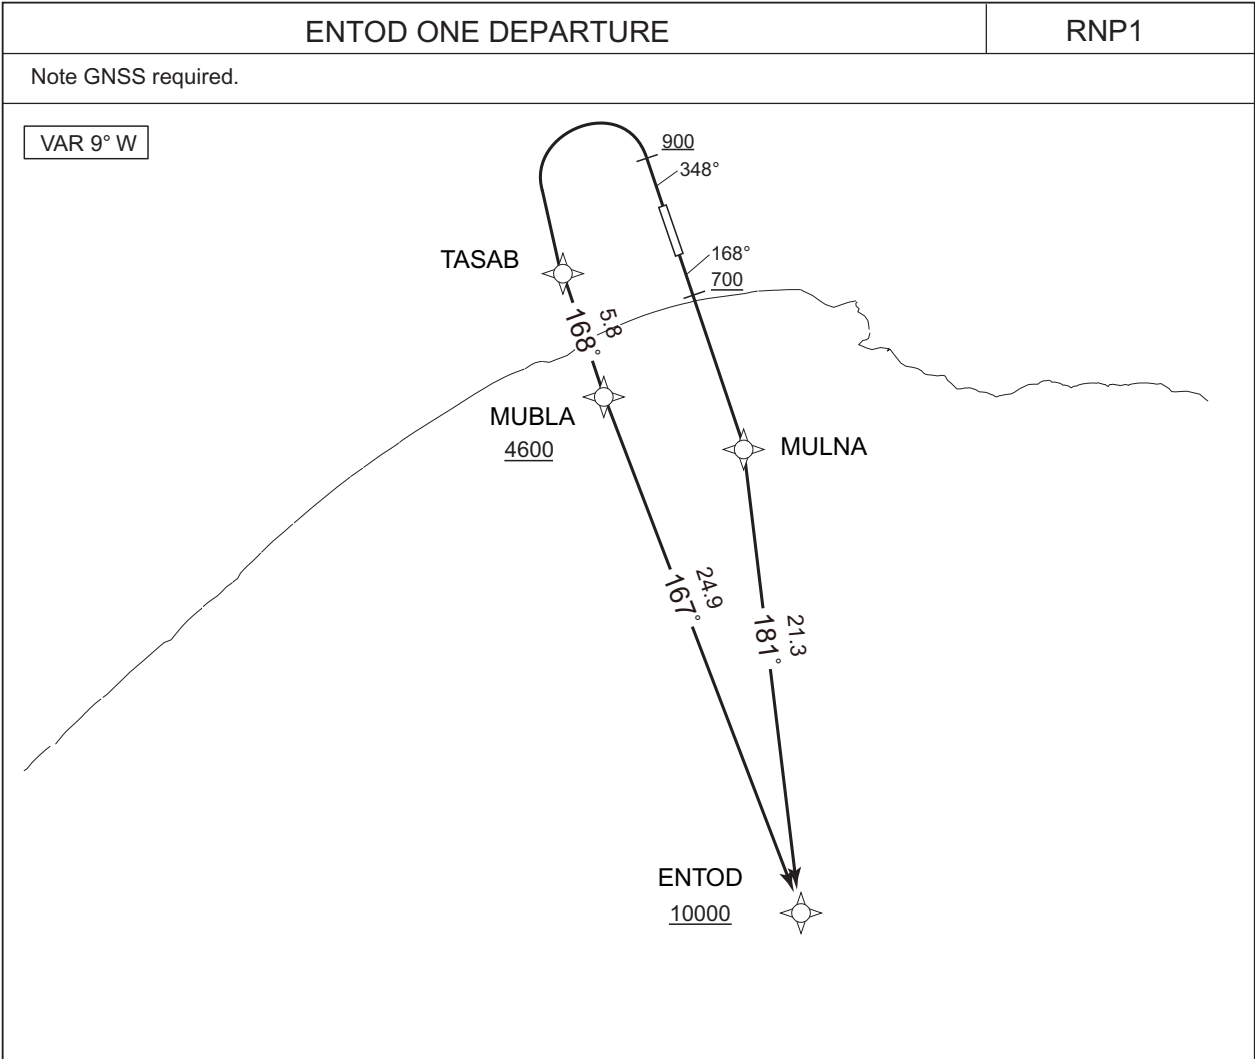

RWY17 : Climb on HDG168° at or above 700FT, direct to MULNA, to ENTOD at or above 10000FT.  
RWY35 : Climb on HDG348° at or above 900FT, turn left direct to TASAB, to MUBLA at or above 4600FT, to ENTOD at or above 10000FT.

RWY17

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | —                   | —        | 168 (159.0)   | -9.3               | —             | —              | +700          | —            | —              | RNP1                     |
| 002           | DF              | MULNA               | —        | —             | -9.3               | —             | —              | —             | —            | —              | RNP1                     |
| 003           | TF              | ENTOD               | —        | 181 (171.4)   | -9.3               | 21.3          | —              | +10000        | —            | —              | RNP1                     |

RWY35

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | —                   | —        | 348 (339.0)   | -9.3               | —             | —              | +900          | —            | —              | RNP1                     |
| 002           | DF              | TASAB               | —        | —             | -9.3               | —             | L              | —             | —            | —              | RNP1                     |
| 003           | TF              | MUBLA               | —        | 168 (159.0)   | -9.3               | 5.8           | —              | +4600         | —            | —              | RNP1                     |
| 004           | TF              | ENTOD               | —        | 167 (157.5)   | -9.3               | 24.9          | —              | +10000        | —            | —              | RNP1                     |

CHANGE : Description of latitude and longitude.



STANDARD DEPARTURE CHART -INSTRUMENT

RJCK / KUSHIRO


RNAV SID

Waypoint Coordinates

| Waypoint Identifier | Coordinates            |
|---------------------|------------------------|
| MULNA               | 425251.7N / 1441636.0E |
| TASAB               | 430015.6N / 1440508.3E |
| MUBLA               | 425452.9N / 1440757.8E |
| ENTOD               | 423150.2N / 1442054.3E |

CHANGE : Waypoint Coordinates added.

STANDARD ARRIVAL CHART -INSTRUMENT

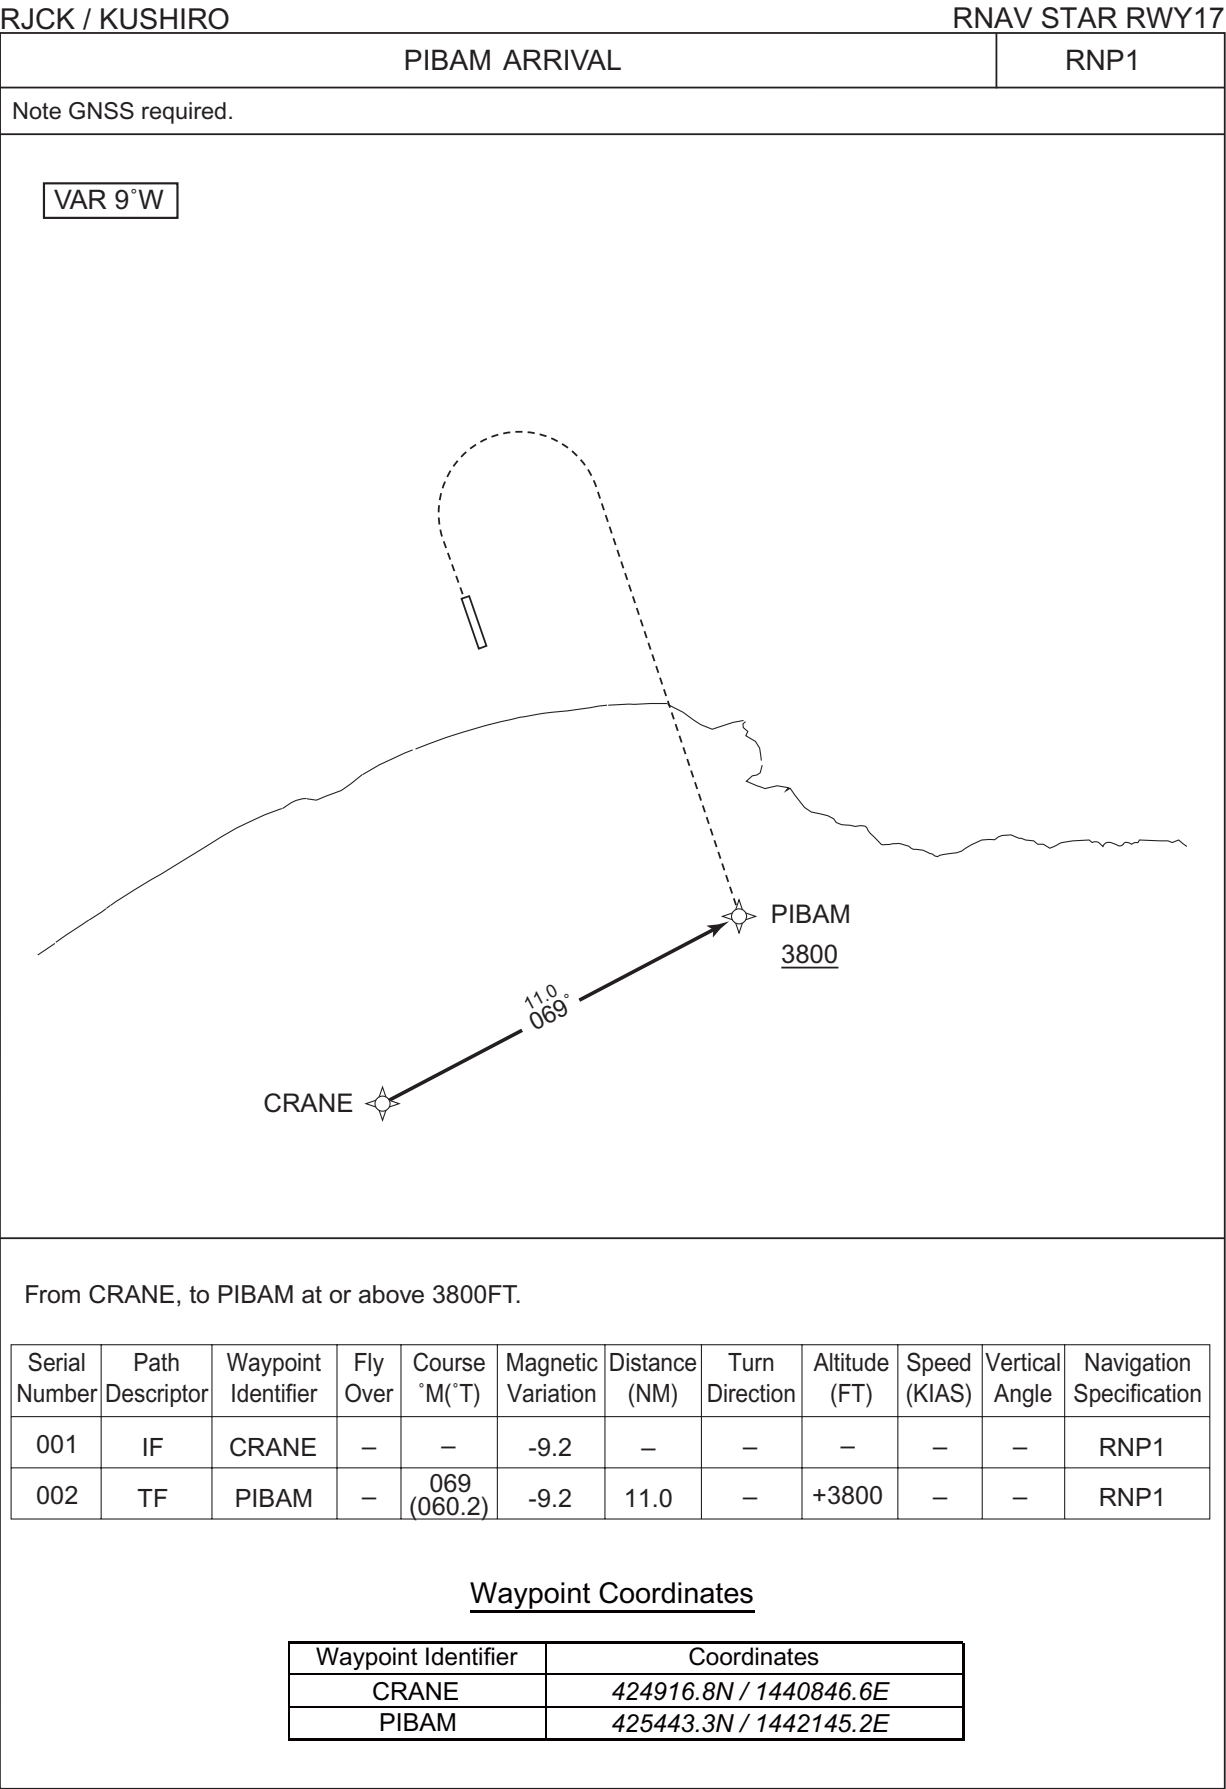


CHANGE : New PROC.

**INTENTIONALLY LEFT BLANK**

STANDARD ARRIVAL CHART -INSTRUMENT

|                                                                                  |                 |
|----------------------------------------------------------------------------------|-----------------|
| RJCK / KUSHIRO                                                                   | RNAV STAR RWY17 |
| AKESI ARRIVAL / IGAMO NORTH ARRIVAL<br>RUGMO NORTH ARRIVAL / RUNPA NORTH ARRIVAL | RNP1            |

Note GNSS required.

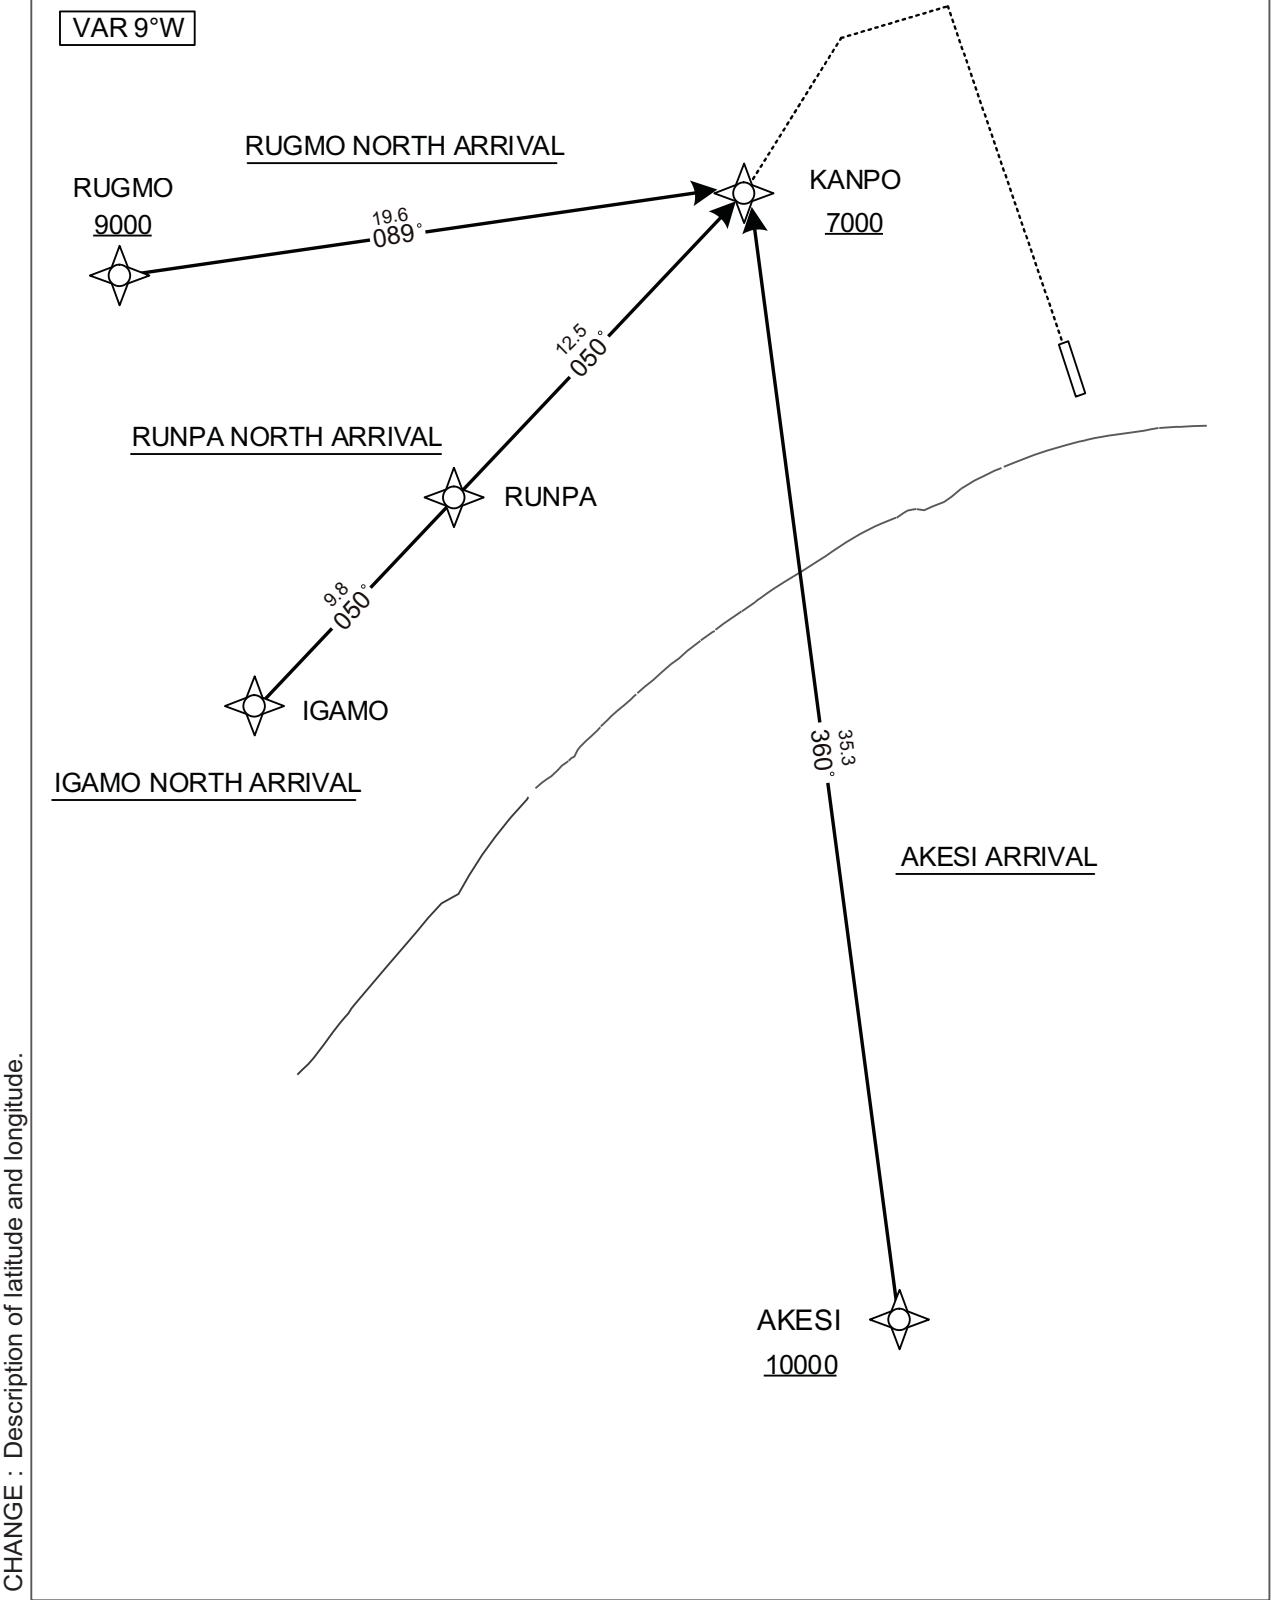

STANDARD ARRIVAL CHART -INSTRUMENT

RJCK / KUSHIRO

RNAV STAR RWY17

AKESI ARRIVAL

From AKESI at or above 10000FT, to KANPO at or above 7000FT.

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | AKESI               | -        | -              | -9.2               | -             | -              | +10000        | -            | -              | RNP1                     |
| 002           | TF              | KANPO               | -        | 360<br>(350.3) | -9.2               | 35.3          | -              | +7000         | -            | -              | RNP1                     |

IGAMO NORTH ARRIVAL

From IGAMO, to RUNPA, to KANPO at or above 7000FT.

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | IGAMO               | -        | -              | -9.2               | -             | -              | -             | -            | -              | RNP1                     |
| 002           | TF              | RUNPA               | -        | 050<br>(040.9) | -9.2               | 9.8           | -              | -             | -            | -              | RNP1                     |
| 003           | TF              | KANPO               | -        | 050<br>(041.0) | -9.2               | 12.5          | -              | +7000         | -            | -              | RNP1                     |

RUGMO NORTH ARRIVAL

From RUGMO at or above 9000FT, to KANPO at or above 7000FT.

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | RUGMO               | -        | -              | -9.2               | -             | -              | +9000         | -            | -              | RNP1                     |
| 002           | TF              | KANPO               | -        | 089<br>(079.6) | -9.2               | 19.6          | -              | +7000         | -            | -              | RNP1                     |

RUNPA NORTH ARRIVAL

From RUNPA, to KANPO at or above 7000FT.

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | RUNPA               | -        | -              | -9.2               | -             | -              | -             | -            | -              | RNP1                     |
| 002           | TF              | KANPO               | -        | 050<br>(041.0) | -9.2               | 12.5          | -              | +7000         | -            | -              | RNP1                     |

Waypoint Coordinates


| Waypoint Identifier | Coordinates            |
|---------------------|------------------------|
| AKESI               | 423316.4N / 1440423.6E |
| IGAMO               | 425112.6N / 1433614.5E |
| RUNPA               | 425838.2N / 1434501.8E |
| RUGMO               | 430433.6N / 1432949.1E |
| KANPO               | 430802.7N / 1435613.8E |

CHANGE : Waypoint Coordinates added.

STANDARD ARRIVAL CHART -INSTRUMENT

RJCK / KUSHIRO

RNAV STAR RWY35

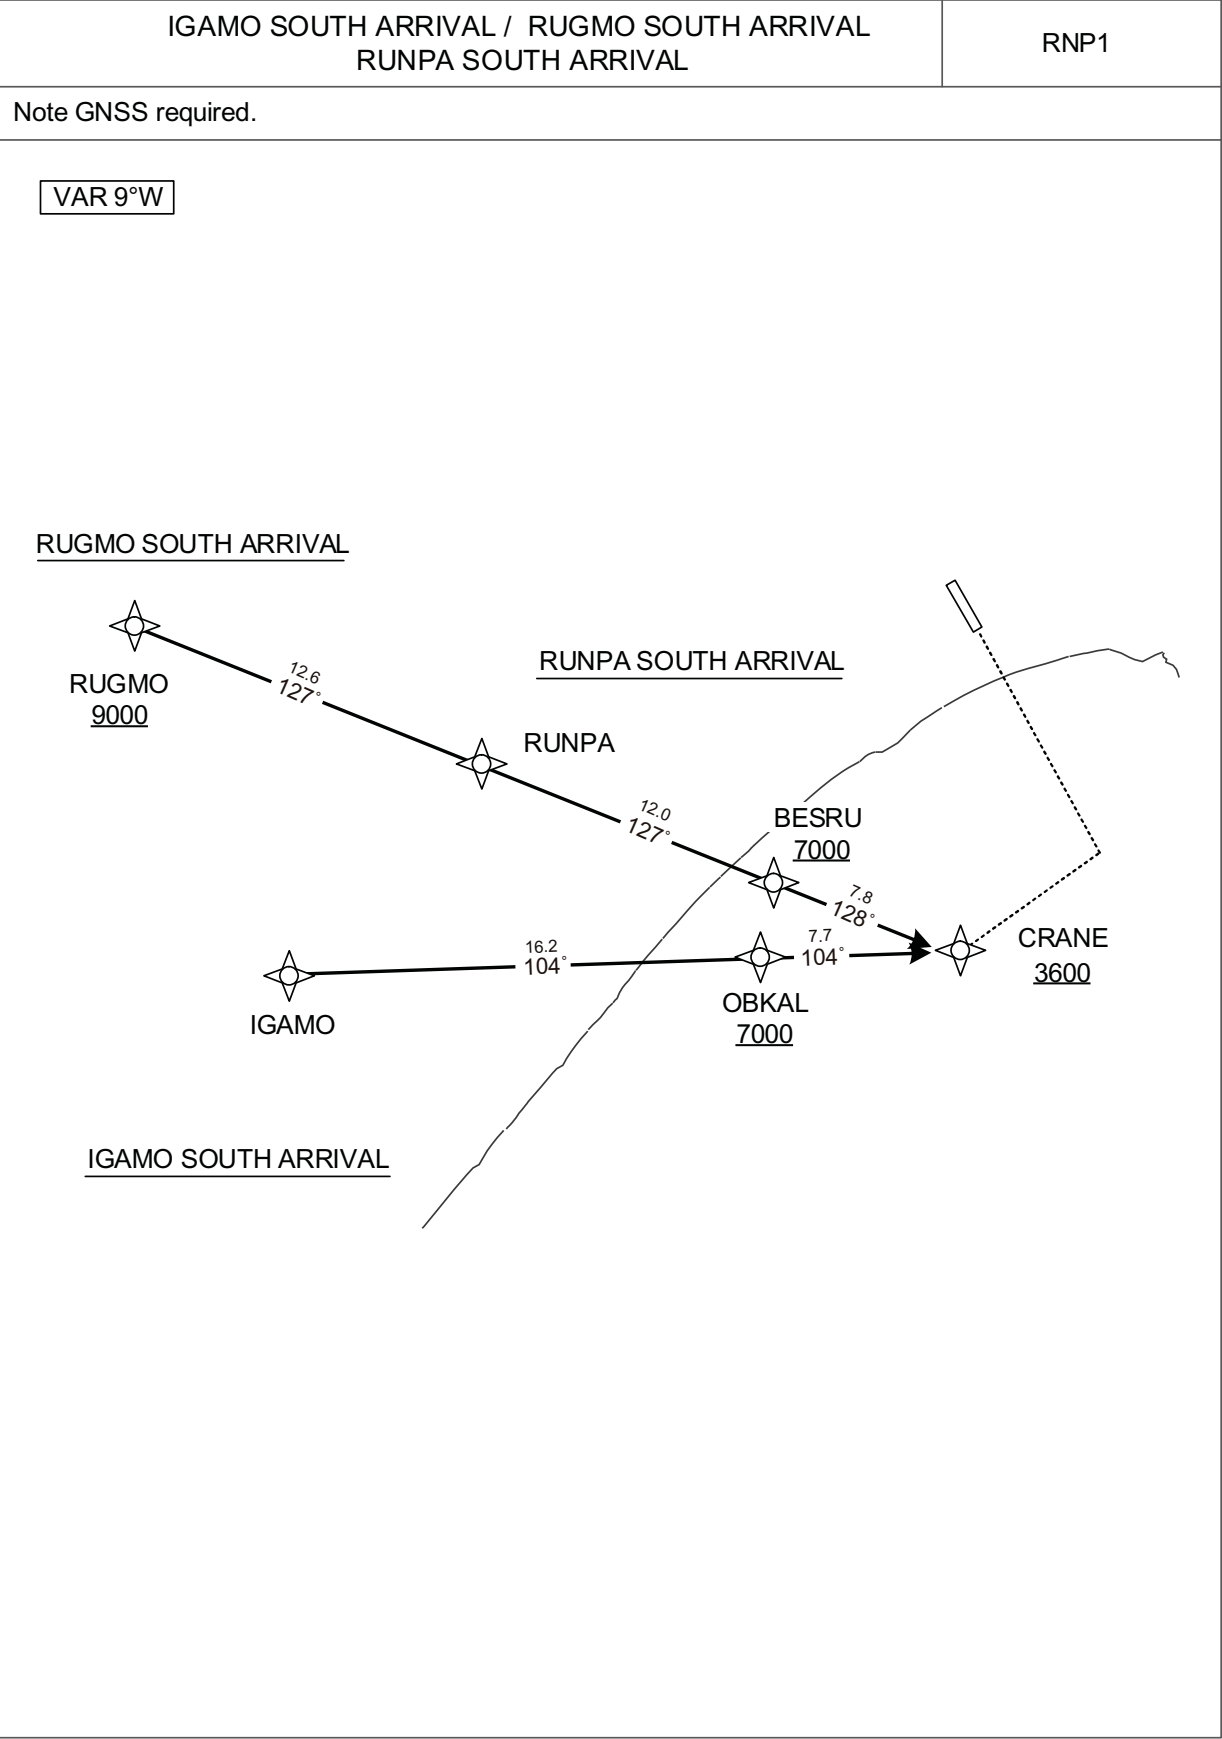

STANDARD ARRIVAL CHART -INSTRUMENT

RJCK / KUSHIRO

RNAV STAR RWY35

| IGAMO SOUTH ARRIVAL                                                   |                 |                     |          |                |                    |               |                |               |              |                |                          |
|-----------------------------------------------------------------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| From IGAMO, to OBKAL at or above 7000FT, to CRANE at or above 3600FT. |                 |                     |          |                |                    |               |                |               |              |                |                          |
| Serial Number                                                         | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
| 001                                                                   | IF              | IGAMO               | -        | -              | -9.2               | -             | -              | -             | -            | -              | RNP1                     |
| 002                                                                   | TF              | OBKAL               | -        | 104<br>(094.4) | -9.2               | 16.2          | -              | +7000         | -            | -              | RNP1                     |
| 003                                                                   | TF              | CRANE               | -        | 104<br>(094.7) | -9.2               | 7.7           | -              | +3600         | -            | -              | RNP1                     |


| RUGMO SOUTH ARRIVAL                                                                                |                 |                     |          |                |                    |               |                |               |              |                |                          |
|----------------------------------------------------------------------------------------------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| From RUGMO at or above 9000FT, to RUNPA, to BESRU at or above 7000FT, to CRANE at or above 3600FT. |                 |                     |          |                |                    |               |                |               |              |                |                          |
| Serial Number                                                                                      | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
| 001                                                                                                | IF              | RUGMO               | -        | -              | -9.2               | -             | -              | +9000         | -            | -              | RNP1                     |
| 002                                                                                                | TF              | RUNPA               | -        | 127<br>(118.0) | -9.2               | 12.6          | -              | -             | -            | -              | RNP1                     |
| 003                                                                                                | TF              | BESRU               | -        | 127<br>(118.1) | -9.2               | 12.0          | -              | +7000         | -            | -              | RNP1                     |
| 004                                                                                                | TF              | CRANE               | -        | 128<br>(118.3) | -9.2               | 7.8           | -              | +3600         | -            | -              | RNP1                     |

| RUNPA SOUTH ARRIVAL                                                   |                 |                     |          |                |                    |               |                |               |              |                |                          |
|-----------------------------------------------------------------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| From RUNPA, to BESRU at or above 7000FT, to CRANE at or above 3600FT. |                 |                     |          |                |                    |               |                |               |              |                |                          |
| Serial Number                                                         | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
| 001                                                                   | IF              | RUNPA               | -        | -              | -9.2               | -             | -              | -             | -            | -              | RNP1                     |
| 002                                                                   | TF              | BESRU               | -        | 127<br>(118.1) | -9.2               | 12.0          | -              | +7000         | -            | -              | RNP1                     |
| 003                                                                   | TF              | CRANE               | -        | 128<br>(118.3) | -9.2               | 7.8           | -              | +3600         | -            | -              | RNP1                     |

Waypoint Coordinates

| Waypoint Identifier | Coordinates            |
|---------------------|------------------------|
| IGAMO               | 425112.6N / 1433614.5E |
| OBKAL               | 424955.3N / 1435815.3E |
| RUGMO               | 430433.6N / 1432949.1E |
| RUNPA               | 425838.2N / 1434501.8E |
| BESRU               | 425257.7N / 1435928.5E |
| CRANE               | 424916.8N / 1440846.6E |

STANDARD ARRIVAL CHART -INSTRUMENT

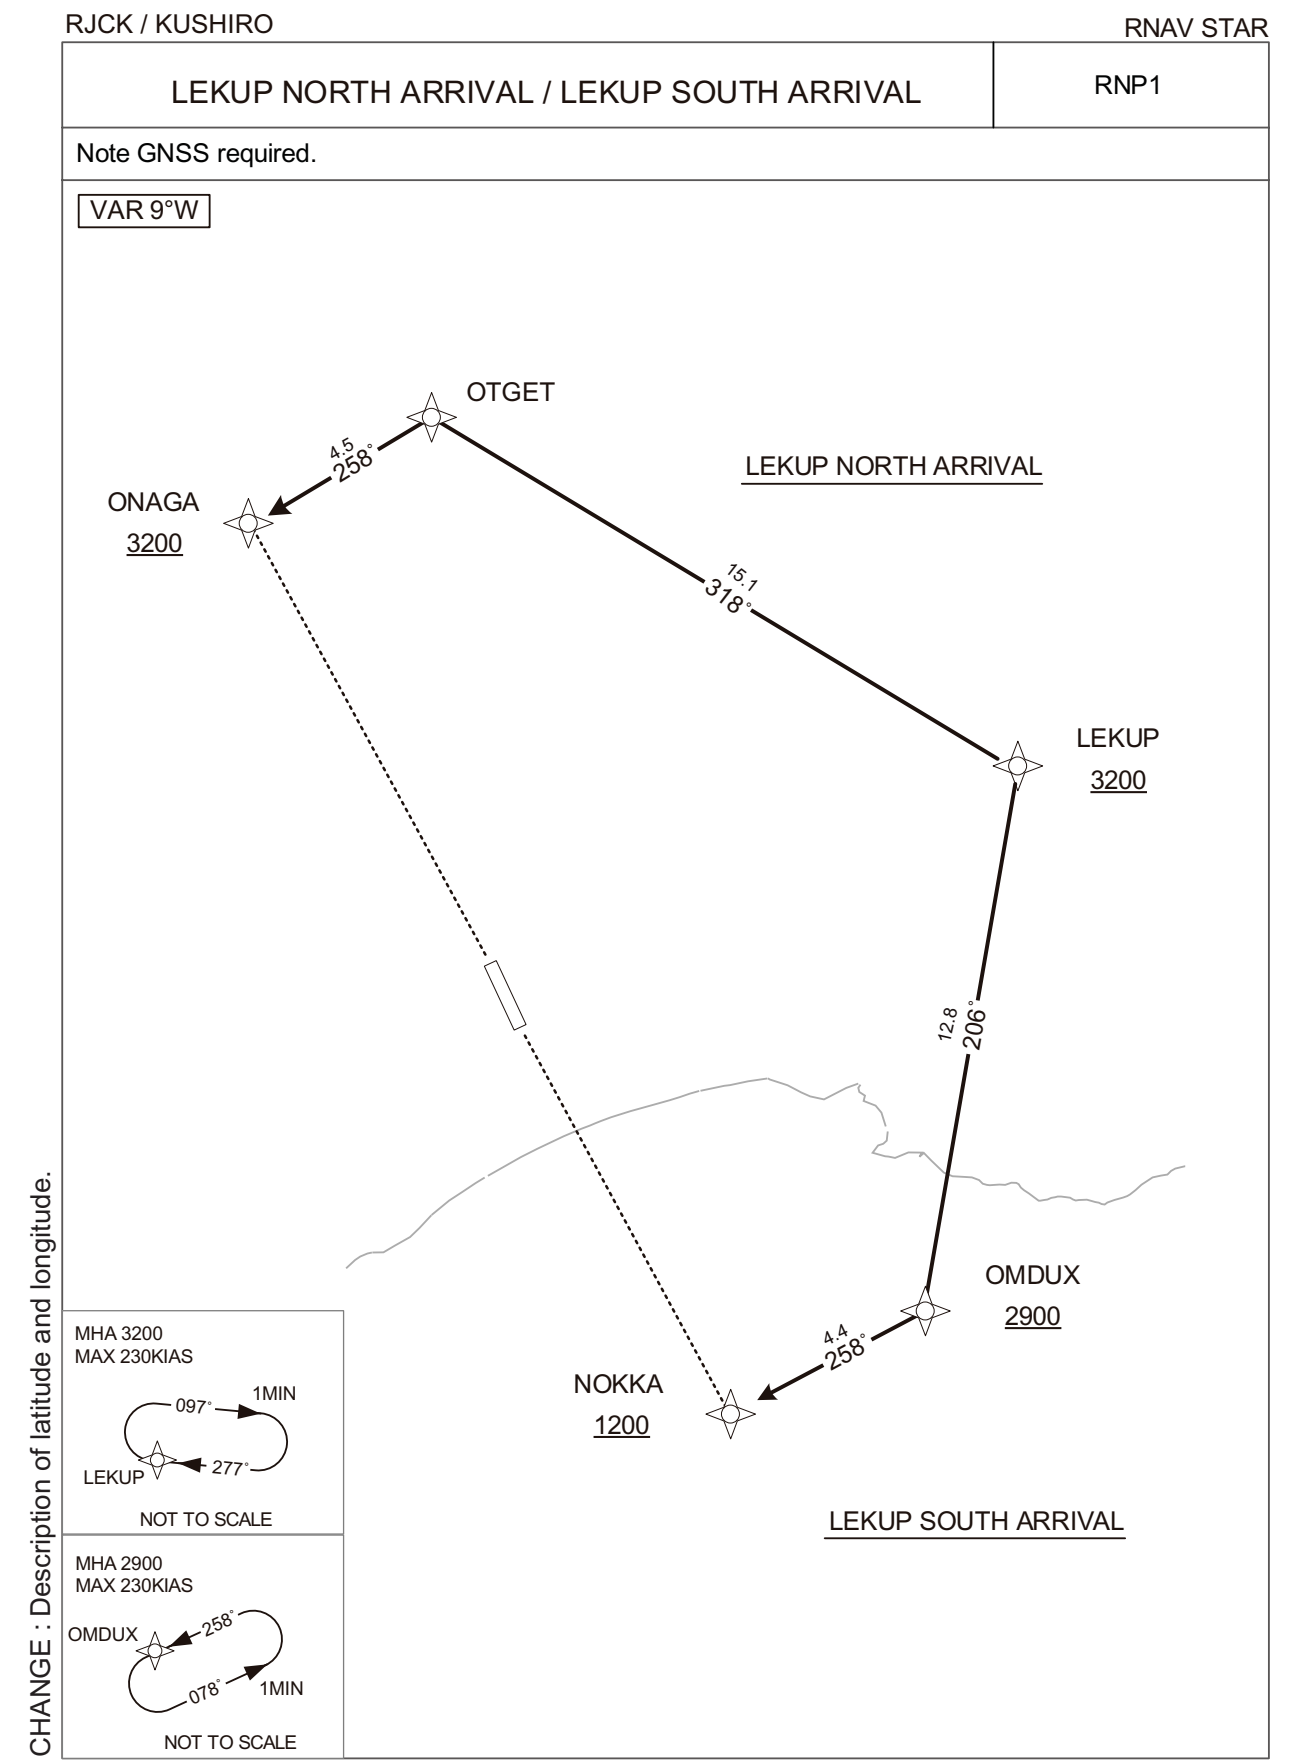



## STANDARD ARRIVAL CHART -INSTRUMENT

RJCK / KUSHIRO

RNAV STAR

LEKUP NORTH ARRIVAL

From LEKUP at or above 3200FT, to OTGET, to ONAGA at or above 3200FT.

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | LEKUP               | -        | -              | -9.2               | -             | -              | +3200         | -            | -              | RNP1                     |
| 002           | TF              | OTGET               | -        | 318<br>(308.5) | -9.2               | 15.1          | -              | -             | -            | -              | RNP1                     |
| 003           | TF              | ONAGA               | -        | 258<br>(248.9) | -9.2               | 4.5           | -              | +3200         | -            | -              | RNP1                     |

| Path | Waypoint Identifier | Inbound Course °M(°T) | Magnetic Variation | Outbound Time (MIN) | Turn Direction | Minimum Altitude (FT) | Maximum Altitude (FT) | Speed (KIAS) | Navigation Specification |
|------|---------------------|-----------------------|--------------------|---------------------|----------------|-----------------------|-----------------------|--------------|--------------------------|
| Hold | LEKUP               | 277<br>(268.1)        | -9.2               | 1.0(-14000)         | R              | 3200                  | FL140                 | -230(-14000) | RNP1                     |

LEKUP SOUTH ARRIVALFrom LEKUP at or above 3200FT, to OMDUX at or above 2900FT,  
to NOKKA at or above 1200FT.

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | LEKUP               | -        | -              | -9.2               | -             | -              | +3200         | -            | -              | RNP1                     |
| 002           | TF              | OMDUX               | -        | 206<br>(196.8) | -9.2               | 12.8          | -              | +2900         | -            | -              | RNP1                     |
| 003           | TF              | NOKKA               | -        | 258<br>(249.0) | -9.2               | 4.4           | -              | +1200         | -            | -              | RNP1                     |

| Path | Waypoint Identifier | Inbound Course °M(°T) | Magnetic Variation | Outbound Time (MIN) | Turn Direction | Minimum Altitude (FT) | Maximum Altitude (FT) | Speed (KIAS) | Navigation Specification |
|------|---------------------|-----------------------|--------------------|---------------------|----------------|-----------------------|-----------------------|--------------|--------------------------|
| Hold | LEKUP               | 277<br>(268.1)        | -9.2               | 1.0(-14000)         | R              | 3200                  | FL140                 | -230(-14000) | RNP1                     |
| Hold | OMDUX               | 258<br>(249.0)        | -9.2               | 1.0(-14000)         | L              | 2900                  | FL140                 | -230(-14000) | RNP1                     |

Waypoint Coordinates


| Waypoint Identifier | Coordinates            |
|---------------------|------------------------|
| LEKUP               | 430627.2N / 1442719.9E |
| OTGET               | 431550.0N / 1441108.1E |
| ONAGA               | 431412.9N / 1440523.5E |
| OMDUX               | 425410.9N / 1442216.8E |
| NOKKA               | 425237.1N / 1441643.5E |

CHANGE : Waypoint Coordinates added.

## INSTRUMENT APPROACH CHART

RJCK / KUSHIRO


ILS Z or LOC Z RWY17 (CAT III)

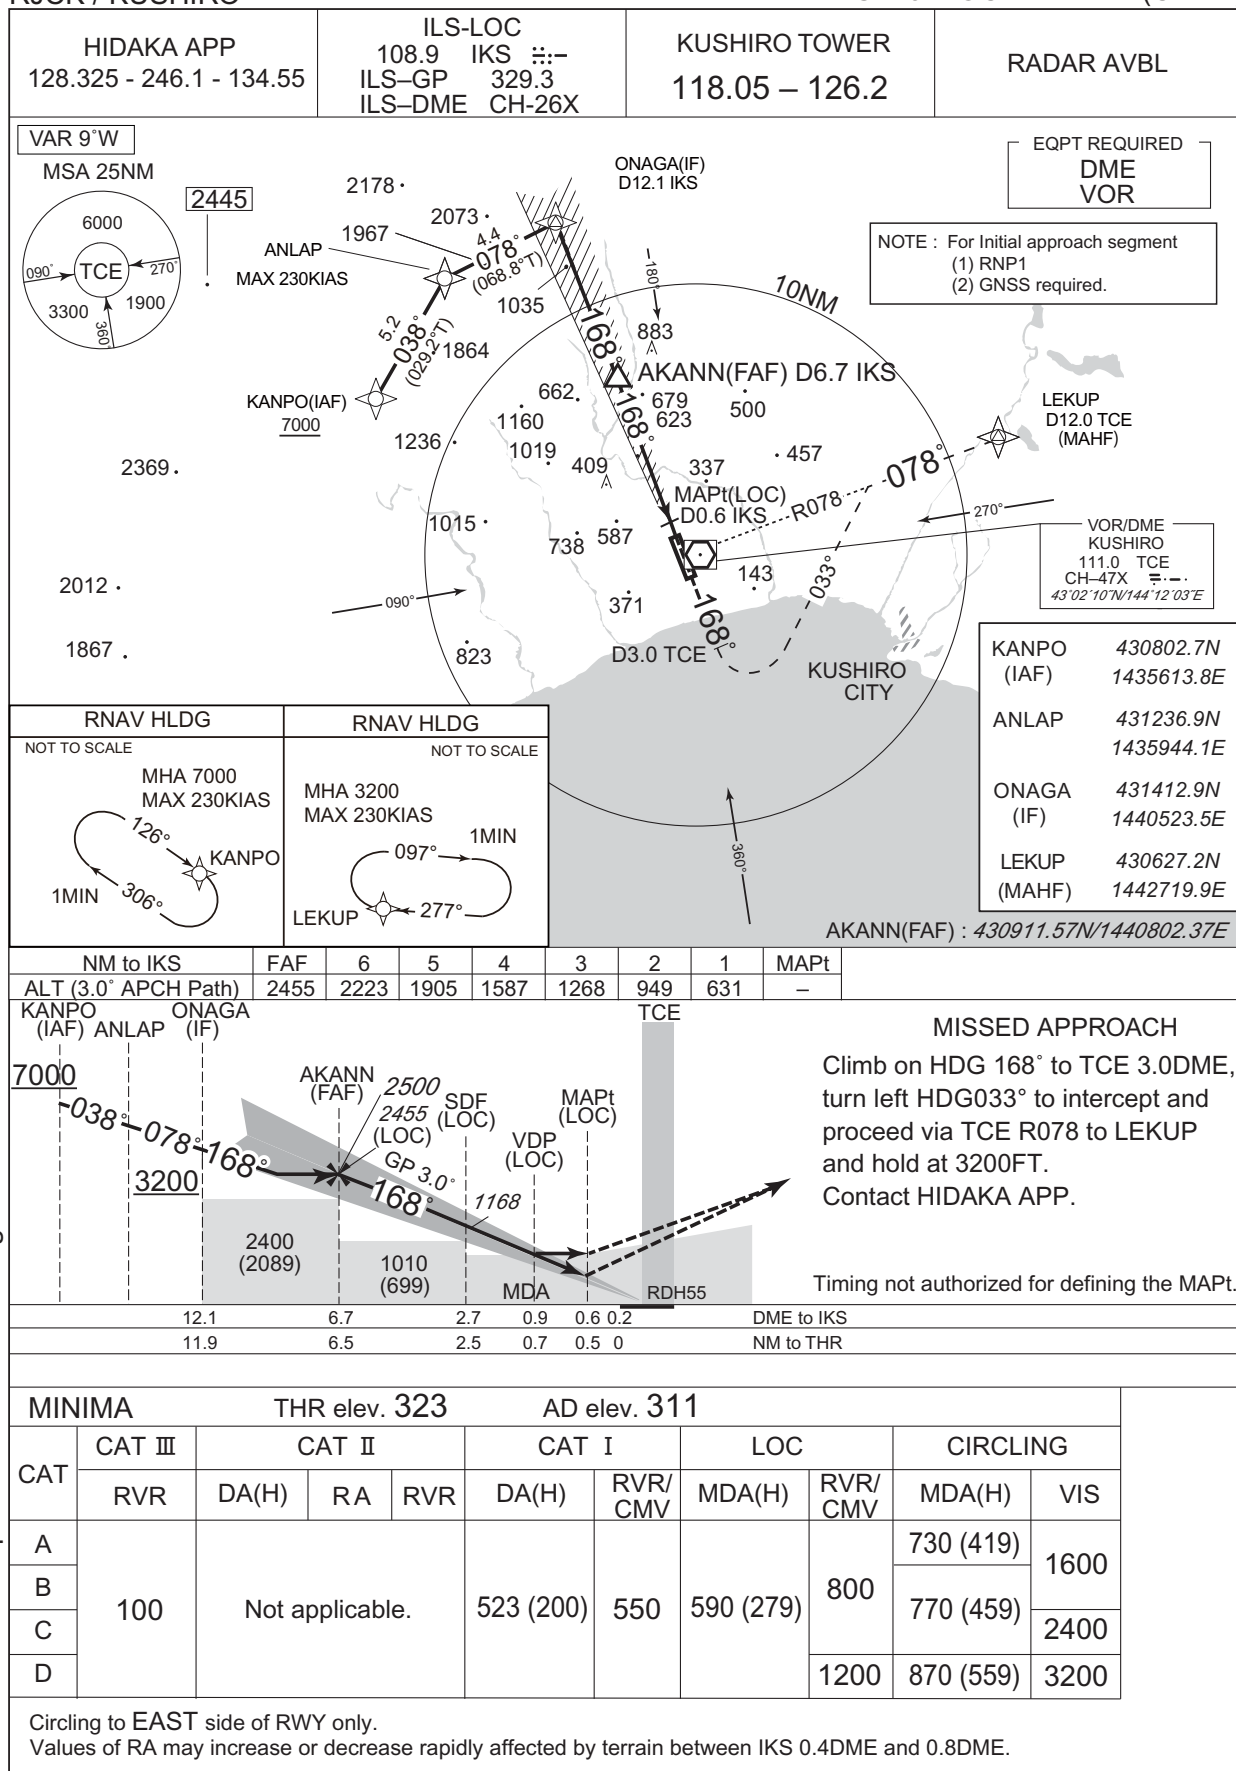

## INSTRUMENT APPROACH CHART

RJCK / KUSHIRO


ILS Y or LOC Y RWY17 (CAT III)

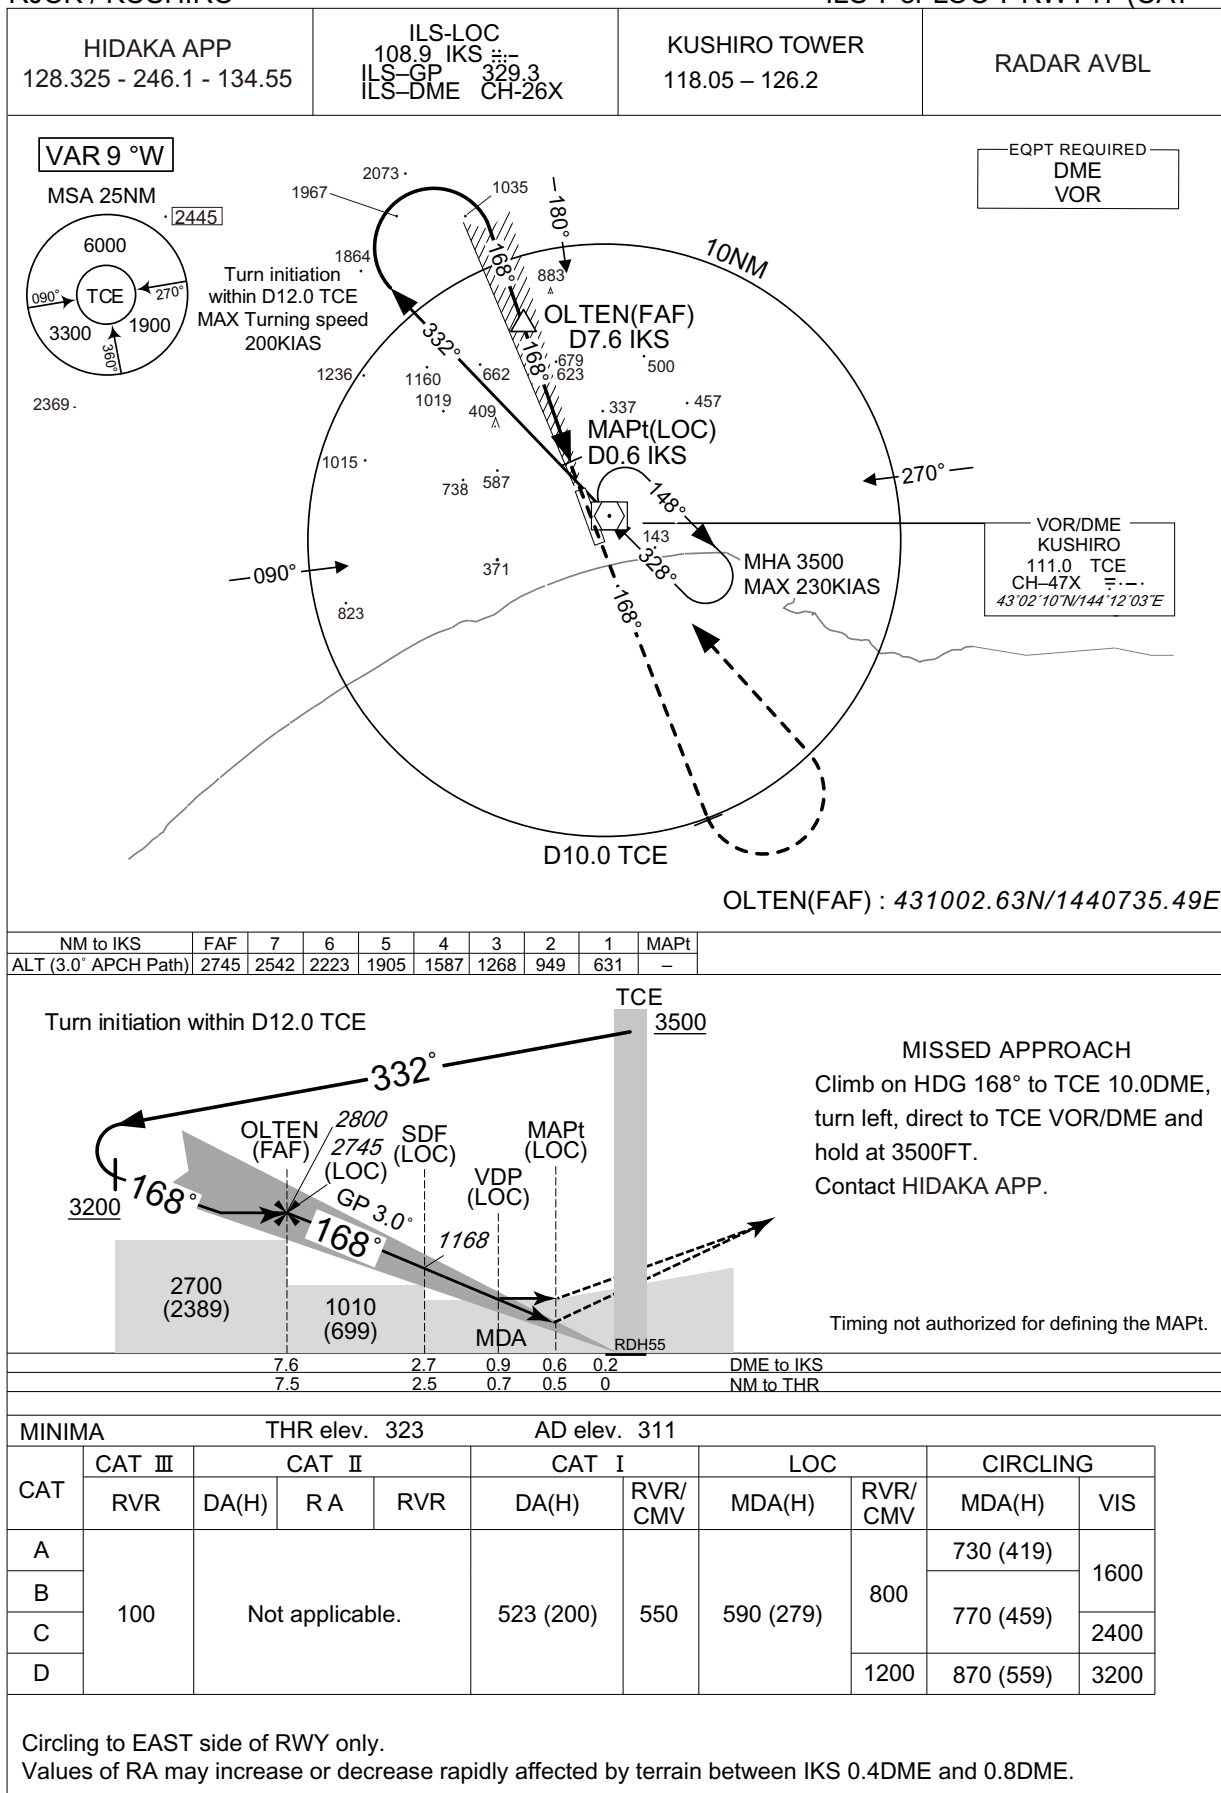

## INSTRUMENT APPROACH CHART

RJCK / KUSHIRO

ILS X RWY17(CAT III)

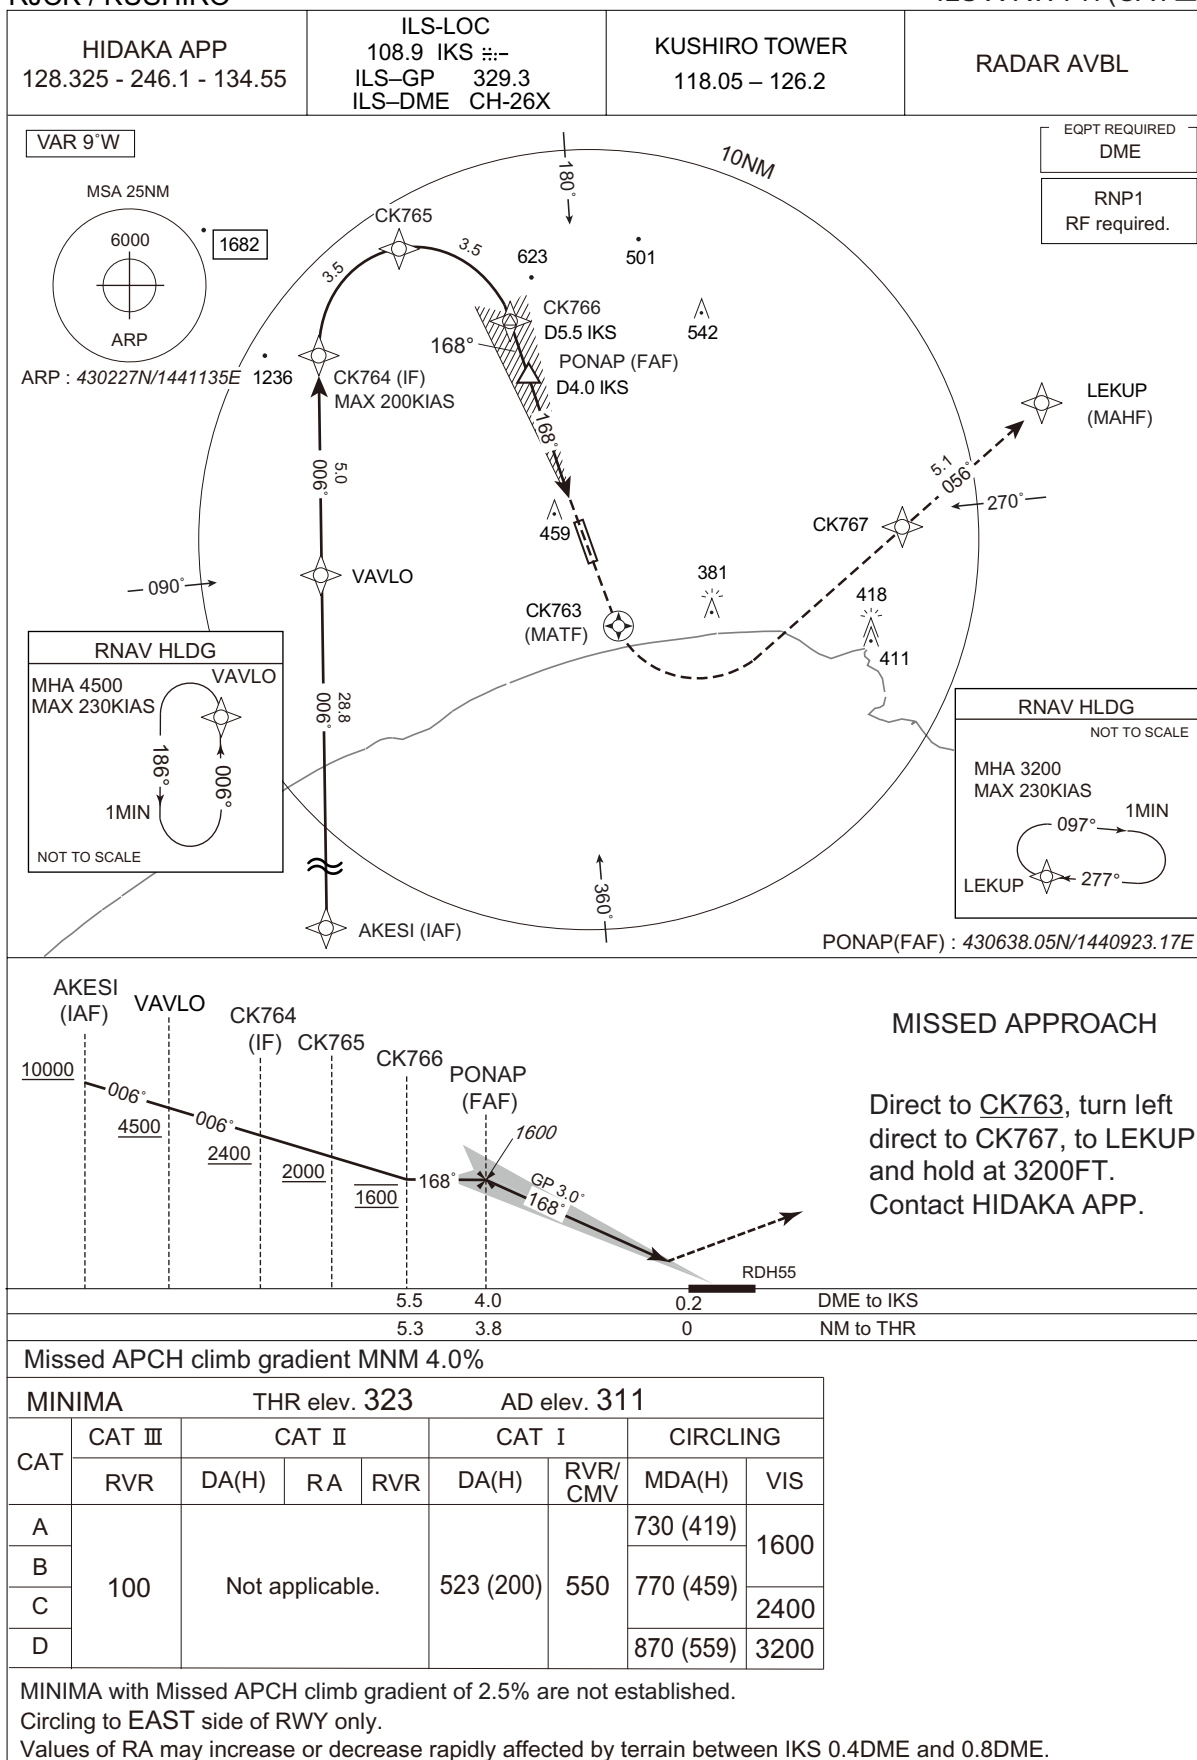

CHANGE : New PROC.

INSTRUMENT APPROACH CHART

RJCK / KUSHIRO

ILS X RWY17(CATⅢ)

Coding Table

| Serial Number | Path Descriptor                    | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|------------------------------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF                                 | AKESI               | —        | —              | -9.3               | —             | —              | +10000        | —            | —              | RNP1                     |
| 002           | TF                                 | VAVLO               | —        | 006<br>(357.1) | -9.3               | 28.8          | —              | +4500         | —            | —              | RNP1                     |
| 003           | TF                                 | CK764               | —        | 006<br>(357.0) | -9.3               | 5.0           | —              | +2400         | -200         | —              | RNP1                     |
| 004           | RF<br>Center:<br>CKRF3<br>r=2.51NM | CK765               | —        | —              | -9.3               | 3.5           | R              | +2000         | —            | —              | RNP1                     |
| 005           | RF<br>Center:<br>CKRF3<br>r=2.51NM | CK766               | —        | —              | -9.3               | 3.5           | R              | 1600          | —            | —              | RNP1                     |
| 001           | DF                                 | CK763               | Y        | —              | -9.3               | —             | —              | —             | —            | —              | RNP1                     |
| 002           | DF                                 | CK767               | —        | —              | -9.3               | —             | L              | —             | —            | —              | RNP1                     |
| 003           | TF                                 | LEKUP               | —        | 056<br>(046.9) | -9.3               | 5.1           | —              | 3200          | —            | —              | RNP1                     |

| Path | Waypoint Identifier | Inbound Course °M(°T) | Magnetic Variation | Outbound Time (MIN) | Turn Direction | Minimum Altitude (FT) | Maximum Altitude (FT) | Speed (KIAS) | Navigation Specification |
|------|---------------------|-----------------------|--------------------|---------------------|----------------|-----------------------|-----------------------|--------------|--------------------------|
| Hold | VAVLO               | 006<br>(357.0)        | -9.3               | 1.0(-14000)         | L              | 4500                  | FL140                 | -230(-14000) | RNP1                     |
| Hold | LEKUP               | 277<br>(268.1)        | -9.3               | 1.0(-14000)         | R              | 3200                  | FL140                 | -230(-14000) | RNP1                     |

Waypoint Coordinates


| Waypoint Identifier | Coordinates              | RF Arc Center Identifier | Coordinates              |
|---------------------|--------------------------|--------------------------|--------------------------|
| AKESI               | 423316.40N / 1440423.57E | CKRF3                    | 430707.83N / 1440527.18E |
| VAVLO               | 430200.49N / 1440223.10E |                          |                          |
| CK764               | 430700.07N / 1440201.89E |                          |                          |
| CK765               | 430935.11N / 1440444.33E |                          |                          |
| CK766               | 430802.03N / 1440839.00E |                          |                          |
| CK763               | 430017.29N / 1441242.98E |                          |                          |
| CK767               | 430257.41N / 1442212.36E |                          |                          |
| LEKUP               | 430627.23N / 1442719.94E |                          |                          |

CHANGE : New PROC.

## INSTRUMENT APPROACH CHART

RJCK / KUSHIRO

VOR RWY17

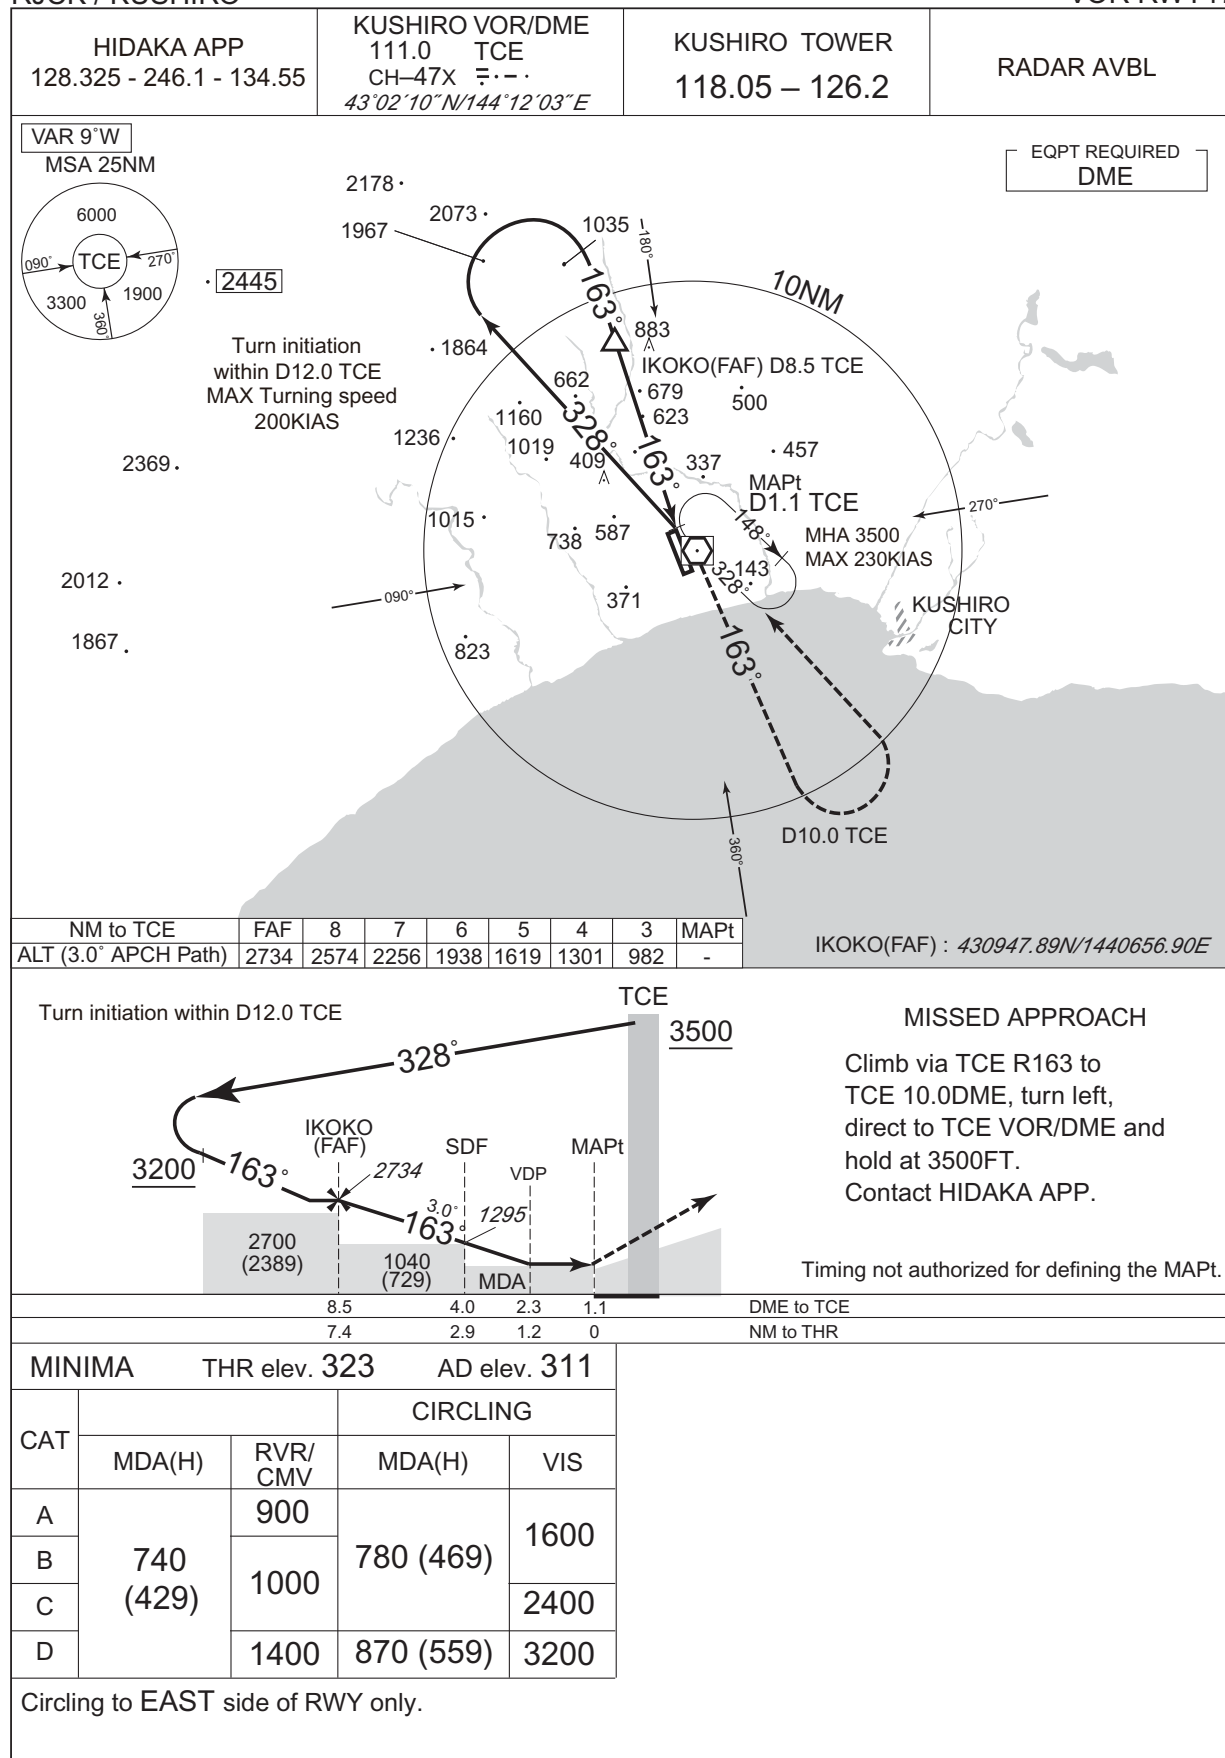

## INSTRUMENT APPROACH CHART

VOR RWY35

**HIDAKA APP**  
128.325 - 246.1 - 134.55

**KUSHIRO VOR/DME**  
111.0 TCE  
CH-47X  
43°02'10"N/144°12'03"E

**KUSHIRO TOWER**  
118.05 - 126.2

**RADAR AVBL**

**VAR 9°W**

**EQPT REQUIRED DME**

**MSA 25NM**  
6000  
TCE  
090° 270°  
3300 1900  
360°

**1967**

**10NM**

**D10.0 TCE**

**MAPt TCE**

**IGNAM(FAF) D5.0 TCE**


**KUSHIRO CITY**

**Turn initiation within D11.0 TCE  
MAX Turning speed 200KIAS**

| NM to TCE            | MAPt | 2   | 3    | 4    | FAF  |
|----------------------|------|-----|------|------|------|
| ALT (3.0° APCH Path) | —    | 881 | 1199 | 1518 | 1836 |

**IGNAM(FAF) : 425713.78N/1441309.25E**

Timing not authorized for defining the MAPt.

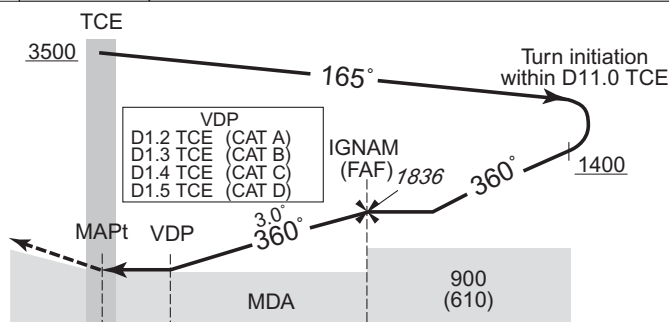


|  |            |     |     |
|--|------------|-----|-----|
|  | DME to TCE | 0.3 | 5.0 |
|  | NM to THR  | 0   | 4.7 |

| MINIMA |           | THR elev. 290 | AD elev. 311 |      |
|--------|-----------|---------------|--------------|------|
| CAT    |           |               | CIRCLING     |      |
|        | MDA(H)    | RVR/<br>CMV   | MDA(H)       | VIS  |
| A      | 640 (350) | 1200          | 730 (419)    | 1600 |
| B      | 670 (380) | 1300          | 770 (459)    |      |
| C      | 700 (410) | 1400          |              |      |
| D      | 720 (430) | 1600          | 870 (559)    | 3200 |

Circling to EAST side of RWY only.



INSTRUMENT APPROACH CHART

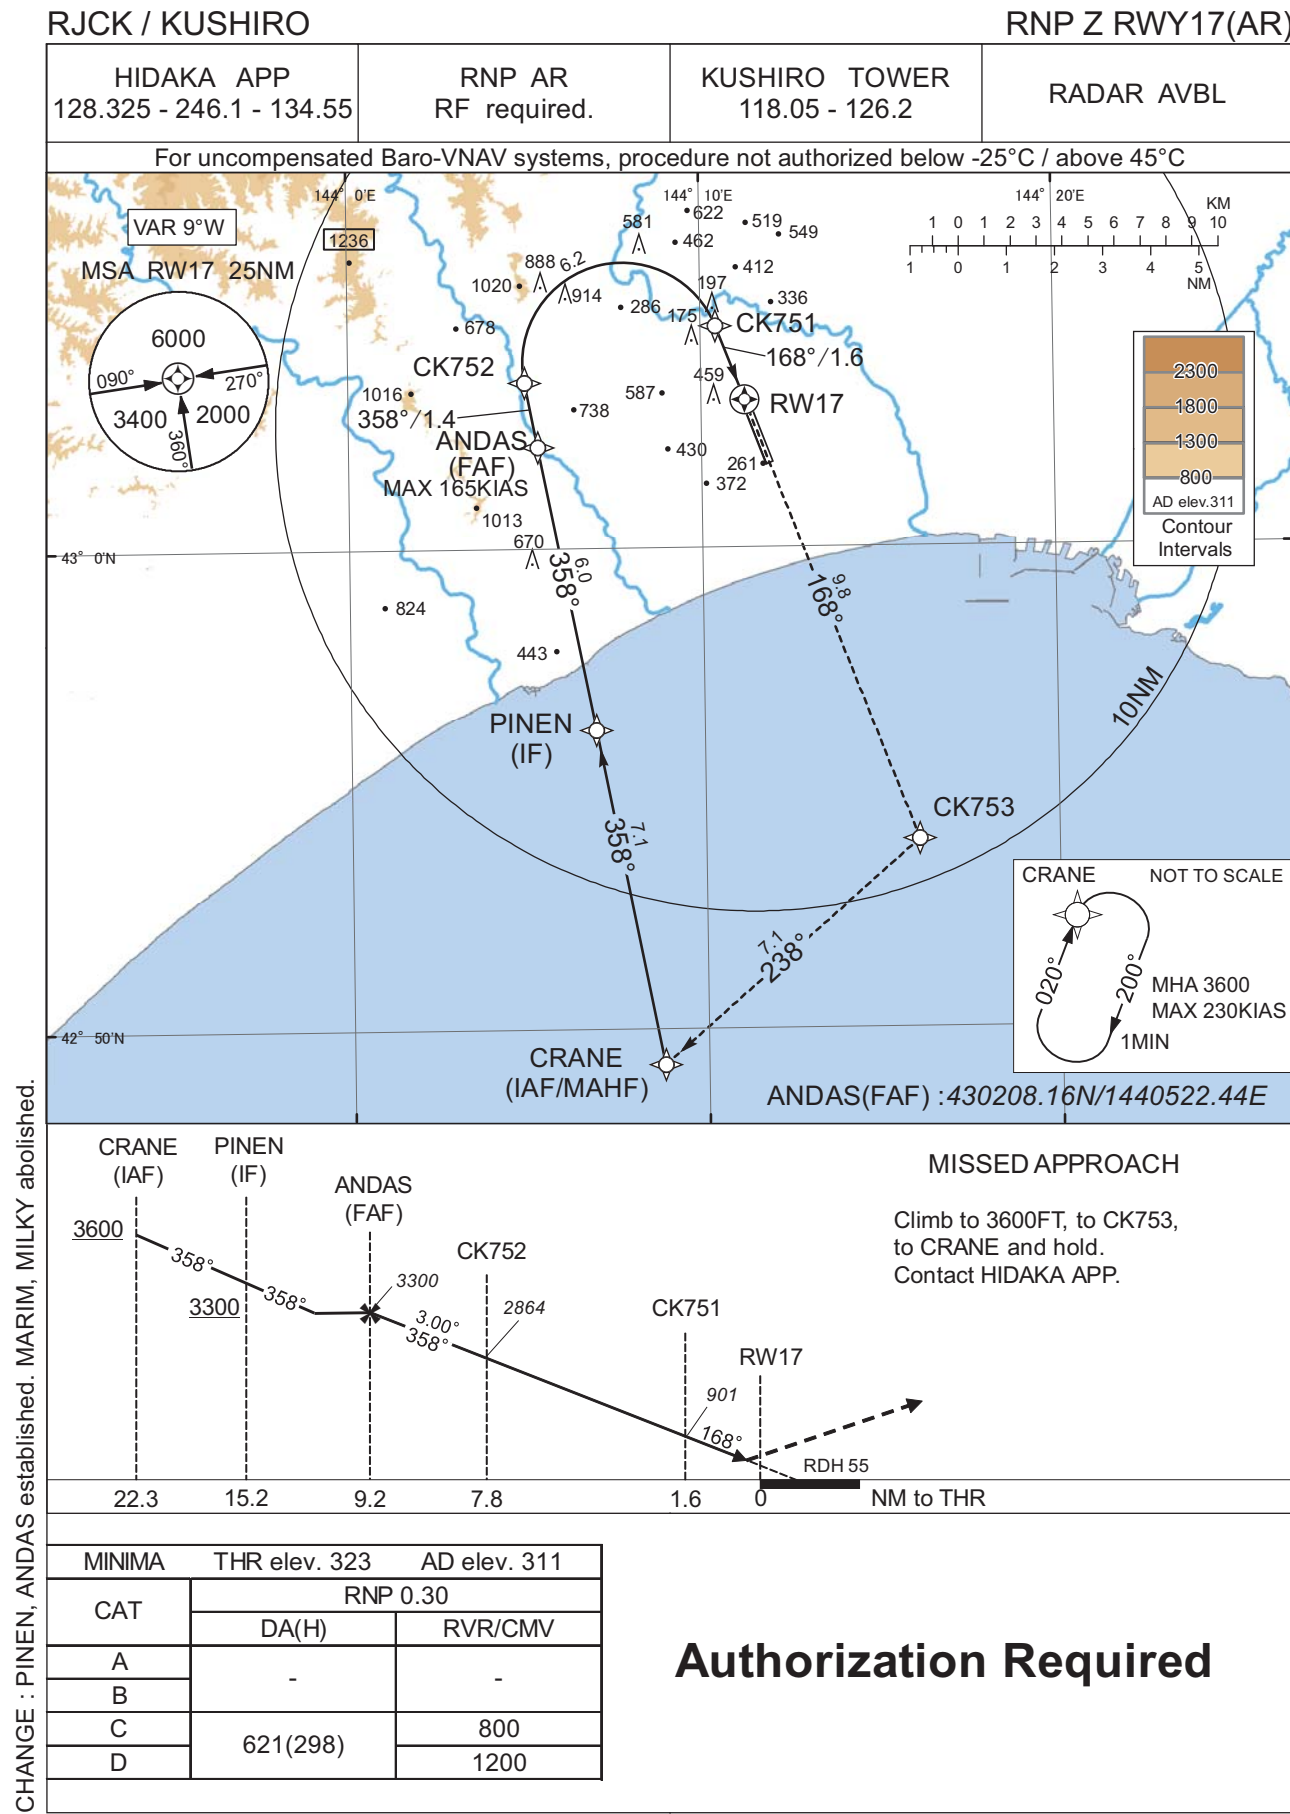

CHANGE : PINEN, ANDAS established. MARIM, MILKY abolished.



INSTRUMENT APPROACH CHART

RJCK / KUSHIRO

RNP Z RWY17(AR)

Coding Table

| Serial Number | Path Descriptor                    | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | VPA/ RDH (°/FT) | RNP Value |
|---------------|------------------------------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|-----------------|-----------|
| 001           | IF                                 | CRANE               | -        | -             | -9.2               | -             | -              | +3600         | -            | -               | -         |
| 002           | TF                                 | PINEN               | -        | 358 (349.1)   | -9.2               | 7.1           | -              | +3300         | -            | -               | 1.0       |
| 003           | TF                                 | ANDAS               | -        | 358 (349.0)   | -9.2               | 6.0           | -              | 3300          | -165         | -               | 1.0       |
| 004           | TF                                 | CK752               | -        | 358 (349.0)   | -9.2               | 1.4           | -              | 2864          | -            | -3.00           | 0.3       |
| 005           | RF<br>Center:<br>CKRF1<br>r=2.08NM | CK751               | -        | -             | -9.2               | 6.2           | R              | 901           | -            | -3.00           | 0.3       |
| 006           | TF                                 | RW17                | Y        | 168 (159.0)   | -9.2               | 1.6           | -              | 378           | -            | -3.00/55        | 0.3       |
| 007           | TF                                 | CK753               | -        | 168 (159.0)   | -9.2               | 9.8           | -              | -             | -            | -               | 1.0       |
| 008           | TF                                 | CRANE               | -        | 238 (229.0)   | -9.2               | 7.1           | -              | 3600          | -            | -               | 1.0       |

| Path | Waypoint Identifier | Inbound Course °M(°T) | Magnetic Variation | Outbound Time (MIN) | Turn Direction | Minimum Altitude (FT) | Maximum Altitude (FT) | Speed (KIAS) | RNP Value |
|------|---------------------|-----------------------|--------------------|---------------------|----------------|-----------------------|-----------------------|--------------|-----------|
| Hold | CRANE               | 020 (010.5)           | -9.2               | 1.0 (-14000)        | R              | 3600                  | FL140                 | -230(-14000) | 1.0       |

Waypoint Coordinates


| Waypoint Identifier | Coordinates              | RF Arc Center Identifier | Coordinates              |
|---------------------|--------------------------|--------------------------|--------------------------|
| CRANE               | 424916.84N / 1440846.59E | CKRF1                    | 430352.65N / 1440747.87E |
| PINEN               | 425614.81N / 1440656.16E |                          |                          |
| ANDAS               | 430208.16N / 1440522.44E |                          |                          |
| CK752               | 430328.83N / 1440501.00E |                          |                          |
| CK751               | 430437.47N / 1441026.54E |                          |                          |
| RW17                | 430305.30N / 1441114.92E |                          |                          |
| CK753               | 425355.48N / 1441602.58E |                          |                          |

CHANGE : PINEN, ANDAS established. MARIM, MILKY abolished.

INSTRUMENT APPROACH CHART

RJCK / KUSHIRO

RNP Y RWY17(AR)

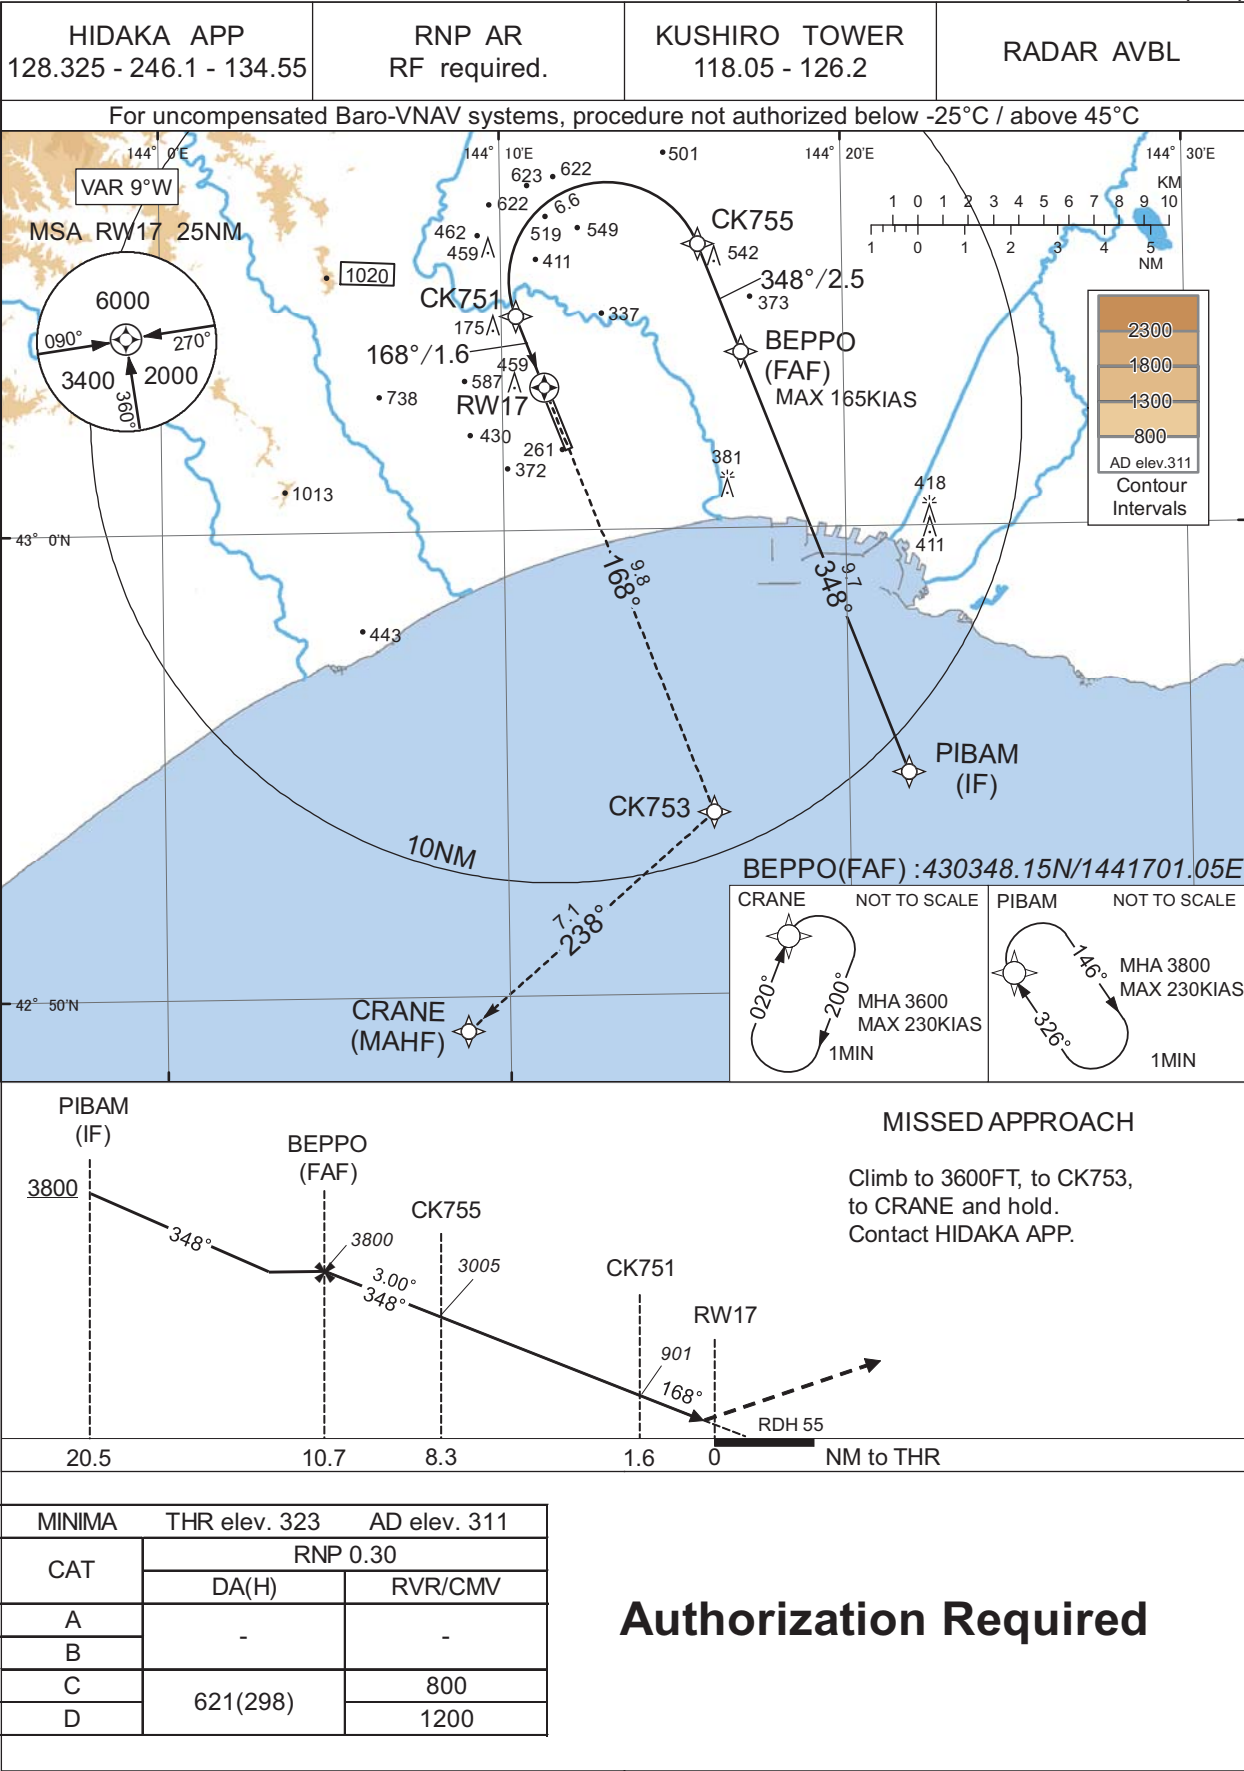

CHANGE : PIBAM established. MARNY abolished.

INSTRUMENT APPROACH CHART

RJCK / KUSHIRO

RNP Y RWY17(AR)

Coding Table

| Serial Number | Path Descriptor                 | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | VPA/ RDH (°/FT) | RNP Value |
|---------------|---------------------------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|-----------------|-----------|
| 001           | IF                              | PIBAM               | -        | -             | -9.2               | -             | -              | +3800         | -            | -               | -         |
| 002           | TF                              | BEPPPO              | -        | 348 (339.1)   | -9.2               | 9.7           | -              | 3800          | -165         | -               | 1.0       |
| 003           | TF                              | CK755               | -        | 348 (339.1)   | -9.2               | 2.5           | -              | 3005          | -            | -3.00           | 0.3       |
| 004           | RF<br>Center: CKRF2<br>r=2.10NM | CK751               | -        | -             | -9.2               | 6.6           | L              | 901           | -            | -3.00           | 0.3       |
| 005           | TF                              | RW17                | Y        | 168 (159.0)   | -9.2               | 1.6           | -              | 378           | -            | -3.00/55        | 0.3       |
| 006           | TF                              | CK753               | -        | 168 (159.0)   | -9.2               | 9.8           | -              | -             | -            | -               | 1.0       |
| 007           | TF                              | CRANE               | -        | 238 (229.0)   | -9.2               | 7.1           | -              | 3600          | -            | -               | 1.0       |


| Path | Waypoint Identifier | Inbound Course °M(°T) | Magnetic Variation | Outbound Time (MIN) | Turn Direction | Minimum Altitude (FT) | Maximum Altitude (FT) | Speed (KIAS) | RNP Value |
|------|---------------------|-----------------------|--------------------|---------------------|----------------|-----------------------|-----------------------|--------------|-----------|
| Hold | CRANE               | 020 (010.5)           | -9.2               | 1.0 (-14000)        | R              | 3600                  | FL140                 | -230(-14000) | 1.0       |
| Hold | PIBAM               | 326 (316.4)           | -9.2               | 1.0 (-14000)        | R              | 3800                  | FL140                 | -230(-14000) | 1.0       |

Waypoint Coordinates

| Waypoint Identifier | Coordinates              | RF Arc Center Identifier | Coordinates              |
|---------------------|--------------------------|--------------------------|--------------------------|
| PIBAM               | 425443.27N / 1442145.22E | CKRF2                    | 430522.76N / 1441307.17E |
| BEPPPO              | 430348.15N / 1441701.05E |                          |                          |
| CK755               | 430607.99N / 1441547.87E |                          |                          |
| CK751               | 430437.47N / 1441026.54E |                          |                          |
| RW17                | 430305.30N / 1441114.92E |                          |                          |
| CK753               | 425355.48N / 1441602.58E |                          |                          |
| CRANE               | 424916.84N / 1440846.59E |                          |                          |

CHANGE : PIBAM established. MARNY abolished.

INSTRUMENT APPROACH CHART

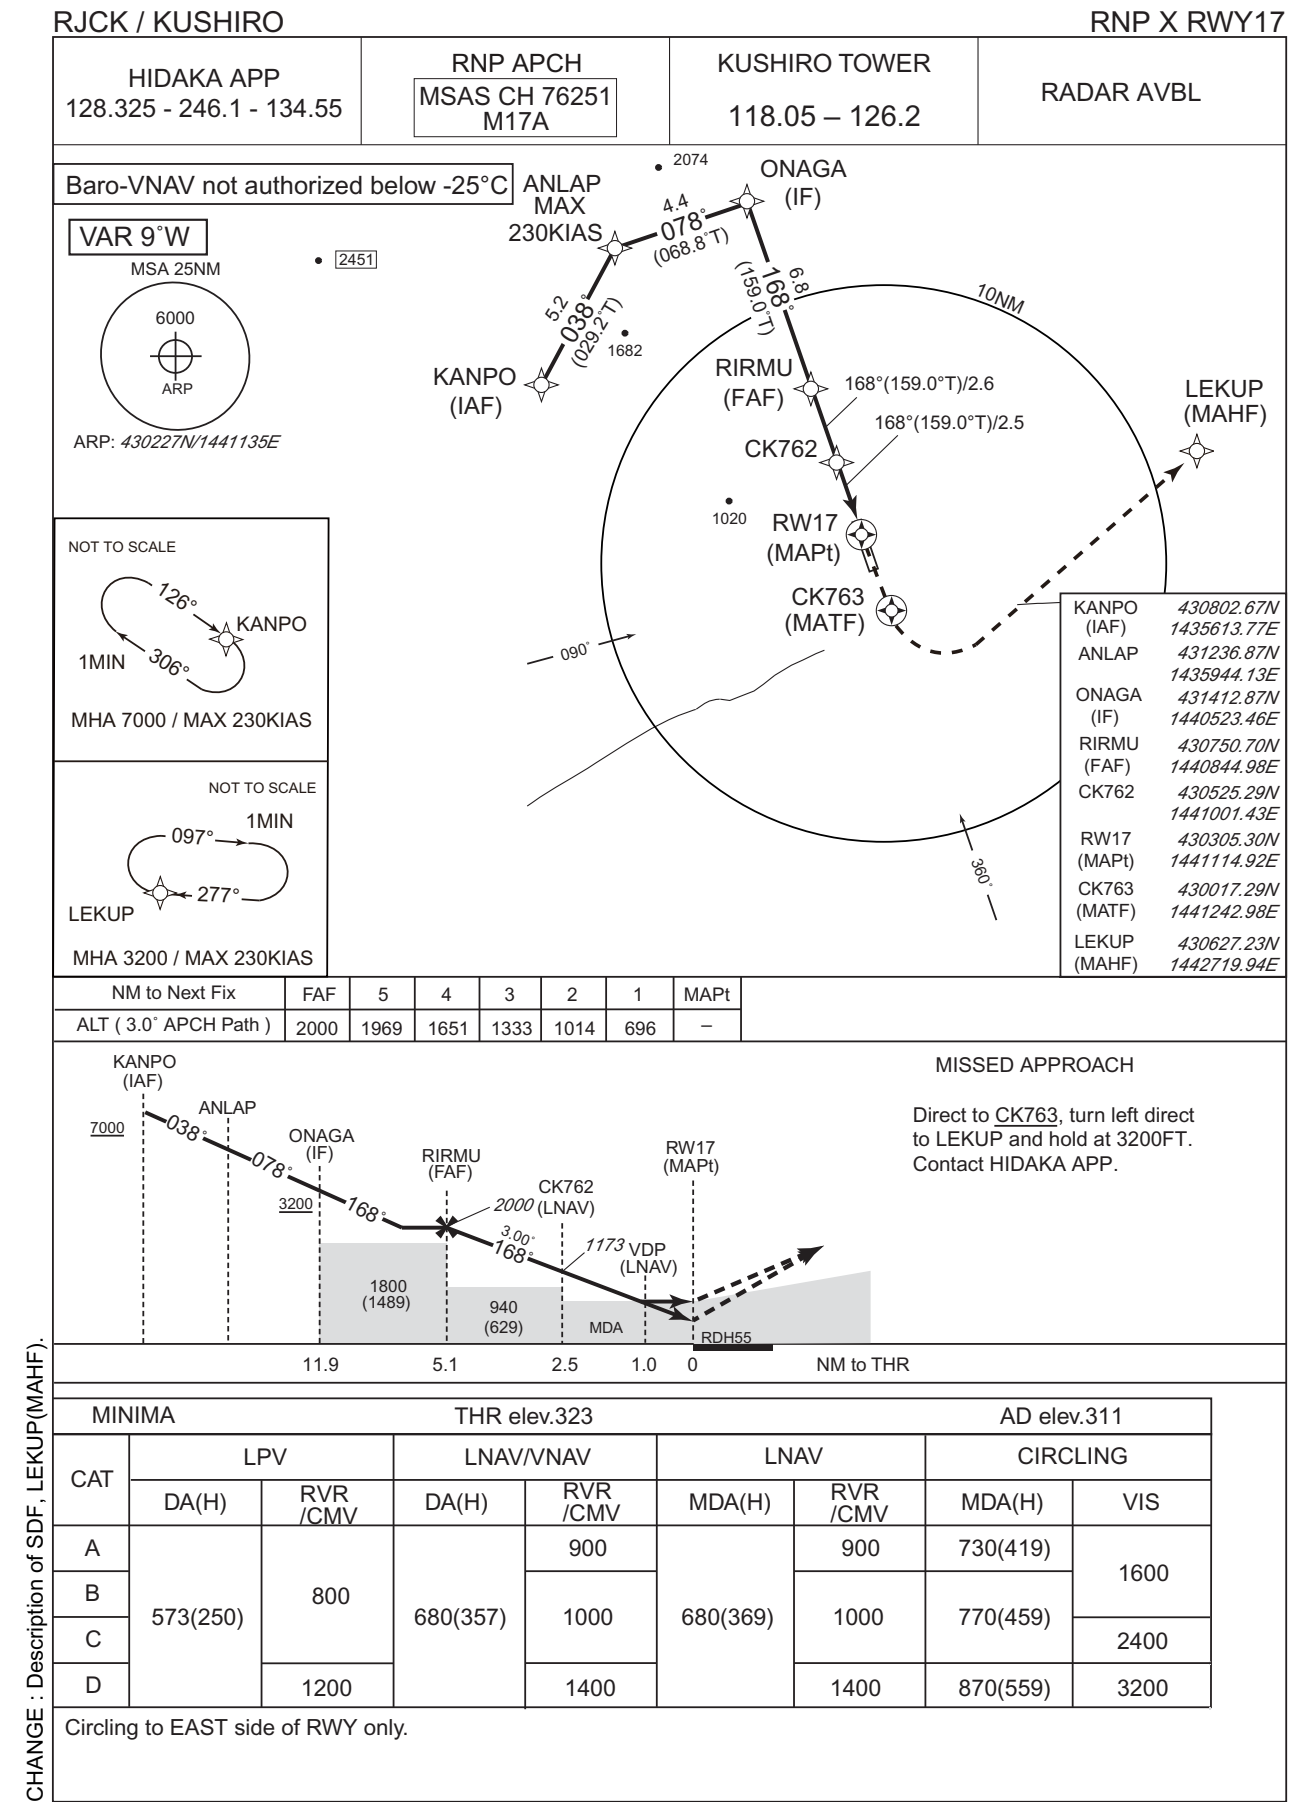

INSTRUMENT APPROACH CHART

RJCK /KUSHIRO

RNP X RWY17

FAS DATA BLOCK

|                                  |               |                            |               |
|----------------------------------|---------------|----------------------------|---------------|
| Operation type                   | 0             | LTP/FTP ellipsoidal height | +01279        |
| SBAS service provider identifier | 2             | FPAP latitude              | 430149.6680N  |
| Airport identifier               | RJCK          | FPAP longitude             | 1441154.5465E |
| Runway                           | 17            | Threshold crossing height  | 00016.7       |
| Approach performance designator  | 0             | TCH units selector         | 1             |
| Route indicator                  | X             | Glide path angle           | 03.00         |
| Reference path data selector     | 0             | Course width at threshold  | 105.00        |
| Reference path ID                | M17A          | ∠ length offset            | 0000          |
| LTP/FTP latitude                 | 430305.2840N  | HAL                        | 40.0          |
| LTP/FTP longitude                | 1441114.8770E | VAL                        | 50.0          |
| CRC remainder                    | A0B919FD      |                            |               |


Required additional data

|                            |      |
|----------------------------|------|
| LTP/FTP orthometric height | 98.0 |
|----------------------------|------|

## INSTRUMENT APPROACH CHART

RJCK / KUSHIRO

RNP RWY35

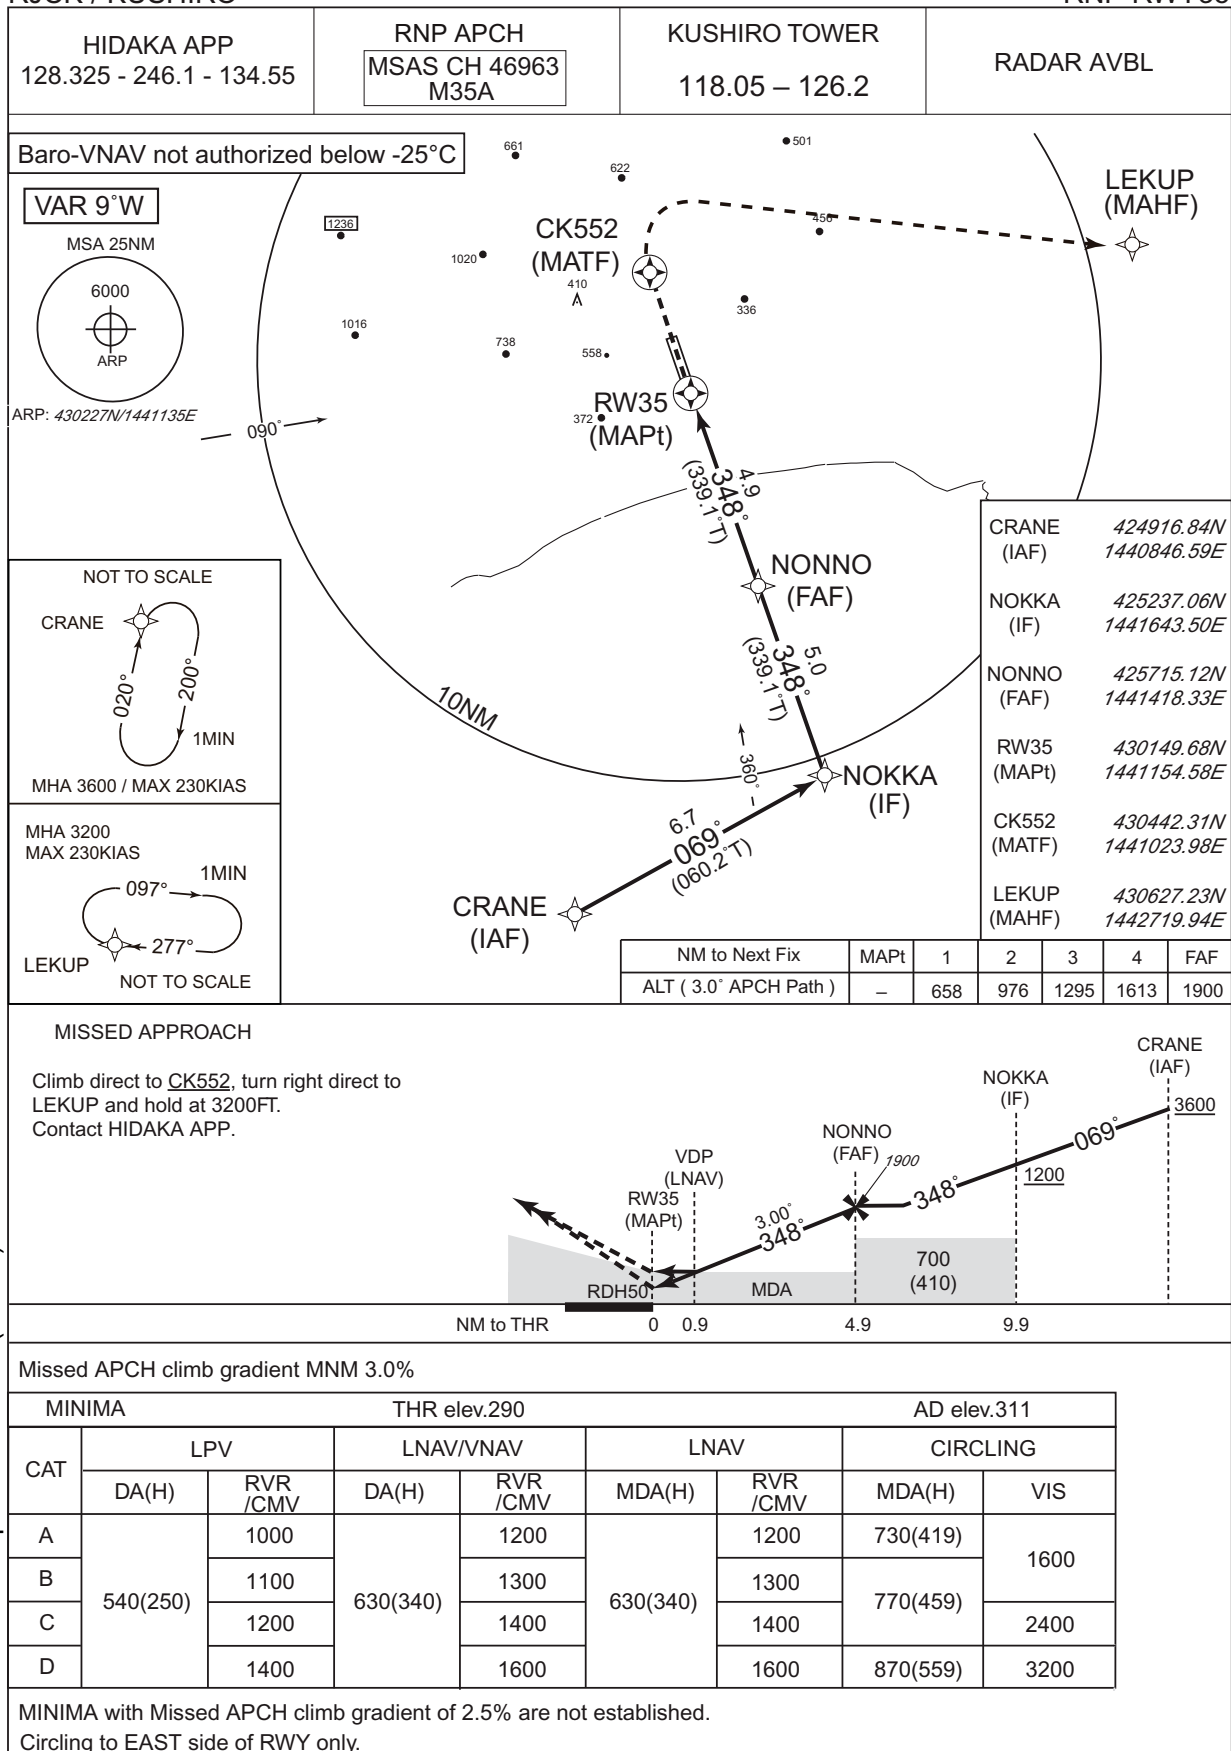

INSTRUMENT APPROACH CHART

RJCK /KUSHIRO

RNP RWY35

FAS DATA BLOCK


|                                  |               |                            |               |
|----------------------------------|---------------|----------------------------|---------------|
| Operation type                   | 0             | LTP/FTP ellipsoidal height | +01179        |
| SBAS service provider identifier | 2             | FPAP latitude              | 430305.2840N  |
| Airport identifier               | RJCK          | FPAP longitude             | 1441114.8770E |
| Runway                           | 35            | Threshold crossing height  | 00015.0       |
| Approach performance designator  | 0             | TCH units selector         | 1             |
| Route indicator                  |               | Glide path angle           | 03.00         |
| Reference path data selector     | 0             | Course width at threshold  | 105.00        |
| Reference path ID                | M35A          | ∠ length offset            | 0000          |
| LTP/FTP latitude                 | 430149.6680N  | HAL                        | 40.0          |
| LTP/FTP longitude                | 1441154.5465E | VAL                        | 50.0          |
| CRC remainder                    | F9C3454C      |                            |               |

Required additional data

|                            |      |
|----------------------------|------|
| LTP/FTP orthometric height | 88.1 |
|----------------------------|------|

RJCK / KUSHIRO

Visual REP

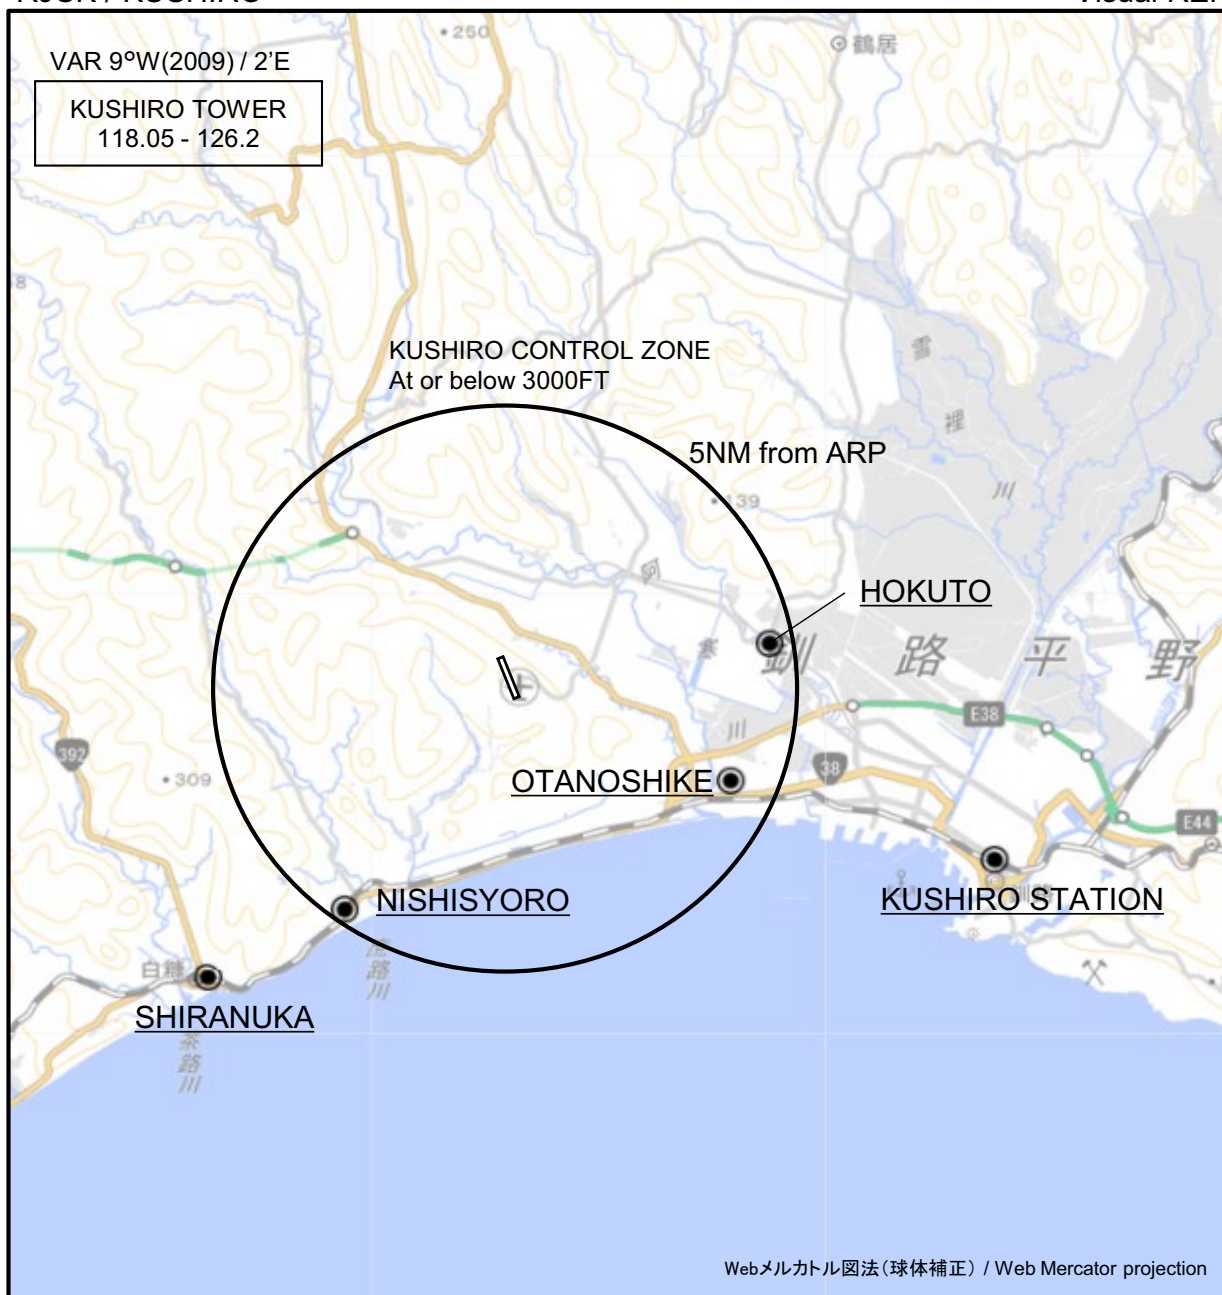

※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

| Call sign                   | BRG / DIST from ARP | Remarks                |
|-----------------------------|---------------------|------------------------|
| 北斗<br>Hokuto                | 080°T / 4.6NM       | T字路交差点<br>Intersection |
| 大楽毛<br>Otanoshike           | 113°T / 4.2NM       | 製紙工場煙突群<br>Chimneys    |
| 釧路ステーション<br>Kushiro Station | 110°T / 8.8NM       | JR駅<br>Station         |
| 西庶路<br>Nishisyoro           | 215°T / 4.7NM       | JR駅<br>Station         |
| 白糖<br>Shiranuka             | 225°T / 7.2NM       | JR駅<br>Station         |


CHANGE : Map updated. BRG/DIST from ARP.



RJCK / KUSHIRO

Minimum Vectoring Altitude CHART

VAR 9°W (2007)

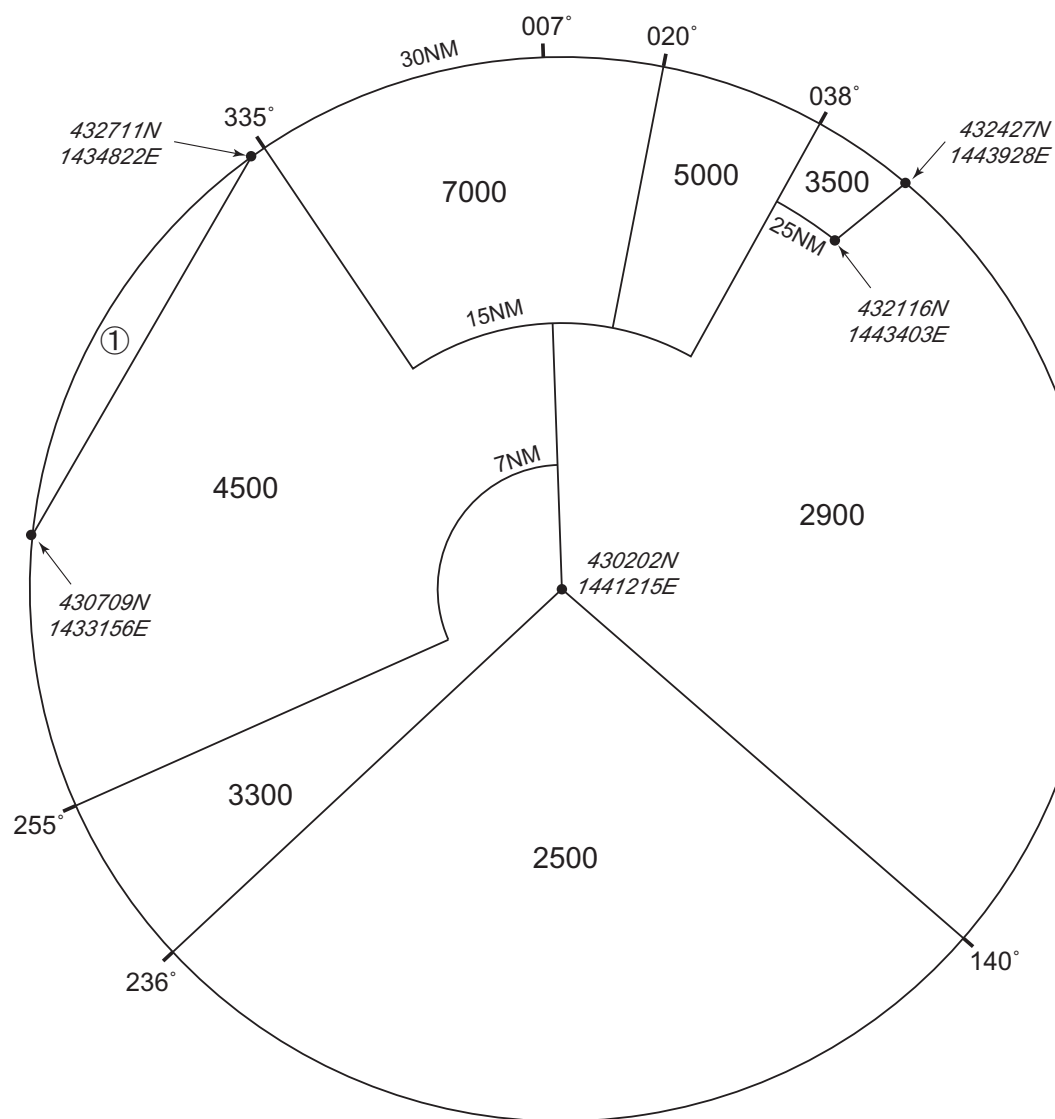

CHANGE : KSE deleted.