

## AD 2 AERODROMES

## RORS AD 2.1 AERODROME LOCATION INDICATOR AND NAME

## RORS - SHIMOJISHIMA

## RORS AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA

|   |                                                                                                    |                                                                                                                            |
|---|----------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|
| 1 | ARP coordinates and site at AD                                                                     | 244936N/1250841E<br>014°/1.5km from RWY 35 THR                                                                             |
| 2 | Direction and distance from (city)                                                                 | 14km NW from Miyakojima City Office                                                                                        |
| 3 | Elevation/ Reference temperature                                                                   | 25ft / 32°C (2004-2008)                                                                                                    |
| 4 | Geoid undulation at AD ELEV<br>PSN                                                                 |                                                                                                                            |
| 5 | MAG VAR/ Annual change                                                                             | 5° W(2022) / 7°W                                                                                                           |
| 6 | AD Administration, address,<br>telephone, telefax, telex, AFS,<br>e-mail and/or Web-site addresses | Okinawa Pref. Public AP.<br>1739, Sawada, Irabu, Miyakojima-shi, Okinawa Pref.<br>TEL : 0980-78-4184<br>FAX : 0980-78-4016 |
| 7 | Types of traffic permitted(IFR/<br>VFR)                                                            | IFR/VFR                                                                                                                    |
| 8 | Remarks                                                                                            | Nil                                                                                                                        |

## RORS AD 2.3 OPERATIONAL HOURS

|    |                           |                                                                                                                                                 |
|----|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| 1  | AD Administration         | 2300 - 1030                                                                                                                                     |
| 2  | Customs and immigration   | Customs: On request (0980-72-2310)<br>Immigration: INTL SKED FLT hours only                                                                     |
| 3  | Health and sanitation     | Quarantine (human): On request (0980-73-5115)<br>Quarantine (animal): On request (098-861-4370)<br>Quarantine (plant): INTL SKED FLT hours only |
| 4  | AIS Briefing Office       | Nil                                                                                                                                             |
| 5  | ATS Reporting Office(ARO) | Nil                                                                                                                                             |
| 6  | MET Briefing Office       | H24 (NAHA)                                                                                                                                      |
| 7  | ATS                       | 2300 - 1030<br>Remarks : 2300 - 0000 and 0730 - 1030, AFIS provided by Naha Airport Office.                                                     |
| 8  | Fuelling                  | Ask AD administration                                                                                                                           |
| 9  | Handling                  | Ask AD administration                                                                                                                           |
| 10 | Security                  | Ask AD administration                                                                                                                           |
| 11 | De-icing                  | Nil                                                                                                                                             |
| 12 | Remarks                   | Nil                                                                                                                                             |

**RORS AD 2.4 HANDLING SERVICES AND FACILITIES**

|   |                                         |                      |
|---|-----------------------------------------|----------------------|
| 1 | Cargo-handling facilities               | Nil                  |
| 2 | Fuel/ oil types                         | JET A-1              |
| 3 | Fuelling facilities/ capacity           | Fuel truck refueling |
| 4 | De-icing facilities                     | Nil                  |
| 5 | Hangar space for visiting aircraft      | Nil                  |
| 6 | Repair facilities for visiting aircraft | Nil                  |
| 7 | Remarks                                 | Nil                  |

**RORS AD 2.5 PASSENGER FACILITIES**

|   |                      |                                                                                |
|---|----------------------|--------------------------------------------------------------------------------|
| 1 | Hotels               | Hotels in Miyakojima city                                                      |
| 2 | Restaurants          | At airport / In Miyakojima city                                                |
| 3 | Transportation       | Buses and Taxis                                                                |
| 4 | Medical facilities   | Clinic 15km from airport                                                       |
| 5 | Bank and Post Office | Bank ATM at airport / Bank in Miyakojima city / Post office in Miyakojima city |
| 6 | Tourist Office       | At airport / In Miyakojima city                                                |
| 7 | Remarks              | Nil                                                                            |

**RORS AD 2.6 RESCUE AND FIRE FIGHTING SERVICES**

|   |                                             |                                                                                     |
|---|---------------------------------------------|-------------------------------------------------------------------------------------|
| 1 | AD category for fire fighting               | Fire protection ;<br>Scale of protection ICAO required : CAT 9<br>Available : CAT 9 |
| 2 | Rescue equipment                            | Chemical fire fighting truck x 3                                                    |
| 3 | Capability for removal of disabled aircraft | Incapable                                                                           |
| 4 | Remarks                                     | Nil                                                                                 |

**RORS AD 2.7 SEASONAL AVAILABILITY-CLEARING**

|   |                             |                |
|---|-----------------------------|----------------|
| 1 | Types of clearing equipment | Not Applicable |
| 2 | Clearance priorities        | Not Applicable |
| 3 | Remarks                     | Nil            |

**RORS AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS DATA**

|   |                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---|-------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | Apron surface and strength          | Surface : Cement-concrete<br>Strength : PCR 925/R/B/W/T                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| 2 | Taxiway width, surface and strength | Width : 30m<br>Surface : Asphalt-concrete<br>Strength : PCR 1000/F/B/X/T                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 3 | ACL and elevation                   | Not available                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| 4 | VOR checkpoints                     | Not available                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| 5 | INS checkpoints                     | <div> <div>(Spot NR)</div> <div> <div>S-5-S</div> <div>244933.67N,1250853.32E</div> </div> </div> <div> <div>S-1-1</div> <div>244946.83N,1250852.34E</div> <div>S-5-N</div> <div>244935.39N,1250852.85E</div> </div> <div> <div>S-1-2</div> <div>244946.24N,1250851.63E</div> <div>S-6-S</div> <div>244930.87N,1250855.73E</div> </div> <div> <div>S-1-3</div> <div>244945.75N,1250852.29E</div> <div>S-6-N</div> <div>244932.38N,1250855.32E</div> </div> <div> <div>S-2-1</div> <div>244944.09N,1250853.09E</div> <div>S-7A-S</div> <div>244927.59N,1250855.18E</div> </div> <div> <div>S-2-2</div> <div>244943.49N,1250852.38E</div> <div>S-7A-N</div> <div>244928.17N,1250855.02E</div> </div> <div> <div>S-2-3</div> <div>244943.00N,1250853.04E</div> <div>S-7B-S</div> <div>244927.75N,1250855.89E</div> </div> <div> <div>S-3-1</div> <div>244941.35N,1250853.84E</div> <div>S-7B-N</div> <div>244928.33N,1250855.73E</div> </div> <div> <div>S-3-2</div> <div>244940.75N,1250853.13E</div> <div>S-7C-S</div> <div>244927.72N,1250856.98E</div> </div> <div> <div>S-3-3</div> <div>244940.26N,1250853.79E</div> <div>S-7C-N</div> <div>244928.82N,1250856.67E</div> </div> |
| 6 | Remarks                             | Nil                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

**RORS AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS**

|   |                                                                                                                |                                                                                                                                                                                                                                                                                                     |
|---|----------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | Use of aircraft stand ID signs, TWY guide lines and Visual docking/ parking guidance system of aircraft stands | Nil                                                                                                                                                                                                                                                                                                 |
| 2 | RWY and TWY markings and LGT                                                                                   | RWY: RWY17/35<br>(Marking) RWY designation, RWY CL, RWY THR, RWY middle point, Aiming point, TDZ, RWY side stripe<br>(LGT) RCLL, REDL, RTHL, RENL, RTZL(RWY17)<br><br>TWY:<br>(Marking) TWY CL, TWY side stripe<br>(LGT)TWY edge LGT,TWY CL LGT(T1-T5), RWY guard LGT(T1-T5), Taxiing guidance sign |
| 3 | Stop bars                                                                                                      | Nil                                                                                                                                                                                                                                                                                                 |
| 4 | Remarks                                                                                                        | (Marking) Overrun area<br>(LGT) Apron flood LGT                                                                                                                                                                                                                                                     |

**RORS AD 2.10 AERODROME OBSTACLES**

In Area2 See Obstacle data

In Area3 To be developed

**RORS AD 2.11 METEOROLOGICAL INFORMATION PROVIDED**

|    |                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                         |
|----|------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1  | Associated MET Office                                                  | NAHA                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 2  | Hours of service<br>MET Office outside hours                           | H24 (NAHA)                                                                                                                                                                                                                                                                                                                                                                                                              |
| 3  | Office responsible for TAF preparation<br>Periods of validity          | NAHA<br>30 Hours                                                                                                                                                                                                                                                                                                                                                                                                        |
| 4  | Trend forecast<br>Interval of issuance                                 | Nil                                                                                                                                                                                                                                                                                                                                                                                                                     |
| 5  | Briefing/ consultation provided                                        | Briefing is available upon inquiry at NAHA                                                                                                                                                                                                                                                                                                                                                                              |
| 6  | Flight documentation<br>Language(s) used                               | C<br>En                                                                                                                                                                                                                                                                                                                                                                                                                 |
| 7  | Charts and other information available<br>for briefing or consultation | S <sub>6</sub> , U <sub>85</sub> , U <sub>7</sub> , U <sub>5</sub> , U <sub>3</sub> , U <sub>25</sub> , U <sub>2</sub> /T <sub>r</sub> , P <sub>S</sub> , P <sub>5</sub> , P <sub>3</sub> , P <sub>25</sub> , P <sub>SWE</sub> , P <sub>SWF</sub> , P <sub>SWG</sub> , P <sub>SWI</sub> , P <sub>SWM</sub> , P <sub>SW</sub> (domestic), E, C, W <sub>E</sub> , W <sub>F</sub> , W <sub>G</sub> , W <sub>I</sub> , W, N |
| 8  | Supplementary equipment<br>available for providing information         | Nil                                                                                                                                                                                                                                                                                                                                                                                                                     |
| 9  | ATS units provided with information                                    | TWR / RADIO                                                                                                                                                                                                                                                                                                                                                                                                             |
| 10 | Additional information(limitation of service, etc.)                    | Nil                                                                                                                                                                                                                                                                                                                                                                                                                     |

**RORS AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS**

| Designations<br>RWY NR | TRUE<br>BRG            | Dimensions of<br>RWY(M)                                                        | Strength(PCR) and<br>surface of RWY                                                                 | THR coordinates<br>THR geoid undulation | THR elevation and<br>highest elevation of TDZ<br>of precision APP RWY |
|------------------------|------------------------|--------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|-----------------------------------------|-----------------------------------------------------------------------|
| 1                      | 2                      | 3                                                                              | 4                                                                                                   | 5                                       | 6                                                                     |
| 17                     | 165.50°                | 3000×60                                                                        | PCR 1003/F/C/X/T<br>Asphalt-Concrete                                                                | 245024.16N<br>1250828.87E               | THR ELEV : 15.1ft                                                     |
| 35                     | 345.50°                | 3000×60                                                                        | Cement-Concrete(*1)                                                                                 | 244849.55N<br>1250854.74E               | THR ELEV : 54.4ft                                                     |
| Slope of RWY           | Strip<br>Dimensions(M) | RESA(Overrun)<br>Dimensions(M)                                                 | Remarks                                                                                             |                                         |                                                                       |
| 7                      | 10                     | 11                                                                             | 14                                                                                                  |                                         |                                                                       |
| See AD2.24 AD chart    | 3120×300<br>3120×300   | 243×491<br>189×(MNM:158 MAX:299)*<br>*For detail,<br>ask airport administrator | RWY GROOVING 3000×40m<br>(*1)First 900m(2955ft)of RWY 17/35-rigid RWY<br>Strength : PCR 830/R/B/W/T |                                         |                                                                       |

## RORS AD 2.13 DECLARED DISTANCES

|                | TORA | TODA | ASDA | LDA  |         |
|----------------|------|------|------|------|---------|
| RWY Designator | (m)  | (m)  | (m)  | (m)  | Remarks |
| 1              | 2    | 3    | 4    | 5    | 6       |
| 17             | 3000 | 3000 | 3000 | 3000 | Nil     |
| 35             | 3000 | 3000 | 3000 | 3000 | Nil     |

## RORS AD 2.14 APPROACH AND RUNWAY LIGHTING

| RWY Designator                               | APCH LGT type LEN INTST | RTHL Color WBAR | PAPI (VASIS) Angle DIST FM THR MEHT | RTZL LEN | RCLL LEN Spacing Color INTST          | REDL LEN Spacing Color INTST             | RENL Color WBAR | STWL LEN Color |
|----------------------------------------------|-------------------------|-----------------|-------------------------------------|----------|---------------------------------------|------------------------------------------|-----------------|----------------|
| 1                                            | 2                       | 3               | 4                                   | 5        | 6                                     | 7                                        | 8               | 9              |
| 17                                           | PALS (CAT-I) 900m LIH   | Green Green     | PAPI 3.0° /LEFT 422.6m 65.6FT       | 900m     | 3000m 30m Coded color (White/Red) LIH | 3000m 60m Coded color (White/Yellow) LIH | Red             | Nil(*1)        |
| 35                                           | PALS 900m LIH           | Green           | PAPI 3.0° /LEFT 533.8m 75.1FT       | -        | 3000M 30m Coded color (White/Red) LIH | 3000m 60m Coded color (White/Yellow) LIH | Red             | Nil(*1)        |
| Remarks                                      |                         |                 |                                     |          |                                       |                                          |                 |                |
| 10                                           |                         |                 |                                     |          |                                       |                                          |                 |                |
| Overrun area edge LGT(LEN:60m Color:Red)(*1) |                         |                 |                                     |          |                                       |                                          |                 |                |

## RORS AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

|   |                                                            |                                                                                                         |
|---|------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|
| 1 | ABN / IBN location, characteristics and hours of operation | ABN: 244848N/1250933E, White/Green EV4.3sec, HO                                                         |
| 2 | LDI location and LGT<br>Anemometer location and LGT        | LDI:Nil<br>Anemometer: RWY 17 : 420m from RWY 17 THR, lighted<br>RWY 35 : 357m from RWY 35 THR, lighted |
| 3 | TWY edge and center line lighting                          | TWY edge and center line lights installed, see AD2.9                                                    |
| 4 | Secondary power supply / switch-over time                  | All LGT / Within 15 sec                                                                                 |
| 5 | Remarks                                                    | WDI LGT                                                                                                 |

## RORS AD 2.16 HELICOPTER LANDING AREA

|     |
|-----|
| Nil |
|-----|

## RORS AD 2.17 ATS AIRSPACE


| Designation and lateral limits |                                                                                    | Vertical limits (ft) | Airspace classification | ATS unit call sign Language                             | Remarks                        |
|--------------------------------|------------------------------------------------------------------------------------|----------------------|-------------------------|---------------------------------------------------------|--------------------------------|
| 1                              |                                                                                    | 2                    | 3                       | 4                                                       | 6                              |
| Shimojishima CTR               | Area within a radius of 5nm of SHIMOJISHIMA ARP, exculuding the area of MIYAKO CTR | 3,000 or below       | D                       | Shimoji TWR<br>Shimoji RADIO(1)<br>En                   | (1):2300 - 0000<br>0730 - 1030 |
| Sakishima ACA                  | See ROMY attached chart                                                            |                      | E                       | Sakishima APP<br>Sakishima DEP<br>Sakishima Radar<br>En |                                |

## RORS AD 2.18 ATS COMMUNICATION FACILITIES

| Service designation                                                                                         | Call sign                              | Frequency                                                                                 | Hours of operation            | Remarks                                                |
|-------------------------------------------------------------------------------------------------------------|----------------------------------------|-------------------------------------------------------------------------------------------|-------------------------------|--------------------------------------------------------|
| 1                                                                                                           | 2                                      | 3                                                                                         | 4                             | 5                                                      |
| APP/ASR                                                                                                     | Sakishima Approach/<br>Sakishima Radar | 125.0MHz(1)<br>120.3MHz<br>121.2MHz<br>133.7MHz<br>315.7MHz<br>121.5MHz(E)<br>243.0MHz(E) | 2300 - 1030                   | (1)Primary<br>APP service provided by<br>Sakishima APP |
| DEP                                                                                                         | Sakishima Departure                    | 125.0MHz<br>121.5MHz(E)<br>243.0MHz(E)                                                    | 2300 - 1030                   |                                                        |
| TWR                                                                                                         | Shimoji Tower                          | 118.3MHz(1)<br>126.2MHz<br>121.5MHz(E)<br>243.0MHz(E)                                     | 0000 - 0730(*)                |                                                        |
| GND                                                                                                         | Shimoji Ground                         | 121.7MHz                                                                                  | 0000 - 0730(*)                |                                                        |
| AFIS                                                                                                        | Shimoji Radio                          | 118.3MHz                                                                                  | 2300 - 0000<br>0730 - 1030(*) | Operated by Naha Airport Office.                       |
| * Depending on air traffic situation, ATC service will be provided from 2345 to 0000 and from 0730 to 0745. |                                        |                                                                                           |                               |                                                        |

## RORS AD 2.19 RADIO NAVIGATION AND LANDING AIDS

| Type of aid<br>(VOR declination) | ID  | Frequency            | Hours of operation | Position of<br>transmitting<br>antenna<br>coordinates | Elevation of<br>DME<br>transmitting<br>antenna | Remarks                                                                                                                           |
|----------------------------------|-----|----------------------|--------------------|-------------------------------------------------------|------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| 1                                | 2   | 3                    | 4                  | 5                                                     | 6                                              | 7                                                                                                                                 |
| VOR<br>(5°W/2022)                | SJE | 117.1MHz             | 2300 - 1030        | 244918.96N/1250837.70E                                |                                                |                                                                                                                                   |
| DME                              | SJE | 1205MHz<br>(CH-118X) | 2300 - 1030        | 244918.96N/1250837.70E                                | 64FT                                           |                                                                                                                                   |
| ILS-LOC 17                       | ISB | 111.5MHz             | 2300 - 1030        | 244840.60N/1250857.18E                                |                                                | LOC: 283m(928ft) away FM<br>RWY 35 THR<br>BRG 170.80°(MAG)                                                                        |
| ILS-GP 17                        | -   | 332.9MHz             | 2300 - 1030        | 245013.23N/1250827.20E                                |                                                | GP: 315m(1033ft) inside FM<br>RWY 17 THR,<br>126m(413ft) W of RCL.<br>GP angle 3.0°<br>HGT of ILS reference datum<br>16.5m (54ft) |
| ILS-DME 17                       | ISB | 1013MHz              | 2300 - 1030        | 245012.89N/1250826.70E                                | 29ft                                           | DME:315m(1033ft)inside FM<br>RWY17 THR,<br>139m(456ft) W of RCL.                                                                  |
| MSAS                             |     | 1575.42MHz           | H24                |                                                       |                                                | Transmitting antennas are<br>satellite based.                                                                                     |

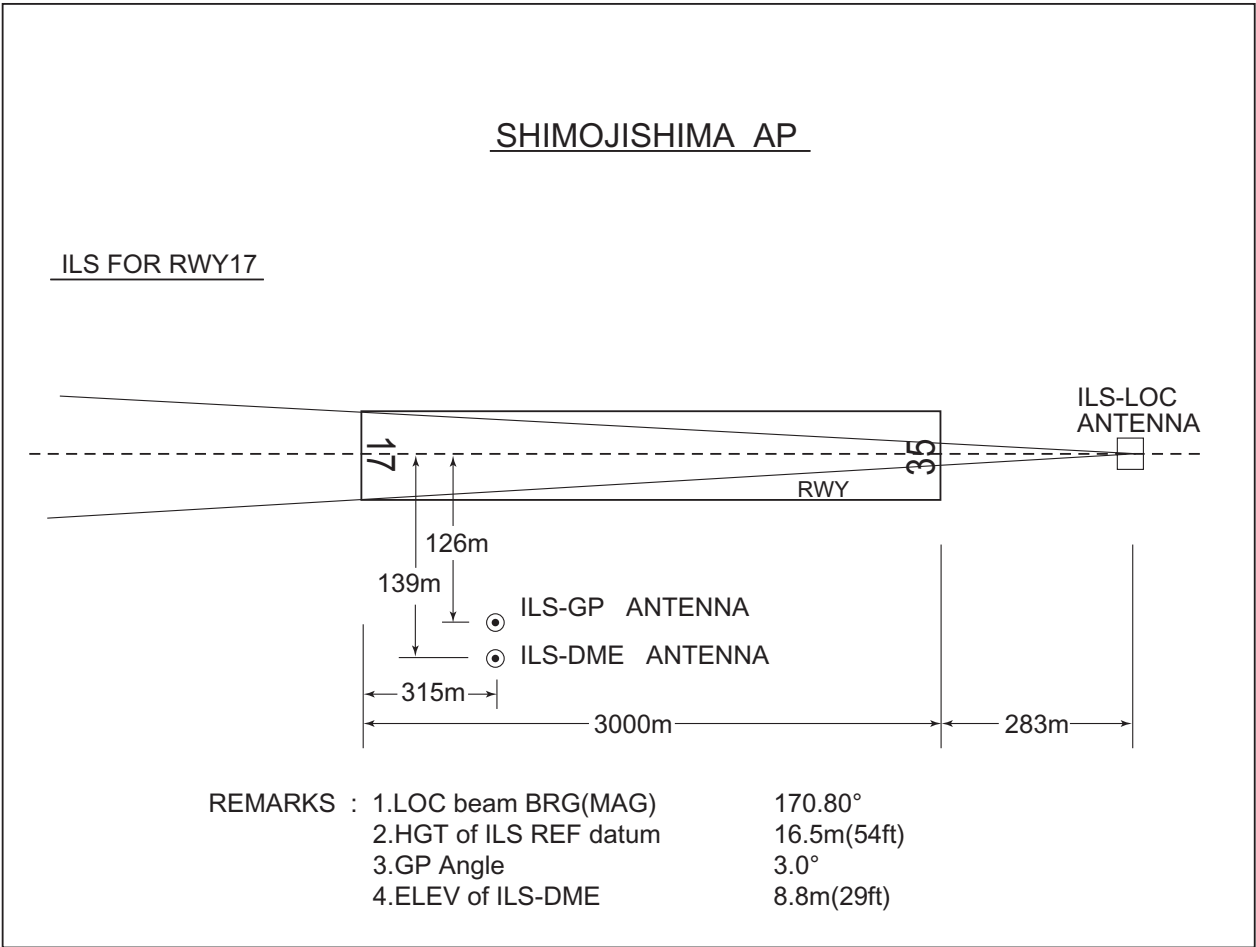



## RORS AD 2.20 LOCAL TRAFFIC REGULATIONS

### 1. Airport regulations

Prior notification should be required with AD Administration for the purpose of getting the permission when crossing Shimojishima CTR from 2300UTC to 0000UTC or from 0730UTC to 1030UTC.

For further information (0000UTC - 0800UTC MON - FRI EXC HOL)

Air Traffic Controller Office, Miyako Airport Branch Office and Air Route Surveillance Rader Office

TEL: 0980-73-3764

8 時 00 分 から 9 時 00 分 または 16 時 30 分 から 19 時 30 分 までの間、下地島管制圏を通過する場合は、当該通過の許可を得るためにあらかじめ宮古空港・航空路監視レーダー事務所へ調整すること。

問い合わせ先

宮古空港・航空路監視レーダー事務所管制官事務室

(月曜日から金曜日までのうち、9 時 00 分 から 17 時 00 分 までの間。ただし休日を除く。)

TEL: 0980-73-3764

### 2. Taxiing to and from stands

Nil

### 3. Parking area for small aircraft(General aviation)

Nil

### 4. Parking area for helicopters

Nil

### 5. Apron - taxiing during winter conditions

Nil

### 6. Taxiing - limitations

Nil

### 7. School and training flights - technical test flights - use of runways

Nil

### 8. Helicopter traffic - limitation

Nil

### 9. Removal of disabled aircraft from runways

Nil

## RORS AD 2.21 NOISE ABATEMENT PROCEDURES

Nil

**RORS AD 2.22 FLIGHT PROCEDURES****1.TAKE OFF MINIMA**

|                                                 | RWY | ACFT<br>CAT | REDL & RCLL     |      | REDL or RCLL<br>or RCL Marking |      | NIL<br>(DAYTIME ONLY) |      |
|-------------------------------------------------|-----|-------------|-----------------|------|--------------------------------|------|-----------------------|------|
|                                                 |     |             | RVR             | VIS  | RVR                            | VIS  | RVR                   | VIS  |
| Multi-Engine<br>ACFT with TKOF<br>ALTN AP Filed | 35  | A,B,C,D     | 400m            | 400m | 400m                           | 400m | -                     | 500m |
|                                                 | 17  | A,B,C,D     | 400m            | 400m | 400m                           | 400m | -                     | 500m |
| OTHER                                           | 35  | A,B,C,D     | AVBL LDG MINIMA |      |                                |      |                       |      |
|                                                 | 17  | A,B,C,D     |                 |      |                                |      |                       |      |

**2. Lost Communication Procedures for Arrival Aircraft under radar navigational guidance**

If radio communications with Sakishima Approach/Radar are lost for one minute, squawk Mode A/3 Code 7600 and ;

1. Contact Shimoji Tower / Shimoji Radio.
2. If unable, proceed in accordance with visual flight rules.
3. If unable, proceed to Shimojishima VOR at the last assigned altitude, or 2,000 feet whichever is higher, and execute instrument approach.

NOTE: Procedures other than above will be issued when situation requires.


**RORS AD 2.23 ADDITIONAL INFORMATION**

Nil

**RORS AD 2.24 CHARTS RELATED TO AN AERODROME**

Aerodrome/Heliport Chart  
 Standard Departure Chart- Instrument (ANNIE)  
 Standard Departure Chart- Instrument (BETTY)  
 Standard Departure Chart- Instrument (MIYAKOJIMA)  
 Standard Departure Chart- Instrument (FREED-RNAV)  
 Standard Arrival Chart- Instrument (ANNIE, BETTY)  
 Instrument Approach Chart (ILS Z or LOC Z RWY17)  
 Instrument Approach Chart (ILS Y or LOC Y RWY17)  
 Instrument Approach Chart (VOR RWY17)  
 Instrument Approach Chart (VOR RWY35)  
 Instrument Approach Chart (RNP RWY17)  
 Instrument Approach Chart (RNP RWY35)  
 Other Chart (VISUAL REP)  
 Other Chart (LDG CHART)  
 Other Chart (MVA CHART)

## AD CHART

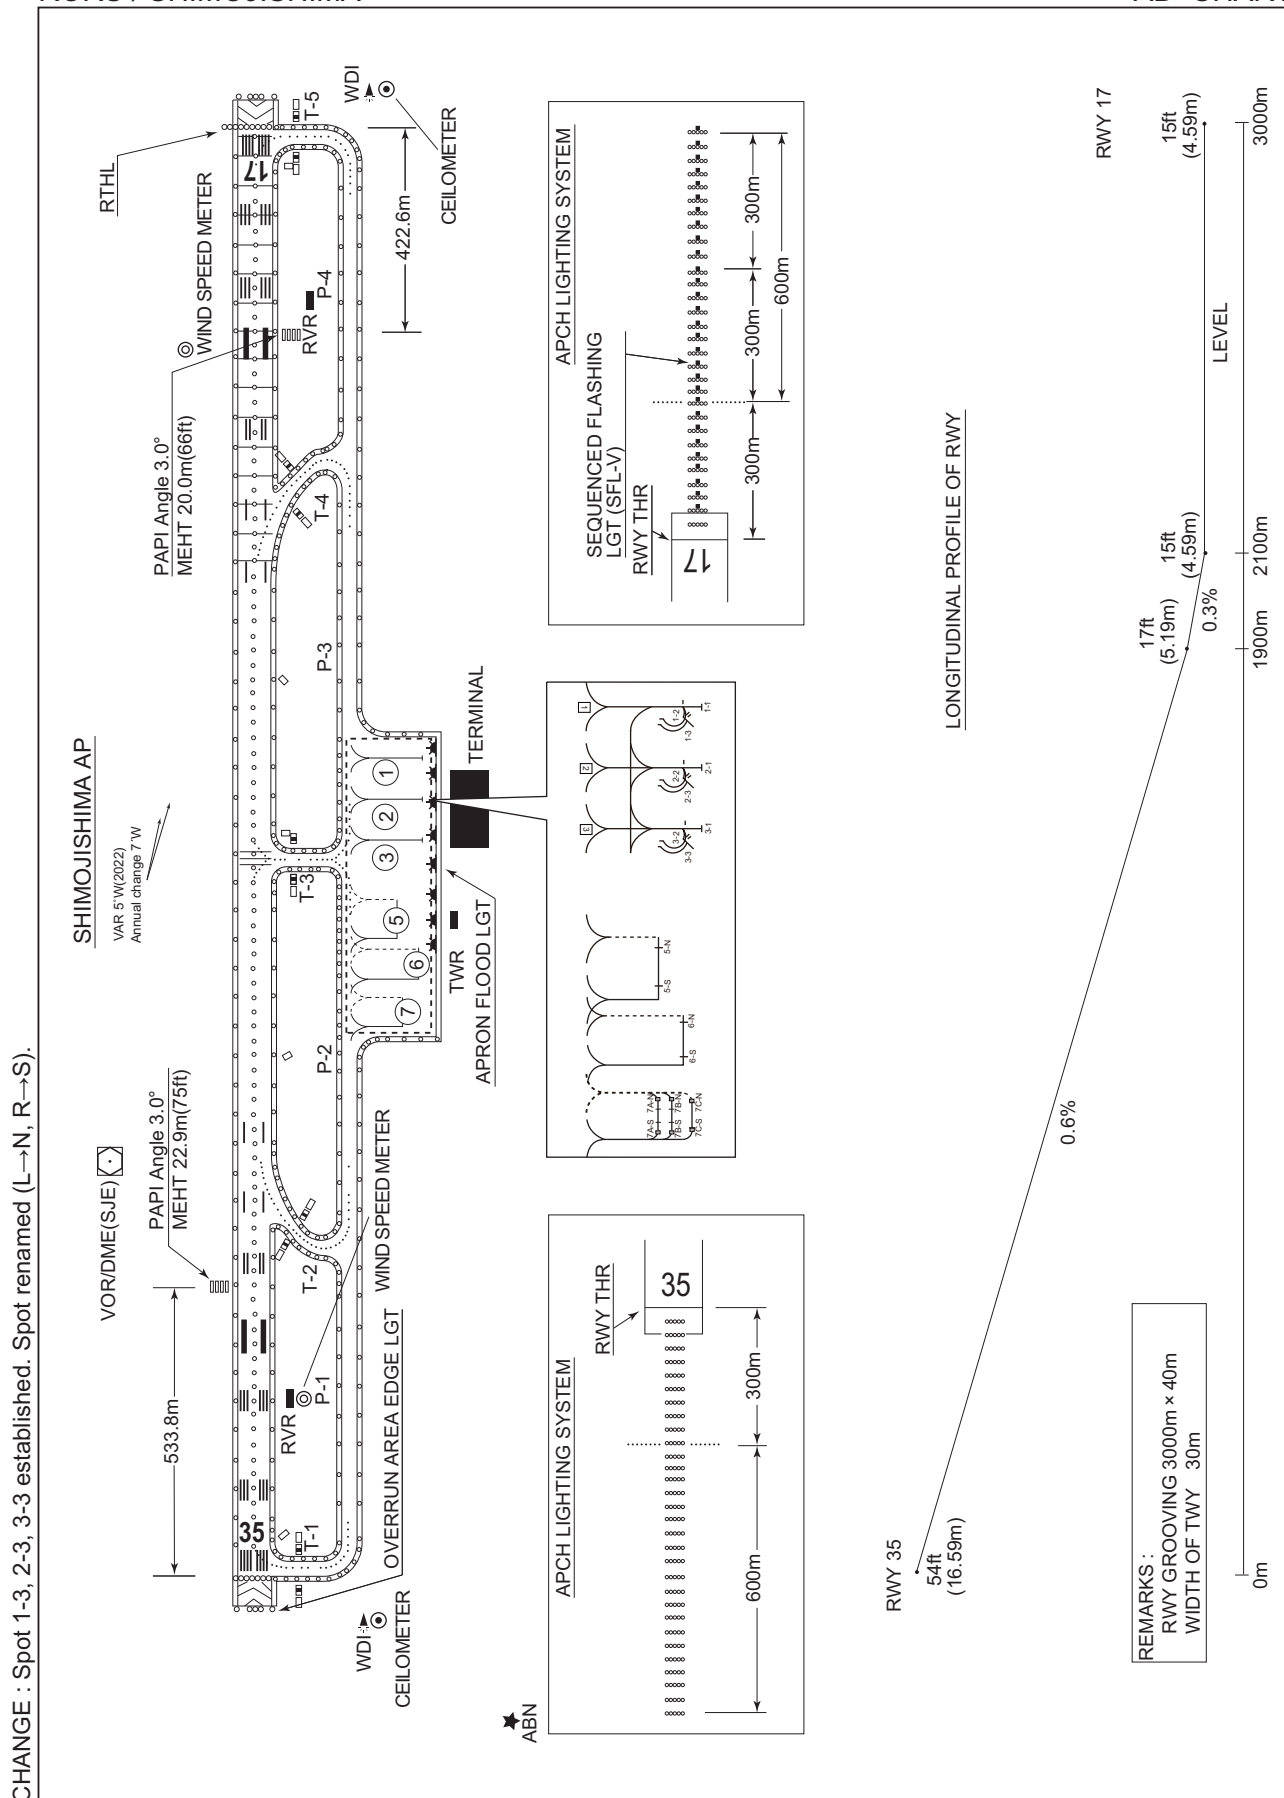

STANDARD DEPARTURE CHART - INSTRUMENT

RORS / SHIMOJISHIMA

SID

ANNIE SIX DEPARTURE

RWY17 : Climb RWY HDG to 500FT, turn right HDG037° to intercept and proceed ...


RWY35 : Climb ...

... via SJE R352 to ANNIE.

Cross ANNIE at assigned altitude.

Note RWY17 : 5.0% climb gradient required up to 500FT.

OBST ALT 93FT located at 0.2NM 162° FM end of RWY17.

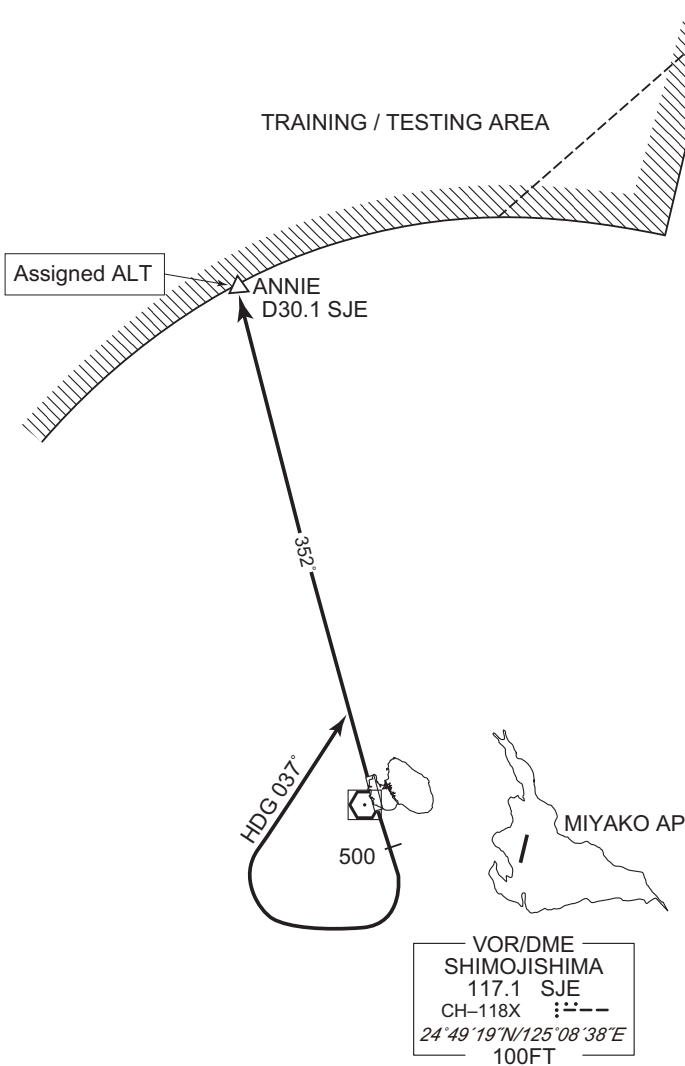

CHANGE : PROC renamed. PROC course.

## STANDARD DEPARTURE CHART - INSTRUMENT

RORS / SHIMOJISHIMA

SID

BETTY SIX DEPARTURE

RWY17 : Climb RWY HDG to 500FT ...


RWY35 : Climb RWY HDG to 500FT, turn left HDG 127° to intercept and  
proceed ...

... via SJE R172 to BETTY.

Cross BETTY at assigned altitude.

Note RWY17 : 5.0% climb gradient required up to 500FT.

OBST ALT 93FT located at 0.2NM 162° FM end of RWY17.

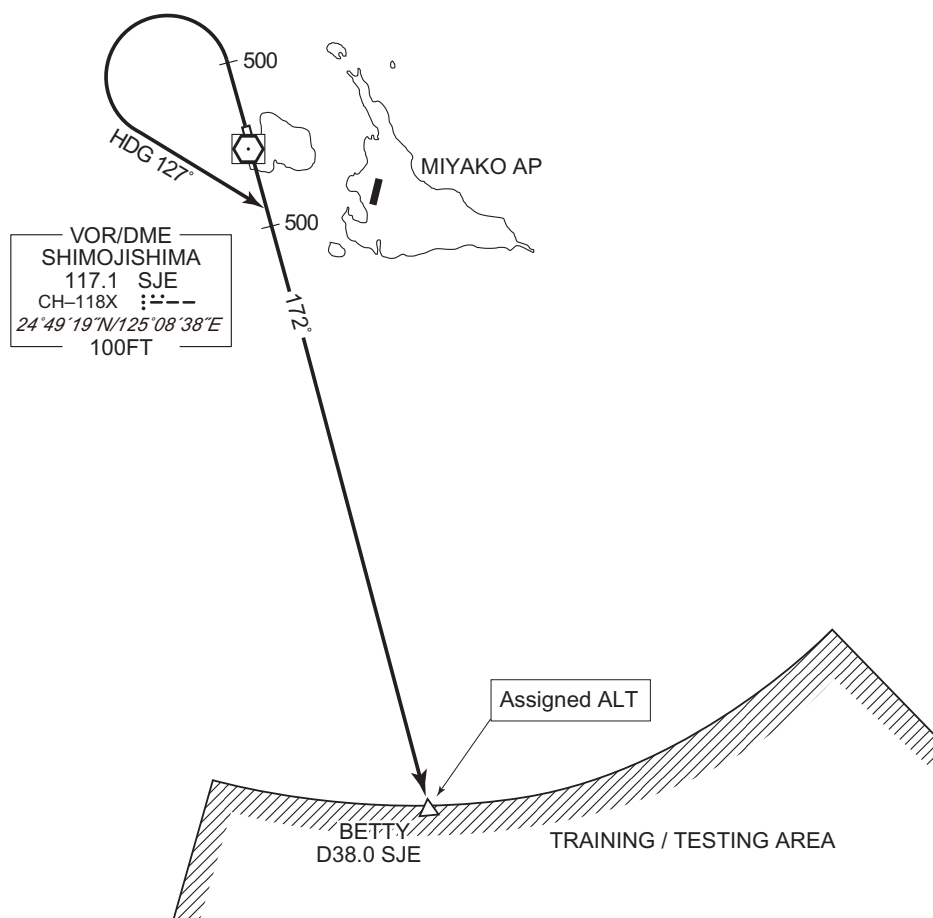

CHANGE : PROC renamed. PROC course.

STANDARD DEPARTURE CHART - INSTRUMENT

RORS / SHIMOJISHIMA

SID

MIYAKOJIMA FOUR DEPARTURE


RWY17 : Climb RWY HDG to 500FT, turn left,...

RWY35 : Climb RWY HDG to 500FT, turn right,...

...direct to MJC VORTAC. Cross MJC VORTAC at or above 3000FT.

Note RWY17 : 5.0% climb gradient required up to 500FT.

OBST ALT 93FT located at 0.2NM 162° FM end of RWY17.

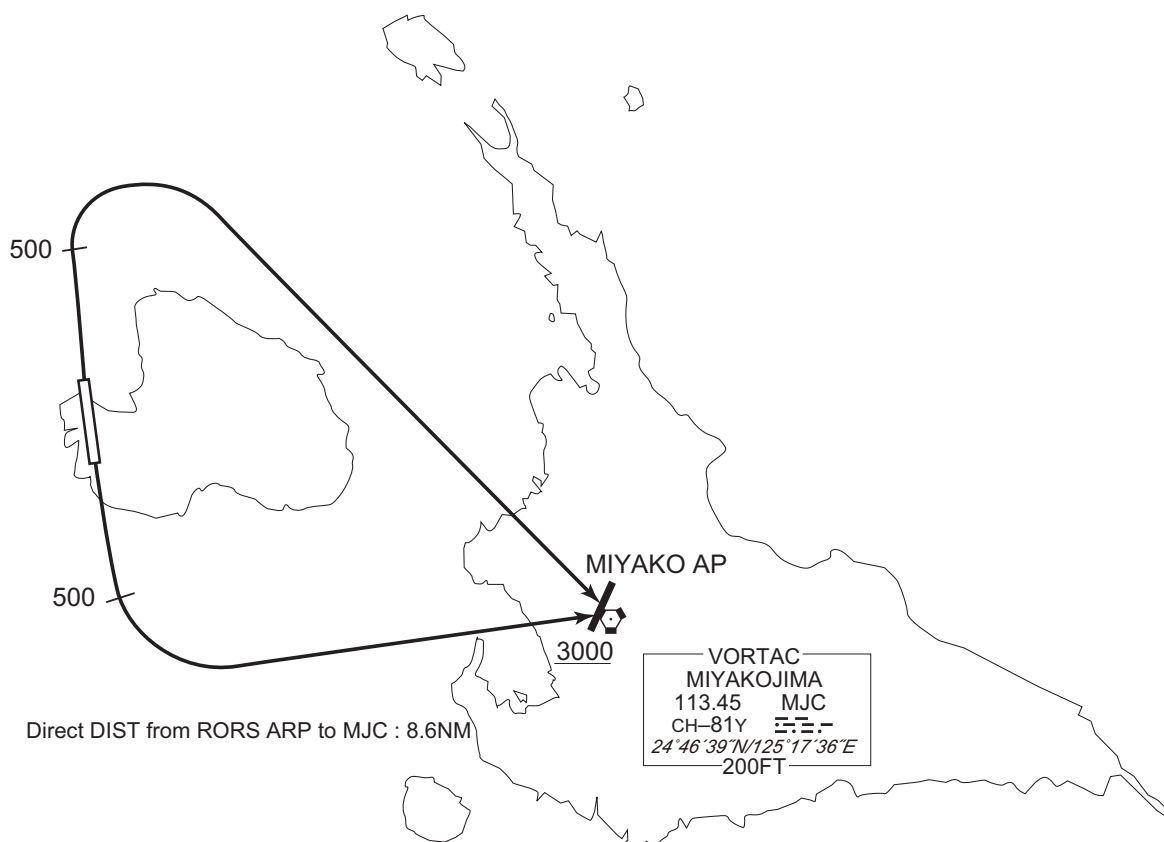


CHANGE : OBST.

STANDARD DEPARTURE CHART - INSTRUMENT

RORS / SHIMOJISHIMA

RNAV SID

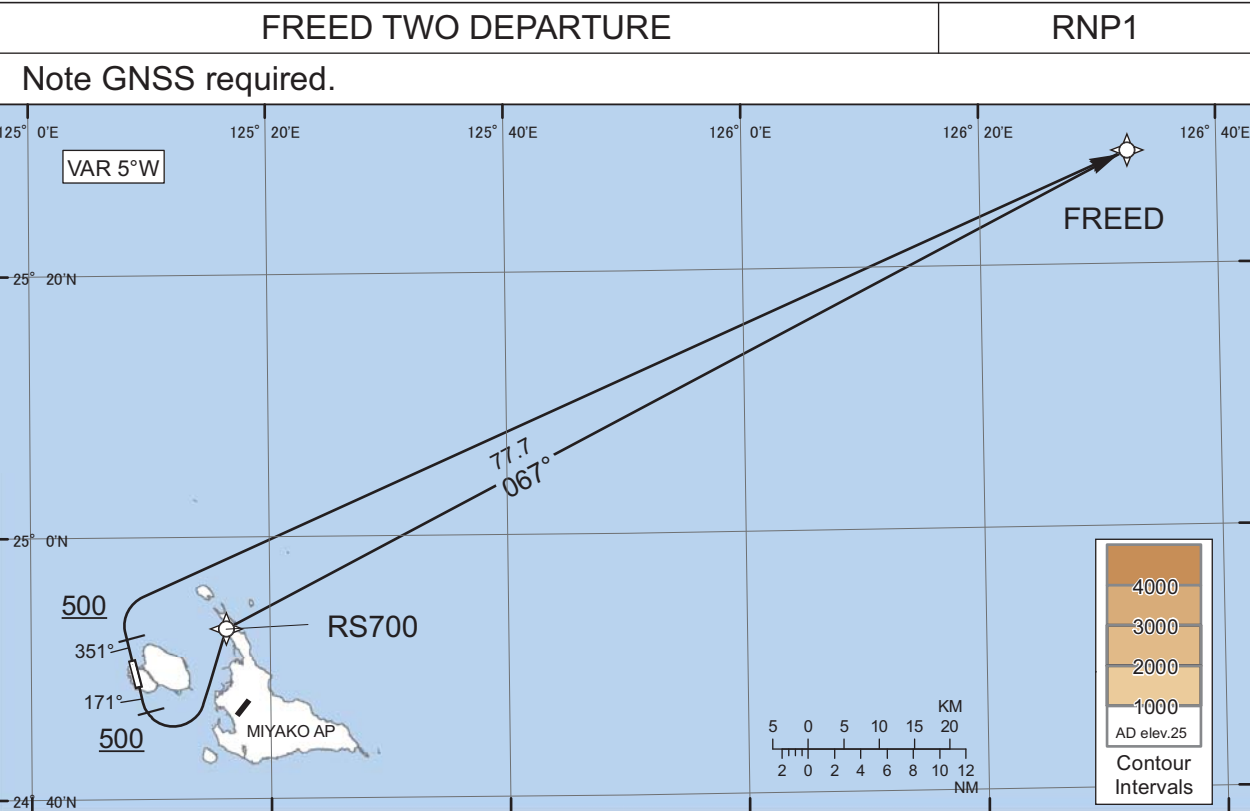

RWY17 : Climb on HDG171° at or above 500FT, turn left direct to RS700, to FREED.  
RWY35 : Climb on HDG351° at or above 500FT, turn right direct to FREED.

Note RWY17 : 5.0% climb gradient required up to 500FT.  
OBST ALT 93FT located at 0.2NM 162° FM end of RWY17.

RWY17

| Serial Number | Path Descriptor | Way point Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|----------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | -                    | -        | 171 (166.1)   | -5.1               | -             | -              | +500          | -            | -              | RNP1                     |
| 002           | DF              | RS700                | -        | -             | -5.1               | -             | L              | -             | -            | -              | RNP1                     |
| 003           | TF              | FREED                | -        | 067 (062.4)   | -5.1               | 77.7          | -              | -             | -            | -              | RNP1                     |

RWY35

| Serial Number | Path Descriptor | Way point Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|----------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | -                    | -        | 351 (346.1)   | -5.1               | -             | -              | +500          | -            | -              | RNP1                     |
| 002           | DF              | FREED                | -        | -             | -5.1               | -             | R              | -             | -            | -              | RNP1                     |

Waypoint Coordinates


| Waypoint Identifier | Coordinates            |
|---------------------|------------------------|
| RS700               | 245300.5N / 1251621.0E |
| FREED               | 252840.1N / 1263232.7E |

CHANGE : OBST. Waypoint Coordinates added.

## RORS / SHIMOJISHIMA

STAR

From over ANNIE, proceed via SJE R352 to DIANA.  
Cross DIANA at or above 1600FT.

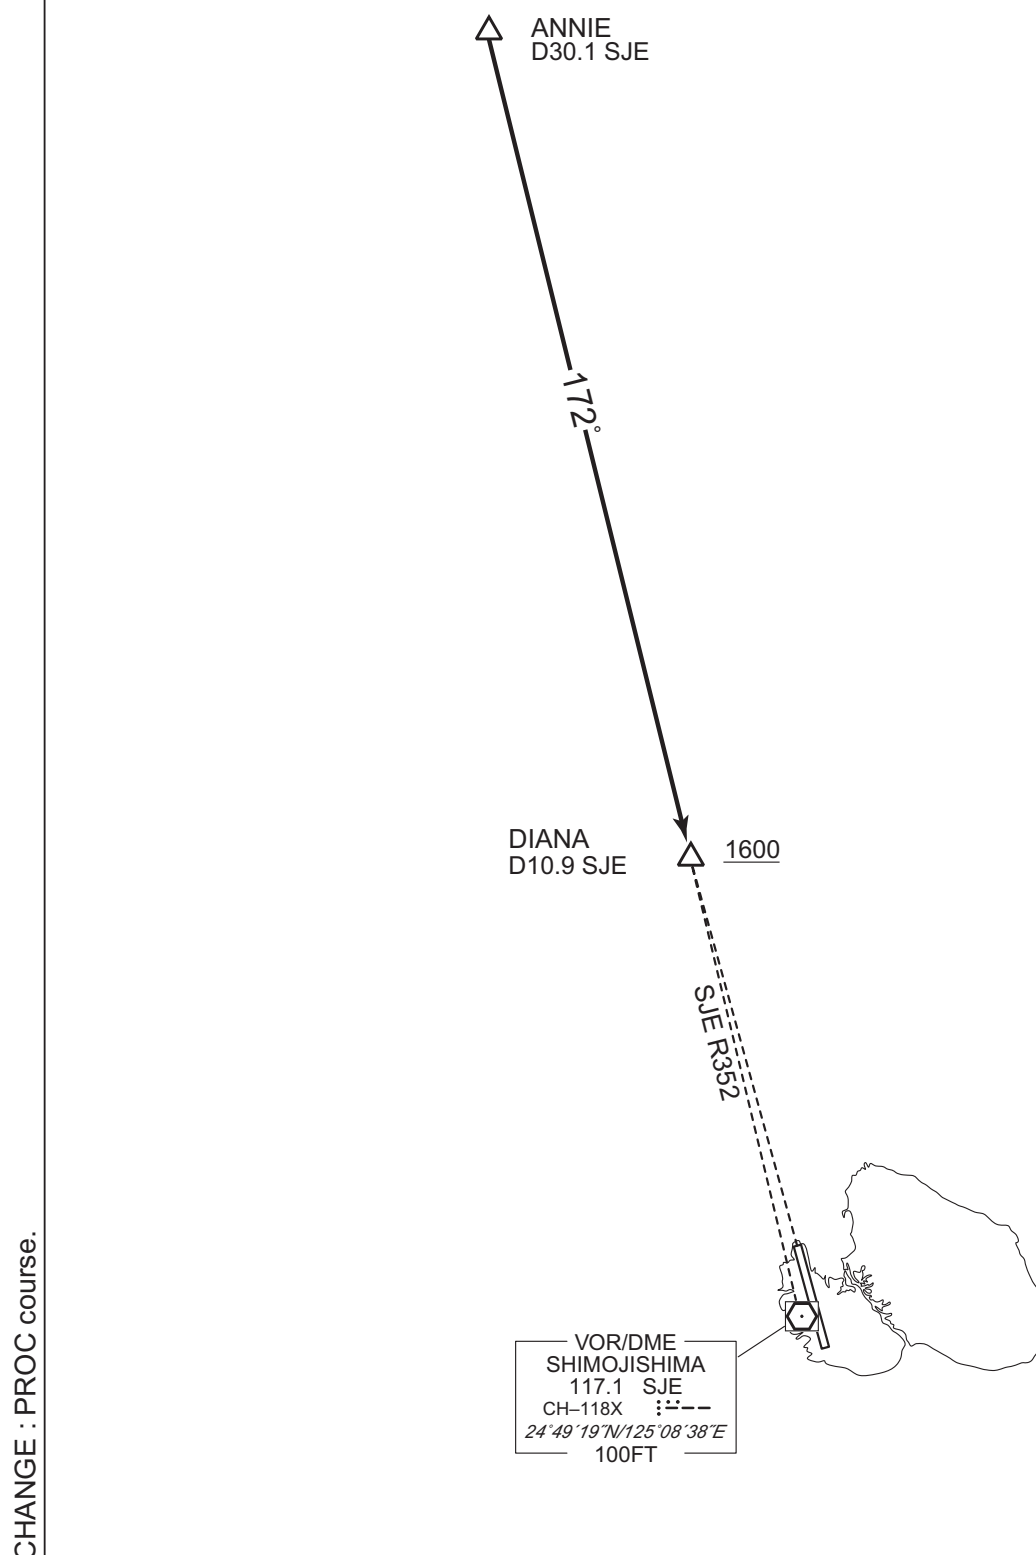




STANDARD ARRIVAL CHART - INSTRUMENT

RORS / SHIMOJISHIMA

STAR

BETTY ARRIVAL

From over BETTY, proceed via MJC R184 to intercept and proceed via SJE R171 to CHIMI.  
Cross CHIMI at or above 1600FT.


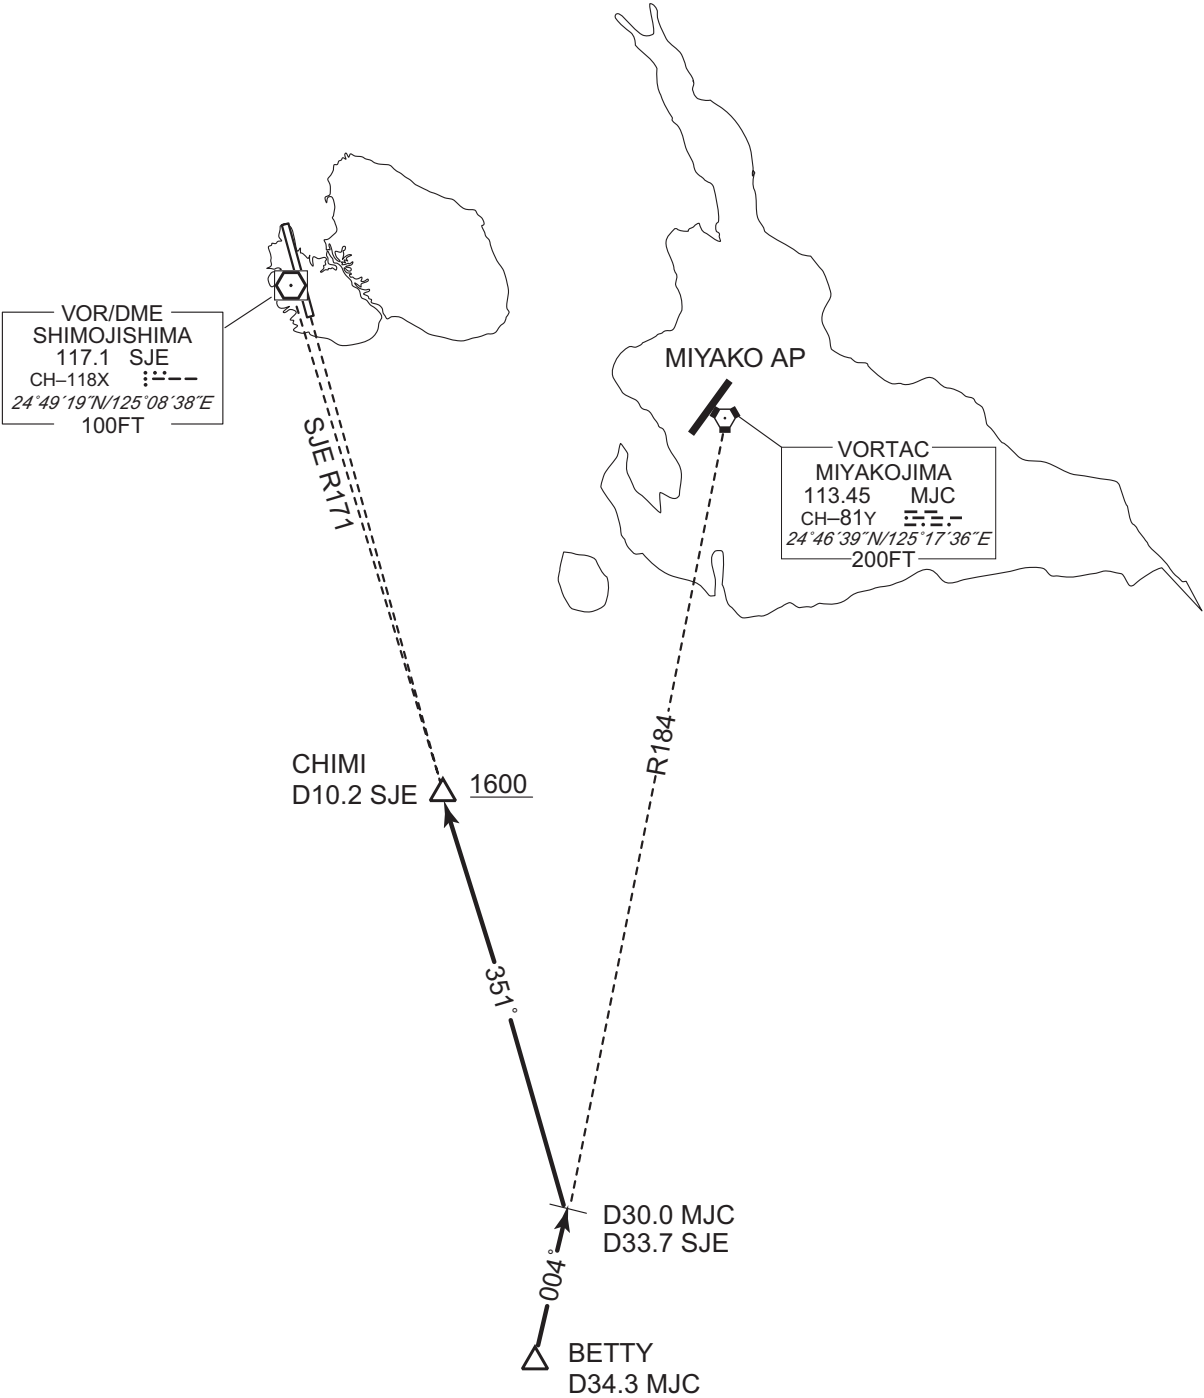


CHANGE : PROC course.

## INSTRUMENT APPROACH CHART

RORS / SHIMOJISHIMA

ILS Z or LOC Z RWY17

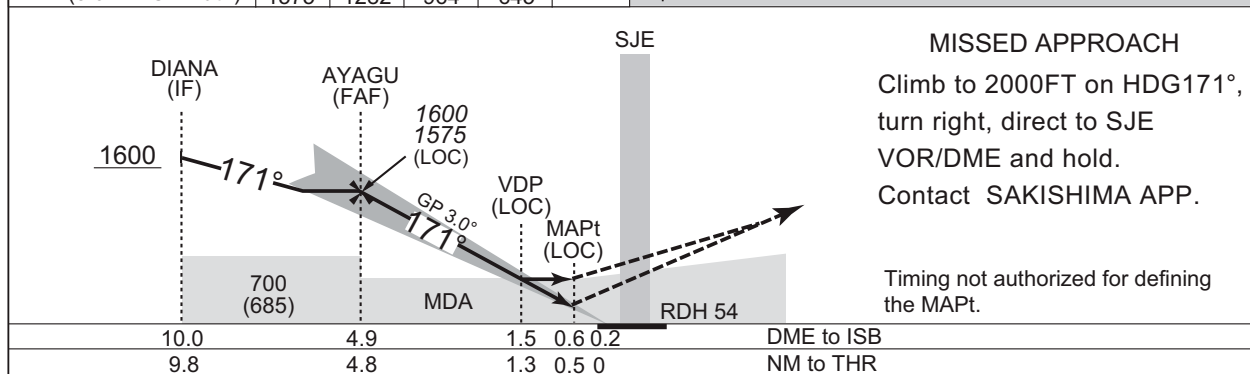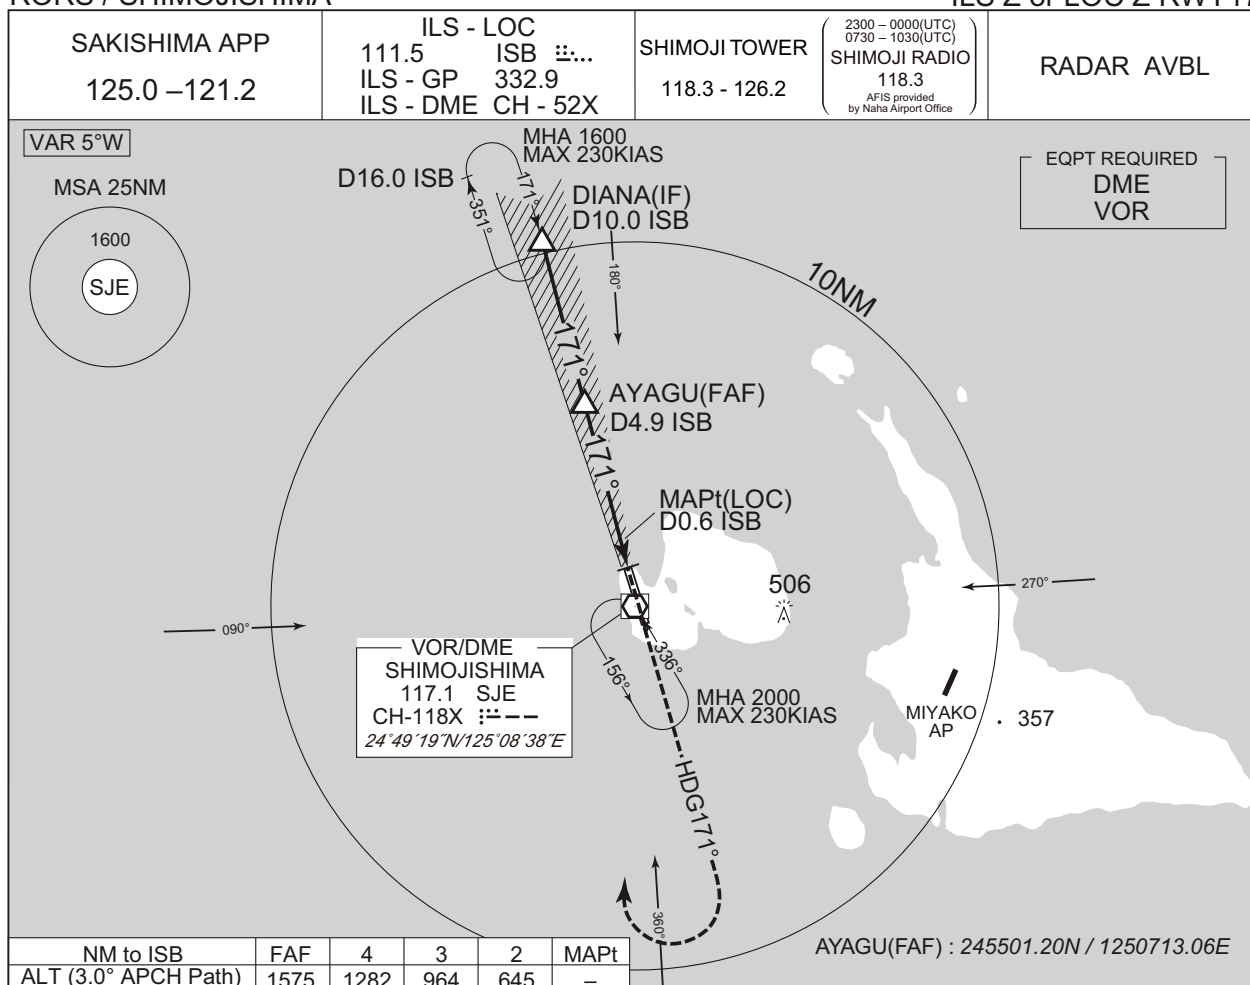

Missed APCH climb gradient MNM 3.0%


| MINIMA |           | THR elev. 15 |           | AD elev. 25 |                |
|--------|-----------|--------------|-----------|-------------|----------------|
| CAT    | CAT I     |              | LOC       |             | CIRCLING       |
|        | DA(H)     | RVR/<br>CMV  | MDA(H)    | RVR/<br>CMV | MDA(H) VIS     |
| A      | 240 (225) | 600          | 460 (445) | 900         | 510 (485) 1600 |
| B      |           |              |           | 1000        |                |
| C      |           |              |           | 1400        | 2400           |
| D      |           |              |           |             | 580 (555) 3200 |

MINIMA with Missed APCH climb gradient of 2.5% are not established.  
Circling to WEST side of RWY only.

CHANGE : HLDG pattern at SJE.

INSTRUMENT APPROACH CHART


RORS / SHIMOJISHIMA ILS Y or LOC Y RWY17

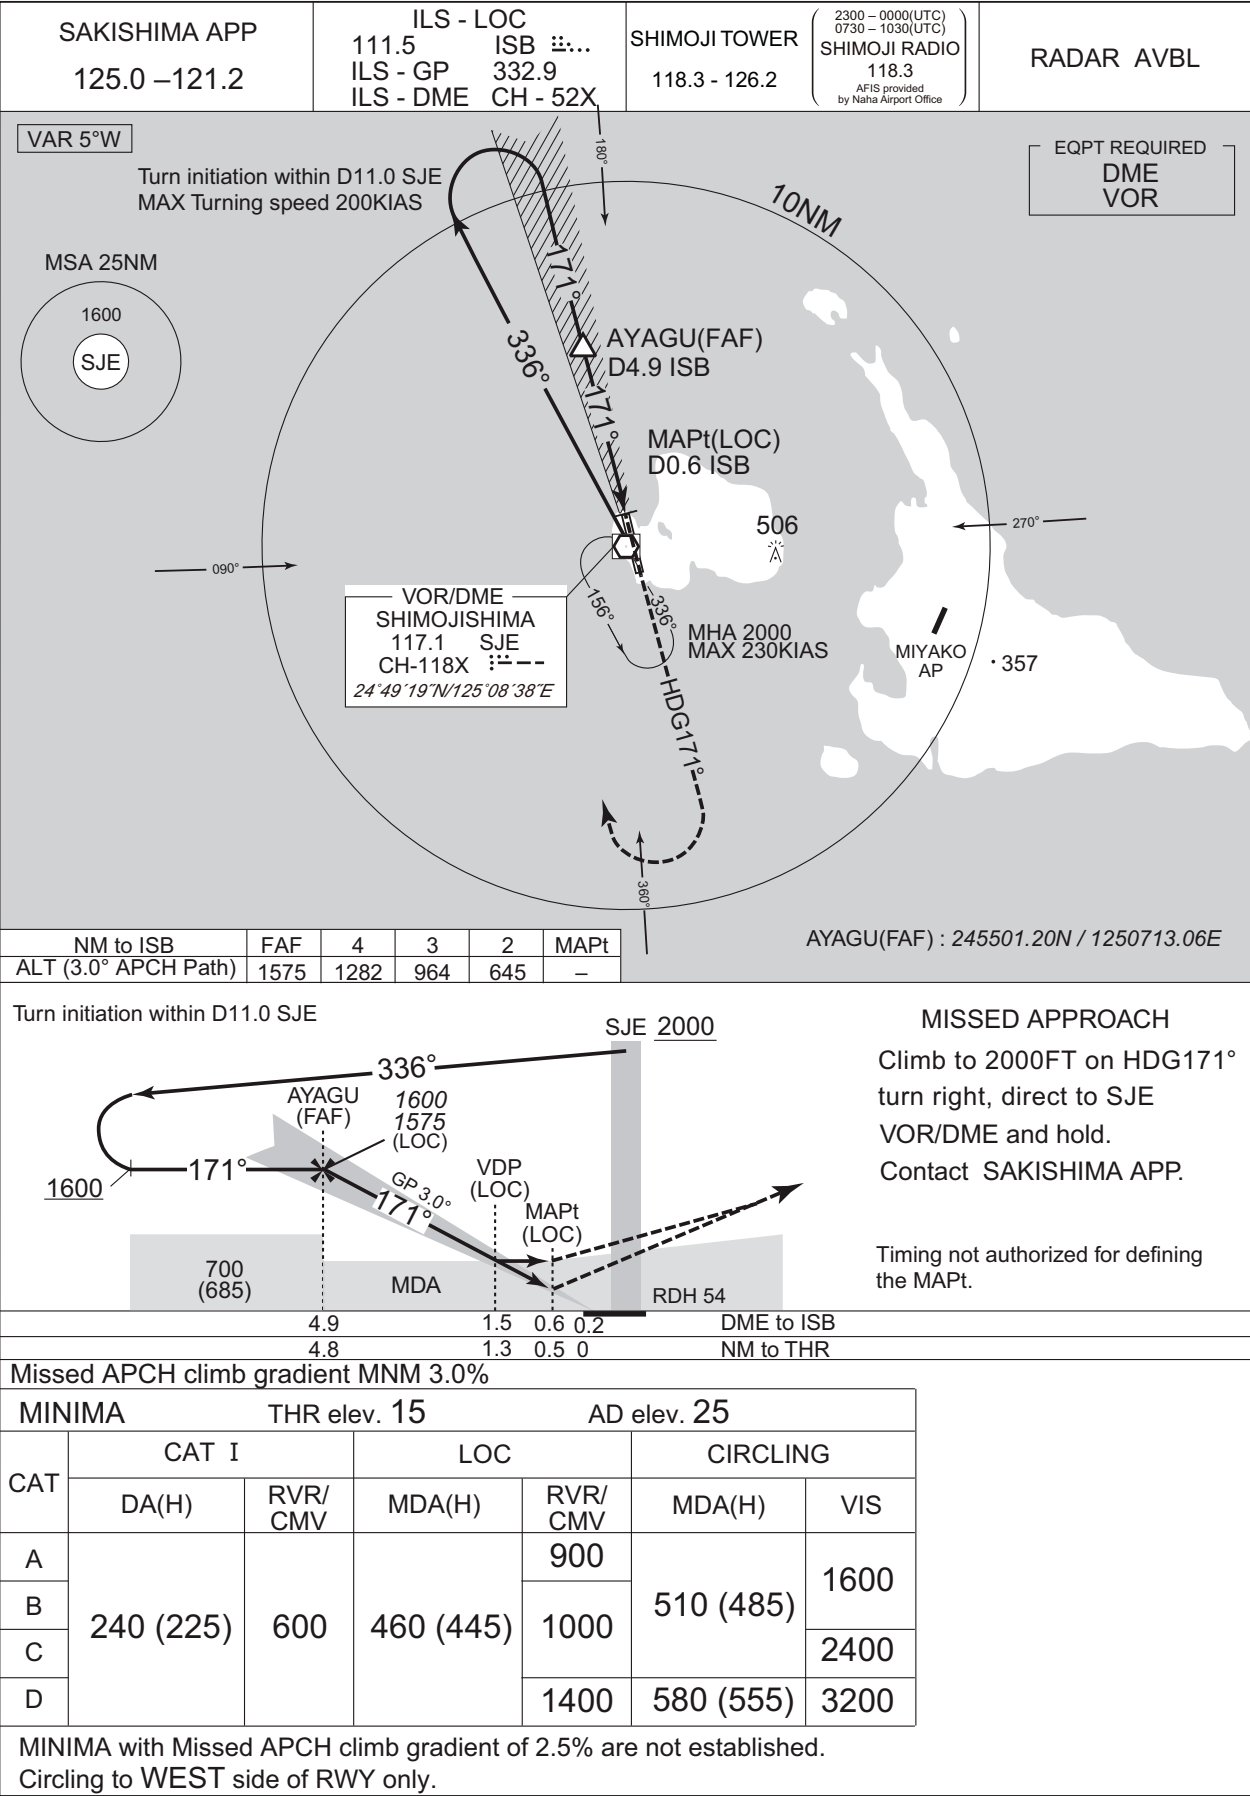


INSTRUMENT APPROACH CHART

RORS / SHIMOJISHIMA

VOR RWY17

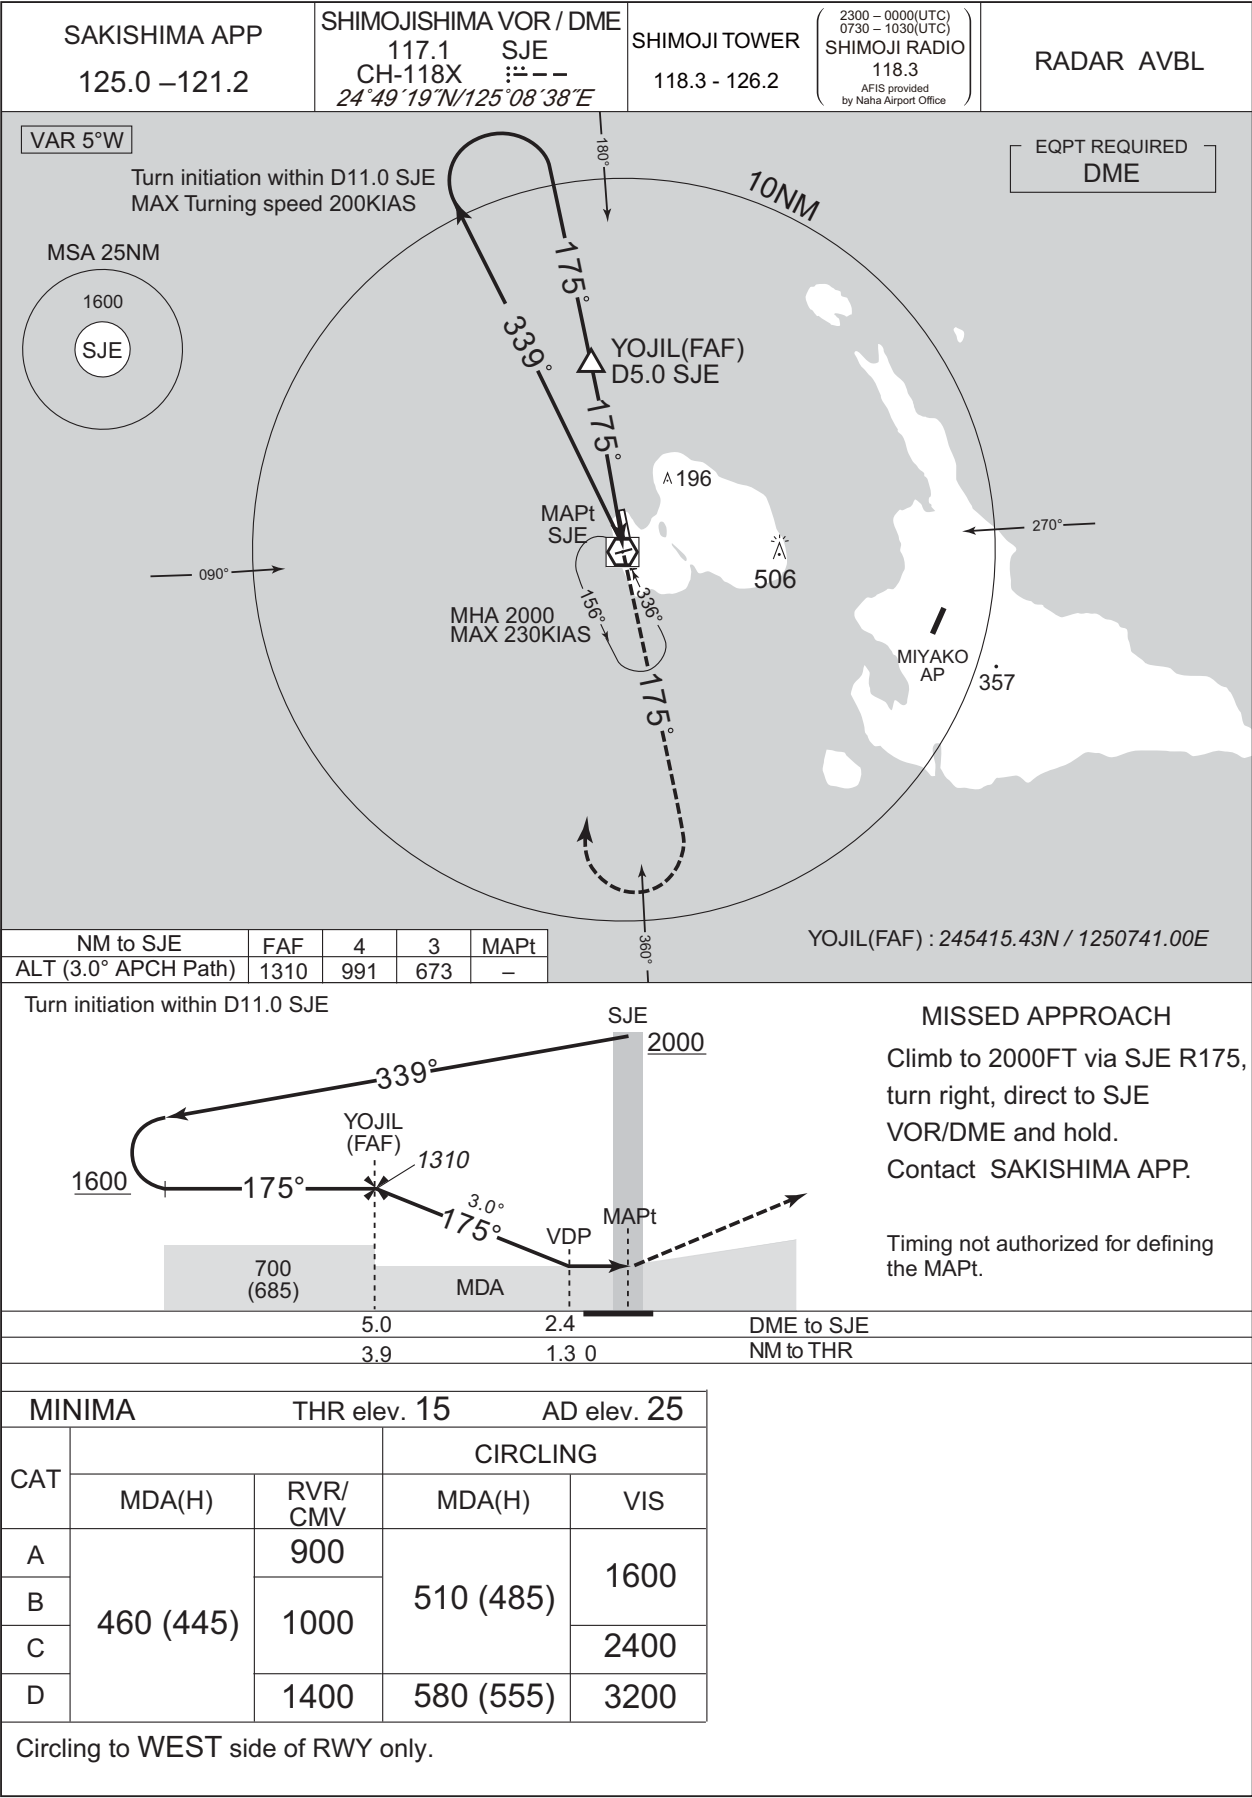

INSTRUMENT APPROACH CHART

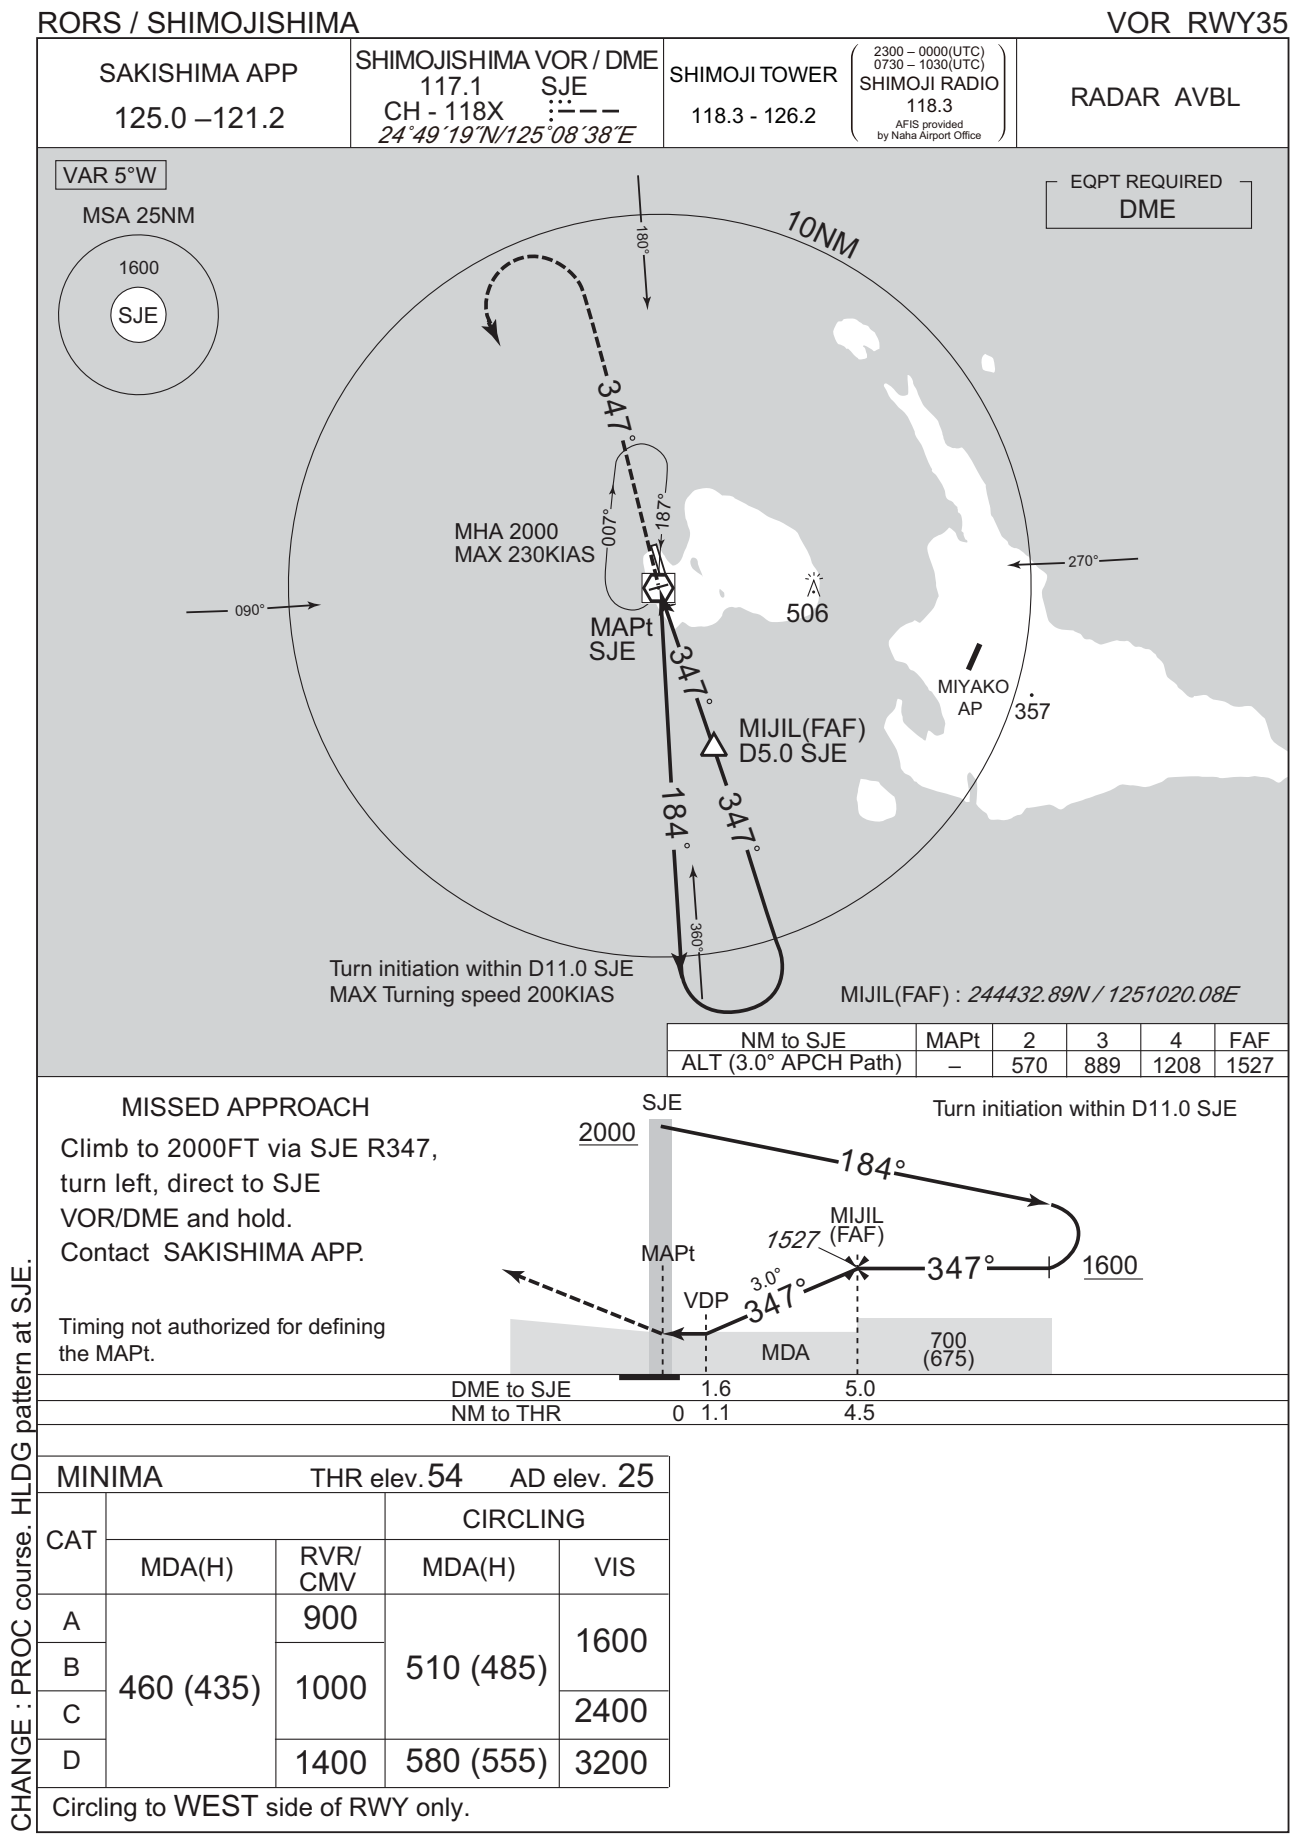


CHANGE : PROC course. HLDG pattern at SJE.

INSTRUMENT APPROACH CHART

RORS / SHIMOJISHIMA


RNP RWY17

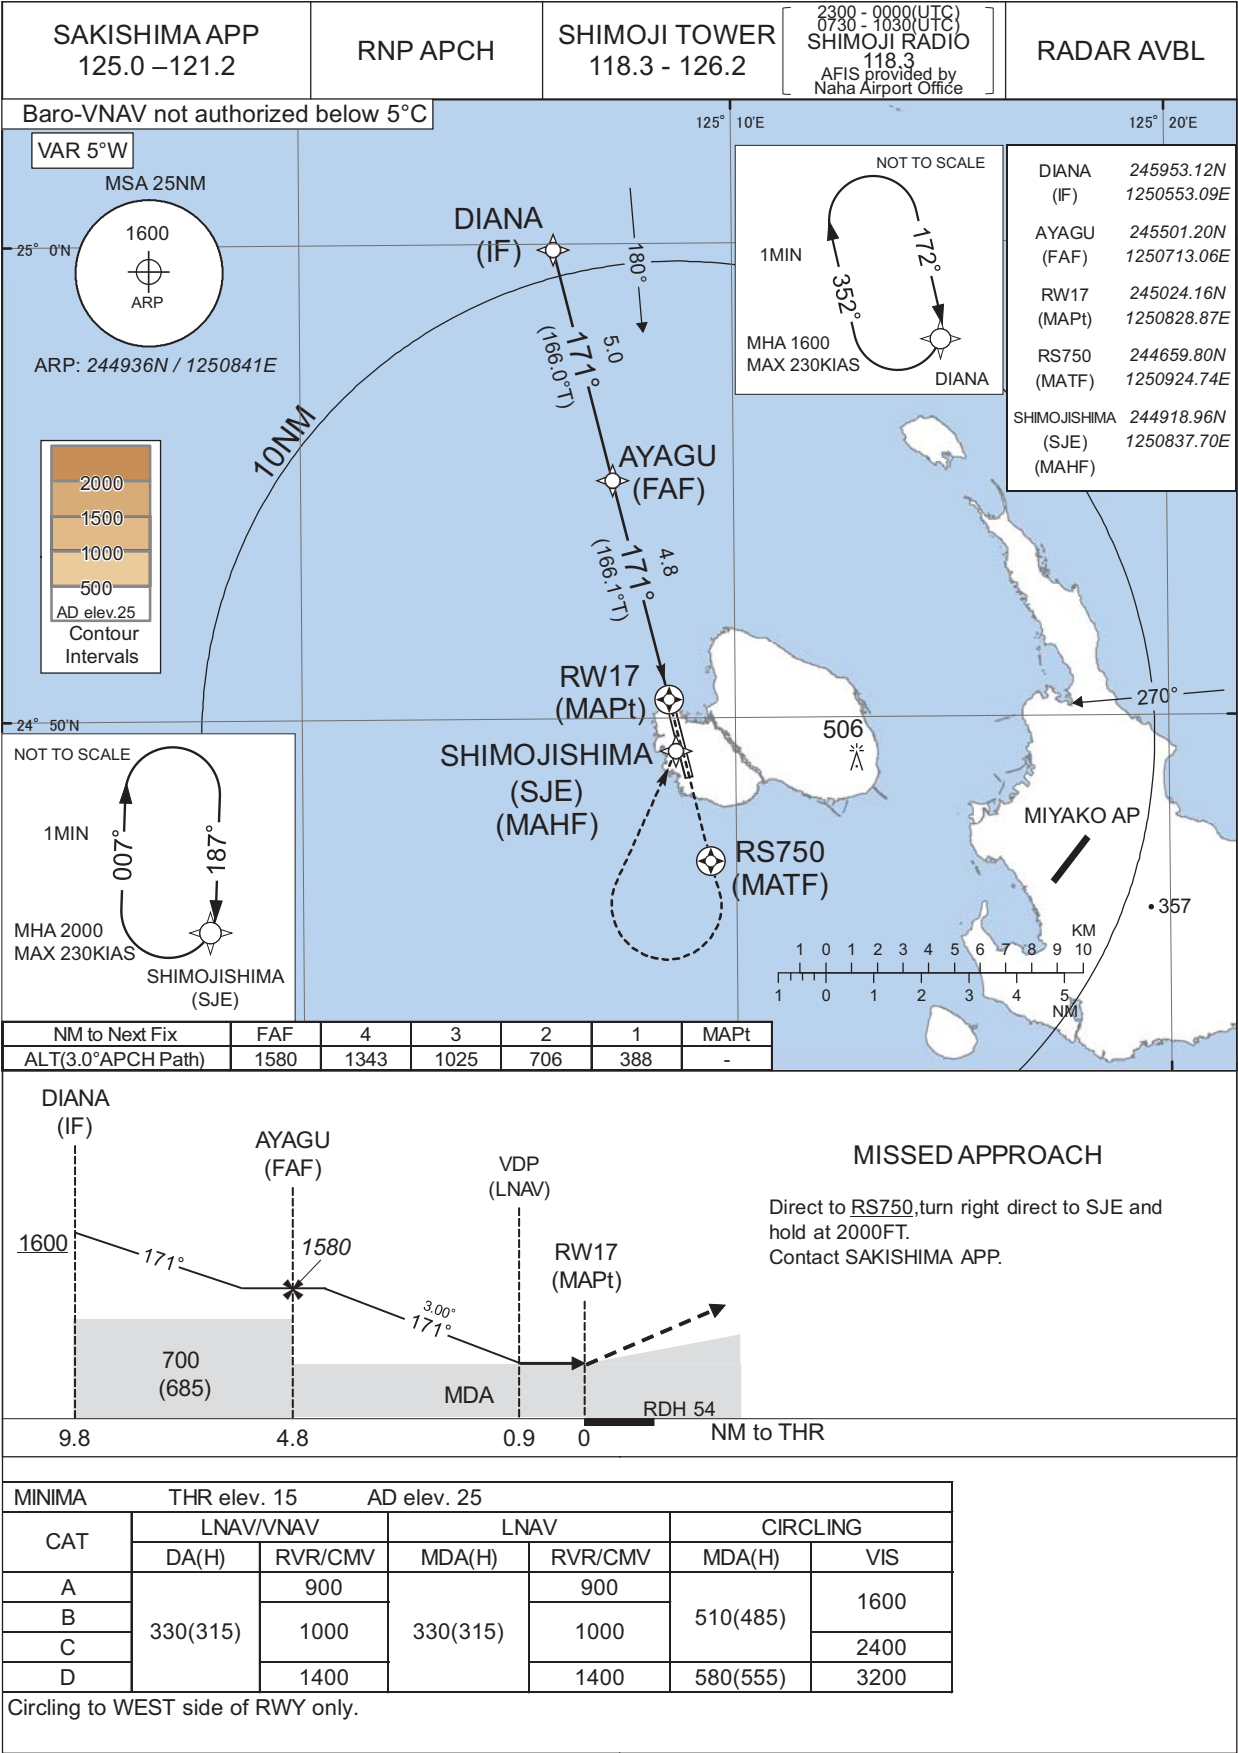

INSTRUMENT APPROACH CHART


RORS / SHIMOJISHIMA

RNP RWY35

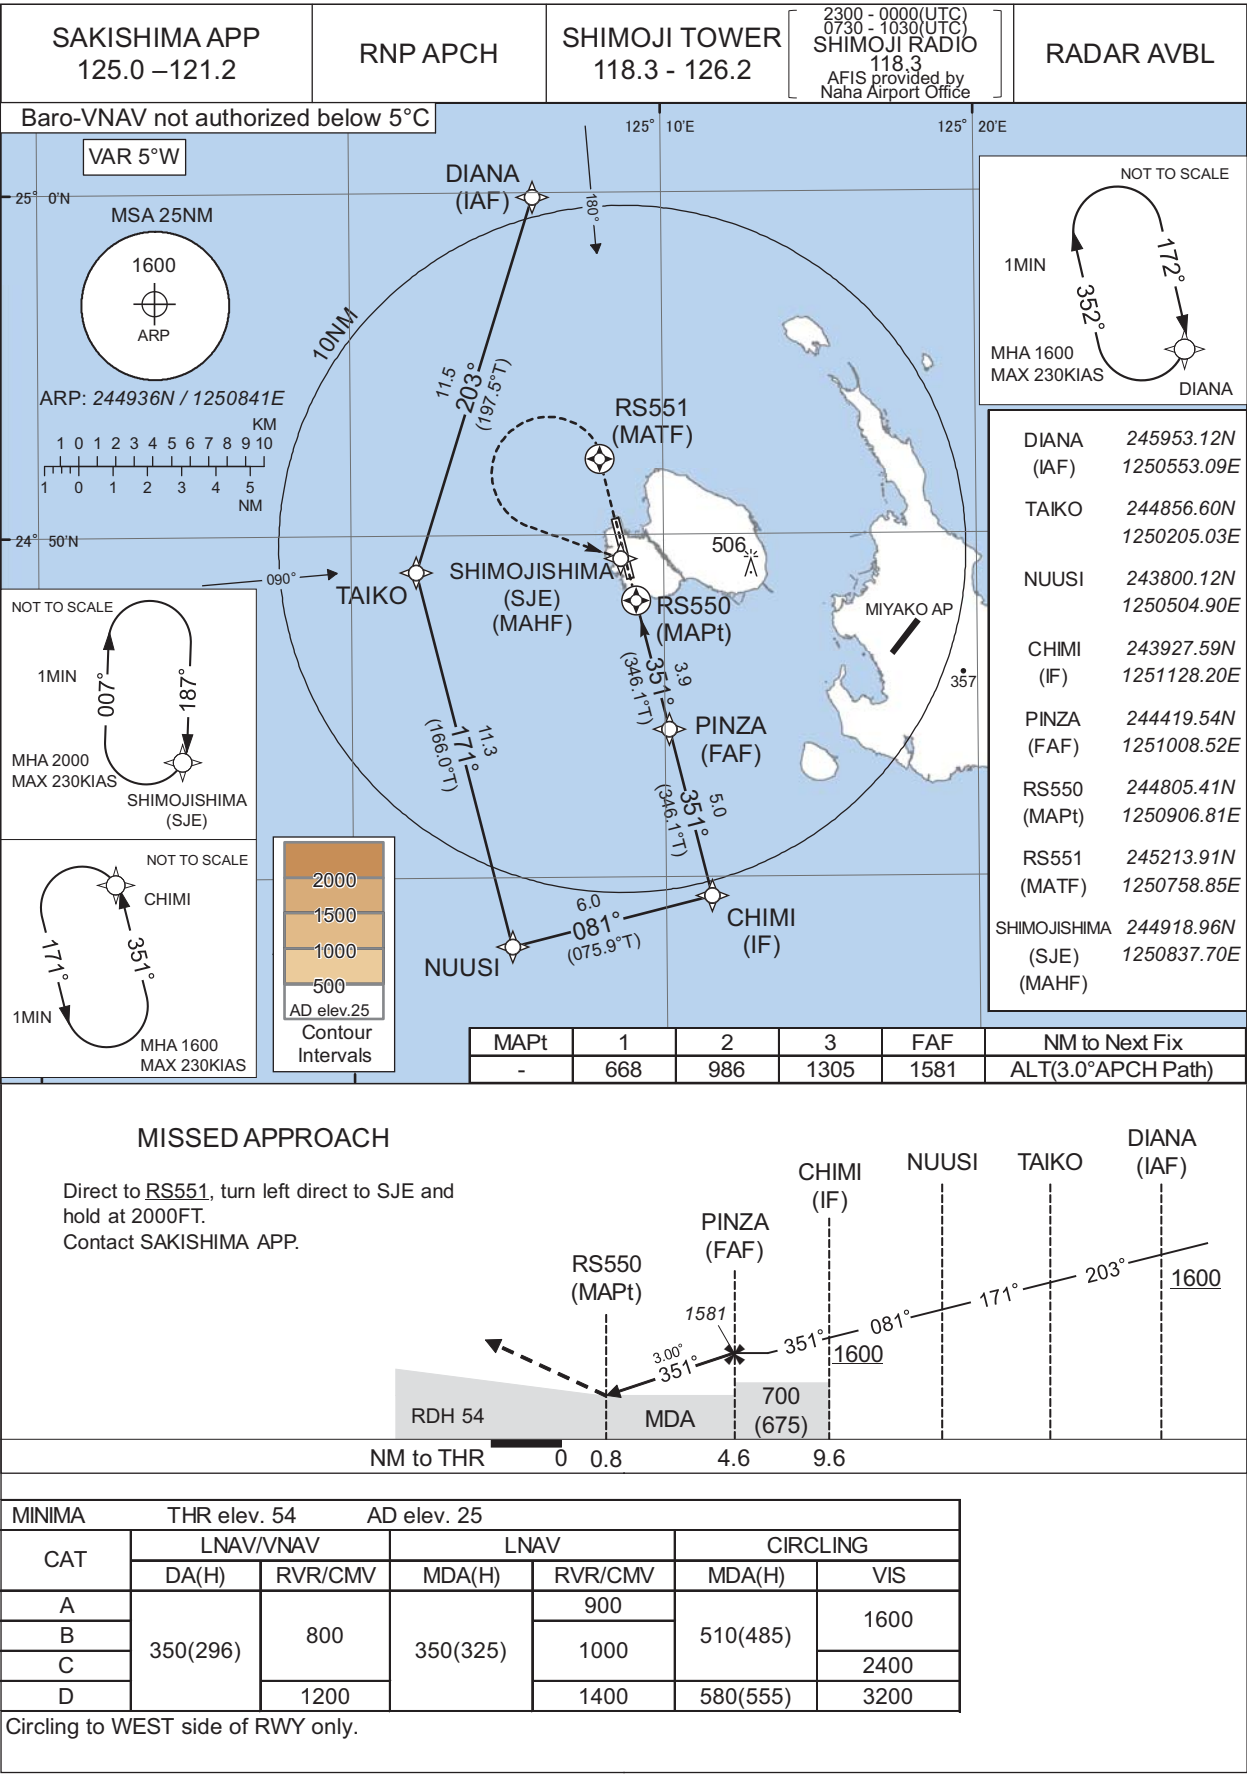

RORS / SHIMOJISHIMA

Visual REP

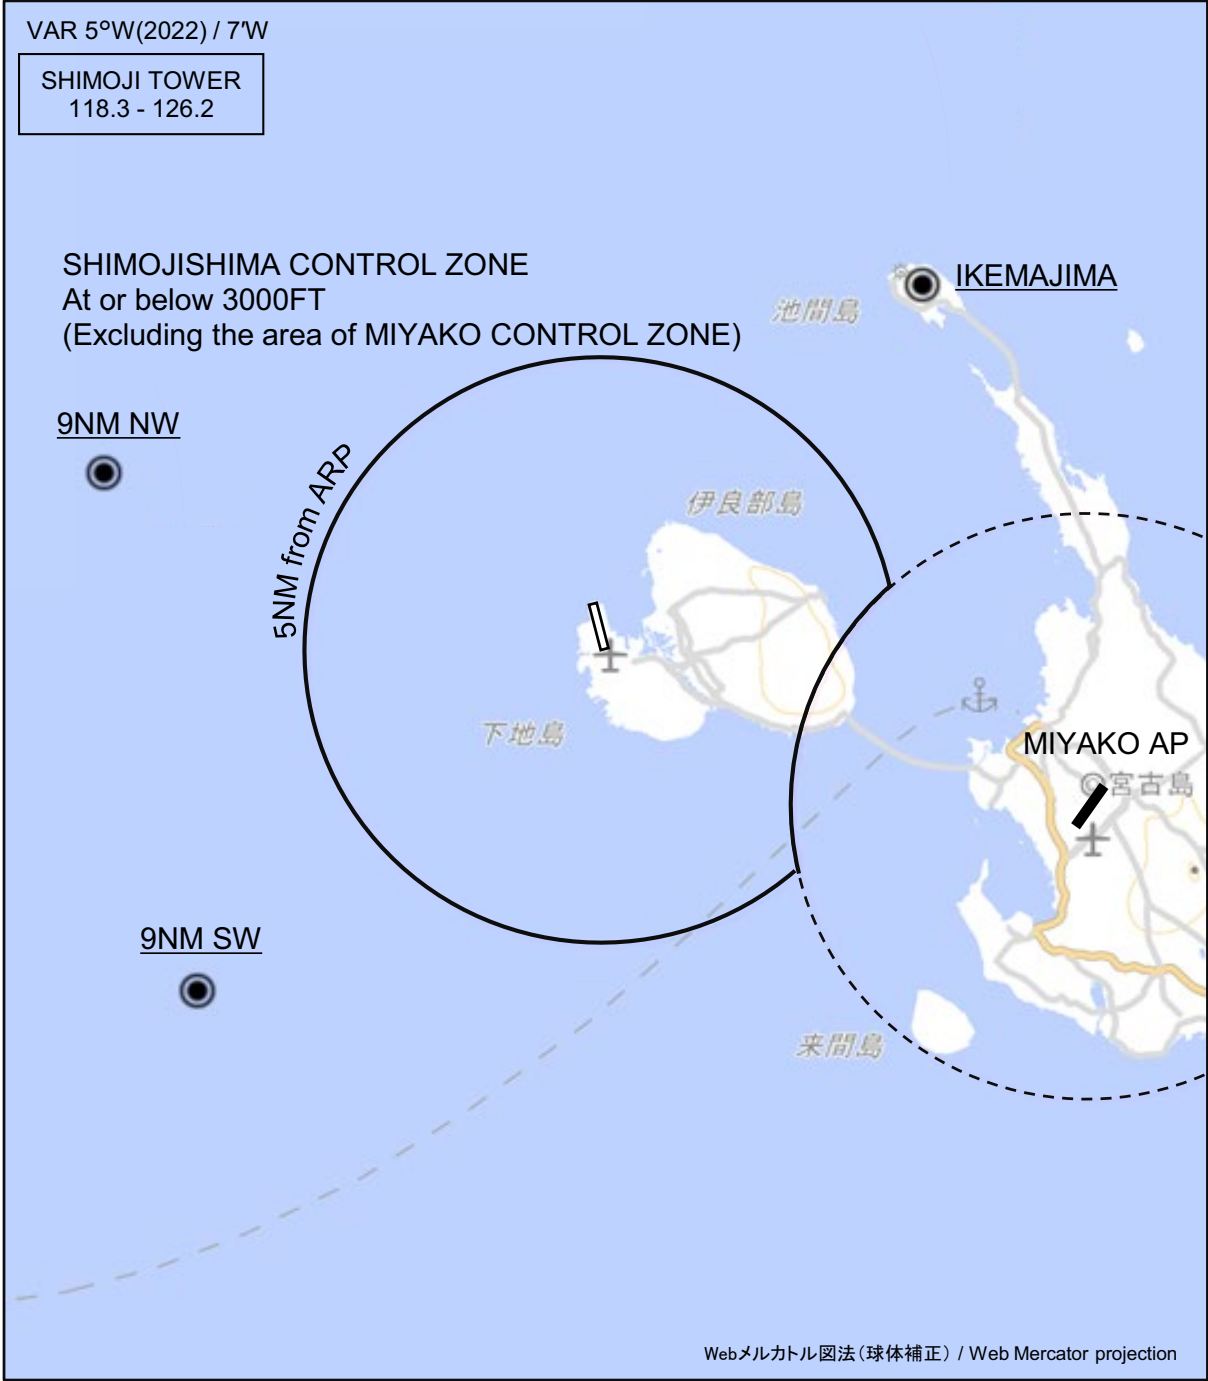

CHANGE : Map updated. BRG/DIST from ARP.


※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

| Call sign        | BRG / DIST from ARP | Remarks            |
|------------------|---------------------|--------------------|
| 池間島<br>Ikemajima | 040°T / 8.2NM       | 島<br>Island        |
| 9NM NW           | 290°T / 9.0NM       | 海上<br>Over the sea |
| 9NM SW           | 230°T / 9.0NM       | 海上<br>Over the sea |



RORS / SHIMOJISHIMA

LDG CHART

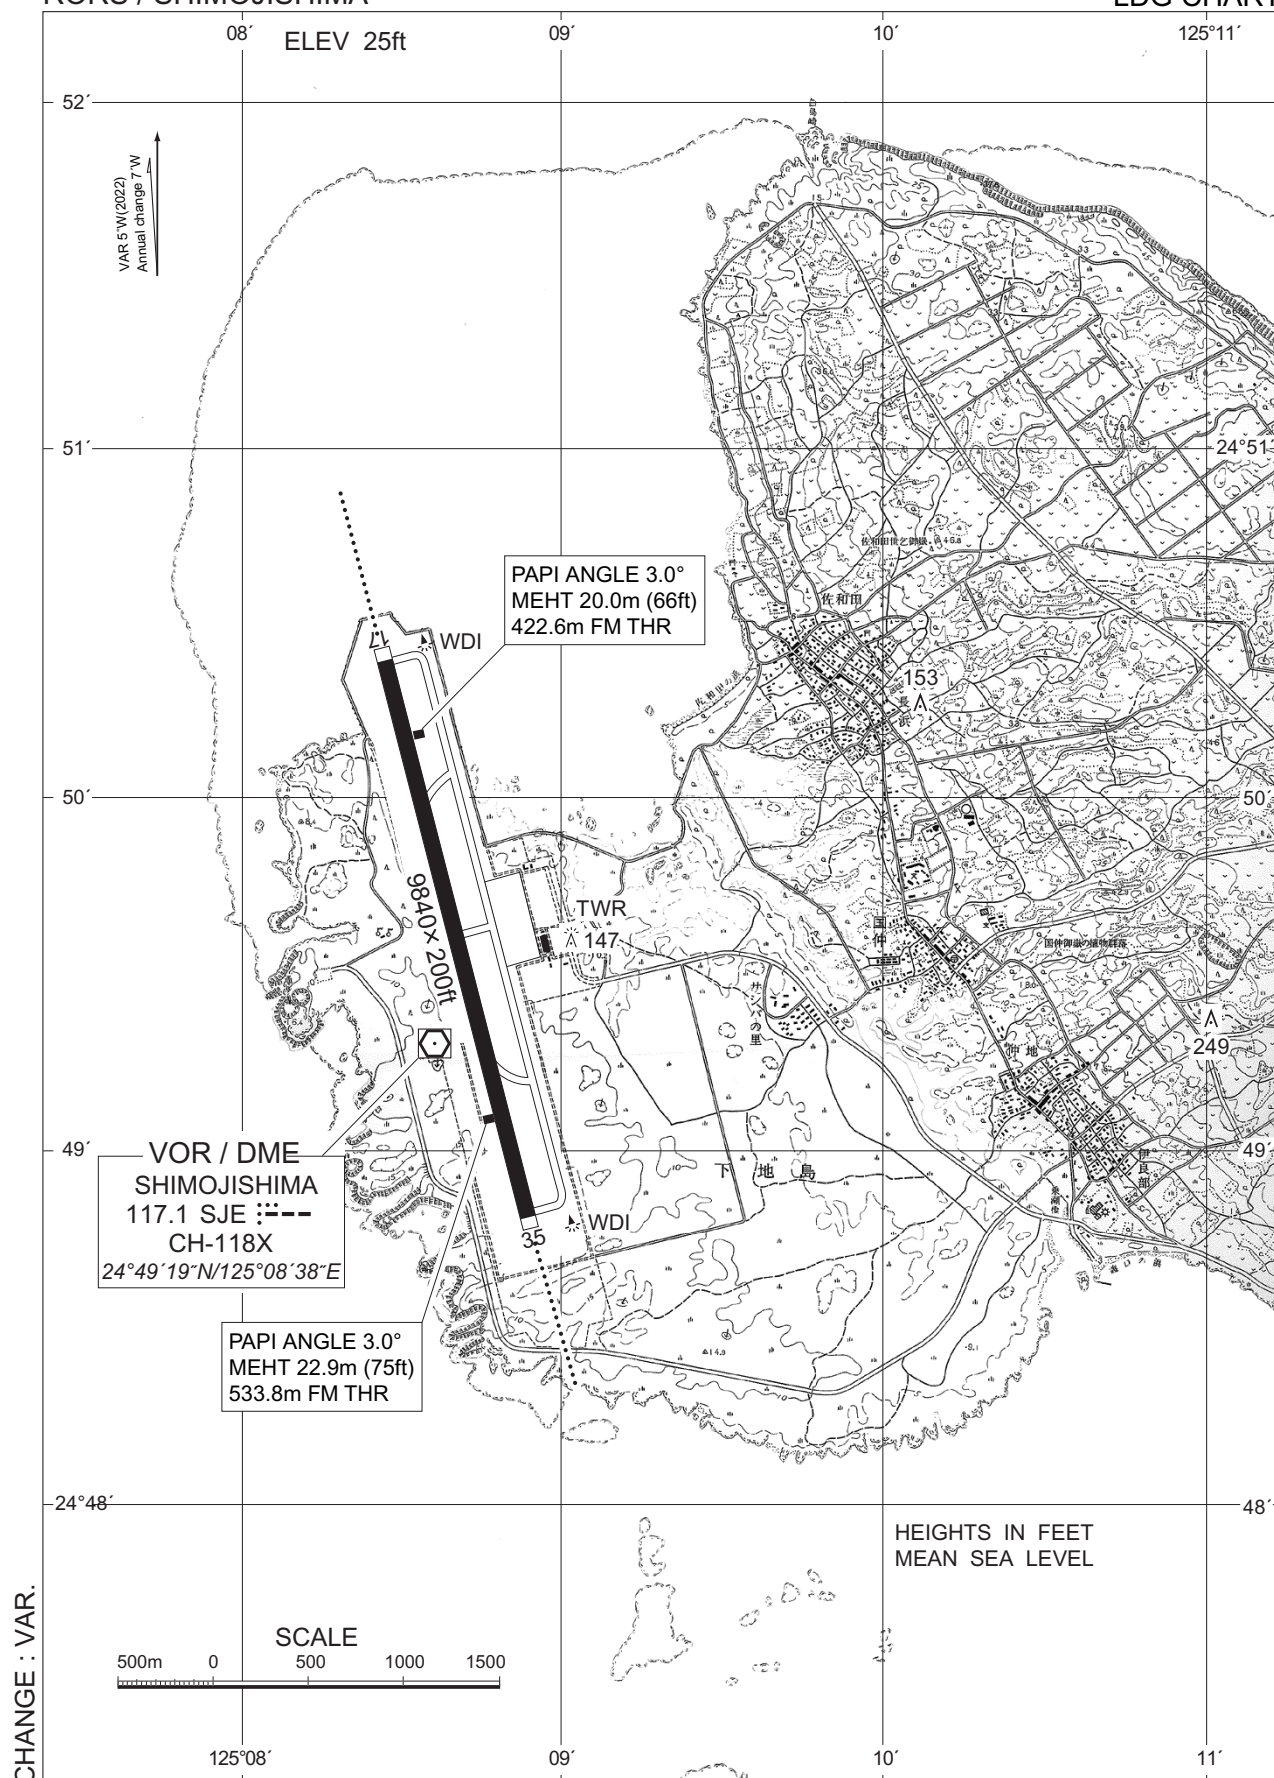

RORS / SHIMOJISHIMA

Minimum Vectoring Altitude CHART

