


## **Automation Test PDF Report**

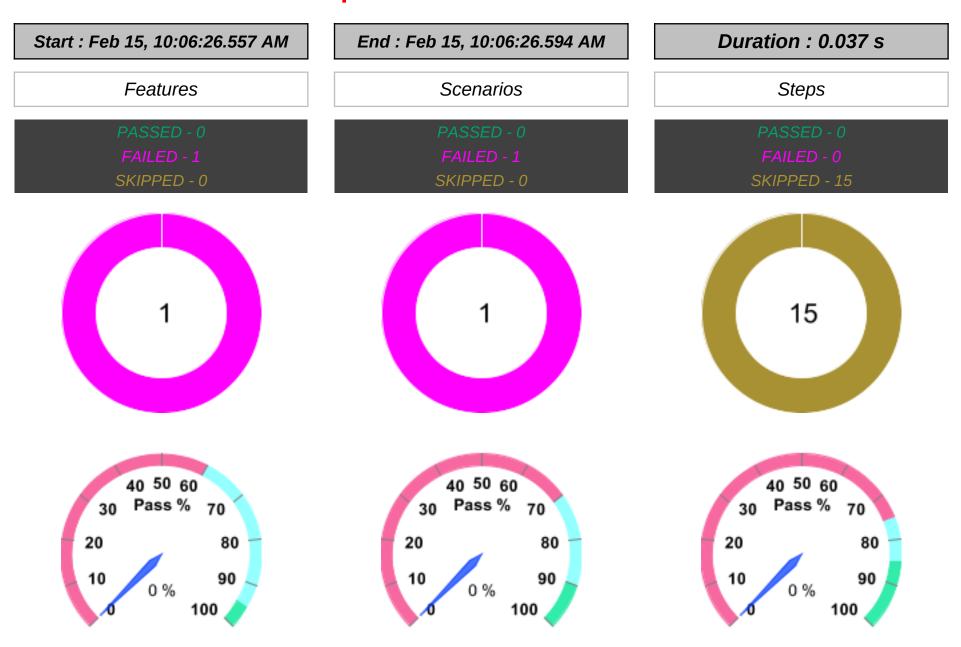

FEATURES SUMMARY -- 2 --

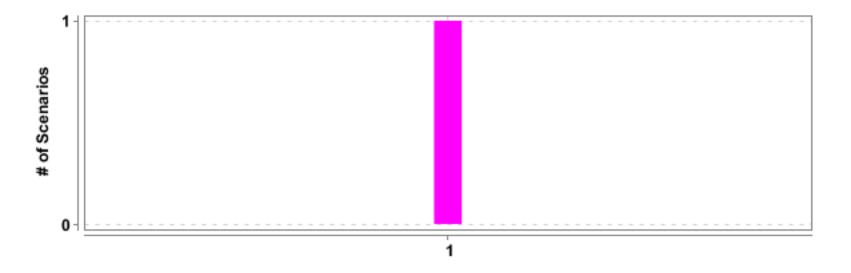

#	Feature Name	T	P	F	S	Duration
1	Adviser Rating Search functionality validation	1	0	1	0	0.037 s

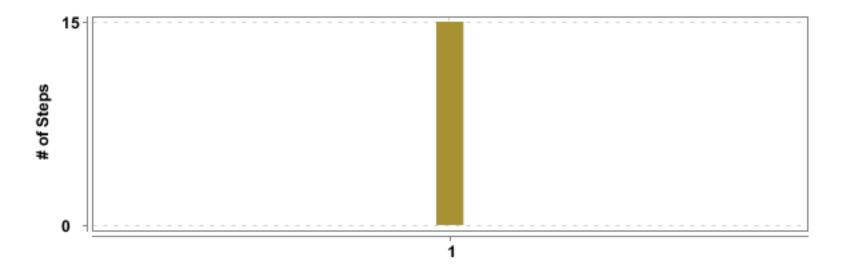


#	Feature Name	Scenario Name	<b>T</b>	P	F	S	Duration
1	Adviser Rating Search functionality	Check adviser's profile page displays correct practice and	15	0	0	15	0.034 s
	validation	<u>addresses</u>					

DETAILED SECTION -- 4 --

## **(F)-** Adviser Rating Search functionality validation

FAILED	DURATION - 0.037 s	Scenarios		Steps	
/ 10 00 00 555 11		Total - 1		Total - 15	
/ 10:06:26.55/ AI	M // 10:06:26.594 AM /	Pass - 0	1	Pass - 0	15
		Fail - 1		Fail - 0	
		Skip - 0		Skip - 15	

## (S)- Check adviser's profile page displays correct practice and addresses

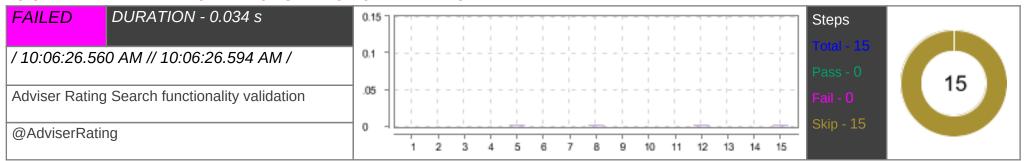

#	Step / Hook Details	Status	Duration
	BEFORE - stepdefinition.StepHooks.before(io.cucumber.java.Scenario)	FAILED	0.006 s
	java.lang.Error: Unresolved compilation problem: The method getADRWebDriverInstance() is undefined for the type ADRWebDriver		
	at com.adviserratinguiautomation.base.BaseTestScripts. <init>(BaseTestScripts.java:17)</init>		
	at com.adviserratinguiautomation.base.BaseTestFixture. <init>(BaseTestFixture.java:28)</init>		
	at com.adviserratinguiautomation.base.BasePage. <init>(BasePage.java:28)</init>		
	at stepdefinition.StepHooks. <init>(StepHooks.java:22)</init>		
	at sun.reflect.NativeConstructorAccessorImpl.newInstanceO(Native Method)		
	at sun.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62)		
	at sun.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)		
	at java.lang.reflect.Constructor.newInstance(Constructor.java:423)		
	at org.picocontainer.injectors.AbstractInjector.newInstance(AbstractInjector.java:145)		
	at org.picocontainer.injectors.ConstructorInjector\$1.run(ConstructorInjector.java:342)		
	at org.picocontainer.injectors.AbstractInjector\$ThreadLocalCyclicDependencyGuard.observe(AbstractInjector.java:270)		
	at org.picocontainer.injectors.ConstructorInjector.getComponentInstance(ConstructorInjector.java:364)		
	at org.picocontainer.injectors.AbstractInjectionFactory\$LifecycleAdapter.getComponentInstance(AbstractInjectionFactory.java:56)		
	at org.picocontainer.behaviors.AbstractBehavior.getComponentInstance(AbstractBehavior.java:64)		
	at org.picocontainer.behaviors.Stored.getComponentInstance(Stored.java:91)		
	at org.picocontainer.DefaultPicoContainer.getInstance(DefaultPicoContainer.java:699)		
	at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:647)		

#	Step / Hook Details	Status	Duration
	at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:678)		
	at io.cucumber.picocontainer.PicoFactory.getInstance(PicoFactory.java:49)		
	at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)		
	at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:59)		
	at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46)		
	at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21)		
	at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)		
	at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92)		
	at io.cucumber.core.runner.TestStep.run(TestStep.java:64)		
	at io.cucumber.core.runner.TestCase.run(TestCase.java:98)		
	at io.cucumber.core.runner.Runner.runPickle(Runner.java:71)		
	at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:151)		
	at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:135)		
	at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27)		
	at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)		
	at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)		
	at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)		
	at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)		
	at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)		
	at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)		
	at org.junit.runners.ParentRunner.run(ParentRunner.java:413)		
	at io.cucumber.junit.Cucumber.runChild(Cucumber.java:199)		
	at io.cucumber.junit.Cucumber.runChild(Cucumber.java:90)		
	at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)		
	at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)		
	at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)		
	at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)		
	at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)		
	at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:234)		
	at org.junit.internal.runners.statements.RunAfters.evaluate(RunAfters.java:27)		
	at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)		
	at org.junit.runners.ParentRunner.run(ParentRunner.java:413)		
	at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93)		
	at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40)		
	at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529)		
	at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756)		
	at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452)		
	at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)		
1	Given I Navigate to "AdviserratingURL"	SKIPPED	0.000 s
2	When I Click on Adviser Tab	SKIPPED	0.000 s
3	And Enter "Brett Dillon" on the Search box	SKIPPED	0.000 s

#	Step / Hook Details	Status	Duration
4	And Iterate the dropdown and select "Brett Dillon"	SKIPPED	0.000 s
5	Then The current Page URL which should contain "Brett-Dillon"	SKIPPED	0.001 s
6	And The Advisers profile image is displayed with src url contains "brett-andrew-dillon"	SKIPPED	0.000 s
7	And The name is "Brett Dillon"	SKIPPED	0.000 s
8	And The Advisor name is "Saige Financial Planning Pty Ltd"	SKIPPED	0.001 s
9	And The location will be "Erina, NSW 2250"	SKIPPED	0.000 s
10	And About tab is "About Brett"	SKIPPED	0.000 s
11	When The google map is displayed with the pin to the address in "Erina, NSW 2250"	SKIPPED	0.000 s
12	Then The Map URL center parameter value should contains "center=-33.4386,151.3868"	SKIPPED	0.001 s
13	And The practice name is displayed under the map is 'Saige Financial Planning Pty Ltd'	SKIPPED	0.000 s
14	And The practice logo is displayed	SKIPPED	0.000 s
15	And Address check is performed	SKIPPED	0.001 s
	AFTER - stepdefinition.StepHooks.AfterScenario(io.cucumber.java.Scenario)	FAILED	0.001 s
	at com.adviserratinguiautomation.base.BaseTestScripts.cinit>(BaseTestScripts.java:17) at com.adviserratinguiautomation.base.BasePastFixture.cinit>(BasePage.java:28) at com.adviserratinguiautomation.base.BasePage.cinit>(BasePage.java:28) at stepdefinition.StepHooks.cinit>(StepHooks.java:22) at sun.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at sun.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at sun.reflect.DelegatingConstructorAccessorImpl.newInstance(OelegatingConstructorAccessorImpl.java:45) at java.lang.reflect.Constructor.newInstance(Constructor.java:423) at org.picocontainer.injectors.AbstractInjector.newInstance(AbstractInjector.java:145) at org.picocontainer.injectors.ConstructorInjectorsI.run(ConstructorInjector.java:342) at org.picocontainer.injectors.ConstructorInjectorsI.run(ConstructorInjector.java:342) at org.picocontainer.injectors.AbstractInjector.getComponentInstance(ConstructorInjector.java:364) at org.picocontainer.injectors.AbstractInjector.getComponentInstance(ConstructorInjector.java:364) at org.picocontainer.behaviors.AbstractBehavior.getComponentInstance(ConstructorInjector.java:64) at org.picocontainer.behaviors.AbstractBehavior.getComponentInstance(ConstructorInjector.java:64) at org.picocontainer.behaviors.Stored.getComponentInstance(Stored.java:91) at org.picocontainer.DefaultPicoContainer.getInstance(DefaultPicoContainer.java:647) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:678) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:49) at io.cucumber.core.runner.RoceHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21)		

#	Step / Hook Details	Status	Duration
	at io.cucumber.core.runner.TestStep.run(TestStep.java:64)		
	at io.cucumber.core.runner.TestCase.run(TestCase.java:110)		
	at io.cucumber.core.runner.Runner.runPickle(Runner.java:71)		
	at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:151)		
	at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:135)		
	at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27)		
	at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)		
	at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)		
	at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)		
	at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)		
	at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)		
	at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)		
	at org.junit.runners.ParentRunner.run(ParentRunner.java:413)		
	at io.cucumber.junit.Cucumber.runChild(Cucumber.java:199)		
	at io.cucumber.junit.Cucumber.runChild(Cucumber.java:90)		
	at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)		
	at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)		
	at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)		
	at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)		
	at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)		
	at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:234)		
	at org.junit.internal.runners.statements.RunAfters.evaluate(RunAfters.java:27)		
	at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)		
	at org.junit.runners.ParentRunner.run(ParentRunner.java:413)		
	at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93)		
	at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40)		
	at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529)		
	at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756)		
	at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452)		
	at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)		