

✔ Successfully created bucket "jashu-bucket01"
To upload files and folders, or to configure additional bucket settings, choose [View details](#).

[View details](#)

Buckets

General purpose buckets

All AWS Regions

Directory buckets

General purpose buckets (1) [Info](#)

Buckets are containers for data stored in S3.



Copy ARN

Empty

Delete

Create bucket

🔍 Find buckets by name

< 1 > 

	Name	AWS Region	Creation date
	jashu-bucket01	Asia Pacific (Mumbai) ap-south-1	March 5, 2026, 11:25:57 (UTC+05:30)

► **Account snapshot** [Info](#)

Info

[View dashboard](#)

Updated daily


Storage Lens provides visibility into storage usage and activity trends.

► **External access summary** [Info](#)

Info

Updated daily

External access findings help you identify bucket permissions that allow public access or access from other AWS accounts.

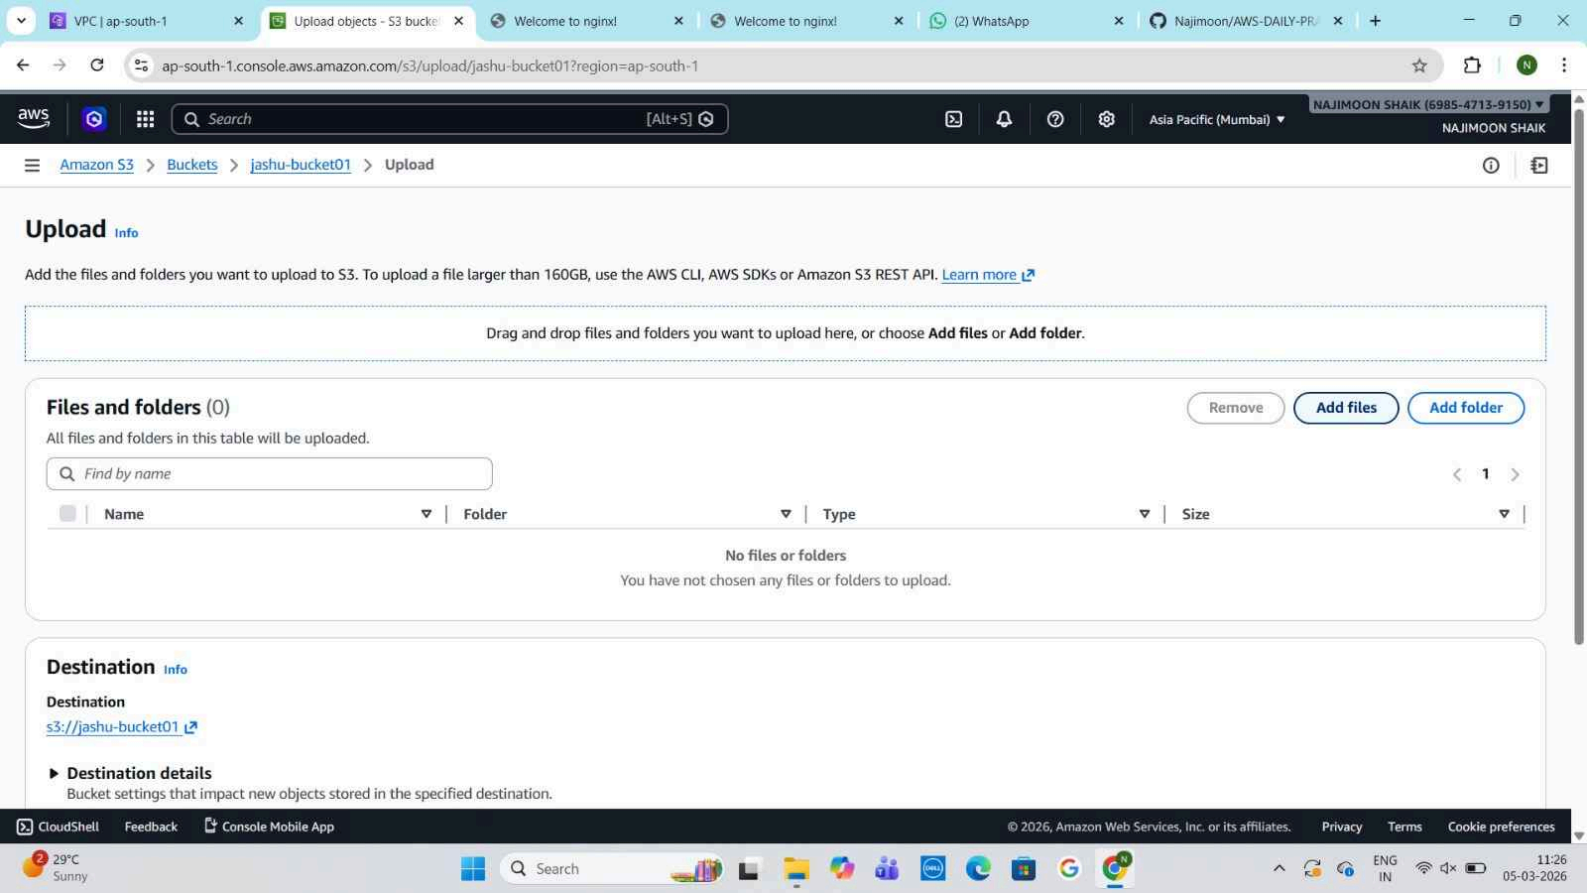

✔ **Upload succeeded**
For more information, see the **Files and folders** table.

 After you navigate away from this page, the following information is no longer available.

Summary

Destination
s3://jashu-bucket01

Succeeded
✔ 1 file, 38.0 KB (100.00%)

Failed
⊖ 0 files, 0 B (0%)

Files and folders

Configuration

Files and folders (1 total, 38.0 KB)

 Find by name

Name	Folder	Type	Size	Status	Error
black.jpg	-	image/jpeg	38.0 KB	✔ Succeeded	-

This XML file does not appear to have any style information associated with it. The document tree is shown below.

```
<Error>
  <Code>AccessDenied</Code>
  <Message>Access Denied</Message>
  <RequestId>KY9TG7SZ9W18THPB</RequestId>
  <HostId>birZI/TJ7nmUHuYcfImZ7MBuS/u0VjcE67Iwp6vezaL5Yk6+Q2/vcEnY/G9q3soyts2e9sI6UVtz6F6JUFU/g66KAxn+1wYe</HostId>
</Error>
```

ap-south-1

Edit Block Public Access se

Welcome to nginx!

(2) WhatsApp

Najimoon/AWS-DAILY-PR/

jashu-bucket01.s3.ap-sou

ap-south-1.console.aws.amazon.com/s3/bucket/jashu-bucket01/property/bpa/edit?region=ap-south-1

aws

Search

[Alt+S] Ask Amazon Q

Asia Pacific (Mumbai)

NAJIMOON SHAIK (6985-4713-9150)

NAJIMOON SHAIK

Amazon S3 > Buckets > jashu-bucket01 > Edit Block public access (bucket settings)

Info

Block public access (bucket settings)

Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to all your S3 buckets and objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to your buckets or objects within, you can customize the individual settings below to suit your specific storage use cases. [Learn more](#)

☐ Block all public access

Turning this setting on is the same as turning on all four settings below. Each of the following settings are independent of one another.

☐ Block public access to buckets and objects granted through new access control lists (ACLs)

S3 will block public access permissions applied to newly added buckets or objects, and prevent the creation of new public access ACLs for existing buckets and objects. This setting doesn't change any existing permissions that allow public access to S3 resources using ACLs.

☐ Block public access to buckets and objects granted through any access control lists (ACLs)

S3 will ignore all ACLs that grant public access to buckets and objects.

☐ Block public access to buckets and objects granted through new public bucket or access point policies

S3 will block new bucket and access point policies that grant public access to buckets and objects. This setting doesn't change any existing policies that allow public access to S3 resources.

☐ Block public and cross-account access to buckets and objects through any public bucket or access point policies

S3 will ignore public and cross-account access for buckets or access points with policies that grant public access to buckets and objects.

Cancel

Save changes

CloudShell

Feedback

Console Mobile App

© 2026, Amazon Web Services, Inc. or its affiliates.

Privacy

Terms

Cookie preferences


NIFTY

+0.72%

Search

11:29

05-03-2026

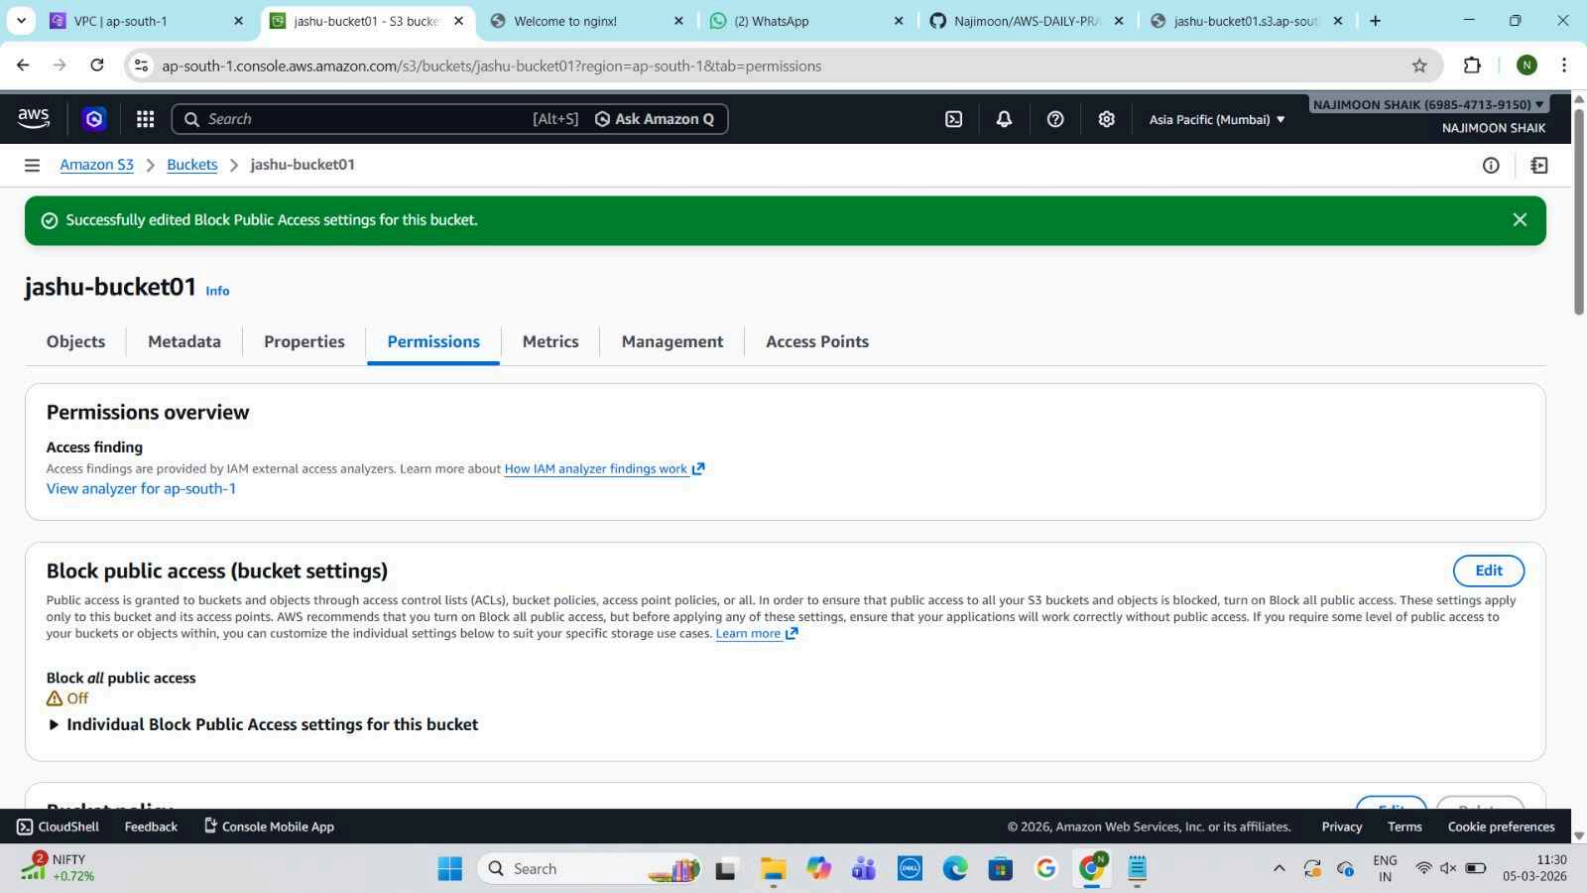

jashu-bucket01 [Info](#)

Objects Metadata Properties Permissions

Objects (1/1)

	Name	Type
--	------	------

black.jpg

Share "black.jpg" with a presigned URL

Presigned URLs are used to grant access to an object for a limited time. [Learn more](#)

- i** Anyone can access the object with this presigned URL until it expires, even if the bucket, and object are private.

Time interval until the presigned URL expires

Using the S3 console, you can share an object with a presigned URL for up to 12 hours or until your session expires. To create a presigned URL with a longer time interval, use the AWS CLI or AWS SDK. Time intervals for presigned URLs can be restricted by your IAM policy.

 Minutes

Hours

Number of minutes


5

Must be a whole number between 1 and 720.

After you create the presigned URL, it's automatically copied to your clipboard.

Cancel

Create presigned URL

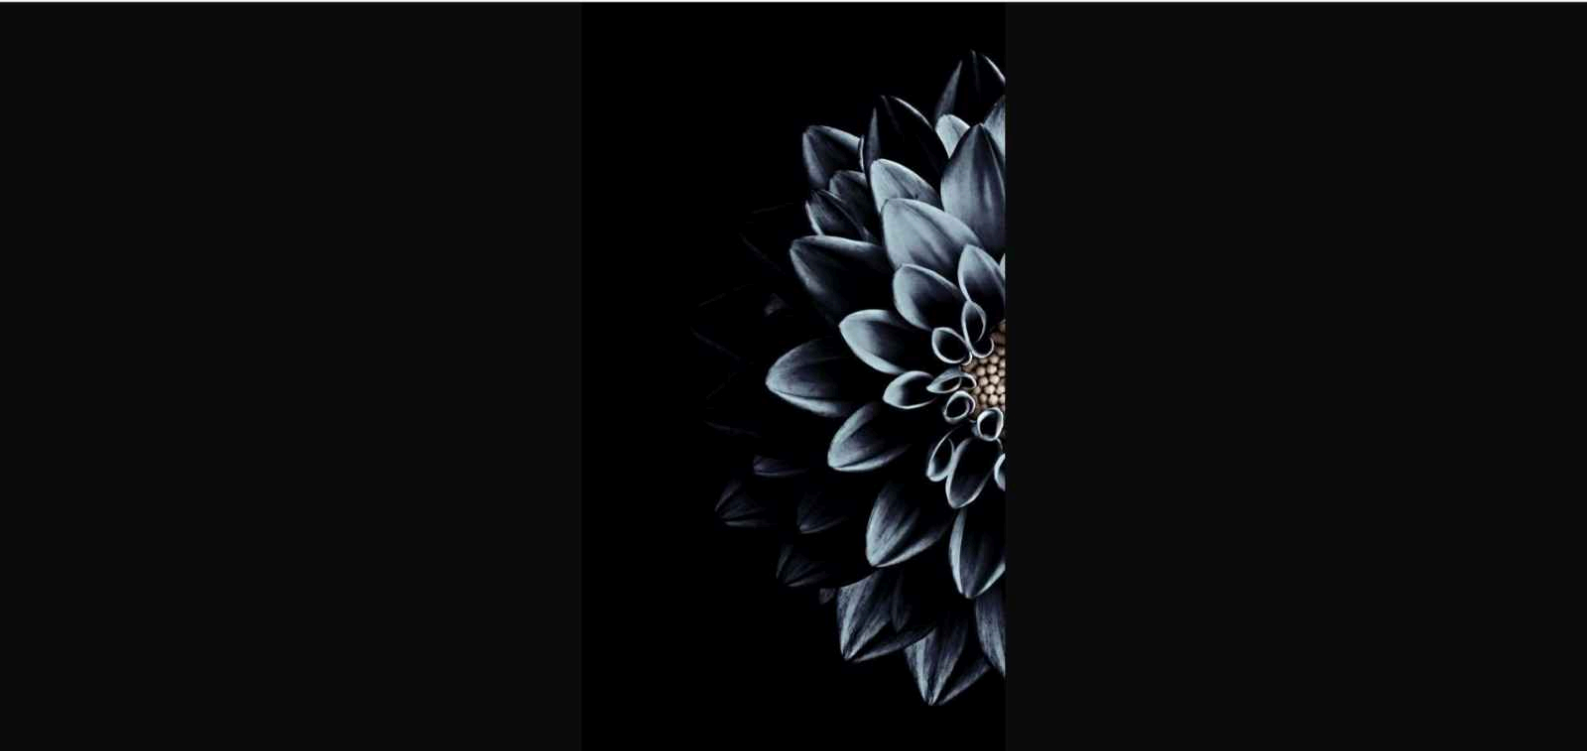

AWS Command Line Interface

User Guide for Version 2

- About the AWS CLI
- Get started
 - Prerequisites
 - Install/Update**
 - Past releases
 - Build and install from source
 - Amazon ECR Public/Docker
 - Setup
- Configure the AWS CLI
- Authentication and access credentials
- Using the AWS CLI
- AWS CLI examples
- Security
- Migration guide
- Uninstall
- Document History

Install and update re

- We support the AWS C
- Admin rights to install

Install or update the

To update your current inst
update to overwrite previo
released, see the [AWS CLI v](#)


- Download and run the
<https://awscli.amazonaws.com/AWSCLIV2.msi>
Alternatively, you can r

C:\> `msiexec.exe`

For various parameters that can be used with `msiexec`, see [msiexec](#) on the *Microsoft Docs* website. For example, you can use the `/qn` flag for a silent installation.

C:\> `msiexec.exe /i https://awscli.amazonaws.com/AWSCLIV2.msi /qn`

- To confirm the installation, open the **Start** menu, search for `cmd` to open a command prompt window, and at the command prompt use the `aws --version` command.

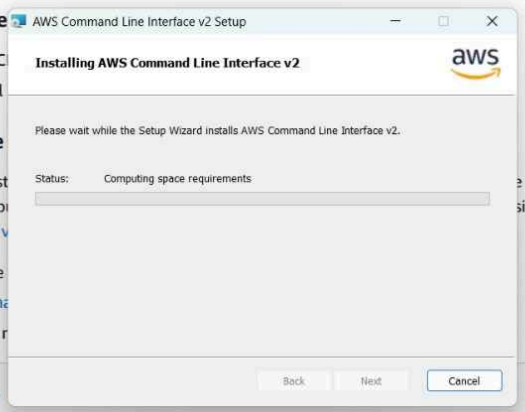

On this page

- [AWS CLI install and update instructions](#)
- Troubleshooting AWS CLI install and uninstall errors
- Next steps

Recommended tasks

Learn about

- [Understand supported AWS Regions for CloudShell service](#)

How to

- [Verify Session Manager plugin installation and test access](#)
- [Install and update the Session Manager plugin on Windows](#)


Recently added to this guide

```
C:\Users\sknaj\OneDrive\Desktop\aws5pm>aws configure
AWS Access Key ID [None]: AKIA2FJFH0JHHIK2HBZG
AWS Secret Access Key [None]: \VqUIUdKyQ80ZawNlxLQb/wjQP54PzCWXJCWhREo
Default region name [ap-south-1]:
```

```
C:\Users\sknaj\OneDrive\Desktop\aws5pm>aws configure
AWS Access Key ID [None]: AKIA2FJFH0JHHIK2HBZG
AWS Secret Access Key [None]: lVqUIUdKyQ80ZawNlxLQb/wjQP54PzCWXCWWhREo
Default region name [ap-south-1]:
Default output format [json]:
```

```
C:\Users\sknaj\OneDrive\Desktop\aws5pm>aws s3 ls
2026-03-05 11:30:13 jashu-bucket01
```

```
C:\Users\sknaj\OneDrive\Desktop\aws5pm>
```

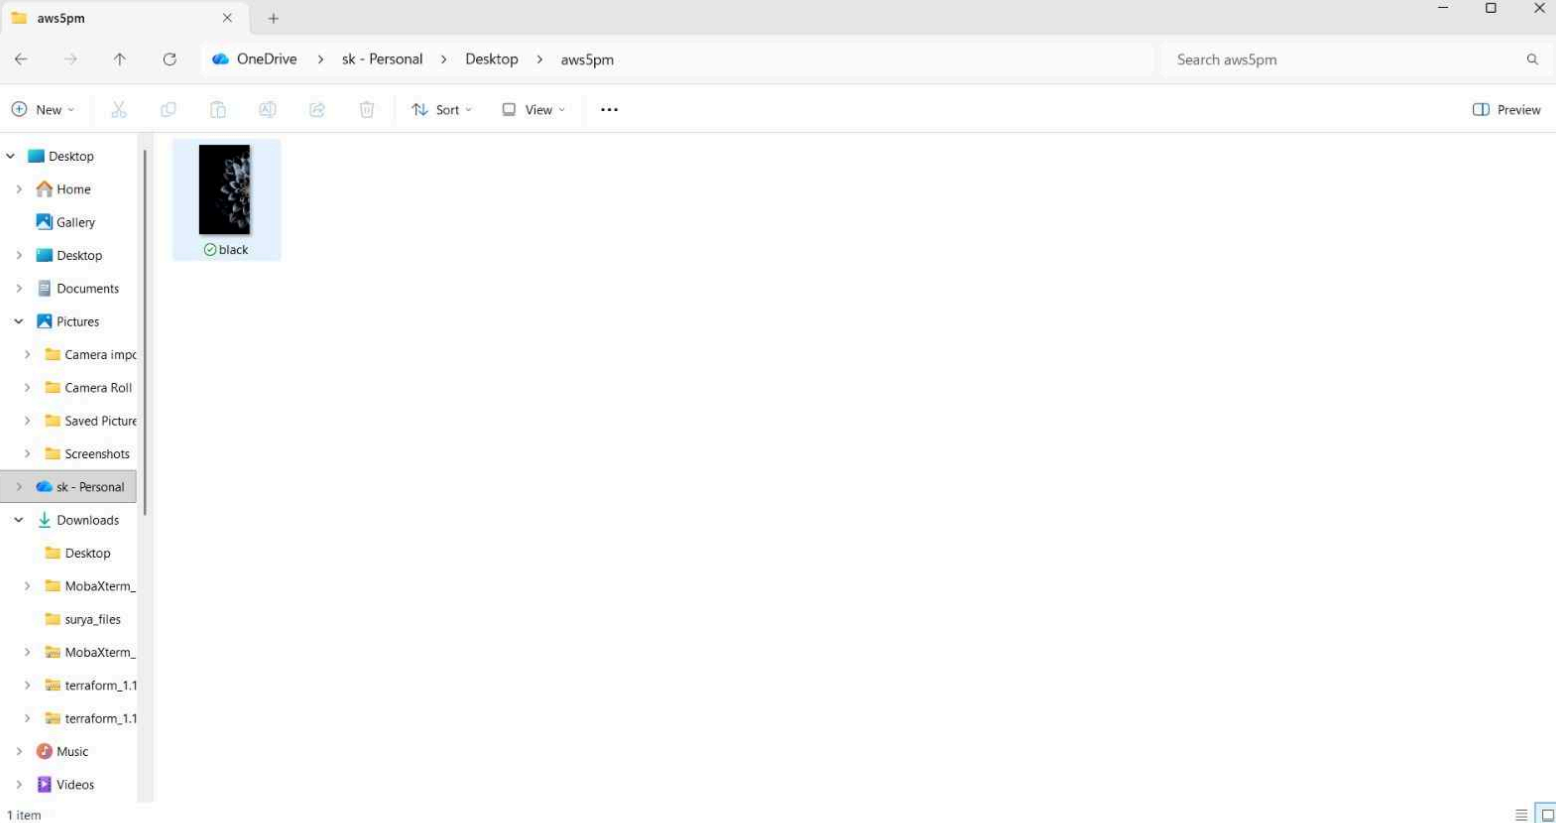

Bucket ARN
arn:aws:s3:::jashu-bucket01

Policy

```
1 {  
2   "Id": "BucketPolicy",  
3   "Version": "2012-10-17",  
4   "Statement": [  
5     {  
6       "Sid": "AllAccess",  
7       "Action": "s3:*",  
8       "Effect": "Allow",  
9       "Resource": [  
10        "arn:aws:s3:::jashu-bucket01",  
11        "arn:aws:s3:::jashu-bucket01/*"  
12      ],  
13       "Principal": "*"   
14     }  
15   ]  
16 }
```

Edit statement

Select a statement

Select an existing statement in the policy or add a new statement.



+ Add new statement

✓ Successfully edited bucket policy.

The bucket policy, written in JSON, provides access to the objects stored in the bucket. Bucket policies don't apply to objects owned by other accounts. [Learn more](#)

```
{
  "Version": "2012-10-17",
  "Id": "BucketPolicy",
  "Statement": [
    {
      "Sid": "AllAccess",
      "Effect": "Allow",
      "Principal": "*",
      "Action": "s3:*",
      "Resource": [
        "arn:aws:s3:::jashu-bucket01",
        "arn:aws:s3:::jashu-bucket01/*"
      ]
    }
  ]
}
```

📄 Copy

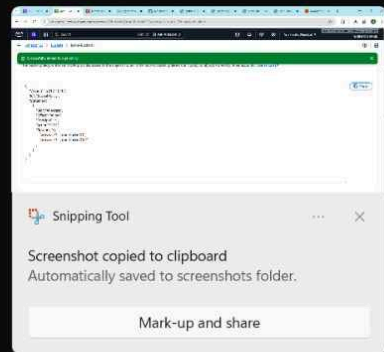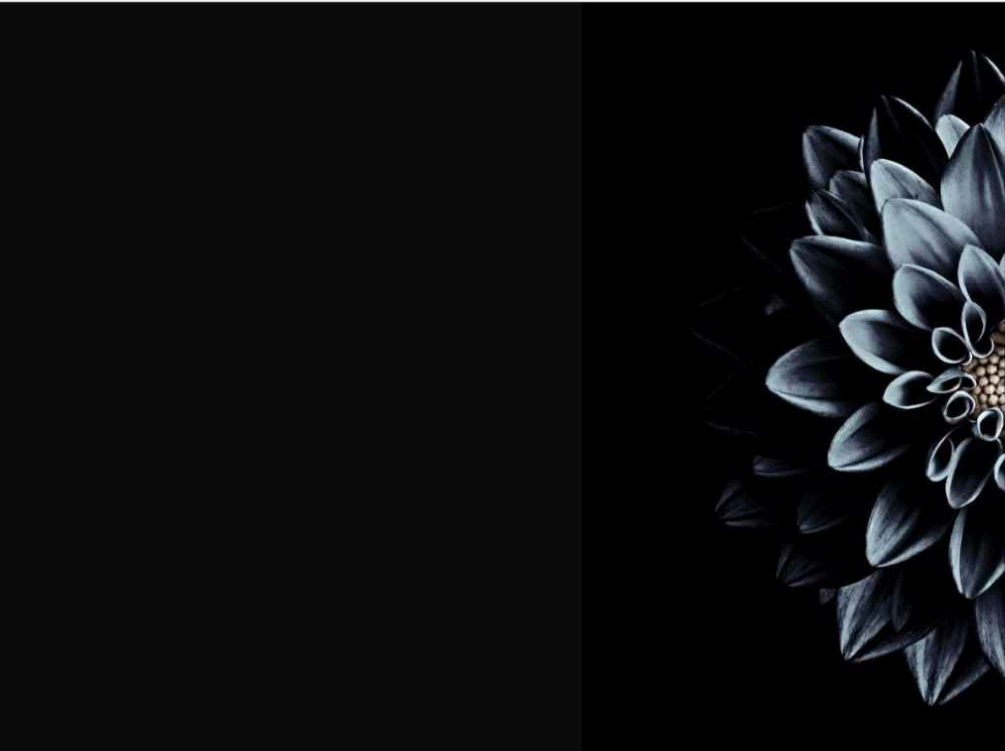

ap-south-1.console.aws.amazon.com/s3/buckets/jashu-bucket01?region=ap-south-1&tab=properties

aws

Search

[Alt+S] Ask Amazon Q

Asia Pacific (Mumbai)

NAJIMOON SHAIK (6985-4713-9150)

NAJIMOON SHAIK

Amazon S3

Buckets

jashu-bucket01

Object Lock

Store objects using a write-once-read-many (WORM) model to help you prevent objects from being deleted or overwritten for a fixed amount of time or indefinitely. Object Lock works only in versioned buckets. [Learn more](#)

Object Lock

Disabled

Edit

Requester pays

When enabled, the requester pays for requests and data transfer costs, and anonymous access to this bucket is disabled. [Learn more](#)

Requester pays

Disabled

Edit

Static website hosting

Use this bucket to host a website or redirect requests. [Learn more](#)

We recommend using AWS Amplify Hosting for static website hosting

Deploy a fast, secure, and reliable website quickly with AWS Amplify Hosting. Learn more about [Amplify Hosting](#) or [View your existing Amplify apps](#)

Create Amplify app

S3 static website hosting

Disabled

CloudShell

Feedback

Console Mobile App

© 2026, Amazon Web Services, Inc. or its affiliates.

Privacy

Terms

Cookie preferences

Hot days ahead
32°C

Search

12:26
05-03-2026

404 Not Found

- Code: NoSuchKey
- Message: The specified key does not exist.
- Key: index.html
- RequestId: 7Z6GED7WHSVHA72T
- HostId: MgF52bj/7vKgBvGqRrjiypdOj1tXr8ctvoxW3Lk6Psg/q+EtzuwsBLEouWSBaQyU//q7CnLCFR1QlgeIcf5EeizAnP1DbTUO

An Error Occurred While Attempting to Retrieve a Custom Error Document

- Code: NoSuchKey
- Message: The specified key does not exist.
- Key: error.html

Welcome to My Website

This is my first HTML webpage

[Home](#) [About](#) [Services](#) [Contact](#)

Hello!

This is a simple webpage created using HTML and CSS.

[Click Me](#)

© 2026 My Website