CS471 – Web Technologies (Laboratory)	Qassim University جامعة القصيم College of Computer | كلية الحاسب	Lab 3
		Django and MVT Architecture

By : Najla Mohammed Alfayez – 421202010

Task 1 + 2 + 3 + 4 (evaluated in the lecture)

Task 5 :

Step 1



Step 2



Result

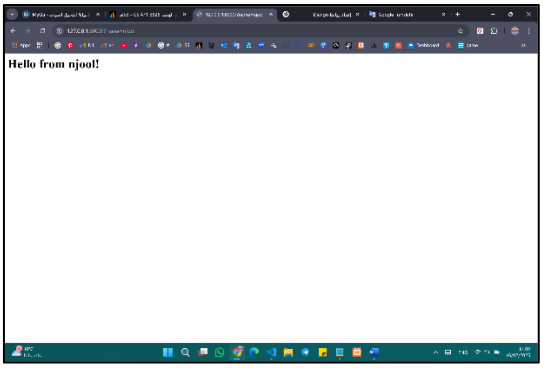

Task 6 :

step 1 : Create a new urls.py file for each app module(bookmodule and usermodule)

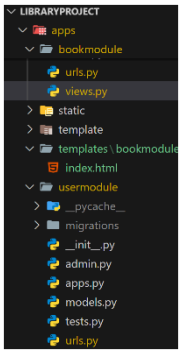

step 2 : DjangoProjects/urls.py

```
from django.contrib import admin
import apps.bookmodule.views
from django.urls import include, path

urlpatterns = [
    path('admin/', admin.site.urls),
    path('books/', include("apps.bookmodule.urls")), #include urls.py of bookmodule app
    path('users/', include("apps.usermodule.urls"))  #include urls.py of usermodule app
]
```

apps/bookmodule/urls.py

```python
from django.urls import path
from . import views
urlpatterns = [
    path('', views.index),
    # path('index2/<int:val1>/', views.index2)
    path('index2/<str:val1>/', views.index2, name="book_index2"),

]
```

apps/usermodule/urls.py

```python
from django.urls import path
urlpatterns = [
]
```

Step 3 : testing

In this task, the numbers should be printed and an error should be displayed if text was entered, but the code: `path('index2/<int:val1>/', views.index2)`

was not working because it specified that the input should only be numbers, so I changed it to : `path('index2/<str:val1>/', views.index2, name="book_index2")`

and re-edited the view so that it would return it as a number: `int_val = int(val1)`

```python
from django.http import HttpResponse
from django.shortcuts import render


def index(request):
    # 'name' variable has a default value of 'world'
    # if not provided in the URL query parameters
    name = request.GET.get('name', 'world')
    # Returns a response with a greeting message
    # including the provided or default name
    return HttpResponse("Hello, "+str(name))

def index2(request, val1 = 0):
    try:
        int_val = int(val1)
        return HttpResponse("value1 = "+str(val1))
    except ValueError:
        return HttpResponse("error, expected val1 to be integer")
```

result :

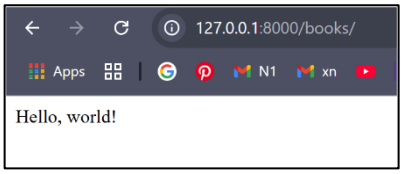

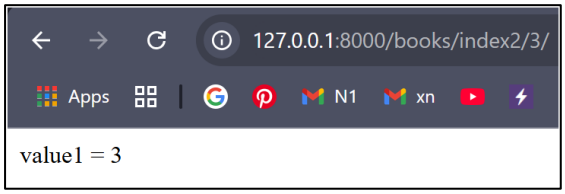

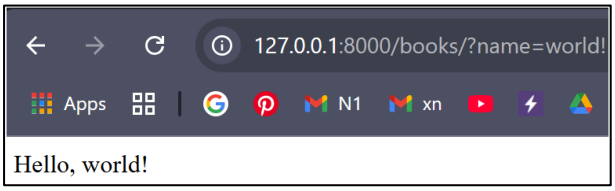

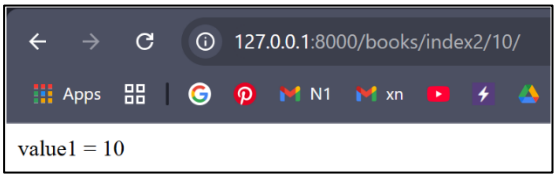

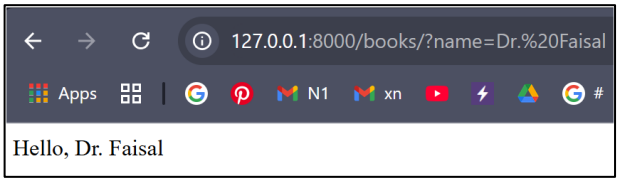

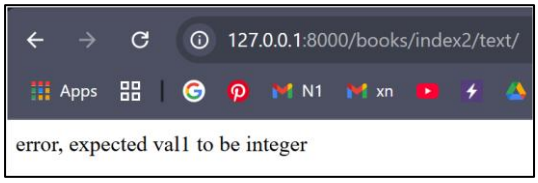

Task 7 :

step 1

```python
from django.http import HttpResponse
from django.shortcuts import render


def index(request):
    # 'name' variable has a default value of 'world'
    # if not provided in the URL query parameters
    name = request.GET.get('name', 'world')
    # Returns a response with a greeting message
    # including the provided or default name
    return HttpResponse("Hello, "+str(name))

def index2(request, val1 = 0):
    try:
        int_val = int(val1)
        return HttpResponse("value1 = "+str(val1))
    except ValueError:
        return HttpResponse("error, expected val1 to be integer")

def viewbook(request, bookId):
    # assume that we have the following books somewhere (e.g. database)
    book1 = {'id':123, 'title':'Continuous Delivery', 'author':'J. Humble and D. Farley'}
    book2 = {'id':456, 'title':'Secrets of Reverse Engineering', 'author':'E. Eilam'}
    targetBook = None
    if book1['id'] == bookId: targetBook = book1
    if book2['id'] == bookId: targetBook = book2
    context = {'book':targetBook} # book is the variable name accessible by the template
    return render(request, 'bookmodule/show.html', context)
```

Step 2

```python
from django.urls import path
from . import views
urlpatterns = [
    path('', views.index),
    # path('index2/<int:val1>/', views.index2)
    path('index2/<str:val1>/', views.index2, name="book_index2"),
    path('<int:bookId>', views.viewbook)
]
```

Step 3

```html
<h4>ID: {{ book.id }}</h4>
<h4>Title: {{ book.title }}</h4>
<h4>Authors</h4>
<p>{{ book.author }}</p>
<h4>Description</h4>
<p>Description here</p>
```
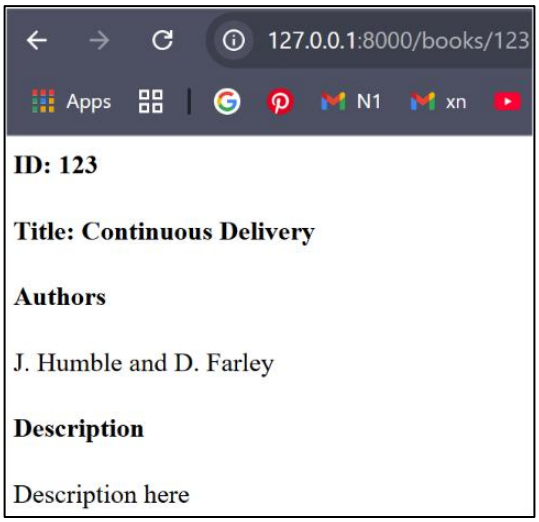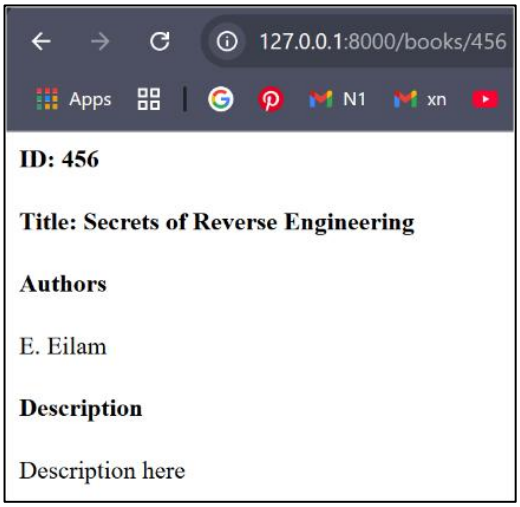
Step 4 – testing-