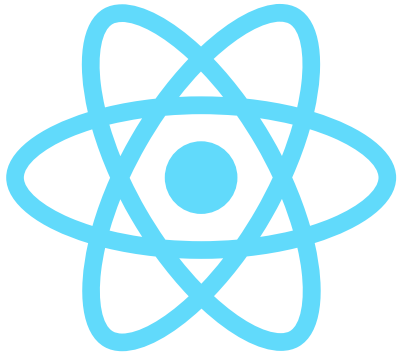


Activity 11 Cart and Bootstrap

Part 1 – Cart 

Part 2 - Bootstrap 

Sarfaraz Ahmed Mohammed, Ph.D.

For this second part, copy the shopping.jsx file to shoppingBootStrap.jsx and work all necessary modifications in this new file.

Keep shopping.jsx from part 1 with no modifications.

The TA will review the two files.

Adding Bootstrap to our Shopping Cart



Reference:
https://fakestoreapi.reactbd.com/
https://dev.to/papasanto/build-a-react-hooks-shopping-cart-with-usestate-and-useeffect-39hk
https://create-react-app.dev/docs/adding-bootstrap/


So far, we have this:

From :




We want this:

To :

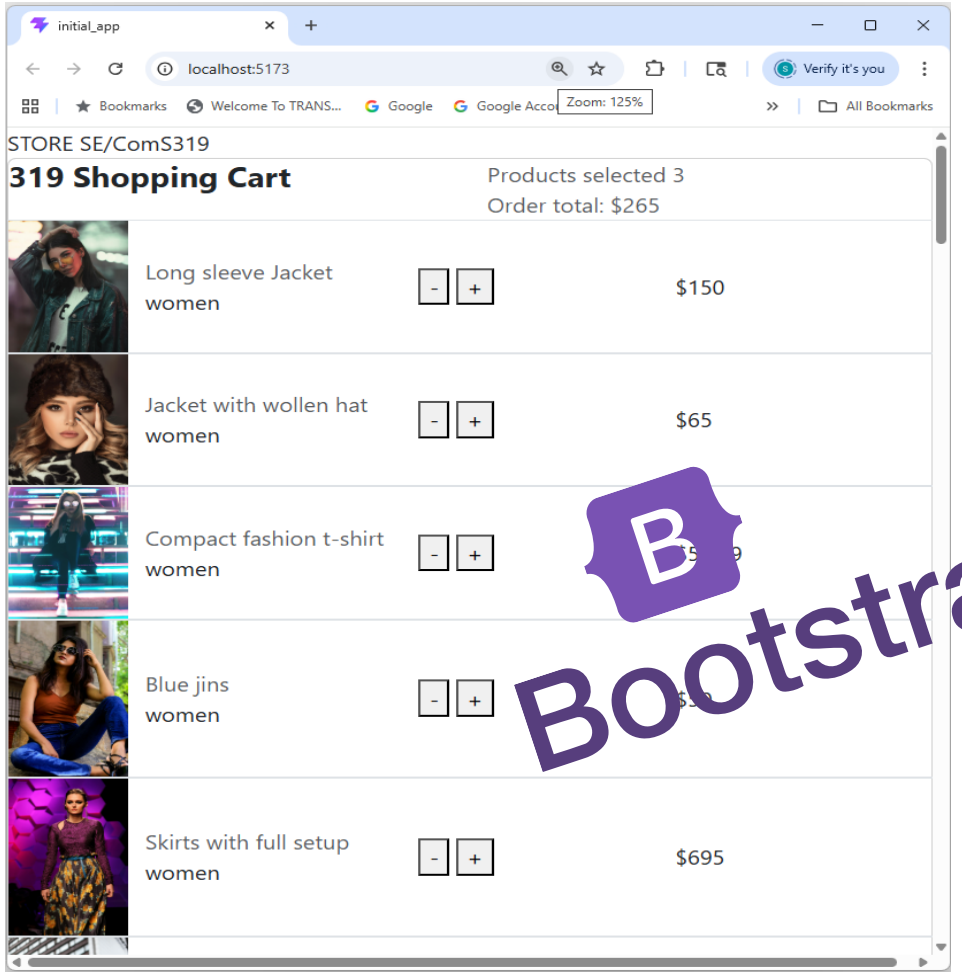


From the shown Shopping Cart, we are going to use the HTML styled using Bootstrap :

Got to this link: https://bbbootstrap.com/snippets/bootstrap-ecommerce-shopping-cart-item-summary-44021562

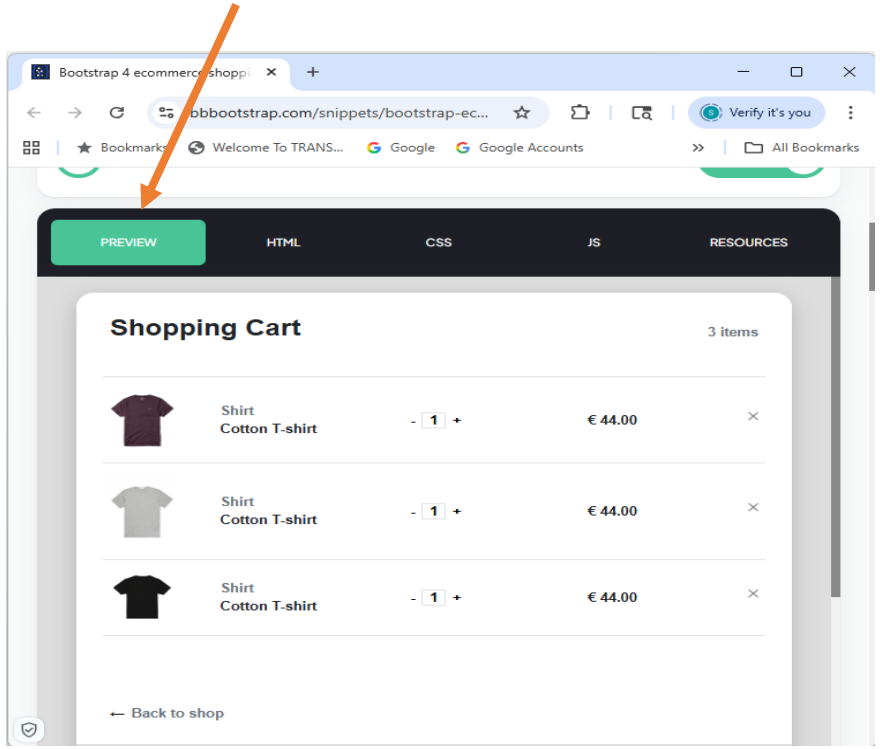

The we are going to use the HTML provided.

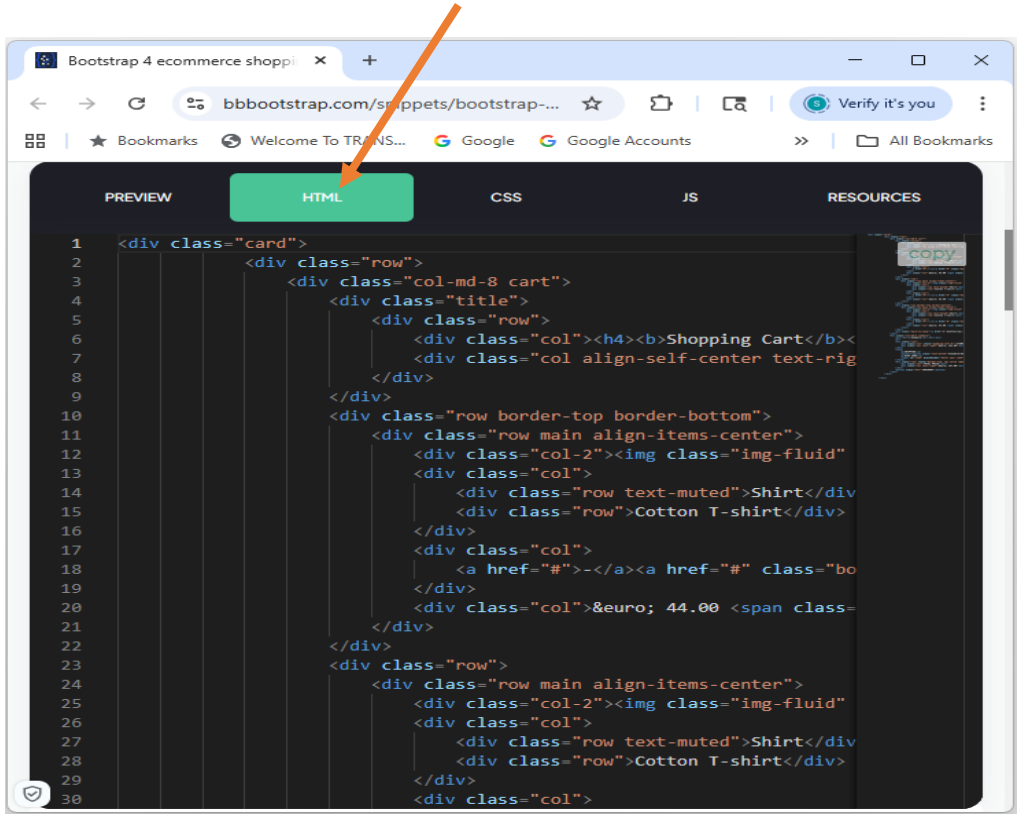

return

listItems



Install Bootstrap in React

Reference:
https://create-react-app.dev/docs/adding-bootstrap/

Adding Bootstrap

```
npm install bootstrap
```

Add Bootstrap to **main.jsx** :

```
import React from "react";
import ReactDOM from "react-dom/client";
import "bootstrap/dist/css/bootstrap.css";
import "./index.css";
import Shops from "./ShoppingBootstrap.jsx";
// Put any other imports below this point so that CSS from your
// components takes precedence over default styles.
```

The complete `main.jsx` looks as follows :

```jsx
import React from "react";
import ReactDOM from "react-dom/client";
import "bootstrap/dist/css/bootstrap.css";
import "./index.css";
import Shops from "./ShoppingBootstrap.jsx";

const root = ReactDOM.createRoot(document.getElementById("root"));

root.render(
  <React.StrictMode>
    <Shops />
  </React.StrictMode>
);
```


We are going to modify these two sections of code adding Boostrap CSS instructions :

```
  const listItems = items.map((el) => (
    <div key={el.id}>
      <img class="img-fluid" src={el.image} width={100} />
      {el.title}
      {el.category}
      {el.price}
      <button type="button" onClick={() => removeFromCart(el)}> - </button>{" "}
      <button type="button" variant="light" onClick={() => addToCart(el)}> +</button>
    </div>
  ));

  return (
    <div>
      <div>{listItems}</div>
      <div>Items in Cart :</div>
      <div>{cartItems}</div>
      <div>Order total to pay :{cartTotal}</div>
    </div>
  );
};

export default Shop;
```

Shopping.jsx

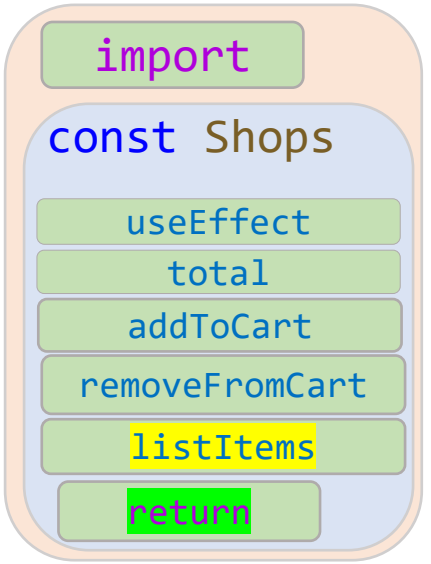

```
const listItems = items.map((el) => (
  <div key={el.id}>
    <img class="img-fluid" src={el.image} width={100} />
    {el.title}
    {el.category}
    {el.price}
    <button type="button" onClick={() => removeFromCart(el)}> - </button>{" "}
    <button type="button" variant="light" onClick={() => addToCart(el)}> +</button>
  </div>
));
```

```
const listItems = items.map((el) => (
  // PRODUCT
  <div class="row border-top border-bottom" key={el.id}>
    <div class="row main align-items-center">
      <div class="col-2">
        <img class="img-fluid" src={el.image} />
      </div>
      <div class="col">
        <div class="row text-muted">{el.title}</div>
        <div class="row">{el.category}</div>
      </div>
      <div class="col">
        <button type="button" variant="light" onClick={() => removeFromCart(el)} > - </button>{" "}
        <button type="button" variant="light" onClick={() => addToCart(el)}> + </button>
      </div>
      <div class="col">
        ${el.price} <span class="close">&#10005;</span>{howManyofThis(el.id)}
      </div>
    </div>
  </div>
));
```



Add a function to count products of same `id`:

```
function howManyofThis(id) {
  let hmot = cart.filter((cartItem) => cartItem.id === id);
  return hmot.length;
}
```

```
      <div class="col">
        ${el.price} <span class="close">&#10005;</span>
        {howManyofThis(el.id)}
      </div>
    </div>{" "}
  </div>
));
```

Shop.jsx

- import
- const Shop
  - useEffect
  - total
  - addToCart
  - removeFromCart
  - howManyofThis
  - listItems
  - return

```
return (
    <div>
      <div>{listItems}</div>
      <div>Itesm in Cart :</div>
      <div>{cartItems}</div>
      <div>Order total to pay :{cartTotal}</div>
    </div>
);
```

From this

We have this, adding Bootstrap

```
return (
  <div>
    STORE SE/ComS319
    <div class="card">
      <div class="row">
        {/* HERE, IT IS THE SHOPING CART */}
        <div class="col-md-8 cart">
          <div class="title">
            <div class="row">
              <div class="col">
                <h4>
                  <b>319 Shopping Cart</b>
                </h4>
              </div>
              <div class="col align-self-center text-right text-muted">
                Products selected {cart.length}
              </div>
            </div>
          </div>

          <div>{listItems}</div>
        </div>
        <div class ="float-end">
          <p class ="mb-0 me-5 d-flex align-items-center">
            <span class ="small text-muted me-2">Order total:</span>
            <span class ="lead fw-normal">${cartTotal}</span>
          </p>
        </div>
      </div>
    </div>
  </div>
);
};

export default Shop;
```

Shopping Cart

