

Brute Force Search

Examples of well-known algorithms

Key Concept

- This is general problem-solving technique
 - Work with very broad class of problem called **constraint satisfactory problem** (CSP) and its generalization called **constraint optimization problem** (COP)
 - Most problem can be considered as a CSP
 - Brute Force a basic tools for solving several problems
 - However, Brute Force is usually inefficient (slow)
- Work by defining **a set of all candidate solutions** then **enumerating each solution** and **check if it satisfies** the requirement on the problem
 - Recursive enumeration is usually needed
- Has many improvements and extension (cover later in the class)
 - Backtracking
 - Branch-and-bound

Constraint Satisfaction Problem (CSP)

- The problem must also give the set of possible value of each variables (maybe implicitly)
- The problem must give the constraints that we have to satisfy (usually over a set of variables that describes the output)
- Many problem may not describe explicitly as a CSP, but we can formulate it as one.

Example: Find a value in an array

เลขจาก 1 ถึง n เลขช่อง 1, 2, 3, ..., n

- Task: Finding a position of a value in an array
- Input: Array $A[1..n]$ and a value k
- Output: an integer i in the range 1 to n such that $A[i] = k$, or 0 when no such i exists

ตำแหน่งที่ค่า k? ถ้าไม่มีตอบ 0
- Example Instance:
 - $A = [1, -3, 5, 2, 3, 1, 5, 7, 9, 11, 4]$
 - $K = 5$

Formulating a problem as a CSP

ကံ့ နာလဲၣ်ၣ် solution

- Must define a description of a candidate solution
 - Usually, this is the same as an output
- Must define a set of candidate solution ၣ်ၣ် ဂီၣ်ၣ်ၣ်ၣ်ၣ်ၣ်
 - Usually, this is given as a range (or set) of possible value of each variable in the output
- Must define ^{ကံ့ နာလဲၣ်ၣ်} constraints, ၣ်ၣ်
 - Define in a way that we can check if a candidate solution satisfies the constraints
 - Usually, this mean we can write a code to check it
- There can be multiple way to formulate a problem as a CSP

Example: Find a value in an array

- **Task:** Finding a position of a value in an array
- **Input:** Array $A[1..n]$ and a value k
- **Output:** an integer i in the range 1 to n such that $A[i] = k$, or 0 when no such i exists

Candidate Solution	Set of candidate solution	Satisfaction condition
A single value i	$\{0, 1, \dots, N\}$	When $i > 0$, $A[i] = k$ When $i = 0$, there must be no K in a

Using Brute Force to solve a problem

- Let S be a set of candidate solutions
- Let T(x) be a function that test if a candidate solution x satisfies all constraints

```
def brute_force(S,T)
  for each x in S
    if T(x)
      return x
```

ถ้าพบก็ตอบกลับ

In practice, we need to write a code that enumerate all candidate solution and test according to the input of the problem

- That's it
- $O(|S| * O(T))$
↳ n^2

Example: Find a value in an array

- Task: Finding a position of a value in an array
- Input: Array $A[1..n]$ and a value k
- Output: an integer i in the range 1 to n such that $A[i] = k$, or 0 when no such i exists

```
def find(A,k)
  for i from 1 to A.length
    if A[i] = k
      return i
```

ถ้าไม่เจอ
return 0

Multiple solutions

- It is possible that there is a multiple solution in the candidate solution set that satisfy the constraints

$A = [1, -3, 5, 2, 3, 1, 5, 7, 9, 11, 4]$
 $K = 5$

The solution can be either 3 or 7
because $A[3] = 5$ and $A[7] = 5$

Example: Find a pair sum equal to K

- **Task:** Given an array, find two distinct elements in the array such that its summation is equal to k
- **Input:** $A[1..n]$, k
- **Output**
 - Two integers, p and q such that $A[p] + A[q] = k$ and $p \neq q$
 - Two integers, 0 and 0 when we cannot find such p and q



Candidate Solution	Set of candidate solution	Satisfaction condition
(p,q)	$\{(1,2), (1,3), \dots (1,N),$ $(2,1), (2,2), \dots (2,N),$ $\dots,$ $(N-1,N), (0,0)\}$	When $p \neq 0$ and $q \neq 0$, $A[p] + A[q] = k$ When $p = 0$ and $q = 0$, there is no other member in the candidate solution that satisfy $A[p] + A[q] = k$

Constraint and Set of candidate solutions

- Set of candidate solutions and constraints are often related
- One problem can be formulated with different constraints and set of candidate solutions
- For example, consider a pair sum equal to K problem

Candidate Solution	Set of candidate solution	Satisfaction condition
(p,q)	$\{(1,2), (1,3), \dots (1,N),$ $(2,3), (2,4), \dots (2,N),$ $\dots,$ $(N-1,N), (0,0)\}$	When $p \neq 0$ and $q \neq 0$, $A[p] + A[q] = k$ When $p = 0$ and $q = 0$, there is no other member in the candidate solution that satisfy $A[p] + A[q] = k$
Candidate Solution	Set of candidate solution	Satisfaction condition
(p,q)	$\{(1,1), (1,2), \dots (1,N),$ $(2,1), (2,2), \dots (2,N),$ $\dots,$ $(N,1), (N,2), \dots (N,N), (0,0)\}$	$p < q$ When $p \neq 0$ and $q \neq 0$, $A[p] + A[q] = k$ When $p = 0$ and $q = 0$, there is no other member in the candidate solution that satisfy $A[p] + A[q] = k$

Larger set, need more time to enumerate

Example: Common Divisor

- **Task:** Find any common divisor
- **Input:** Two positive integers A and B
- **Output:** a positive integer d such that $A \% d == 0$ and $B \% d == 0$

Candidate Solution	Set of candidate solution	Satisfaction condition
d	$\{1, \dots, \min(A, B)\}$	$A \% d == 0$ and $B \% d == 0$

Constraint Optimization Problem (COP)

- An extension to CSP by including an **objective function** in the problem
- The goal is not only to find a solution that satisfies all constraints but the solution must give minimal (or maximal) value of the objective function over all satisfied solution

↓
หาค่าที่เหมาะสมที่สุด

Example: Greatest Common Divisor

- **Task:** Find a maximum common divisor
- **Input:** Two positive integer A and B
- **Output:** a positive integer d such that $A \% d == 0$ and $B \% d == 0$ that is maximum
- • **Objective function:** $f(d) = d$
 - (we just need a maximum value of the output)

} หารกันจนลงตัว

Using Brute Force for COP

- Let S be a set of candidate solutions
- Let $T(x)$ be a test function
- Let $O(x)$ be an objective function
- Very similar to CSP
 - But we must enumerate every member of S

```
def brute_force_opt(S,T,O)
    best = INFINITY
    for each x in S
        if T(x) && O(x) < best
            best = O(x)
            best_answer = x
    return best_answer
```

$$O(|S| \cdot O(T))$$

$$\textcircled{+} [|S| \cdot O(T)] + O(|S| \cdot O(O))$$

ထိုစဉ်အတွင်းမှာ အကုန်လုံး

အကုန်လုံးအတွက် အကုန်လုံး

Example: Maximum Different Value in an Array

- **Task:** Find two different elements in the array such that their different is maximum
- **Input:** $A[1..n]$
- **Output:** Two integers, p and q such that $p \neq q$
- **Objective function:** $f(p,q) = |A[p] - A[q]|$

ဂုဏ်ကံလှိုင်

$p \neq q$

```
def two_diff(A)
    max_diff = 0
    ans = nil
    for i in 1..(n-1)
        for j in i+1..n
            diff = abs(A[i]-A[j])
            if diff > max_diff
                max_diff = diff
                ans = [i,j]
            end
        end
    end
    return ans
end
```


Exercise

- Write
 - Definition of a candidate solution
 - A candidate solution set
 - A function to check if a candidate solution is the one that we want

Ex2

- **Task:** find a perfect number in the range a to b
- **Input:** two integer a and b
- **Output:** and integer x that $a \leq x < b$ and x is perfect (sum of its sum of its positive divisor equal to itself, e.g., 6 is a perfect number because $1+2+3 = 6$)

Ex3

- Task: Maximum sum in range
- Input: An array $A[1..n]$ and an integer w
- Output: an index b such that sum of $A[b] + A[b+1] + \dots + A[b+w-1]$

Ex3

- **Task:** find smallest rectangle that contains all points
- **Input:** A 2D array $A[1..R][1..C]$ where $A[i][j]$ is either true or false
- **Output:** $(r1, c1)$ and $(r2, c2)$ such that for every (i, j) that $A[i][j]$ is true, $(r1 \leq i \leq r2)$ and $(c1 \leq j \leq c2)$

ຈຸດປະສານຂອງການຈຳລອງ

Combination and Permutation

Candidate Set based on perm and combi

- Often, the candidate set consists of permutations of a sequence, or a combination of a set
- Permutation of a sequence is an arrangement of a sequence
 - E.g., for a sequence [1,2,3], there are 6 permutations: [1,2,3], [1,3,2], [2,1,3], [2,3,1], [3,1,2], [3,2,1]
- Combination of a set is a selection of members of the set
 - E.g., for a set {a,b,c}, there are 8 combinations of its members, {}, {a}, {b}, {c}, {a,b}, {b,c}, {a,c}, {a,b,c}
- Enumerating all combinations or permutation can be done easily by recursion

Combination Example

- Subset sum problem *↗ dynamic programming*
เลือกก็ได้ไม่ก็ได้
- Task: find a subset of a given array such that its sum is K
- Input: An array A, an integer K
- Output: a set $\{i_1, i_2, \dots, i_m\}$ such that $A[i_1] + A[i_2] + \dots + A[i_m] =$
1 5 3
 $A[1] + A[5] + A[3] = K$

*for $i_1 = 0 \dots 1$
 $i_2 = 0 \dots 1$
 $i_3 = 0 \dots 1$
 ...*

Candidate Solution	Set of candidate solution	Satisfaction condition
$\{i_1, i_2, \dots, i_m\}$	Power set of $\{1, 2, \dots, N\}$	$A[i_1] + A[i_2] + \dots + A[i_m] = k$

Example Instance

• Ex1:

• $A = [9,4,5]$, $K = 9$

• Solution

• $\{1\}$ $(A[1] = 9)$

• $\{2,3\}$ $(A[2]+a[3] = 9)$

• Ex2:

• $A = [10,40,30,20]$, $k = 60$

• Solution

• $\{2,4\}$ $(a[2] + a[4] = 60)$

• $\{1,3,4\}$ $(a[1] + a[3] + a[4] = 60)$

A[1]	A[2]	A[3]	Candidate solution				
			A[1]	A[2]	A[3]	A[4]	Candidate solution
✓							{ }
	✓		✓				{1}
✓	✓			✓			{2}
		✓	✓	✓			{1,2}
✓		✓			✓		{3}
	✓	✓	✓		✓		{1,3}
✓	✓	✓		✓	✓		{2,3}
			✓	✓	✓		{1,2,3}
						✓	{4}
			✓			✓	{1,4}
				✓		✓	{2,4}
			✓	✓		✓	{1,2,4}
					✓	✓	{3,4}
			✓		✓	✓	{1,3,4}
				✓	✓	✓	{2,3,4}
			✓	✓	✓	✓	{1,2,3,4}


= 9)

= 60)

+ a[4] = 60)

Permutation Example

- Task: find a path in a graph
- Input: A graph $G=(V,E)$, two vertices p and q
- Output: A path in the graph start with p and end with q

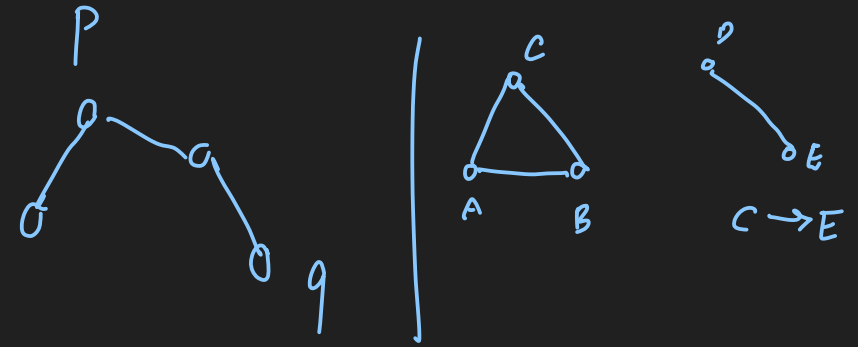

Candidate Solution	Set of candidate solution	Satisfaction condition
$[v_1, v_2, \dots, v_k]$ <i>p</i> <i>q</i>	Every permutation of size $1 \dots V $ of vertices $O(n^2)$	<i>replacement</i> (v_i, v_{i+1}) is an edge for every i from 1 to $k-1$ $V_1 = p$ $V_k = q$

1. list von edge
2. list von vertices


$$O\left(\frac{n^2}{2} + \frac{n}{2}\right) \rightarrow \frac{n^2}{2} + \frac{n}{2} \in O(n)^2$$

Example Instance

Ex1:

V

E




- $G = (\{a,b,c\}, \{(a,c), (c,b)\})$
- $p = a, q = b$
- Solution
 - $[a,c,b]$

Ex2:

V

E

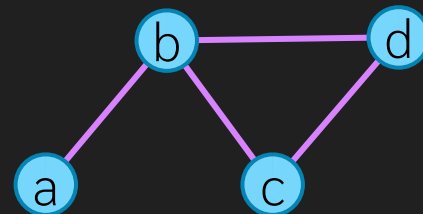

- $G = (\{a,b,c,d\}, \{(a,b), (b,d), (b,c), (c,d)\})$
- $p = a, q = d$
- Solution
 - $[a,b,c,d]$
 - $[a,b,d]$

Path length	Candidate solution
1	$[a], [b], [c],$
2	$[a,b], [a,c], [b,a], [b,c], [c,a], [c,b]$
3	$[a,b,c], [a,c,b], [b,a,c], [b,c,a], [c,a,b], [c,b,a]$

จะเพิ่มก็ได้เหมือนกัน จะลบจะ

$[b,b]$

เลือกพวกนี้ไม่ได้ดีกว่า

Path length	Candidate solution
1	$[a], [b], [c], [d]$
2	$[a,b], [a,c], [b,a], [b,c], [c,a], [c,b]$ $[a,d], [b,d], [c,d], [d,a], [d,b], [d,c]$
3	$[a,b,c], [a,c,b], [b,a,c], [b,c,a], [c,a,b], [c,b,a]$ $[a,b,d], [a,c,d], [a,d,b], [a,d,c],$ $[b,a,d], [b,c,d], [b,d,a], [b,d,c],$ $[c,a,d], [c,b,d], [c,d,a], [c,d,b]$
4	$[a,b,c,d], [a,b,c,d], [a,c,b,d], [a,c,d,b], [a,d,b,c], [a,d,c,b],$ $[b,a,c,d], [b,a,d,c], [b,c,a,d], [b,c,d,a], [b,c,a,d], [b,c,d,a],$ $[c,a,b,d], [c,a,d,b], [c,b,a,d], [c,b,d,a], [c,d,a,b], [c,d,b,a],$ $[d,a,b,c], [d,a,c,b], [d,b,a,c], [d,b,c,a], [d,c,a,b], [d,c,b,a]$

Generating all combinations

$i_1 \ i_2 \ i_3$
 $[1, 0, 1]$

- We have N items, we want to generate all combinations of these items

- Recursive Programming

- Very similar to the binary counter in the complexity analysis topics
- At i^{th} step, we decide if the i^{th} item is selected

- `combination(len, sol)`

- Array `sol` (`sol[i] == true` when we use i^{th} item)
- Start by call `combination(N, [])`
- Each candidate solution is enumerated every time we reach the else block

```
def combination(N, sol)
  if sol.length < N
    sol_a = sol + [0]
    combination(N, sol_a)
    sol_b = sol + [1]
    combination(N, sol_b)
  else
    #sol is array of length N
    #sol[i] = 1 when we pick item I
    print sol - check
    #each candidate solution is here
  end
end
```

`sol 3`
000
001
010
011
100
101
110
111

$i_1 \ i_2 \ i_3$
1 0 0
0 1 0
0 0 1

สิ่งที่ต้อง
Array ที่บอกไว้เลือก/ไม่เลือก

} binary

- check

Gen combination (c++)

```
#include <iostream>
#include <vector>
using namespace std;

void combi(int n, vector<int> &sol, int len) {
    if (len < n) {
        sol[len] = 0;
        combi(n, sol, len+1);
        sol[len] = 1;
        combi(n, sol, len+1);
    } else {
        for (int i = 0; i < n; i++)
            if (sol[i] == 1)
                cout << i+1 << " ";
        cout << "." << endl;
    }
}

int main() {
    vector<int> sol(3);
    combi(3, sol, 0);
}
```

reference so don't need to copy


จะไม่ได้ไม่หัด resize

สร้างให้พอหมด-1158

print

- Slightly different from the pseudo-code

- Create the array with large enough size
- len indicates the current actual size
- Use pass-by-reference to speed up

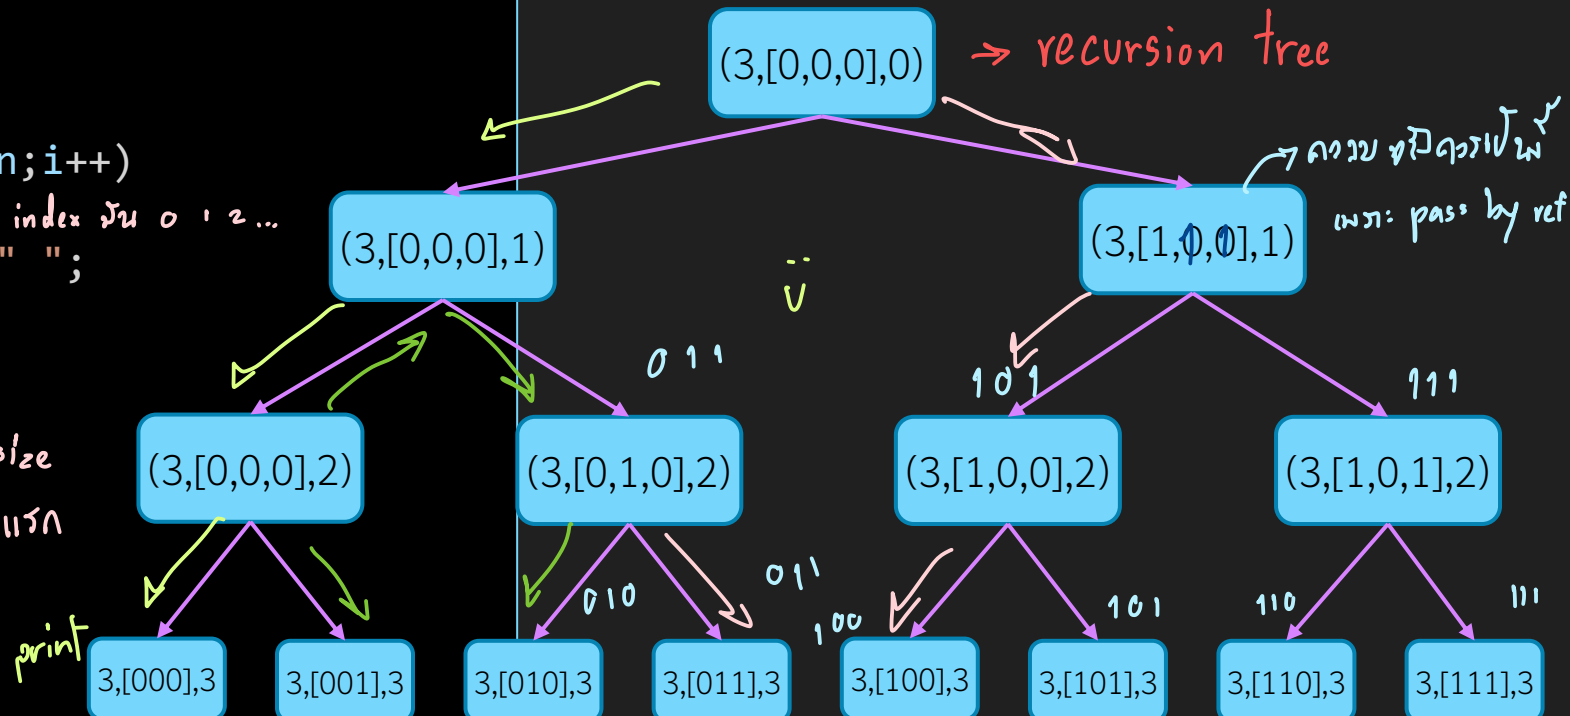


output

```
. 123
3 . 12
2 . 13
2 3 . 123
1 . 2
1 3 . 3
1 2 .
1 2 3 .
```

Recursion Tree

- A **tree** that display function calling
- **Nodes** = each function call
 - Put parameters (or related input) in a node, can omit irrelevant one
 - Root node display the first function call
 - Leaf nodes are where **terminating condition** is met
- Directed **edges** = associate calling and caller
ใครเรียกใคร
- Can draw one node per line and top-to-bottom to emphasize order of calling

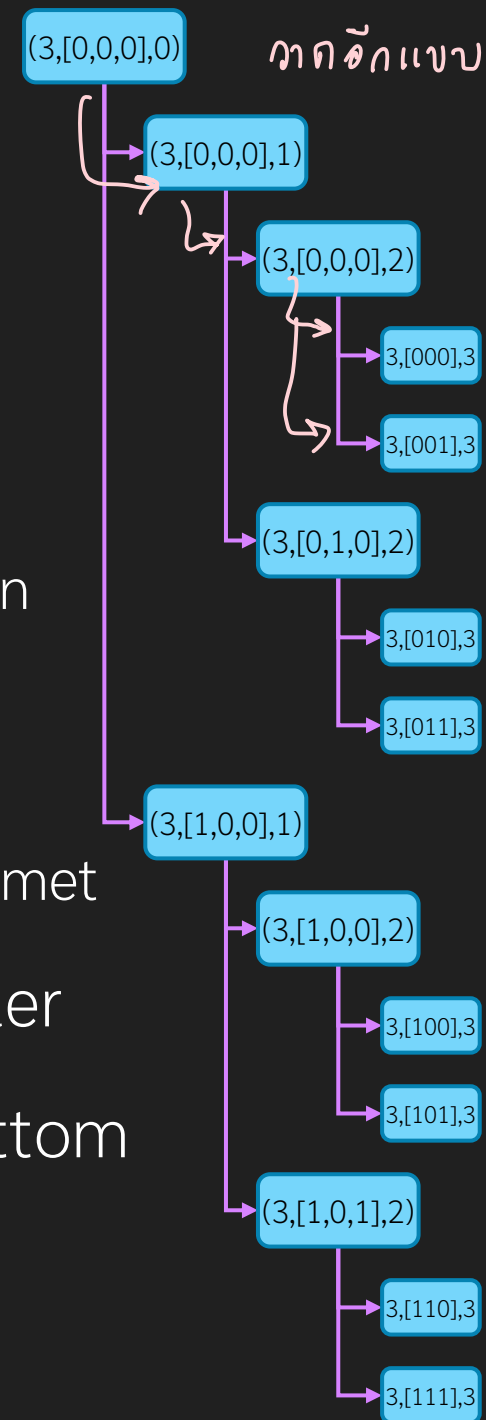


เปลี่ยนที่ค่า แล่นับ
ตัวกับชื่อคน

Exercise

```
void combi(int n,vector<int> &sol,int len) {
    if (len < n) {
        sol[len] = 0;
        combi(n,sol,len+1);
        sol[len] = 1;
        combi(n,sol,len+1);
    } else {
        for (int i = 0;i < n;i++)
            if (sol[i] == 1)
                cout << i+1 << " ";
        cout << "." << endl;
    }
}

int main() {
    vector<int> sol(3);
    combi(3,sol,0);
}
```



- What happen when we swap **A** and **B**
 - what is the output
 - Can we draw a recursion tree

Generating all permutations


```
def permutation(N,sol)
  if sol.length < N
    for i in {1..N}
      if there is no i in sol
        sol_new = sol + [i]
        permutation(N,sol_new)
      end
    end
    #sol is array of length N
    #sol[i] = 1 when we pick item i
    print sol
  end
end
```

- Also like the combination, except
- At i^{th} step, we decide if the item for the i^{th} position of the answer
 - There are N choices at each step (recursion tree is N -ary tree)
- Do not pick item that is already included
 - If it's permutation with replacement, we can skip this one

สร้างการเรียงสับเปลี่ยน

Gen permutation (c++)

```
void perm(int n,vector<int> &sol,int len,vector<bool> &used) {  
    if (len < n) {  
        for (int i = 1;i<=n;i++) {  
            if (used[i] == false) {  
                used[i] = true;  
                sol[len] = i;  
                perm(n,sol,len+1,used);  
                used[i] = false;  
            }  
        }  
    } else {  
        for (auto &x : sol) cout << x;  
        cout << endl;  
    }  
}
```

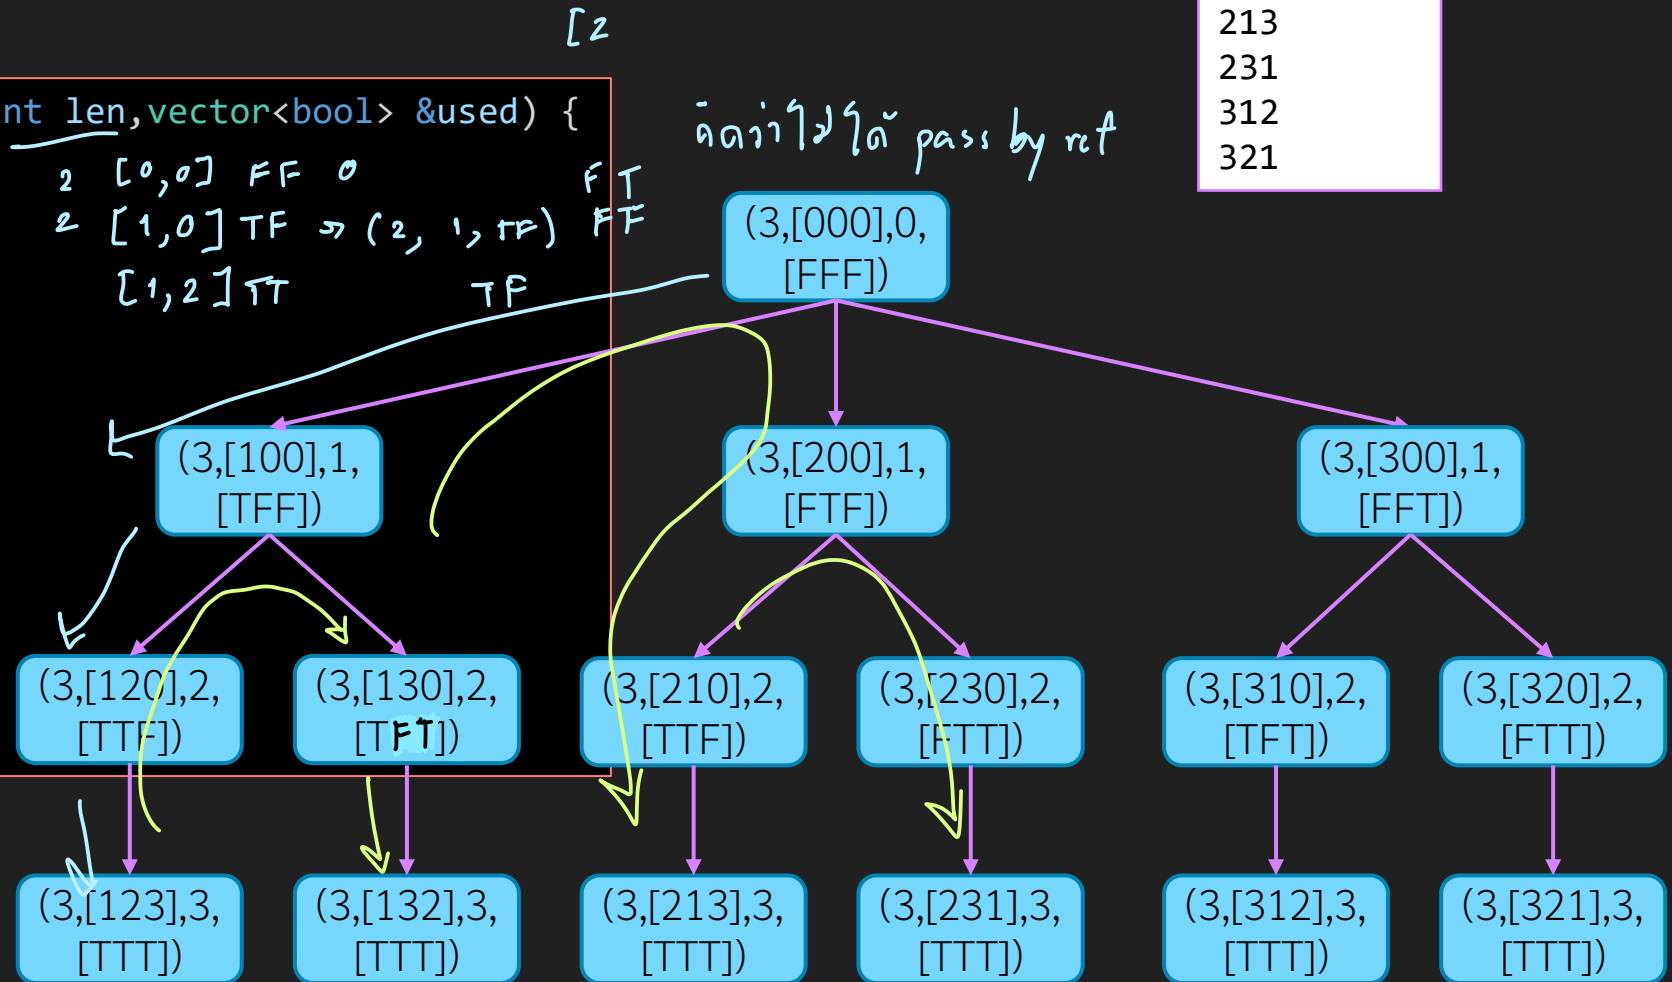

output

123
132
213
231
312
321

- `used[i]` indicates if i^{th} item is used in the sol
- Pass-by-value

More example

$$\frac{n!}{(n-k)!}$$

- Permutation of k items from n items

```
void perm(int n,
          vector<int> &sol,
          int len,
          vector<bool> &used) {
    if (len < n) {
        for (int i = 1; i <= n; i++) {
            if (used[i] == false) {
                used[i] = true;
                sol[len] = i;
                perm(n, sol, len+1, used);
                used[i] = false;
            }
        }
    } else {
        for (auto &x : sol) cout << x;
        cout << endl;
    }
}
```

original

```
void perm_kn(int n,
             vector<int> &sol,
             int len,
             vector<bool> &used, int k) {
    if (len < k) {
        for (int i = 1; i <= n; i++) {
            if (used[i] == false) {
                used[i] = true;
                sol[len] = i;
                perm_kn(n, sol, len+1, used, k);
                used[i] = false;
            }
        }
    } else {
        for (auto &x : sol) cout << x;
        cout << endl;
    }
}
```

k items

Output n = 4, k = 3

123
124
132
134
142
143
213
214
231
234
241
243
312
314
321
324
341
342
412
413
421
423
431
432

More example

idx 1 used 1 limit 2 3 >
 3-1 2-1 3-2
 2 1 1 > 0

- Permutation of k items from n items, with replacement

```
void perm(int n,
          vector<int> &sol,
          int len,
          vector<bool> &used) {
    if (len < n) {
        for (int i = 1; i <= n; i++) {
            if (used[i] == false) {
                used[i] = true;
                sol[len] = i;
                perm(n, sol, len+1, used);
                used[i] = false;
            }
        }
    } else {
        for (auto &x : sol) cout << x;
        cout << endl;
    }
}
```

original

```
void perm_kn_replace(int n,
                     vector<int> &sol,
                     int len,
                     int k) {
    if (len < k) {
        for (int i = 1; i <= n; i++) {
            sol[len] = i;
            perm_kn_replace(n, sol, len+1, k);
        }
    } else {
        for (auto &x : sol) cout << x;
        cout << endl;
    }
}
```

k items, with replacement

ซ้ำได้

Output n = 4, k = 2

11
 12
 13
 14
 21
 22
 23
 24
 31
 32
 33
 34
 41
 42
 43
 44

n
 k

$(5, [\text{---}], 0, 3, 0)$

$\begin{matrix} & 5, 3 \\ 0 & [&] \end{matrix}$

$\begin{matrix} | \\ \text{---} [0, &] \end{matrix}$

$\begin{matrix} | \\ \text{---} [1, &] \end{matrix}$

More example

- Combination, choose not more than k items from n items

```
void combi(int n,
           vector<int> &sol,
           int len
           ) {
    if (len < n) {
        sol[len] = 0;
        combi(n, sol, len+1);

        sol[len] = 1;
        combi(n, sol, len+1);
    } else {
        for (int i = 0; i < n; i++)
            if (sol[i] == 1)
                cout << i+1 << " ";
        cout << "." << endl;
    }
}
```

original

```
void combi_kn(int n,
              vector<int> &sol,
              int len,
              int k, int chosen) {
    if (len < n) {
        sol[len] = 0;
        combi_kn(n, sol, len+1, k, chosen);
        if (chosen < k) {
            sol[len] = 1;
            combi_kn(n, sol, len+1, k, chosen+1);
        }
    } else {
        for (int i = 0; i < n; i++) [100001]
            if (sol[i] == 1)
                cout << i+1 << " ";
        cout << endl;
    }
}
```

k items

output, n = 4, k = 2

```
.
4 .
3 .
3 4 .
2 .
2 4 .
2 3 .
1 .
1 4 .
1 3 .
1 2 .
```

More example

2 2
จำนวน n-k ชิ้นพอดี

- Combination, choose **exactly** **k** items from **n** items

```
void combi(int n,
           vector<int> &sol,
           int len
           ) {
    if (len < n) {

        sol[len] = 0;
        combi(n,sol,len+1);

        sol[len] = 1;
        combi(n,sol,len+1);

    } else {
        for (int i = 0;i < n;i++)
            if (sol[i] == 1)
                cout << i+1 << " ";
        cout << "." << endl;
    }
}
```

original

```
void combi_exact(int n,
                 vector<int> &sol,
                 int len,
                 int k,int chosen) {
    if (len < n) {
        if (len - chosen < n-k) {
            sol[len] = 0;
            combi_exact(n,sol,len+1,k,chosen);
        }
        if (chosen < k) {
            sol[len] = 1;
            combi_exact(n,sol,len+1,k,chosen+1);
        }
    } else {
        for (int i = 0;i < n;i++)
            if (sol[i] == 1)
                cout << i+1 << " ";
        cout << endl;
    }
}
```

k items

output, n = 4, k = 2

```
3 4 .
2 4 .
2 3 .
1 4 .
1 3 .
1 2 .
```

Sorting problem as CSP

- Task: Sort an array
- Input: An array $A[1..n]$
- Output: $o[1..n]$, which is an ordering of the items in the array, where $A[o[1]] \leq A[o[2]] \leq A[o[3]] \leq \dots \leq A[o[n]]$

- Example instance:

- $A = [40, 10, 30, 20]$
- Output = $[2, 4, 3, 1]$

Candidate Solution	Set of candidate solution	Satisfaction condition
$[o_1, o_2, \dots, o_n]$	Every permutation of $\{1..N\}$	$A[o[1]] \leq A[o[2]] \leq \dots \leq A[o[n]]$

$N!$

$O(N!)$