

Application Deployment


(Deploy the given react application to a production ready state)

Application:

Clone the below mentioned repo and deploy the application (Run the application in port 80 [HTTP])


Repo URL: <https://github.com/sriram-R-krishnan/devops-build>

Clone the above repository use vs code.click clone repository .

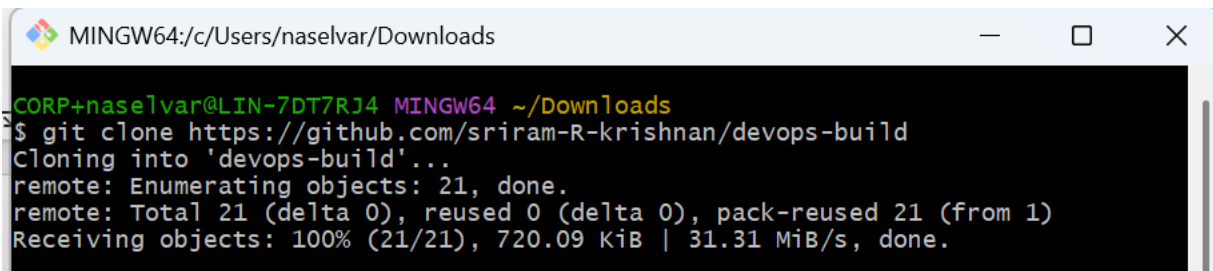A terminal window titled 'MINGW64:/c/Users/naselvar/Downloads' showing the execution of a git clone command. The command is '\$ git clone https://github.com/sriram-R-krishnan/devops-build'. The output shows 'Cloning into 'devops-build'...', 'remote: Enumerating objects: 21, done.', 'remote: Total 21 (delta 0), reused 0 (delta 0), pack-reused 21 (from 1)', and 'Receiving objects: 100% (21/21), 720.09 KiB | 31.31 MiB/s, done.'

```
MINGW64:/c/Users/naselvar/Downloads
CORP+naselvar@LIN-7DT7RJ4 MINGW64 ~/Downloads
$ git clone https://github.com/sriram-R-krishnan/devops-build
Cloning into 'devops-build'...
remote: Enumerating objects: 21, done.
remote: Total 21 (delta 0), reused 0 (delta 0), pack-reused 21 (from 1)
Receiving objects: 100% (21/21), 720.09 KiB | 31.31 MiB/s, done.
```

Open repo in vs code

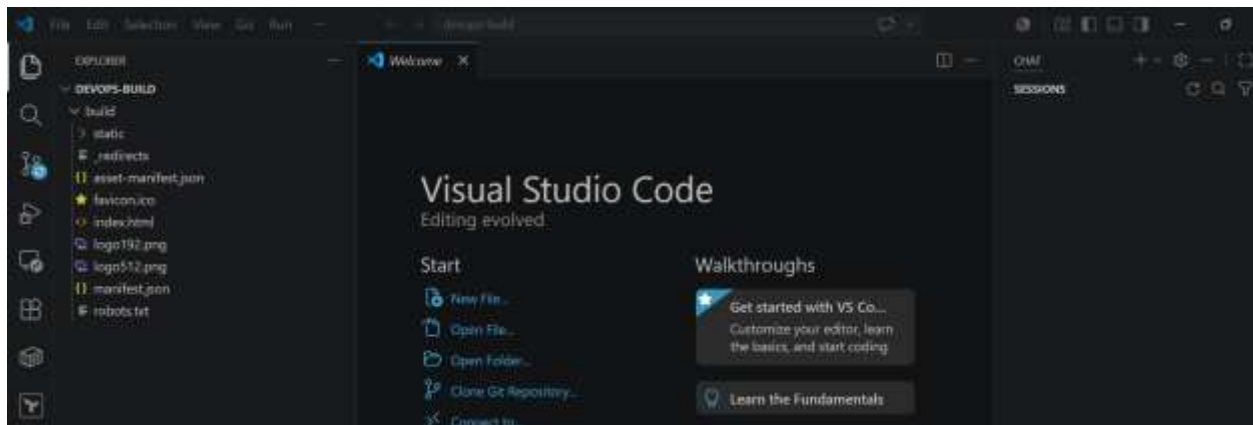

Create repo in Github

New repository

Q Type to search

Create a new repository

Repositories contain a project's files and version history. Have a project elsewhere? [Import a repository](#)

Required fields are marked with an asterisk (*)

1 General

Owner *

Nalini-0212

Repository name *

devops-build

devops-build is available.

Great repository names are short and memorable. How about [miniature-waffle](#)?

Description

project for application deployment

34 / 350 characters

2 Configuration

Choose visibility *

Public

Choose who can see and commit to this repository

Nalini-0212 / devops-build

Q Type to search

<> Code

Issues

Pull requests

Agents

Actions

Projects

Wiki

Security and quality

Insights

Settings

devops-build

Public

Fits

Watch 0

Fork 0

Star 0

Start coding with Codespaces

Add a README file and start coding in a secure, configurable, and dedicated development environment.

Create a codespace

Add collaborators to this repository

Search for people using their GitHub username or email address.

Invite collaborators

Quick setup — if you've done this kind of thing before

Set up in Desktop

 or

HTTPS

SSH


<https://github.com/Nalini-0212/devops-build.git>

Get started by [creating a new file](#) or [uploading an existing file](#). We recommend every repository include a [README](#), [LICENSE](#), and [gitignore](#).

...or create a new repository on the command line

```
echo "# devops-build" >> README.md
git init
```

also change remote to this repo

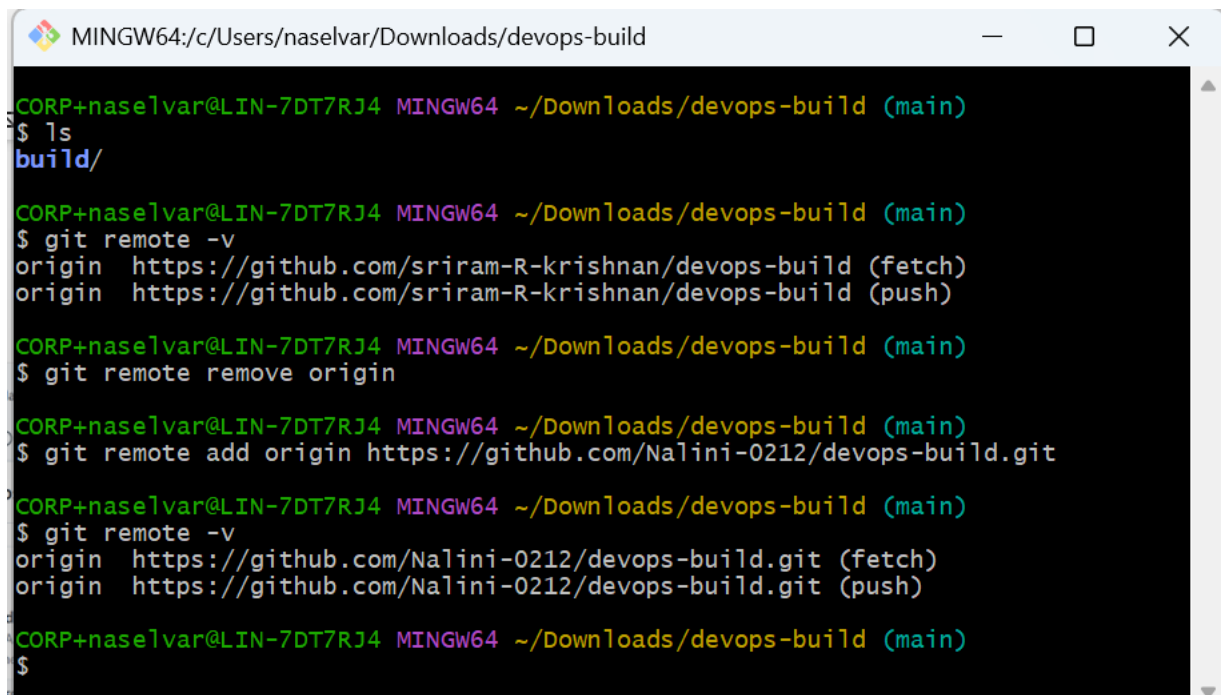


```
MINGW64:/c/Users/naselvar/Downloads/devops-build
CORP+naselvar@LIN-7DT7RJ4 MINGW64 ~/Downloads/devops-build (main)
$ ls
build/
CORP+naselvar@LIN-7DT7RJ4 MINGW64 ~/Downloads/devops-build (main)
$ git remote -v
origin https://github.com/sriram-R-krishnan/devops-build (fetch)
origin https://github.com/sriram-R-krishnan/devops-build (push)
CORP+naselvar@LIN-7DT7RJ4 MINGW64 ~/Downloads/devops-build (main)
$ git remote remove origin
CORP+naselvar@LIN-7DT7RJ4 MINGW64 ~/Downloads/devops-build (main)
$ git remote add origin https://github.com/Nalini-0212/devops-build.git
CORP+naselvar@LIN-7DT7RJ4 MINGW64 ~/Downloads/devops-build (main)
$ git remote -v
origin https://github.com/Nalini-0212/devops-build.git (fetch)
origin https://github.com/Nalini-0212/devops-build.git (push)
CORP+naselvar@LIN-7DT7RJ4 MINGW64 ~/Downloads/devops-build (main)
$
```

Docker:

- Dockerize the application by creating a Dockerfile
- Create a docker-compose file to use the above image

Create below structure

Dockerfile

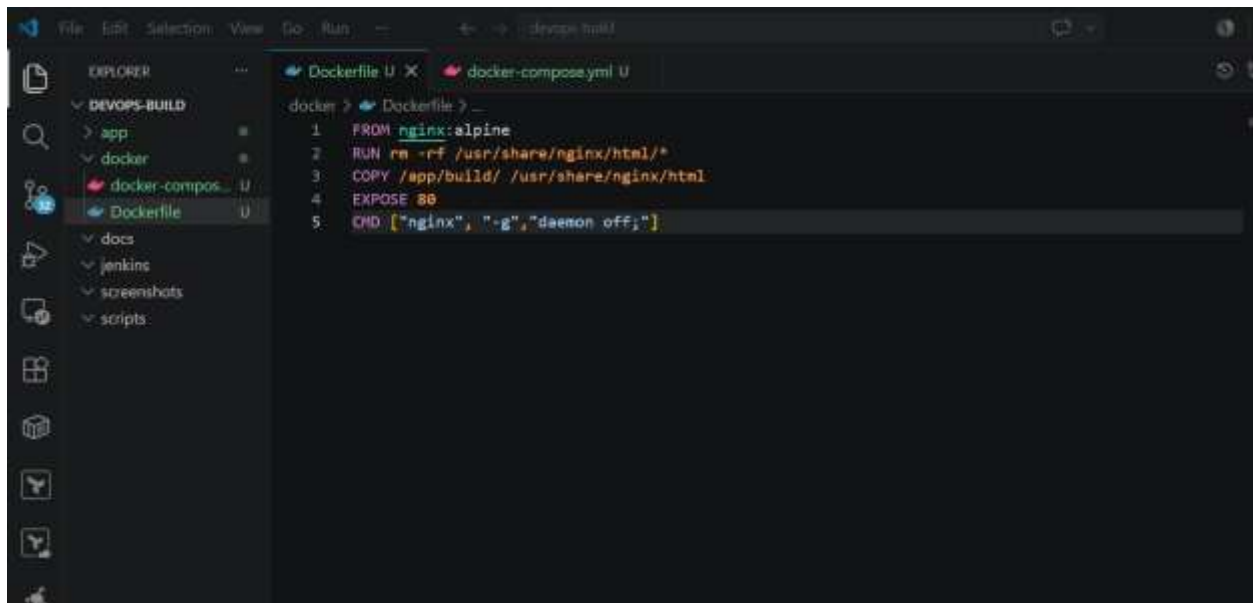


```
File Explorer: devops-build
- devops-build
  - app
  - docker
  - docker-compose.yml
  - Dockerfile
  - docs
  - jenkins
  - screenshots
  - scripts

Dockerfile
1 FROM nginx:alpine
2 RUN rm -rf /usr/share/nginx/html/*
3 COPY /app/build/ /usr/share/nginx/html
4 EXPOSE 80
5 CMD ["nginx", "-g", "daemon off;"]

docker-compose.yml
```

Dockercompose file

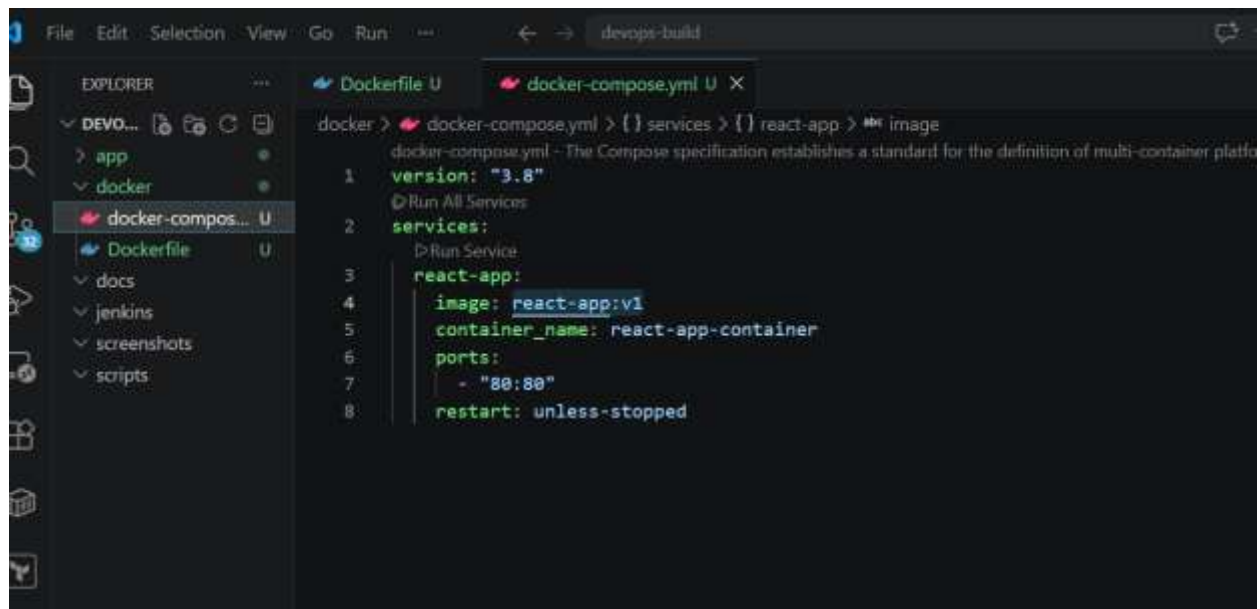

Stage file and commit & then push to github

```

CORP+nase1var@LIN-7DT7RJ4 MINGW64 ~/Downloads/devops-build (main)
$ git remote -v
origin https://github.com/Nalini-0212/devops-build.git (fetch)
origin https://github.com/Nalini-0212/devops-build.git (push)

CORP+nase1var@LIN-7DT7RJ4 MINGW64 ~/Downloads/devops-build (main)
$ git add .

CORP+nase1var@LIN-7DT7RJ4 MINGW64 ~/Downloads/devops-build (main)
$ git commit -m "added dockerfiles"
[main 7c15709] added dockerfiles
17 files changed, 13 insertions(+)
rename {build => app/build}/_redirects (100%)
rename {build => app/build}/asset-manifest.json (100%)
rename {build => app/build}/favicon.ico (100%)
rename {build => app/build}/index.html (100%)
rename {build => app/build}/logo192.png (100%)
rename {build => app/build}/logo512.png (100%)
rename {build => app/build}/manifest.json (100%)
rename {build => app/build}/robots.txt (100%)
rename {build => app/build}/static/css/main.cf5c13c5.css (100%)
rename {build => app/build}/static/css/main.cf5c13c5.css.map (100%)
rename {build => app/build}/static/js/787.2f5360e2.chunk.js (100%)
rename {build => app/build}/static/js/787.2f5360e2.chunk.js.map (100%)
rename {build => app/build}/static/js/main.flc48542.js (100%)
rename {build => app/build}/static/js/main.flc48542.js.LICENSE.txt (100%)
rename {build => app/build}/static/js/main.flc48542.js.map (100%)
create mode 100644 docker/Dockerfile
create mode 100644 docker/docker-compose.yml

CORP+nase1var@LIN-7DT7RJ4 MINGW64 ~/Downloads/devops-build (main)
$ git push -u origin main
Enumerating objects: 26, done.
Counting objects: 100% (26/26), done.
Delta compression using up to 14 threads
Compressing objects: 100% (24/24), done.
Writing objects: 100% (26/26), 720.62 KiB | 180.16 MiB/s, done.
Total 26 (delta 0), reused 21 (delta 0), pack-reused 0 (from 0)
To https://github.com/Nalini-0212/devops-build.git
 * [new branch]      main -> main
branch 'main' set up to track 'origin/main'.

CORP+nase1var@LIN-7DT7RJ4 MINGW64 ~/Downloads/devops-build (main)
$ git status
On branch main
Your branch is up to date with 'origin/main'.

nothing to commit, working tree clean

CORP+nase1var@LIN-7DT7RJ4 MINGW64 ~/Downloads/devops-build (main)
$

```

Create EC2 server(t2.micro) and install docker and build docker image and also run the container. Same server we will be installing jenkins and deploying application.

EC2 > Instances > Launch an instance

Launch an instance [Info](#)

Amazon EC2 allows you to create virtual machines, or instances, that run on the AWS Cloud. Quickly get started by following the simple steps below.

Name and tags [Info](#)

Name

docker

Add additional tags

▼ Application and OS Images (Amazon Machine Image) [Info](#)

An AMI contains the operating system, application server, and applications for your instance. If you don't see a suitable AMI below, use the search field or choose [Browse more AMIs](#).

Q Search our full catalog including 1000s of application and OS images

RecentsQuick Start

Amazon Linux

aws

macOS

Ubuntu

Windows

Red Hat

SUSE Linux

Browse more AMIs

Including AMIs from

▼ Summary

Number of instances [Info](#)

1

Software Image (AMI)

Canonical, Ubuntu, 26.04, amd6...n
ami-01a00762f46d584a1

Virtual server type (instance type)

t2.micro

Firewall (security group)

New security group

Storage (volumes)

1 volume(s) - 8 GiB

Cancel

EC2 > Instances > Launch an instance

awsMacUbuntuMicrosoftRed HatSUSE

Including AMIs from AWS, Marketplace and the Community

Amazon Machine Image (AMI)

Ubuntu Server 26.04 LTS (HVM), SSD Volume Type
ami-01a00762f46d584a1 (64-bit x86_64) / ami-0p40571b9c2387b13 (64-bit ARMv8)
Virtualization: hvm ENA enabled: true Root device type: ebs

▼

Description

Ubuntu Server 26.04 LTS (HVM),EBS General Purpose (SSD) Volume Type. Support available from Canonical (<http://www.ubuntu.com/cloud/services>).

Canonical, Ubuntu, 26.04, amd64 resolute image

ArchitectureAMI IDPublish DateUsernameVerified provider

64-bit (x86_64)

ami-01a00762f46d584a1

2026-06-04

ubuntu

▼ Instance type [Info](#) | [Get advice](#)

Instance type

▼ Summary

Number of instances [Info](#)

1

Software Image (AMI)

Canonical, Ubuntu, 26.04, amd6...read more
ami-01a00762f46d584a1

Virtual server type (instance type)

t2.micro

Firewall (security group)

New security group

Storage (volumes)

1 volume(s) - 8 GiB

Cancel

Launch instance

[Preview code](#)

EC2 > Instances > Launch an instance

Instance type

t2.micro
Family: t2 | 1 vCPU | 1 GiB Memory | Current generation: true
On-Demand Windows base pricing: 0.017 USD per Hour
On-Demand Intel base pricing: 0.0268 USD per Hour
On-Demand Linux base pricing: 0.0124 USD per Hour
On-Demand Ubuntu Pro base pricing: 0.0142 USD per Hour
On-Demand SUSE base pricing: 0.0124 USD per Hour

All generations

Compare instance types

Additional costs apply for AMIs with pre-installed software

▼ Key pair (login) [Info](#)

You can use a key pair to securely connect to your instance. Ensure that you have access to the selected key pair before you launch the instance.

Key pair name - required

boi

Create new key pair

▼ Network settings [Info](#)

VPC - required [Info](#)

vpc-0bbc7fb9cee7e9bd1 (default)

▼ Summary

Number of instances [Info](#)

1

Software Image (AMI)
Canonical, Ubuntu, 26.04, amd64...[read more](#)
ami-01a00762f46d584e1

Virtual server type (instance type)
t2.micro

Firewall (security group)
New security group

Storage (volumes)
1 volume(s) - 8 GiB

Cancel

Launch instance

Preview code

EC2 > Instances > Launch an instance

Auto-assign public IP [Info](#)

Enable

Firewall (security groups) [Info](#)

A security group is a set of firewall rules that control the traffic for your instance. Add rules to allow specific traffic to reach your instance.

Create security group

Select existing security group

Security group name - required

launch-wizard-12

This security group will be added to all network interfaces. The name can't be edited after the security group is created. Max length is 255 characters. Valid characters: a-z, A-Z, 0-9, spaces, and _-/0@[]+=&|!\$*

Description - required [Info](#)

launch-wizard-12 created 2026-07-09T05:16:50.328Z

Inbound Security Group Rules

▼ Security group rule 1 (TCP, 22, 202.91.157.205/32)

Type [Info](#)

ssh

Protocol [Info](#)

TCP

Port range [Info](#)

22

Remove

Source type [Info](#)

My IP

Name [Info](#)

SSH from my desktop

Description - optional [Info](#)

▼ Summary

Number of instances [Info](#)

1

Software Image (AMI)
Canonical, Ubuntu, 26.04, amd64...[read more](#)
ami-01a00762f46d584e1

Virtual server type (instance type)
t2.micro

Firewall (security group)
New security group

Storage (volumes)
1 volume(s) - 8 GiB

Cancel

Launch instance

Preview code

EC2 > Instances > Launch an instance

▼ Security group rule 1 (TCP, 22, 202.91.137.205/32) [Remove](#)

Type	Protocol	Port range
ssh	TCP	22

Source type: My IP [Add CIDR, prefix list or security](#)

Name: 202.91.137.205/32 [X](#)

Description - optional: e.g. SSH for admin desktop

▼ Security group rule 2 (TCP, 8080, 202.91.137.205/32) [Remove](#)

Type	Protocol	Port range
Custom TCP	TCP	8080

Source type: My IP [Add CIDR, prefix list or security](#)

Name: 202.91.137.205/32 [X](#)

Description - optional: e.g. SSH for admin desktop

▼ Security group rule 3 (TCP, 80, 0.0.0.0/0) [Remove](#)

Type	Protocol	Port range
HTTP	TCP	80

Source type: Anywhere [Add CIDR, prefix list or security](#)

Name: 0.0.0.0/0 [X](#)

Description - optional: e.g. SSH for admin desktop

Summary

Number of instances: 1

Software image (AMI): Canonical, Ubuntu, 26.04, amd64... [read more](#)
ami-01a00762f462584e1

Virtual server type (instance type): t2.micro

Firewall (security group): New security group

Storage (volumes): 1 volume(s) - 8 GiB

[Cancel](#) [Launch instance](#) [Preview code](#)

EC2 > Instances > Launch an instance

▼ Security group rule 3 (TCP, 80, 0.0.0.0/0) [Remove](#)

Type	Protocol	Port range
HTTP	TCP	80

Source type: Anywhere [Add CIDR, prefix list or security](#)

Name: 0.0.0.0/0 [X](#)

Description - optional: e.g. SSH for admin desktop

Rules with source of 0.0.0.0/0 allow all IP addresses to access your instance. We recommend setting security group rules to allow access from known IP addresses only. [X](#)

[Add security group rule](#)

▼ Configure storage [info](#) [Advanced](#)

1x 70 GiB gp3 Root volume, 3000 IOPS, Not encrypted

[Add new volume](#)

Summary

Number of instances: 1

Software image (AMI): Canonical, Ubuntu, 26.04, amd64... [read more](#)
ami-01a00762f462584e1

Virtual server type (instance type): t2.micro

Firewall (security group): New security group

Storage (volumes): 1 volume(s) - 70 GiB

[Cancel](#) [Launch instance](#) [Preview code](#)

SSH from my IP, HTTP from anywhere and 8080 from my IP satisfies requirement

AWS:

Launch t2.micro instance and deploy the create application.

Configure SG as below:

- whoever has ip address can access the application.

- login to server can should be made only from your ip

Launch instance now.



Install docker by referring documentation

[Install Docker Engine on Ubuntu | Docker Docs](#)

```
ubuntu@ip-172-31-4-192:~$
get:14 http://ap-south-1.ec2.archive.ubuntu.com/ubuntu resolute-updates/multiverse Translation-en [772 B]
get:15 http://ap-south-1.ec2.archive.ubuntu.com/ubuntu resolute-updates/multiverse amd64 Components [216 B]
get:16 http://ap-south-1.ec2.archive.ubuntu.com/ubuntu resolute-updates/multiverse amd64 c-n-f Metadata [256 B]
get:17 http://ap-south-1.ec2.archive.ubuntu.com/ubuntu resolute-backports/main amd64 Components [212 B]
get:18 http://ap-south-1.ec2.archive.ubuntu.com/ubuntu resolute-backports/main amd64 c-n-f Metadata [112 B]
get:19 http://ap-south-1.ec2.archive.ubuntu.com/ubuntu resolute-backports/universe amd64 Components [216 B]
get:20 http://ap-south-1.ec2.archive.ubuntu.com/ubuntu resolute-backports/universe amd64 c-n-f Metadata [116 B]
get:21 http://ap-south-1.ec2.archive.ubuntu.com/ubuntu resolute-backports/restricted amd64 Components [216 B]
get:22 http://ap-south-1.ec2.archive.ubuntu.com/ubuntu resolute-backports/restricted amd64 c-n-f Metadata [120 B]
get:23 http://ap-south-1.ec2.archive.ubuntu.com/ubuntu resolute-backports/multiverse amd64 Components [216 B]
get:24 http://ap-south-1.ec2.archive.ubuntu.com/ubuntu resolute-backports/multiverse amd64 c-n-f Metadata [120 B]
get:25 http://security.ubuntu.com/ubuntu resolute-security/main amd64 Packages [272 kB]
get:26 http://security.ubuntu.com/ubuntu resolute-security/main Translation-en [71.3 kB]
get:27 http://security.ubuntu.com/ubuntu resolute-security/main amd64 Components [31.2 kB]
get:28 http://security.ubuntu.com/ubuntu resolute-security/main amd64 c-n-f Metadata [4616 B]
get:29 http://security.ubuntu.com/ubuntu resolute-security/universe amd64 Packages [130 kB]
get:30 http://security.ubuntu.com/ubuntu resolute-security/universe Translation-en [40.9 kB]
get:31 http://security.ubuntu.com/ubuntu resolute-security/universe amd64 Components [43.1 kB]
get:32 http://security.ubuntu.com/ubuntu resolute-security/universe amd64 c-n-f Metadata [3552 B]
get:33 http://security.ubuntu.com/ubuntu resolute-security/restricted amd64 Packages [240 kB]
get:34 http://security.ubuntu.com/ubuntu resolute-security/restricted Translation-en [44.3 kB]
get:35 http://security.ubuntu.com/ubuntu resolute-security/restricted amd64 Components [712 B]
get:36 http://security.ubuntu.com/ubuntu resolute-security/multiverse amd64 c-n-f Metadata [120 B]
Fetched 30.4 MB in 5s (6522 kB/s)
58 packages can be upgraded. Run 'apt list --upgradable' to see them.
Upgrading:
  ca-certificates cur1 11bcurl3t64-gnutils 11bcurl4t64
Summary:
  Upgrading: 4, Installing: 0, Removing: 0, Not Upgrading: 54
  Download size: 1255 kB
  Freed space: 49.0 kB
Continue? [y/n] y
get:1 http://ap-south-1.ec2.archive.ubuntu.com/ubuntu resolute-updates/main amd64v3 ca-certificates 411 20260601-26.04.1 [139 kB]
get:2 http://ap-south-1.ec2.archive.ubuntu.com/ubuntu resolute-updates/main amd64v3 cur1 amd64 8.18.0-1ubuntu2.2 [272 kB]
get:3 http://ap-south-1.ec2.archive.ubuntu.com/ubuntu resolute-updates/main amd64v3 11bcurl4t64 amd64 8.18.0-1ubuntu2.2 [426 kB]
get:4 http://ap-south-1.ec2.archive.ubuntu.com/ubuntu resolute-updates/main amd64v3 11bcurl3t64-gnutils amd64 8.18.0-1ubuntu2.2 [417 kB]
Fetched 1255 kB in 0s (34.8 MB/s)
reconfiguring packages ...
(Reading database ... 85303 files and directories currently installed.)
Preparing to unpack .../ca-certificates_20260601-26.04.1_all.deb ...
Unpacking ca-certificates (20260601-26.04.1) over (20160223) ...
Preparing to unpack .../cur1_8.18.0-1ubuntu2.2_amd64v3.deb ...
Unpacking cur1 (8.18.0-1ubuntu2.2) over (8.18.0-1ubuntu2.1) ...
Preparing to unpack .../11bcurl4t64_8.18.0-1ubuntu2.2_amd64v3.deb ...
Unpacking 11bcurl4t64:amd64 (8.18.0-1ubuntu2.2) over (8.18.0-1ubuntu2.1) ...
Preparing to unpack .../11bcurl3t64-gnutils_8.18.0-1ubuntu2.2_amd64v3.deb ...
Unpacking 11bcurl3t64-gnutils:amd64 (8.18.0-1ubuntu2.2) over (8.18.0-1ubuntu2.1) ...
Setting up 11bcurl4t64:amd64 (8.18.0-1ubuntu2.2) ...
Setting up 11bcurl3t64-gnutils:amd64 (8.18.0-1ubuntu2.2) ...
Setting up ca-certificates (20260601-26.04.1) ...
```

```

ubuntu@ip-172-31-4-192:~$ sudo apt install docker-ce docker-ce-cli containerd.io docker-buildx-plugin docker-compose-plugin
Installing:
  containerd.io  docker-buildx-plugin  docker-ce  docker-ce-cli  docker-compose-plugin

Installing dependencies:
  docker-ce-rootless-extras  pigz

Suggested packages:
  cgroupfs-mount | cgroup-lite  docker-model-plugin

Summary:
  Upgrading: 0, Installing: 7, Removing: 0, Not Upgrading: 54
  Download size: 99.3 MB
  Space needed: 380 MB / 69.3 GB available

Continue? [Y/n] Y
Get:1 http://sg-south-1.ec2.archive.ubuntu.com/ubuntu/ jammy/universe amd64 pigz amd64 2.8-1build1 [68.5 kB]
Get:2 https://download.docker.com/linux/ubuntu jammy/stable amd64 containerd.io amd64 2.2.5-1ubuntu.26.04-resolute [27.6 MB]
Get:3 https://download.docker.com/linux/ubuntu jammy/stable amd64 docker-ce-cli amd64 5:29.6.1-1ubuntu.26.04-resolute [16.9 MB]
Get:4 https://download.docker.com/linux/ubuntu jammy/stable amd64 docker-ce amd64 5:29.6.1-1ubuntu.26.04-resolute [29.3 MB]
Get:5 https://download.docker.com/linux/ubuntu jammy/stable amd64 docker-buildx-plugin amd64 0.35.0-1ubuntu.26.04-resolute [17.2 MB]
Get:6 https://download.docker.com/linux/ubuntu jammy/stable amd64 docker-ce-rootless-extras amd64 5:29.6.1-1ubuntu.26.04-resolute [10.2 MB]
Get:7 https://download.docker.com/linux/ubuntu jammy/stable amd64 docker-compose-plugin amd64 5.2.1-1ubuntu.26.04-resolute [8100 kB]
Fetched 99.3 MB in 1s (74.1 MB/s)
Selecting previously unselected package containerd.io.
(Reading database ... 85280 files and directories currently installed.)
Preparing to unpack .../0-containerd.io_2.2.5-1ubuntu.26.04-resolute_amd64.deb ...
Unpacking containerd.io (2.2.5-1ubuntu.26.04-resolute) ...
Selecting previously unselected package docker-ce-cli.
Preparing to unpack .../1-docker-ce-cli_5:29.6.1-1ubuntu.26.04-resolute_amd64.deb ...
Unpacking docker-ce-cli (5:29.6.1-1ubuntu.26.04-resolute) ...

```

Check docker version and add ubuntu user to docker group and logout and login again

```

No VM guests are running outdated hypervisor (qemu) binaries on this host.
ubuntu@ip-172-31-4-192:~$ docker version
Client: Docker Engine - Community
 Version:           29.6.1
 API version:       1.55
 Go version:        go1.26.4
 Git commit:        8900f1d
 Built:             Fri Jun 26 11:40:38 2026
 OS/Arch:           linux/amd64
 Context:           default
permission denied while trying to connect to the docker API at unix:///var/run/docker.sock
ubuntu@ip-172-31-4-192:~$ sudo usermod -sG docker ubuntu
ubuntu@ip-172-31-4-192:~$ exit
logout
Connection to 13.200.237.142 closed.

CORP+naselvar@LIN-7DT7R34 MINGW64 ~/Downloads
$ ssh -i boi.pem ubuntu@13.200.237.142
Welcome to Ubuntu 26.04 LTS (GNU/Linux 7.0.0-1006-aws x86_64)

 * Documentation:  https://docs.ubuntu.com
 * Management:    https://landscape.canonical.com
 * Support:       https://ubuntu.com/pro

System information as of Thu Jul 9 05:27:36 UTC 2026

System load: 0.48      Processes:            118
Usage of /:   3.9% of 66.75GB   Users logged in:     0
Memory usage: 31%       IPv4 address for enx0: 172.31.4.192
Swap usage:   0%

Expanded Security Maintenance for Applications is not enabled.

55 updates can be applied immediately.

```

```

main docker image coming here for more information and commands
ubuntu@ip-172-31-4-192:~$ docker images

IMAGE ID          DISK USAGE  CONTENT SIZE  EXTRA
ubuntu@ip-172-31-4-192:~$ |

```

Clone repo and go to folder and build image and run container from image


```

    "networkMode": "docker_default",
    "portBindings": {
      "80/tcp": [
        {
          "HostIp": "",
          "HostPort": "80"
        }
      ]
    },
    "restartPolicy": {
      "name": "unless-stopped",
      "maximumRetryCount": 0
    },
    "autoRemove": false,
    "volumeDriver": "",
    "volumesFrom": null,
    "consoleSize": [
      0,
      0
    ],
    "capAdd": null,
    "capDrop": null,
    "cgroupnsMode": "private",
    "dns": null,
    "dnsOptions": null,
    "dnsSearch": null,
    "extraHosts": [],
    "groupAdd": null,
    "ipcMode": "private",
    "cgroup": "",
    "links": null,
    "oomScoreAdj": 0,
    "pidMode": "",
    "privileged": false,
    "publishAllPorts": false,
    "readOnlyRootfs": false,
    "securityOpt": null,
    "utsMode": "",
    "usernsMode": "",
    "shmSize": 67108864,
    "runtime": "runc",
    "isolation": "",
    "cpuShares": 0,
    "memory": 0,
    "nanoCpus": 0,
    "cgroupParent": "",
    "blkioWeight": 0,
    "blkioWeightDevice": null,
    "blkioDeviceReadBps": null,
    "blkioDeviceWriteBps": null,
    "blkioDeviceReadIops": null,
    "blkioDeviceWriteIops": null,
    "cpuPeriod": 0,
    "cpuQuota": 0,

```

```

    "cpuPeriod": 0,
    "cpuQuota": 0,
    "cpuRealtimePeriod": 0,
    "cpuRealtimeRuntime": 0,
    "cpuSetcpus": "",
    "cpuSetmems": "",
    "devices": null,
    "deviceCgroupRules": null,
    "deviceRequests": null,
    "memoryReservation": 0,
    "memorySwap": 0,
    "memorySwappiness": null,
    "oomKillDisable": null,
    "pidLimit": null,
    "ulimits": null,
    "cpuCount": 0,
    "cpuPercent": 0,
    "ioMaximumIops": 0,
    "ioMaximumBandwidth": 0,
    "maskedPaths": [
      "/proc/acpi",
      "/proc/asound",
      "/proc/interrupts",
      "/proc/kcore",
      "/proc/keys",
      "/proc/latency_stats",
      "/proc/sched_debug",
      "/proc/scsi",
      "/proc/timer_list",
      "/proc/timer_stats",
      "/sys/devices/virtual/powercap",
      "/sys/firmware"
    ],
    "readonlyPaths": [
      "/proc/bus",
      "/proc/fs",
      "/proc/irq",
      "/proc/sys",
      "/proc/sysrq-trigger"
    ]
  },
  "storage": {
    "rootfs": {
      "snapshot": {
        "name": "overlayfs"
      }
    }
  },
  "mounts": [],
  "config": {
    "hostname": "88d4e93ac49",
    "domainname": "",
    "user": "",
    "attachStdin": false,

```

```

"AttachStdin": false,
"AttachStdout": true,
"AttachStderr": true,
"ExposedPorts": {
  "80/tcp": {}
},
"tty": false,
"OpenStdin": false,
"StdinOnce": false,
"Env": [
  "PATH=/usr/local/sbin:/usr/local/bin:/usr/sbin:/usr/bin:/sbin:/bin",
  "NGINX_VERSION=1.31.2",
  "PKG_RELEASE=1",
  "DYNPMO_RELEASE=1",
  "NJS_VERSION=0.9.8",
  "NJS_RELEASE=1",
  "AOE_VERSION=0.4.1"
],
"Cmd": [
  "nginx",
  "-g",
  "daemon off;"
],
"image": "react-app:v1",
"volumes": null,
"WorkingDir": "/",
"Entrypoint": [
  "/docker-entrypoint.sh"
],
"labels": {
  "com.docker.compose.config-hash": "21fc6e1280f71f7e5fe588b818176d9f1fc8fc58acd663ed3b8cd4e2658655",
  "com.docker.compose.container-number": "1",
  "com.docker.compose.depends_on": "",
  "com.docker.compose.image": "sha256:01c192ed37dad7a1a00ebaf62f4001b8fe361bbdab5b3345b5f0bb44d8f",
  "com.docker.compose.oneoff": "false",
  "com.docker.compose.project": "docker",
  "com.docker.compose.project.config_files": "/home/ubuntu/devops-build/docker/docker-compose.yml",
  "com.docker.compose.project.working_dir": "/home/ubuntu/devops-build/docker",
  "com.docker.compose.service": "react-app",
  "com.docker.compose.version": "5.3.1",
  "maintainer": "NGINX Docker Maintainers <docker-maint@nginx.com>"
},
"stopSignal": "SIGQUIT"
},
"networkSettings": {
  "sandboxID": "217038a077c7ff3d3d3861c2aa2d20d806213c8710f1bf4e70566cb49b43a66e",
  "sandboxkey": "/var/run/docker/netns/217038a077c7",
  "ports": {
    "80/tcp": [
      {
        "HostIp": "0.0.0.0",
        "HostPort": "80"
      }
    ],
    "80/tcp": [
      {
        "HostIp": "::",
        "HostPort": "80"
      }
    ]
  }
}
}

```

```

"networkSettings": {
  "sandboxID": "217038a077c7ff3d3d3861c2aa2d20d806213c8710f1bf4e70566cb49b43a66e",
  "sandboxkey": "/var/run/docker/netns/217038a077c7",
  "ports": {
    "80/tcp": [
      {
        "HostIp": "0.0.0.0",
        "HostPort": "80"
      }
    ],
    "80/tcp": [
      {
        "HostIp": "::",
        "HostPort": "80"
      }
    ]
  }
},
"networks": {
  "docker_default": {
    "IPAMConfig": null,
    "Links": null,
    "Aliases": [
      "react-app-container",
      "react-app"
    ],
    "DriverOpts": null,
    "QoSPriority": 0,
    "NetworkID": "1862b56c8892e4ddc88116772074aa8b091c527a9142554875519eb9a877781",
    "EndpointID": "35b7f308770647e34d378415f4126188390f9dc483240b47909c2a73c86falc",
    "Gateway": "172.18.0.1",
    "IPAddress": "172.18.0.3",
    "MacAddress": "ca:50:00:fe:ce:53",
    "PrefixLen": 16,
    "IPv6Gateway": "",
    "GlobalIPv6Address": "",
    "GlobalIPv6PrefixLen": 0,
    "DNSNames": [
      "react-app-container",
      "react-app",
      "8adaw9iac4b"
    ]
  }
},
"imageManifestDescriptor": {
  "mediaType": "application/vnd.oci.image.manifest.v1+json",
  "digest": "sha256:ae5b7f8af39fcb474d30822e677b4c7517b83df32b2cfbe9a861a07a7b88b16",
  "size": 2188,
  "platform": {
    "architecture": "amd64",
    "os": "linux"
  }
}
}
}
ubuntu@ip-172-31-4-192:~/devops-build$

```


Logs in container

```

ubuntu@ip-172-31-4-192:~/devops-build$ docker logs react-app-container
/docker-entrypoint.sh: /docker-entrypoint.d/ is not empty, will attempt to perform configuration
/docker-entrypoint.sh: Looking for shell scripts in /docker-entrypoint.d/
/docker-entrypoint.sh: Launching /docker-entrypoint.d/10-listen-on-ipv6-by-default.sh
10-listen-on-ipv6-by-default.sh: info: Getting the checksum of /etc/nginx/conf.d/default.conf
10-listen-on-ipv6-by-default.sh: info: Enabled listen on IPv6 in /etc/nginx/conf.d/default.conf
/docker-entrypoint.sh: Sourcing /docker-entrypoint.d/15-local-resolvers.envsh
/docker-entrypoint.sh: Launching /docker-entrypoint.d/20-envsubst-on-templates.sh
/docker-entrypoint.sh: Launching /docker-entrypoint.d/30-tune-worker-processes.sh
/docker-entrypoint.sh: Configuration complete; ready for start up
2026/07/09 05:37:46 [notice] 1#1: using the "epoll" event method
2026/07/09 05:37:46 [notice] 1#1: nginx/1.31.2
2026/07/09 05:37:46 [notice] 1#1: built by gcc 15.2.0 (Alpine 15.2.0)
2026/07/09 05:37:46 [notice] 1#1: OS: Linux 7.0.0-1005-aws
2026/07/09 05:37:46 [notice] 1#1: getrlimit(RLIMIT_NOFILE): 1024:524288
2026/07/09 05:37:46 [notice] 1#1: start worker processes
2026/07/09 05:37:46 [notice] 1#1: start worker process 30
ubuntu@ip-172-31-4-192:~/devops-build$

```

Try to access Application URL now with server ip:80

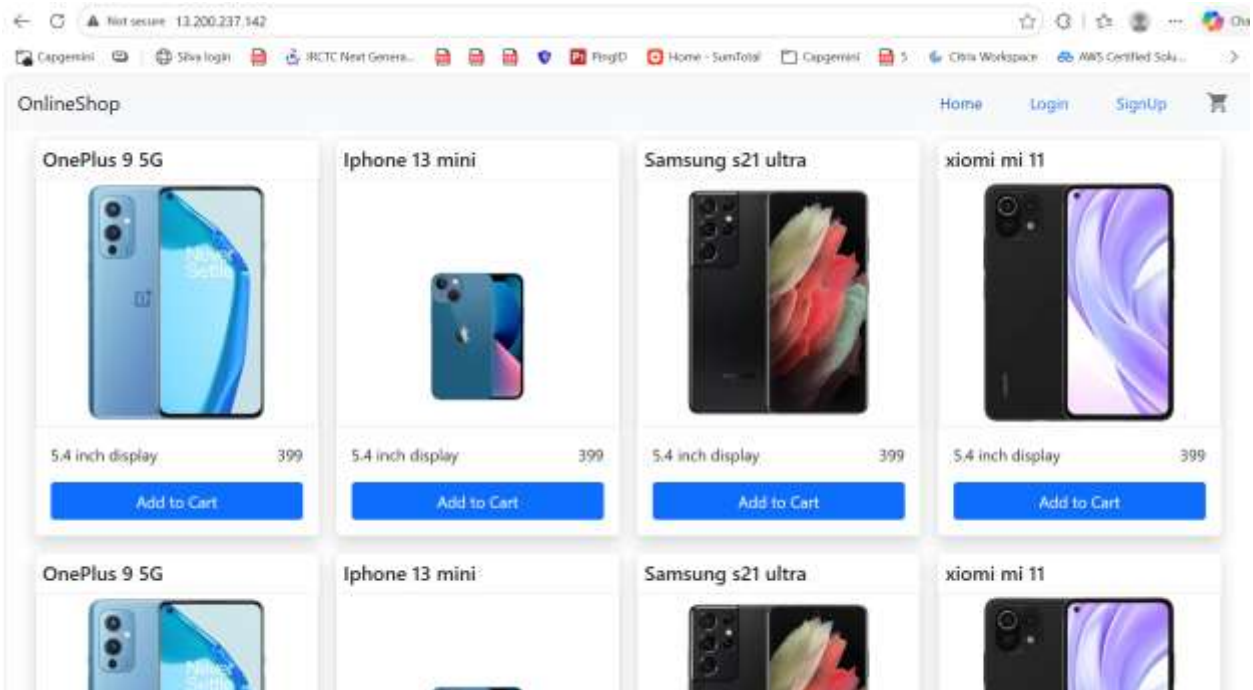

Try to remove container.

```

ubuntu@ip-172-31-4-192:~/devops-build$ docker ps
CONTAINER ID   IMAGE     COMMAND                  CREATED    STATUS    PORTS    NAMES
89adae33ac49   react-app:latest "/docker-entrypoint..." 8 minutes ago    up 8 minutes    0.0.0.0:80->80/tcp, [::]:80->80/tcp    react-app-container
ubuntu@ip-172-31-4-192:~/devops-build$ docker stop react-app-container
react-app-container
ubuntu@ip-172-31-4-192:~/devops-build$ docker ps -a
CONTAINER ID   IMAGE     COMMAND                  CREATED    STATUS    PORTS    NAMES
89adae33ac49   react-app:latest "/docker-entrypoint..." 8 minutes ago    Exited (0) 6 seconds ago                react-app-container
ubuntu@ip-172-31-4-192:~/devops-build$ docker rm react-app-container
react-app-container
ubuntu@ip-172-31-4-192:~/devops-build$ docker ps -a
CONTAINER ID   IMAGE     COMMAND                  CREATED    STATUS    PORTS    NAMES
ubuntu@ip-172-31-4-192:~/devops-build$

```

Try to check if you are able to push to docker hub take any by creating one repo in docker hub

This repo already exist . try to push to this repo by tagging with same name as repo


```

ubuntu@ip-172-31-4-192:~/devops-build$ docker images

```

IMAGE	ID	DESK USAGE	CONTENT SIZE	EXTRA
react-app:v1	01c192ad87da	95.5MB	26.7MB	

```

ubuntu@ip-172-31-4-192:~/devops-build$ docker tag react-app:v1 na1n1se1v/docker
ubuntu@ip-172-31-4-192:~/devops-build$ docker push na1n1se1v/docker
Using default tag: latest
The push refers to repository [docker.io/na1n1se1v/docker]
6e78d1d218c1: Layer already exists
96e9a734a04c: Waiting
78f50a7e0fd3: Waiting
e6f31ffc071e: Layer already exists
c1bdefa09b1f: Layer already exists
5b428a40a60f: Layer already exists
ab1fd9049751: Layer already exists
ce42635eae50: Layer already exists
01ef383d81e8: Layer already exists
c75b9c33e8b0: Layer already exists
47ac1cuf178b: Waiting
push access denied, repository does not exist or may require authorization; server message: insufficient_scope: authorization failed
ubuntu@ip-172-31-4-192:~/devops-build$

```

Try to enter docker login follow below:

```

ubuntu@ip-172-31-4-192:~/devops-build$ docker login

```


USING WEB-BASED LOGIN

Info - To sign in with credentials on the command line, use 'docker login -u <username>'.

Your one-time device confirmation code is: **0XJHD-8F13**
 Press ENTER to open your browser or submit your device code here: <https://login.docker.com/activate>
 waiting for authentication in the browser...

WARNING! Your credentials are stored unencrypted in '/home/ubuntu/.docker/config.json'.
 Configure a credential helper to remove this warning. See
<https://docs.docker.com/go/credential-store/>

Login Succeeded
 ubuntu@ip-172-31-4-192:~/devops-build\$

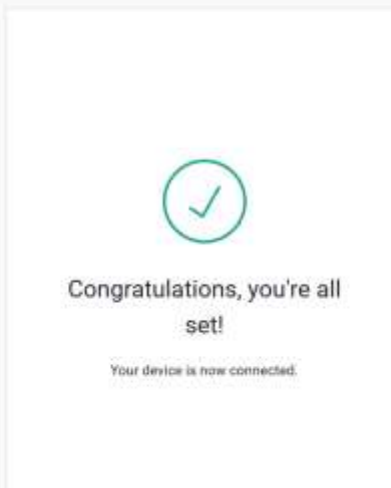


Now push to docker hub

```

ubuntu@ip-172-31-4-192:~/devops-build$ docker push naliniselv/docker
Using default tag: latest
The push refers to repository [docker.io/naliniselv/docker]
78f50d7e0fd3: Pushed
e6f31ffc071e: Layer already exists
5b429a43b8df: Layer already exists
ab1fd9049751: Layer already exists
ce42635eeddd: Layer already exists
01bf363d61e6: Layer already exists
96e9a734a04c: Pushed
47ac5caf176b: Pushed
c16defe09b2f: Layer already exists
967885d218c5: Layer already exists
c75b9c33e8b0: Layer already exists
latest: digest: sha256:01c192ad87dad7a1a00ebabf62f4601b88e361bbdeab5b83345b585f0bb44d8f size: 856
ubuntu@ip-172-31-4-192:~/devops-build$

```

Now go to docker hub and check if image exist

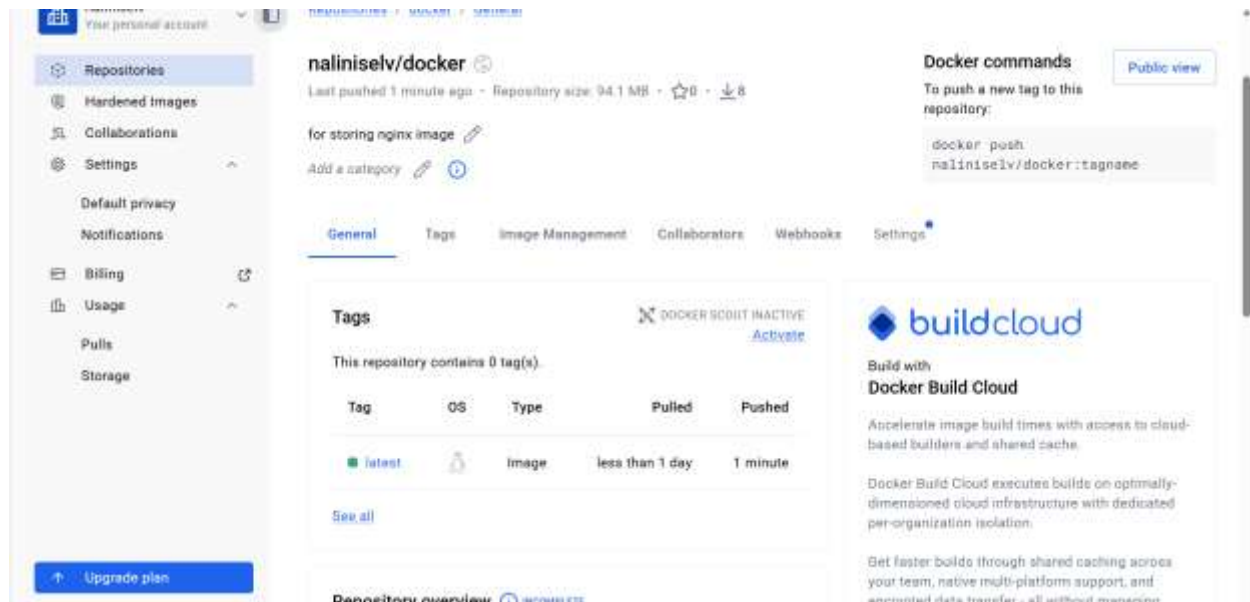

Able to see image

Now delete image

```

ubuntu@ip-172-31-4-192:~/devops-build$ docker images
IMAGE ID DISK USAGE CONTENT SIZE EXTRA
naliniselv/docker:latest 01c192ad87da 95.3MB 26.7MB
react-app:v1 01c192ad87da 95.3MB 26.7MB
ubuntu@ip-172-31-4-192:~/devops-build$ docker rmi naliniselv/docker:latest react-app:v1
Untagged: react-app:v1
Deleted: sha256:01c192ad87dad7a1a00ebabf62f4601b88e361bbdeab5b83345b585f0bb44d8f
ubuntu@ip-172-31-4-192:~/devops-build$ docker images
IMAGE ID DISK USAGE CONTENT SIZE EXTRA
ubuntu@ip-172-31-4-192:~/devops-build$


```

Bash Scripting:

write 2 scripts

- build.sh - for building the docker images
- deploy.sh - for deploying the image to server

Write 2 scripts and put in as below structure

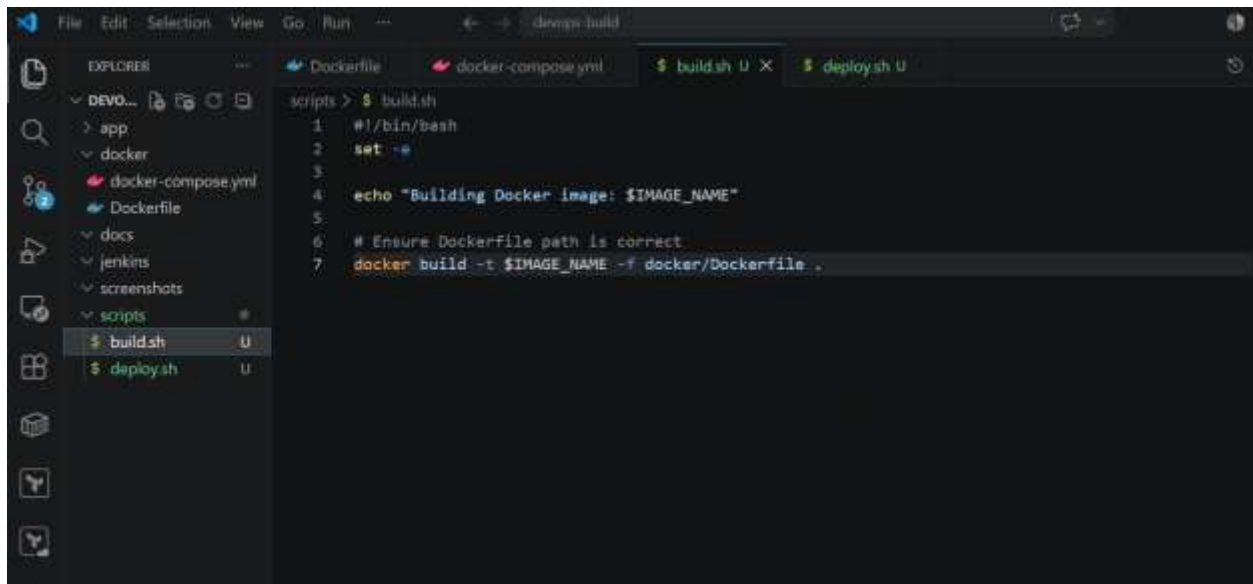A screenshot of the Visual Studio Code editor interface. The Explorer sidebar on the left shows a project structure with folders like 'app', 'docker', 'docs', 'jenkins', 'screenshots', and 'scripts'. The 'scripts' folder is expanded, showing 'build.sh' and 'deploy.sh'. The main editor window displays the content of 'build.sh'.

```
scripts > $ build.sh
1  #!/bin/bash
2  set -e
3
4  echo "Building Docker image: $IMAGE_NAME"
5
6  # Ensure Dockerfile path is correct
7  docker build -t $IMAGE_NAME -f docker/Dockerfile .
```

A screenshot of the Visual Studio Code editor showing the content of the 'deploy.sh' script. The main editor window displays the following code:

```
scripts > $ deploy.sh
1  #!/bin/bash
2  set -e
3
4  echo "Pulling latest image..."
5  docker pull $IMAGE_NAME
6
7  echo "Stopping existing container..."
8  docker compose -f docker/docker-compose.yml down || true
9
10 echo "Starting application..."
11 IMAGE_NAME=$IMAGE_NAME docker compose -f docker/docker-compose.yml up -d
```

Same what we have build and run write it as file to use during jenkins as image name is different each image it is from jenkins we are specifying it in jenkins pipeline

Version Control:

- push to GitHub to dev branch (use dockerignore and gitignore files)
- Note: Use only CLI for related git commands

We don't want some files to go to github (include those in .gitignore) and also some files not be included while building docker images (include those in .dockerignore)

Use git cli to commit all 4 files (script 2 files, .dockerignore and .gitignore)

```

CORP+naseIvar@LIN-7DT7RJ4 MINGW64 ~/Downloads/devops-build (main)
$ git add .
warning: in the working copy of 'scripts/build.sh', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'scripts/deploy.sh', LF will be replaced by CRLF the next time Git touches it
CORP+naseIvar@LIN-7DT7RJ4 MINGW64 ~/Downloads/devops-build (main)
$ git status
On branch main
Your branch is up to date with 'origin/main'.

Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
        new file:   scripts/.dockerignore
        new file:   scripts/.gitignore
        new file:   scripts/build.sh
        new file:   scripts/deploy.sh

CORP+naseIvar@LIN-7DT7RJ4 MINGW64 ~/Downloads/devops-build (main)
$ git commit -m "added script files,.dockerignore & .gitignore file"
[main b438df8] added script files,.dockerignore & .gitignore file
4 files changed, 41 insertions(+)
create mode 100644 scripts/.dockerignore
create mode 100644 scripts/.gitignore
create mode 100644 scripts/build.sh
create mode 100644 scripts/deploy.sh

CORP+naseIvar@LIN-7DT7RJ4 MINGW64 ~/Downloads/devops-build (main)
$ git push -u origin main
Enumerating objects: 8, done.
Counting objects: 100% (8/8), done.
Delta compression using up to 14 threads
Compressing objects: 100% (6/6), done.
Writing objects: 100% (7/7), 904 bytes | 301.00 KiB/s, done.
Total 7 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/Nalini-0212/devops-build.git
 7c15709..b438df8  main -> main
branch 'main' set up to track 'origin/main'.

CORP+naseIvar@LIN-7DT7RJ4 MINGW64 ~/Downloads/devops-build (main)
$

```



Github repo below

The screenshot shows the GitHub interface for a repository named 'devops-build' owned by 'Nalini-0212'. The repository is public and has 1 branch (main) and 0 tags. The commit history shows a recent commit 'b438df8' from 1 minute ago, titled 'added script files,.dockerignore & .gitignore file'. The commit details show four files added: 'app/build', 'docker', 'scripts', and 'README'. The 'scripts' directory contains 'build.sh' and 'deploy.sh'. The 'README' section is currently empty, with a prompt to 'Add a README'. The right sidebar shows the repository's 'About' section, stating it is a 'project for application deployment', and sections for 'Releases' and 'Packages', both of which are currently empty.

DockerHub:


- Create 2 repos "dev" and "prod" to push images

"prod" repo must be private and "dev" repo can be public

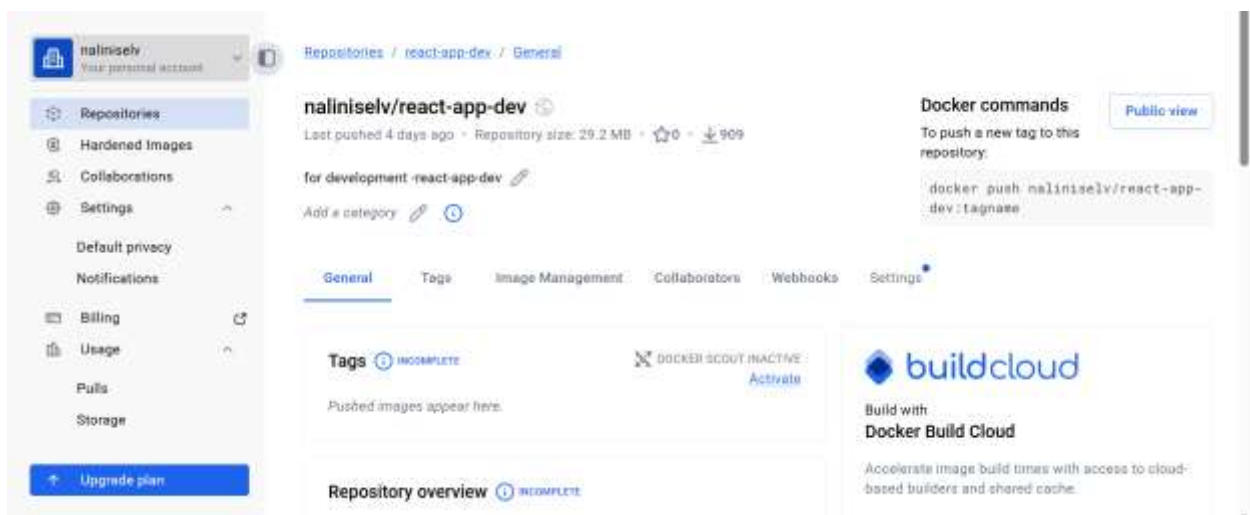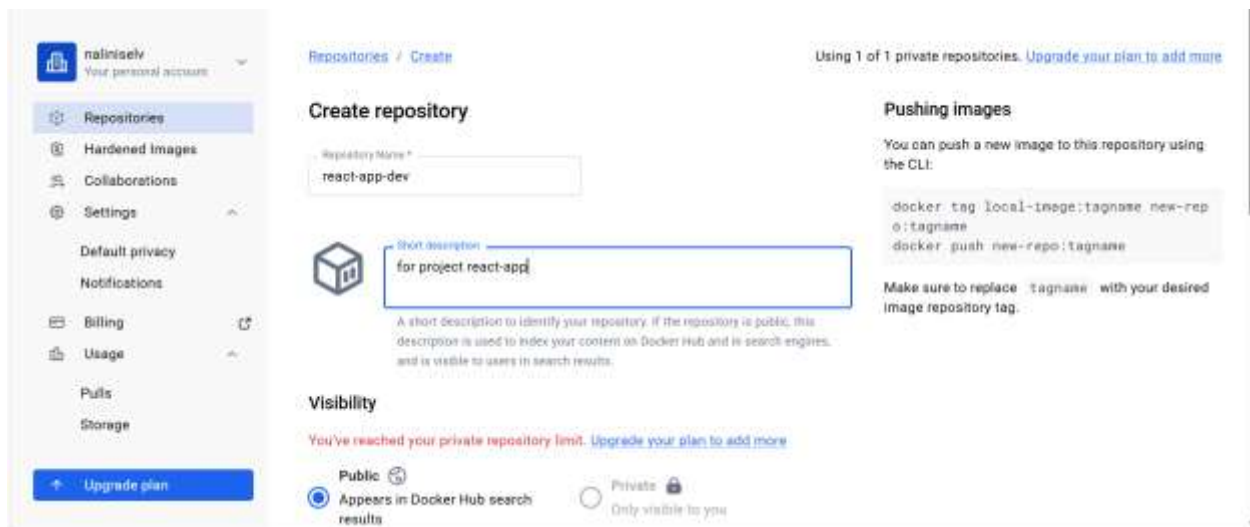

Public repo – nalinisely/react-app-dev

Below is private repo – nalinisely/react-app-prod. Lock shows private repo.

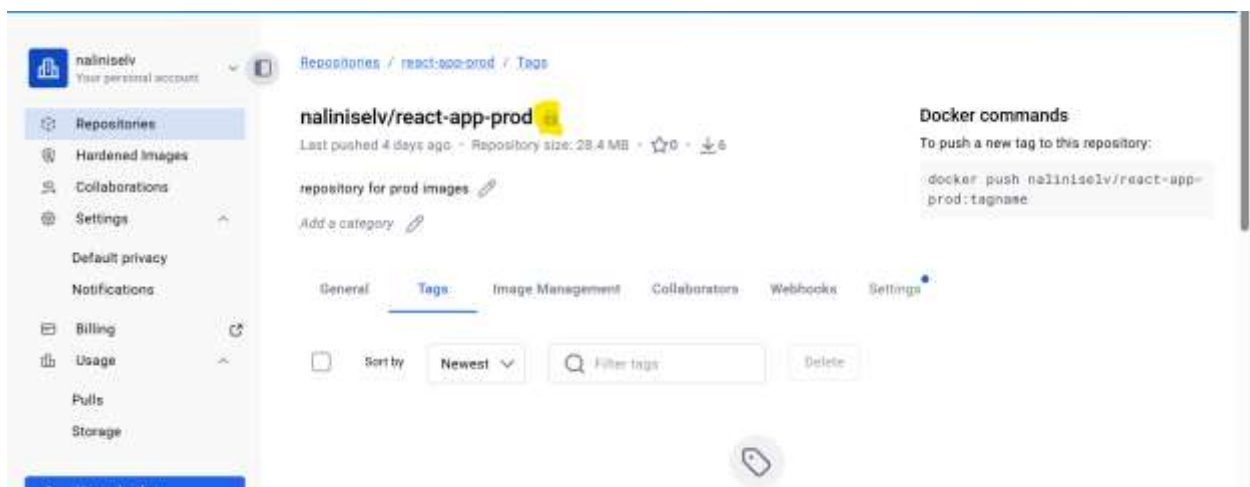

Jenkins:

- Install and configure Jenkins build step as per needs to build, push and deploy the application.
- connect Jenkins to the GitHub repo with auto build trigger from both dev and master branch.
- If code pushed to dev branch , docker image must build and pushed to dev repo in docker hub.
- If dev merged to master , then docker image must be pushed to prod repo in docker hub

Install jenkins refer documentation below:

Linux

Install java first

[illegible]


```

Adding debian:TeleSec_GlobalRoot_Class_3.pem
Adding debian:TWCA_Global_Root_CA.pem
Adding debian:TWCA_Global_Root_CA.pem
Adding debian:TWCA_Root_Certification_Authority.pem
Adding debian:Telecom_Security_TLS_ECC_Root_2020.pem
Adding debian:Telecom_Security_TLS_RSA_Root_2023.pem
Adding debian:Telia_Root_CA_v2.pem
Adding debian:TrustAsia_Global_Root_CA_G3.pem
Adding debian:TrustAsia_Global_Root_CA_G4.pem
Adding debian:TrustAsia_TLS_ECC_Root_CA.pem
Adding debian:TrustAsia_TLS_RSA_Root_CA.pem
Adding debian:TunTrust_Root_CA.pem
Adding debian:UCA_Extended_Validation_Root.pem
Adding debian:UCA_Global_G2_Root.pem
Adding debian:USERTrust_ECC_Certification_Authority.pem
Adding debian:USERTrust_RSA_Certification_Authority.pem
Adding debian:certSIGN_Root_CA_G2.pem
Adding debian:certSIGN_Root_CA_G3.pem
Adding debian:certSIGN_Root_CA_G4.pem
Adding debian:certSIGN_Root_CA_G5.pem
Adding debian:certSIGN_Root_CA_G6.pem
Adding debian:certSIGN_Root_CA_G7.pem
Adding debian:certSIGN_Root_CA_G8.pem
Adding debian:certSIGN_Root_CA_G9.pem
Adding debian:certSIGN_Root_CA_G10.pem
Adding debian:certSIGN_Root_CA_G11.pem
Adding debian:certSIGN_Root_CA_G12.pem
Adding debian:certSIGN_Root_CA_G13.pem
Adding debian:certSIGN_Root_CA_G14.pem
Adding debian:certSIGN_Root_CA_G15.pem
Adding debian:certSIGN_Root_CA_G16.pem
Adding debian:certSIGN_Root_CA_G17.pem
Adding debian:certSIGN_Root_CA_G18.pem
Adding debian:certSIGN_Root_CA_G19.pem
Adding debian:certSIGN_Root_CA_G20.pem
Adding debian:certSIGN_Root_CA_G21.pem
Adding debian:certSIGN_Root_CA_G22.pem
Adding debian:certSIGN_Root_CA_G23.pem
Adding debian:certSIGN_Root_CA_G24.pem
Adding debian:certSIGN_Root_CA_G25.pem
Adding debian:certSIGN_Root_CA_G26.pem
Adding debian:certSIGN_Root_CA_G27.pem
Adding debian:certSIGN_Root_CA_G28.pem
Adding debian:certSIGN_Root_CA_G29.pem
Adding debian:certSIGN_Root_CA_G30.pem
Adding debian:certSIGN_Root_CA_G31.pem
Adding debian:certSIGN_Root_CA_G32.pem
Adding debian:certSIGN_Root_CA_G33.pem
Adding debian:certSIGN_Root_CA_G34.pem
Adding debian:certSIGN_Root_CA_G35.pem
Adding debian:certSIGN_Root_CA_G36.pem
Adding debian:certSIGN_Root_CA_G37.pem
Adding debian:certSIGN_Root_CA_G38.pem
Adding debian:certSIGN_Root_CA_G39.pem
Adding debian:certSIGN_Root_CA_G40.pem
Adding debian:certSIGN_Root_CA_G41.pem
Adding debian:certSIGN_Root_CA_G42.pem
Adding debian:certSIGN_Root_CA_G43.pem
Adding debian:certSIGN_Root_CA_G44.pem
Adding debian:certSIGN_Root_CA_G45.pem
Adding debian:certSIGN_Root_CA_G46.pem
Adding debian:certSIGN_Root_CA_G47.pem
Adding debian:certSIGN_Root_CA_G48.pem
Adding debian:certSIGN_Root_CA_G49.pem
Adding debian:certSIGN_Root_CA_G50.pem
Adding debian:certSIGN_Root_CA_G51.pem
Adding debian:certSIGN_Root_CA_G52.pem
Adding debian:certSIGN_Root_CA_G53.pem
Adding debian:certSIGN_Root_CA_G54.pem
Adding debian:certSIGN_Root_CA_G55.pem
Adding debian:certSIGN_Root_CA_G56.pem
Adding debian:certSIGN_Root_CA_G57.pem
Adding debian:certSIGN_Root_CA_G58.pem
Adding debian:certSIGN_Root_CA_G59.pem
Adding debian:certSIGN_Root_CA_G60.pem
Adding debian:certSIGN_Root_CA_G61.pem
Adding debian:certSIGN_Root_CA_G62.pem
Adding debian:certSIGN_Root_CA_G63.pem
Adding debian:certSIGN_Root_CA_G64.pem
Adding debian:certSIGN_Root_CA_G65.pem
Adding debian:certSIGN_Root_CA_G66.pem
Adding debian:certSIGN_Root_CA_G67.pem
Adding debian:certSIGN_Root_CA_G68.pem
Adding debian:certSIGN_Root_CA_G69.pem
Adding debian:certSIGN_Root_CA_G70.pem
Adding debian:certSIGN_Root_CA_G71.pem
Adding debian:certSIGN_Root_CA_G72.pem
Adding debian:certSIGN_Root_CA_G73.pem
Adding debian:certSIGN_Root_CA_G74.pem
Adding debian:certSIGN_Root_CA_G75.pem
Adding debian:certSIGN_Root_CA_G76.pem
Adding debian:certSIGN_Root_CA_G77.pem
Adding debian:certSIGN_Root_CA_G78.pem
Adding debian:certSIGN_Root_CA_G79.pem
Adding debian:certSIGN_Root_CA_G80.pem
Adding debian:certSIGN_Root_CA_G81.pem
Adding debian:certSIGN_Root_CA_G82.pem
Adding debian:certSIGN_Root_CA_G83.pem
Adding debian:certSIGN_Root_CA_G84.pem
Adding debian:certSIGN_Root_CA_G85.pem
Adding debian:certSIGN_Root_CA_G86.pem
Adding debian:certSIGN_Root_CA_G87.pem
Adding debian:certSIGN_Root_CA_G88.pem
Adding debian:certSIGN_Root_CA_G89.pem
Adding debian:certSIGN_Root_CA_G90.pem
Adding debian:certSIGN_Root_CA_G91.pem
Adding debian:certSIGN_Root_CA_G92.pem
Adding debian:certSIGN_Root_CA_G93.pem
Adding debian:certSIGN_Root_CA_G94.pem
Adding debian:certSIGN_Root_CA_G95.pem
Adding debian:certSIGN_Root_CA_G96.pem
Adding debian:certSIGN_Root_CA_G97.pem
Adding debian:certSIGN_Root_CA_G98.pem
Adding debian:certSIGN_Root_CA_G99.pem
Adding debian:certSIGN_Root_CA_G100.pem
done.
Setting up openjdk-11-jre:amd64 (21.0.11+10-1-26.04.2) ...
Processing triggers for libc-bin (2.41-2ubuntu2) ...
Processing triggers for libgdk-pixbuf-2.0-0:amd64 (2.44.5+dfsg-4ubuntu1) ...
Scanning processes...
Scanning linux images...

Running kernel seems to be up-to-date.

No services need to be restarted.

No containers need to be restarted.

No user sessions are running outdated binaries.

No VM guests are running outdated hypervisor (qemu) binaries on this host.
openjdk version "21.0.11" 2026-04-21
OpenJDK Runtime Environment (build 21.0.11+10-1-26.04.2-Ubuntu)
OpenJDK 64-Bit Server VM (build 21.0.11+10-1-26.04.2-Ubuntu, mixed mode, sharing)
ubuntu@ip-172-31-4-192:~$ java -version
Error: Could not find or load main class version
Caused by: java.lang.ClassNotFoundException: version
ubuntu@ip-172-31-4-192:~$ java --version
openjdk 21.0.11 2026-04-21
OpenJDK Runtime Environment (build 21.0.11+10-1-26.04.2-Ubuntu)
OpenJDK 64-Bit Server VM (build 21.0.11+10-1-26.04.2-Ubuntu, mixed mode, sharing)
ubuntu@ip-172-31-4-192:~$

```

Install jenkins now

```

ubuntu@ip-172-31-4-192:~$ sudo wget -O /etc/apt/keyrings/jenkins-keyring.asc \
https://pkg.jenkins.io/debian-stable/jenkins.io-2026.key
echo "deb [signed-by=/etc/apt/keyrings/jenkins-keyring.asc] \
https://pkg.jenkins.io/debian-stable binary/" | sudo tee \
/etc/apt/sources.list.d/jenkins.list > /dev/null
sudo apt update
sudo apt install jenkins
--2026-07-09 06:13:40-- https://pkg.jenkins.io/debian-stable/jenkins.io-2026.key
Resolving pkg.jenkins.io (pkg.jenkins.io)... 151.101.210.133, 2a04:4e42:131::645
Connecting to pkg.jenkins.io (pkg.jenkins.io)|151.101.210.133|:443... connected.
HTTP request sent, awaiting response... 200 OK
Length: 1680 (1.6K) [application/octet-stream]
Saving to: '/etc/apt/keyrings/jenkins-keyring.asc'

/etc/apt/keyrings/jenkins-keyring.asc 100%[=====] 1.64K --.-KB/s in 0s

2026-07-09 06:13:40 (25.7 MB/s) - '/etc/apt/keyrings/jenkins-keyring.asc' saved [1680/1680]

Hit:1 http://sp-south-1.ec2.archive.ubuntu.com/ubuntu focal InRelease
Hit:2 http://sp-south-1.ec2.archive.ubuntu.com/ubuntu focal-updates InRelease
Hit:3 http://sp-south-1.ec2.archive.ubuntu.com/ubuntu focal-backports InRelease
Ign:4 https://pkg.jenkins.io/debian-stable binary/ InRelease
Hit:5 https://download.docker.com/linux/ubuntu focal InRelease
Get:6 https://pkg.jenkins.io/debian-stable binary/ Release [2044 B]
Get:7 https://pkg.jenkins.io/debian-stable binary/ Packages [633 B]
Get:8 https://pkg.jenkins.io/debian-stable binary/ Packages [31.2 kB]
Hit:9 http://security.ubuntu.com/ubuntu focal-security InRelease
Fetched 34.0 kB in 1s (67.2 kB/s)
14 packages can be upgraded. Run 'apt list --upgradable' to see them.

```

```

Hit:1 http://ap-south-1.ec2.archive.ubuntu.com/ubuntu release InRelease
Hit:2 http://ap-south-1.ec2.archive.ubuntu.com/ubuntu release-updates InRelease
Hit:3 http://ap-south-1.ec2.archive.ubuntu.com/ubuntu release-backports InRelease
Ign:4 https://pkg.jenkins.io/debian-stable binary/ InRelease
Hit:5 https://download.docker.com/linux/ubuntu release InRelease
Get:6 https://pkg.jenkins.io/debian-stable binary/ Release [204 B]
Get:7 https://pkg.jenkins.io/debian-stable binary/ Release.gpg [333 B]
Get:8 https://pkg.jenkins.io/debian-stable binary/ Packages [31.2 kB]
Hit:9 http://security.ubuntu.com/ubuntu release-security InRelease
Fetched 34.0 kB in 1s (67.2 kB/s)
54 packages can be upgraded. Run 'apt list --upgradable' to see them.
Installing:
jenkins

Installing dependencies:
net-tools

Summary:
Upgrading: 0, Installing: 2, Removing: 0, Not Upgrading: 54
Download size: 99.8 MB
Space needed: 101 MB / 68.3 GB available

Continue? [Y/n] Y
Get:1 http://ap-south-1.ec2.archive.ubuntu.com/ubuntu release/main amd64 net-tools amd64 2.10-2ubuntu1 [152 kB]
Get:2 https://pkg.jenkins.io/debian-stable binary/ jenkins 2.555.3 [39.4 MB]
Fetched 99.8 MB in 6s (17.2 MB/s)
Selecting previously unselected package net-tools.
(Reading database ... 89782 files and directories currently installed.)
Preparing to unpack .../net-tools_2.10-2ubuntu1_amd64.deb ...
Unpacking net-tools (2.10-2ubuntu1) ...
Selecting previously unselected package jenkins.
Preparing to unpack .../jenkins_2.555.3_all.deb ...
Unpacking jenkins (2.555.3) ...
Setting up net-tools (2.10-2ubuntu1) ...
Setting up jenkins (2.555.3) ...
Created symlink '/etc/systemd/system/multi-user.target.wants/jenkins.service' -> '/usr/lib/systemd/system/jenkins.service'.
Processing triggers for man-db (2.10.1-1build1) ...
Scanning processes...
Scanning linux images...

Running kernel seems to be up-to-date.

No services need to be restarted.

No containers need to be restarted.

No user sessions are running outdated binaries.

No VM guests are running outdated hypervisor (qemu) binaries on this host.
ubuntu@ip-172-31-4-192:~$ jenkins --version
2.555.3
ubuntu@ip-172-31-4-192:~$

```

Add jenkins to docker group as jenkins user is one going to execute all commands

```

Running kernel seems to be up-to-date.

No services need to be restarted.

No containers need to be restarted.

No user sessions are running outdated binaries.

No VM guests are running outdated hypervisor (qemu) binaries on this host.
ubuntu@ip-172-31-4-192:~$ jenkins --version
2.555.3
ubuntu@ip-172-31-4-192:~$ sudo usermod -ad docker jenkins
ubuntu@ip-172-31-4-192:~$ sudo systemctl restart jenkins
ubuntu@ip-172-31-4-192:~$ sudo su - jenkins
jenkins@ip-172-31-4-192:~$ pwd
/var/lib/jenkins
jenkins@ip-172-31-4-192:~$ docker images

```

IMAGE ID	DISK USAGE	CONTENT SIZE	EXTRA
jenkins@ip-172-31-4-192:~\$			

Write jenkins file to build, push & deploy applications (prod)

We need to create 2 branches in git dev one branch we will build image and push to dev (public repo) automatically triggered by webhook in docker hub and deploy manually and test it

And then if testing is fine . then raise pull request to merge dev to main repo and then deploy (automatically).


Mutibranch pipeline in jenkins

If dev branch -> dev pipeline only build & push to dockerhub dev repo and deploy manually


If merged with main -> main pipeline will trigger automatically which will build, push and deploy to server.

We assumed same jenkins server to deploy application as instruction says ssh from only my ip.


Create jenkins file

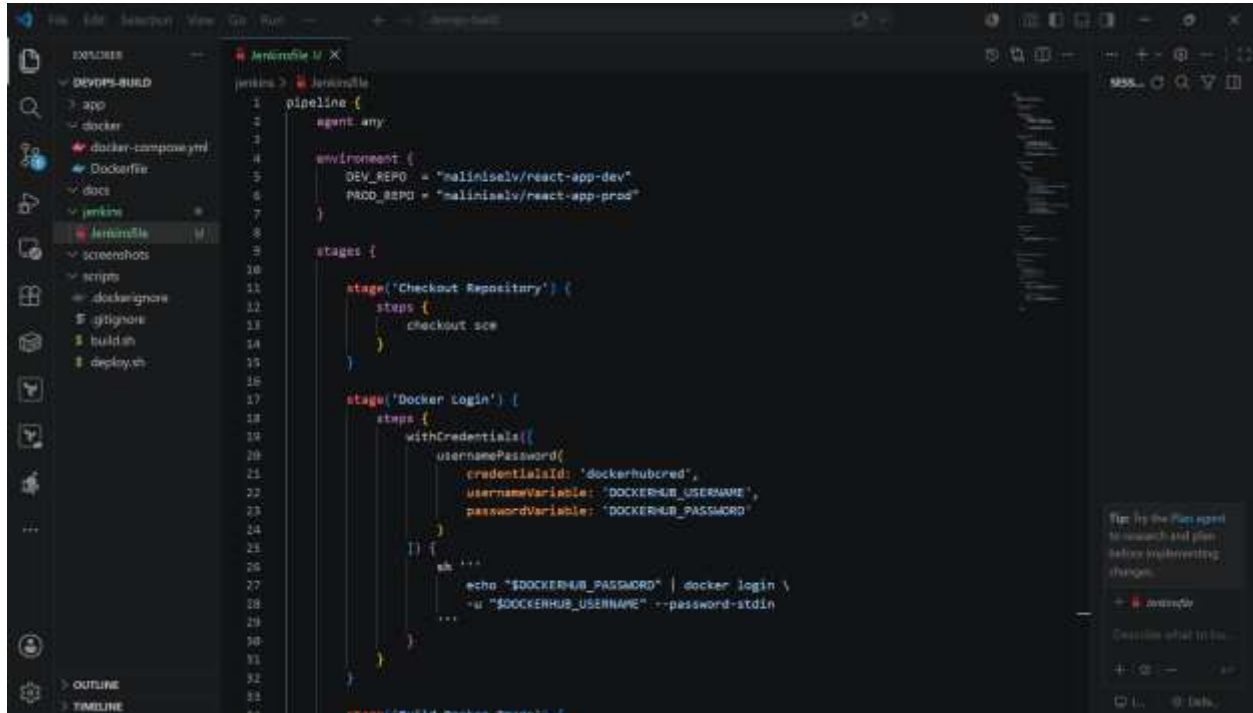


```
jenkins > Jenkinsfile
1 pipeline {
2   agent any
3
4   environment {
5     DEV_REPO = "maliniaselv/react-app-dev"
6     PROD_REPO = "maliniaselv/react-app-prod"
7   }
8
9   stages {
10
11     stage('Checkout Repository') {
12       steps {
13         checkout scm
14       }
15     }
16
17     stage('Docker Login') {
18       steps {
19         withCredentials([
20           usernamePassword(
21             credentialId: 'dockerhubcred',
22             usernameVariable: 'DOCKERHUB_USERNAME',
23             passwordVariable: 'DOCKERHUB_PASSWORD'
24           )
25         ]) {
26           sh """
27             echo "${DOCKERHUB_PASSWORD}" | docker login \
28             -u "${DOCKERHUB_USERNAME}" --password-stdin
29           """
30         }
31       }
32     }
33
34     stage('Build Docker Image') {
35       steps {
36         script {
37           if (env.BRANCH_NAME == "dev") {
38             env.IMAGE_NAME = "${DEV_REPO}:latest"
39           } else if (env.BRANCH_NAME == "main") {
40             env.IMAGE_NAME = "${PROD_REPO}:latest"
41           } else {
42             error "Unsupported branch: ${env.BRANCH_NAME}"
43           }
44         }
45
46         sh """
47           chmod +x scripts/build.sh
48           IMAGE_NAME=${env.IMAGE_NAME} ./scripts/build.sh
49         """
50       }
51     }
52
53     stage('Push Docker Image') {
54       when {
55         anyOf {
56           branch 'dev'
57           branch 'main'
58         }
59       }
60       steps {
61         docker.push(
62           image: env.IMAGE_NAME,
63           registry: 'dockerhub',
64           username: 'maliniaselv',
65           password: 'maliniaselv'
66         )
67       }
68     }
69   }
70 }
```

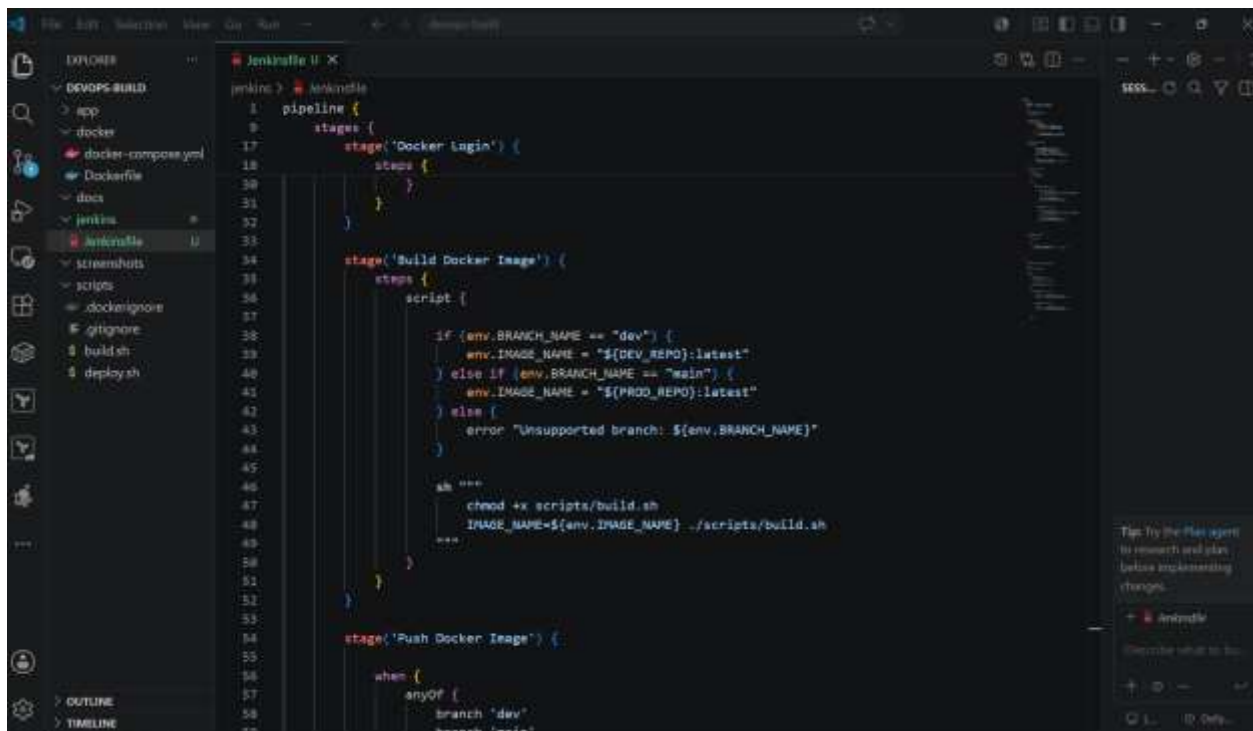


```
jenkins > Jenkinsfile
1 pipeline {
2   agent any
3
4   environment {
5     DEV_REPO = "maliniaselv/react-app-dev"
6     PROD_REPO = "maliniaselv/react-app-prod"
7   }
8
9   stages {
10
11     stage('Checkout Repository') {
12       steps {
13         checkout scm
14       }
15     }
16
17     stage('Docker Login') {
18       steps {
19         withCredentials([
20           usernamePassword(
21             credentialId: 'dockerhubcred',
22             usernameVariable: 'DOCKERHUB_USERNAME',
23             passwordVariable: 'DOCKERHUB_PASSWORD'
24           )
25         ]) {
26           sh """
27             echo "${DOCKERHUB_PASSWORD}" | docker login \
28             -u "${DOCKERHUB_USERNAME}" --password-stdin
29           """
30         }
31       }
32     }
33
34     stage('Build Docker Image') {
35       steps {
36         script {
37           if (env.BRANCH_NAME == "dev") {
38             env.IMAGE_NAME = "${DEV_REPO}:latest"
39           } else if (env.BRANCH_NAME == "main") {
40             env.IMAGE_NAME = "${PROD_REPO}:latest"
41           } else {
42             error "Unsupported branch: ${env.BRANCH_NAME}"
43           }
44         }
45
46         sh """
47           chmod +x scripts/build.sh
48           IMAGE_NAME=${env.IMAGE_NAME} ./scripts/build.sh
49         """
50       }
51     }
52
53     stage('Push Docker Image') {
54       when {
55         anyOf {
56           branch 'dev'
57           branch 'main'
58         }
59       }
60       steps {
61         docker.push(
62           image: env.IMAGE_NAME,
63           registry: 'dockerhub',
64           username: 'maliniaselv',
65           password: 'maliniaselv'
66         )
67       }
68     }
69   }
70 }
```

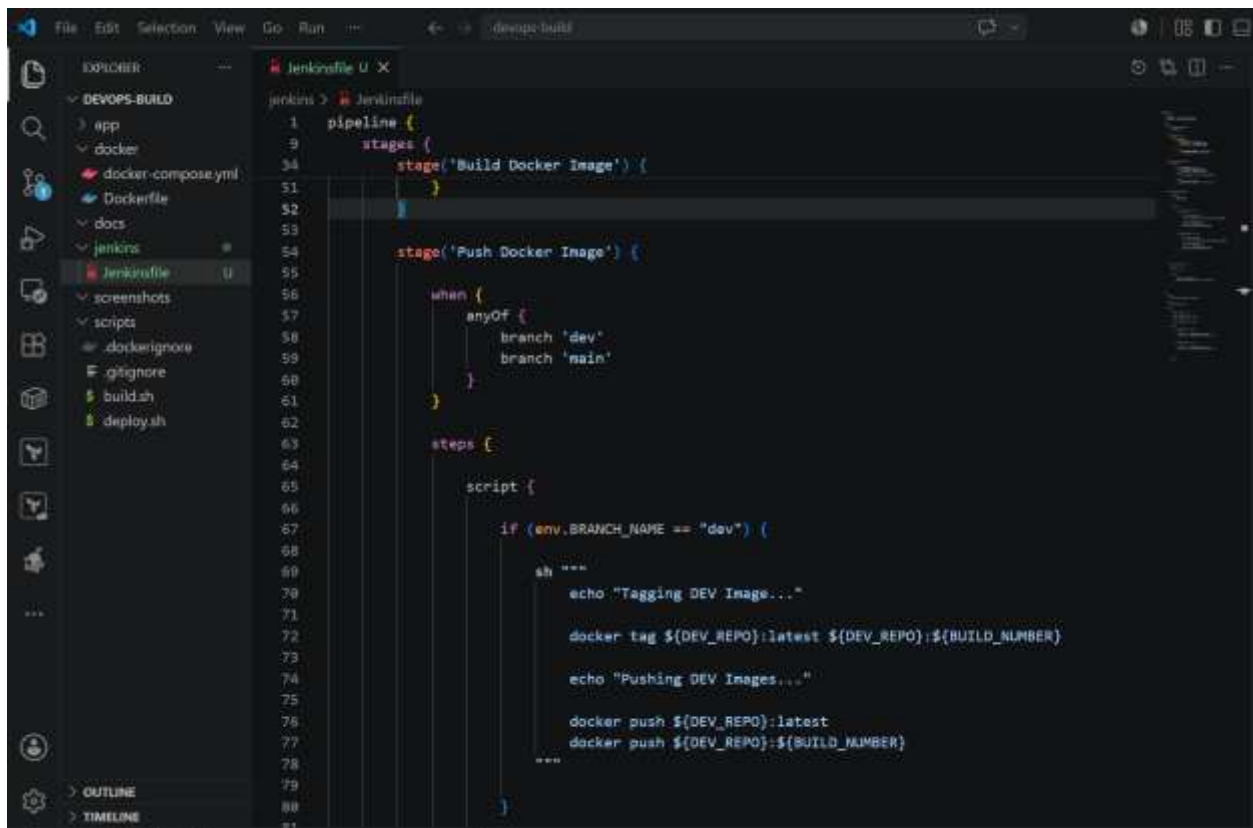

```
jenkins > Jenkinsfile
1 pipeline {
9   stages {
34     stage('Build Docker Image') {
51     }
52   }
53
54   stage('Push Docker Image') {
55
56     when {
57       anyOf {
58         branch 'dev'
59         branch 'main'
60       }
61     }
62
63     steps {
64
65       script {
66
67         if (env.BRANCH_NAME == "dev") {
68
69           sh """
70             echo "Tagging DEV Image..."
71
72             docker tag ${DEV_REPO}:latest ${DEV_REPO}:${BUILD_NUMBER}
73
74             echo "Pushing DEV Images..."
75
76             docker push ${DEV_REPO}:latest
77             docker push ${DEV_REPO}:${BUILD_NUMBER}
78           """
79
80         }
81       }
82     }
83   }
84 }
```

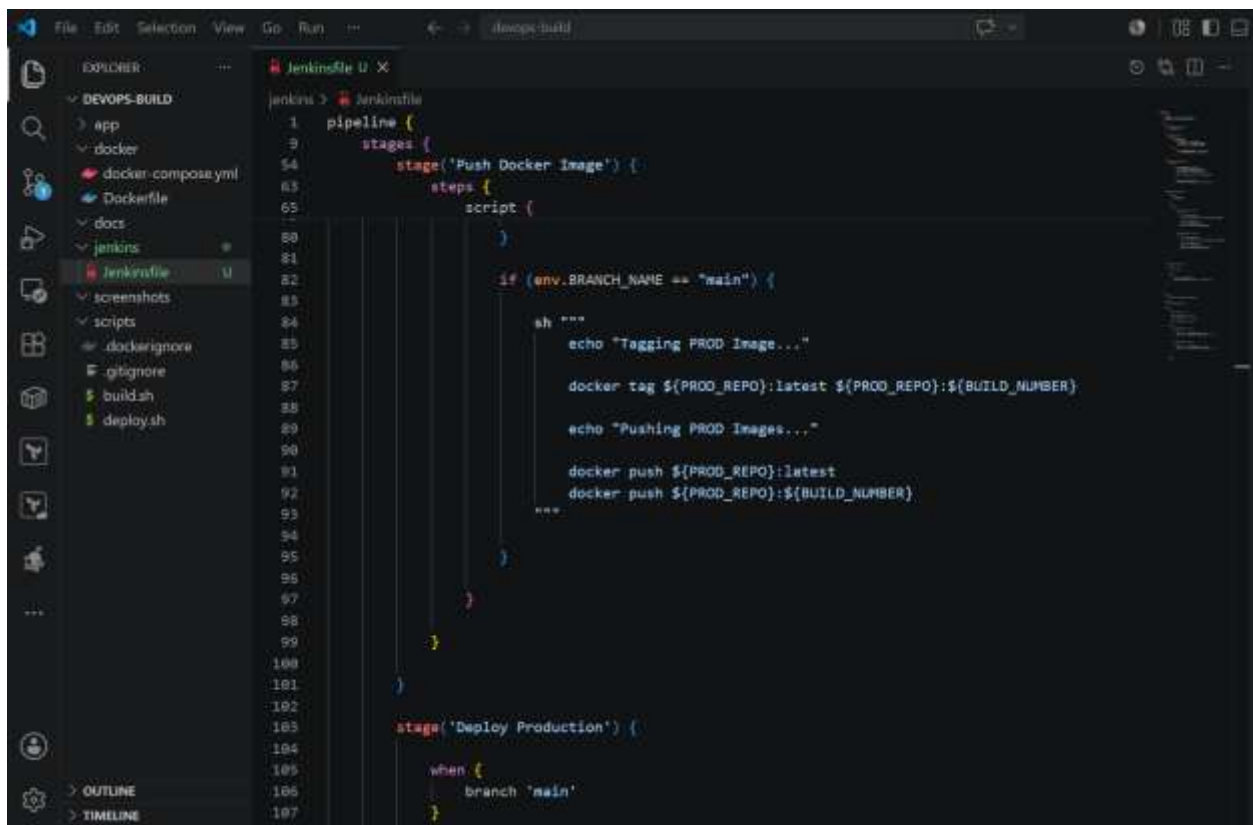


```
jenkins > Jenkinsfile
1 pipeline {
9   stages {
54     stage('Push Docker Image') {
63       steps {
65         script {
66
67           if (env.BRANCH_NAME == "main") {
68
69             sh """
70               echo "Tagging PROD Image..."
71
72               docker tag ${PROD_REPO}:latest ${PROD_REPO}:${BUILD_NUMBER}
73
74               echo "Pushing PROD Images..."
75
76               docker push ${PROD_REPO}:latest
77               docker push ${PROD_REPO}:${BUILD_NUMBER}
78             """
79
80           }
81         }
82       }
83     }
84
85     stage('Deploy Production') {
86
87       when {
88         branch 'main'
89       }
90     }
91   }
92 }
```

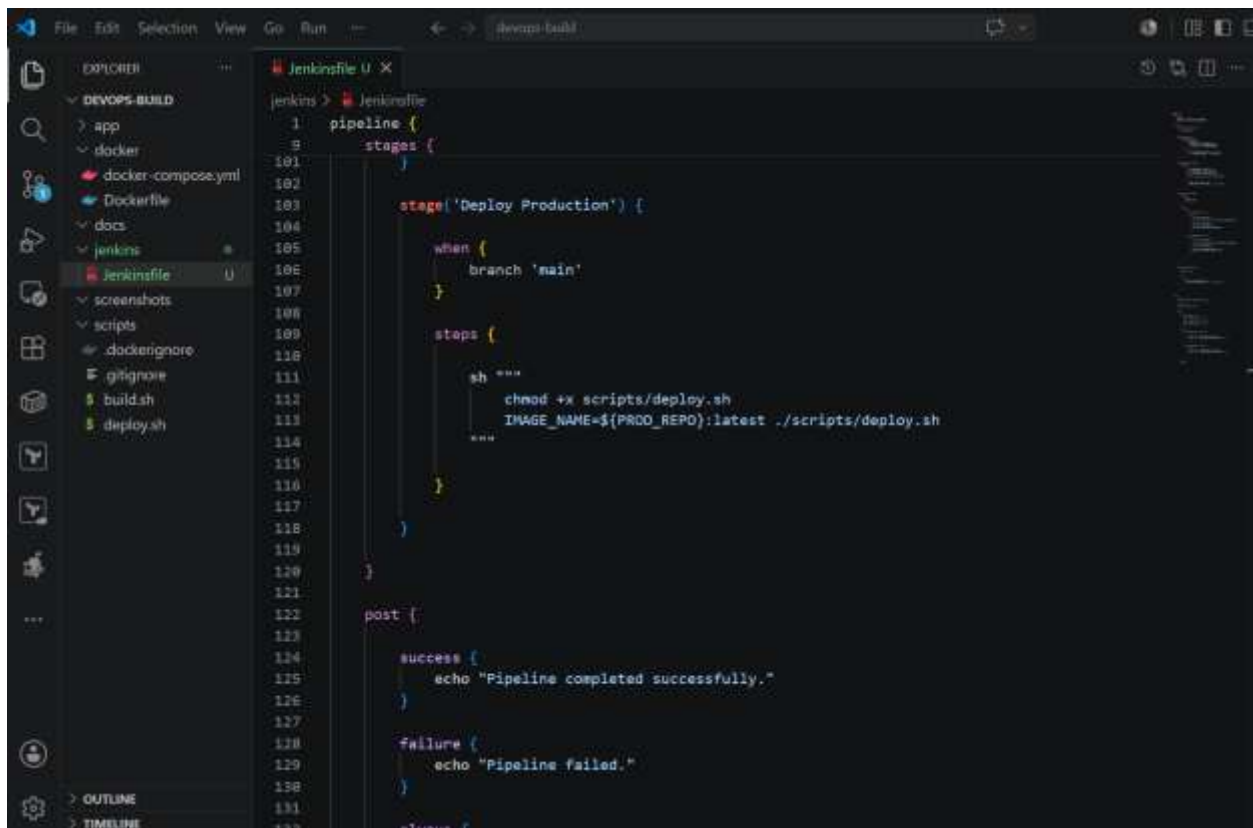


This screenshot shows a VS Code editor with a file explorer on the left and a code editor on the right. The file explorer shows a project structure with folders like 'app', 'docker', 'docs', and 'jenkins'. The 'jenkins' folder contains a 'Jenkinsfile'. The code editor displays the 'Jenkinsfile' with the following content:

```
jenkins > Jenkinsfile
1 pipeline {
2   stages {
101   }
102
103   stage('Deploy Production') {
104
105     when {
106       branch 'main'
107     }
108
109     steps {
110
111       sh """
112         chmod +x scripts/deploy.sh
113         IMAGE_NAME=${PROD_REPO}:latest ./scripts/deploy.sh
114       """
115
116     }
117   }
118 }
119
120
121
122 post {
123
124   success {
125     echo "Pipeline completed successfully."
126   }
127
128   failure {
129     echo "Pipeline failed."
130   }
131
132 }
133
134 always {
```

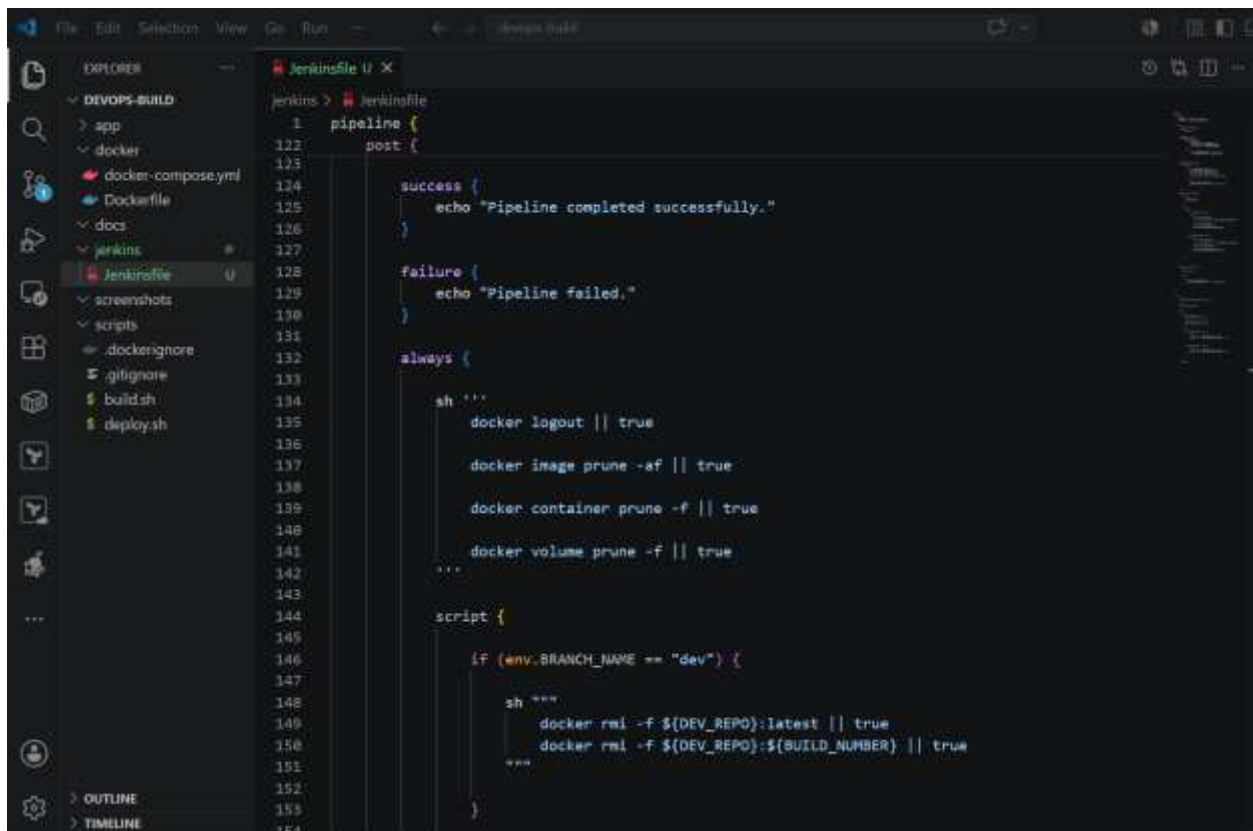

This screenshot shows the same VS Code editor with the 'Jenkinsfile' open. The code editor displays the following content:

```
jenkins > Jenkinsfile
1 pipeline {
122   post {
123
124     success {
125       echo "Pipeline completed successfully."
126     }
127
128     failure {
129       echo "Pipeline failed."
130     }
131
132     always {
133
134       sh '''
135         docker logout || true
136
137         docker image prune -af || true
138
139         docker container prune -f || true
140
141         docker volume prune -f || true
142         ...
143
144       script {
145
146         if (env.BRANCH_NAME == "dev") {
147
148           sh """
149             docker rmi -f ${DEV_REPO}:latest || true
150             docker rmi -f ${DEV_REPO}:${BUILD_NUMBER} || true
151           """
152
153         }
154       }
155     }
156   }
157 }
```

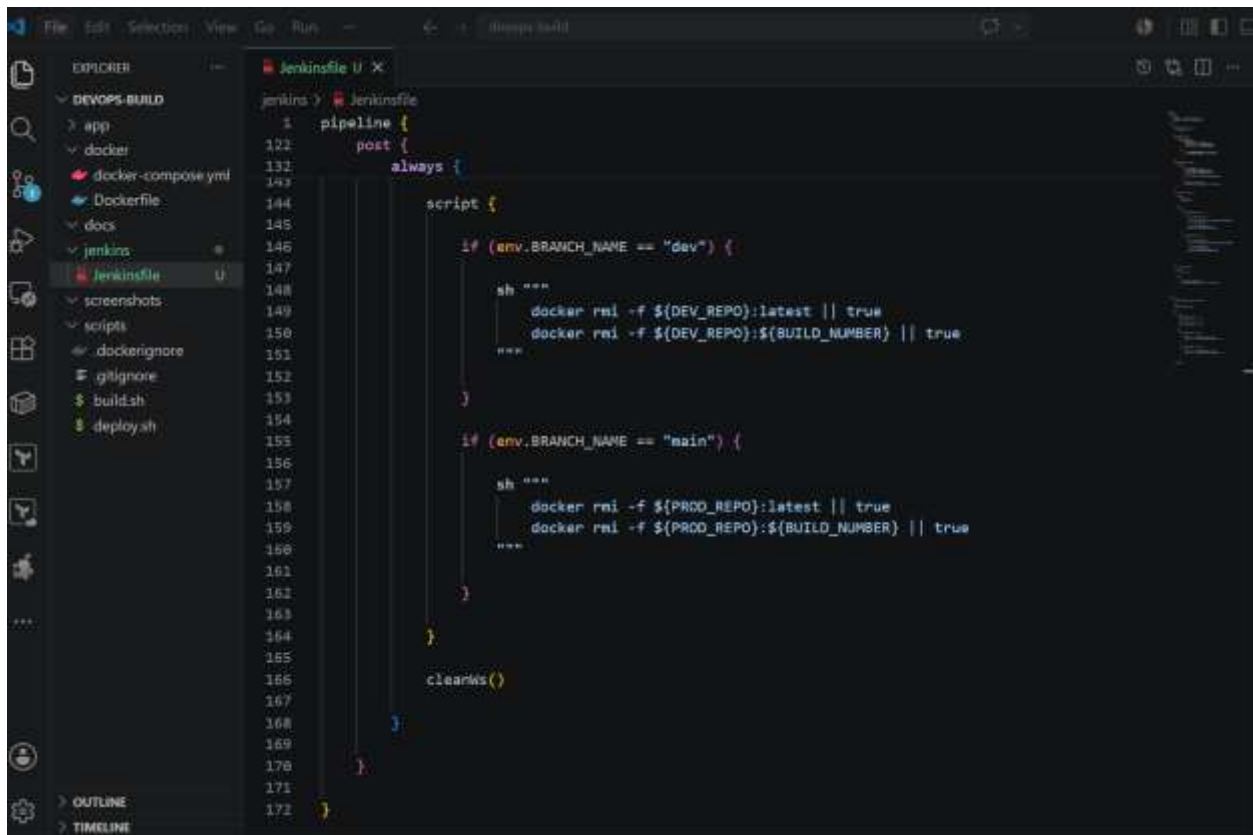

The screenshot shows a code editor with a file explorer on the left and a code editor on the right. The file explorer shows a project structure with folders like 'app', 'docker', 'docs', 'jenkins', 'screenshots', and 'scripts'. The 'jenkins' folder is expanded, showing a file named 'Jenkinsfile'. The code editor displays the content of 'Jenkinsfile', which is a Jenkins pipeline script. The script defines a pipeline with a 'post' block containing an 'always' block. Inside the 'always' block, there is a 'script' block that contains two conditional blocks. The first conditional block checks if the environment variable 'BRANCH_NAME' is equal to 'dev'. If true, it runs a shell script that builds a Docker image from the 'dev' branch. The second conditional block checks if the environment variable 'BRANCH_NAME' is equal to 'main'. If true, it runs a shell script that builds a Docker image from the 'main' branch. The script ends with a 'cleanWs()' call.

```
jenkinsfile
1 pipeline {
122   post {
132     always {
142       script {
146         if (env.BRANCH_NAME == "dev") {
147
148           sh """
149             docker rmi -f ${DEV_REPO}:latest || true
150             docker rmi -f ${DEV_REPO}:${BUILD_NUMBER} || true
151           """
152         }
153
154         if (env.BRANCH_NAME == "main") {
155
156           sh """
157             docker rmi -f ${PROD_REPO}:latest || true
158             docker rmi -f ${PROD_REPO}:${BUILD_NUMBER} || true
159           """
160         }
161       }
162     }
163   }
164 }
165
166 cleanWs()
167
168 }
169
170
171
172 }
```

Go to git cli and create a branch by checking out

Instead of pushing to main. Push to dev . later we will raise pull request and merge


```

CORP+nase1var@LIN-7DT7RJ4 MINGW64 ~/Downloads/devops-build (main)
$ ls
app/  docker/  docs/  jenkins/  screenshots/  scripts/

CORP+nase1var@LIN-7DT7RJ4 MINGW64 ~/Downloads/devops-build (main)
$ git branch
* main

CORP+nase1var@LIN-7DT7RJ4 MINGW64 ~/Downloads/devops-build (main)
$ git status
On branch main
Your branch is up to date with 'origin/main'.

Untracked files:
  (use "git add <file>..." to include in what will be committed)
    jenkins/

nothing added to commit but untracked files present (use "git add" to track)

CORP+nase1var@LIN-7DT7RJ4 MINGW64 ~/Downloads/devops-build (main)
$ git checkout -b dev
Switched to a new branch 'dev'

CORP+nase1var@LIN-7DT7RJ4 MINGW64 ~/Downloads/devops-build (dev)
$ ls
app/  docker/  docs/  jenkins/  screenshots/  scripts/

CORP+nase1var@LIN-7DT7RJ4 MINGW64 ~/Downloads/devops-build (dev)
$ git status
On branch dev
Untracked files:
  (use "git add <file>..." to include in what will be committed)
    jenkins/

nothing added to commit but untracked files present (use "git add" to track)

CORP+nase1var@LIN-7DT7RJ4 MINGW64 ~/Downloads/devops-build (dev)
$ git add .

CORP+nase1var@LIN-7DT7RJ4 MINGW64 ~/Downloads/devops-build (dev)
$ git commit -m "added jenkinsfile to dev branch"
[dev 5a30428] added jenkinsfile to dev branch
1 file changed, 172 insertions(+)
create mode 100644 jenkins/Jenkinsfile

CORP+nase1var@LIN-7DT7RJ4 MINGW64 ~/Downloads/devops-build (dev)
$ git status
On branch dev
nothing to commit, working tree clean

CORP+nase1var@LIN-7DT7RJ4 MINGW64 ~/Downloads/devops-build (dev)
$ |

```

```


CORP+nase1var@LIN-7DT7RJ4 MINGW64 ~/Downloads/devops-build (dev)
$ git push -u origin dev
Enumerating objects: 5, done.
Counting objects: 100% (5/5), done.
Delta compression using up to 14 threads
Compressing objects: 100% (3/3), done.
Writing objects: 100% (4/4), 1.20 KiB | 614.00 KiB/s, done.
Total 4 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
remote:
remote: Create a pull request for 'dev' on GitHub by visiting:
remote:   https://github.com/Nalini-0212/devops-build/pull/new/dev
remote:
To https://github.com/Nalini-0212/devops-build.git
 * [new branch]      dev -> dev
branch 'dev' set up to track 'origin/dev'.

CORP+nase1var@LIN-7DT7RJ4 MINGW64 ~/Downloads/devops-build (dev)
$ |


```

Go to github

The screenshot shows the GitHub repository page for 'devops-build' by user 'Nalini-0212'. The repository is public and has 2 branches and 0 tags. The main branch is selected. The repository description is 'project for application deployment'. The repository has 0 stars, 0 watching, and 0 forks. The repository has 3 commits. The repository has no releases published. The repository has no packages published. The repository has a README file. The repository has a 'dev' branch with recent pushes 55 seconds ago. The repository has a 'Compare & pull request' button. The repository has a 'Code' button. The repository has a 'README' file. The repository has a 'Add a README' button.

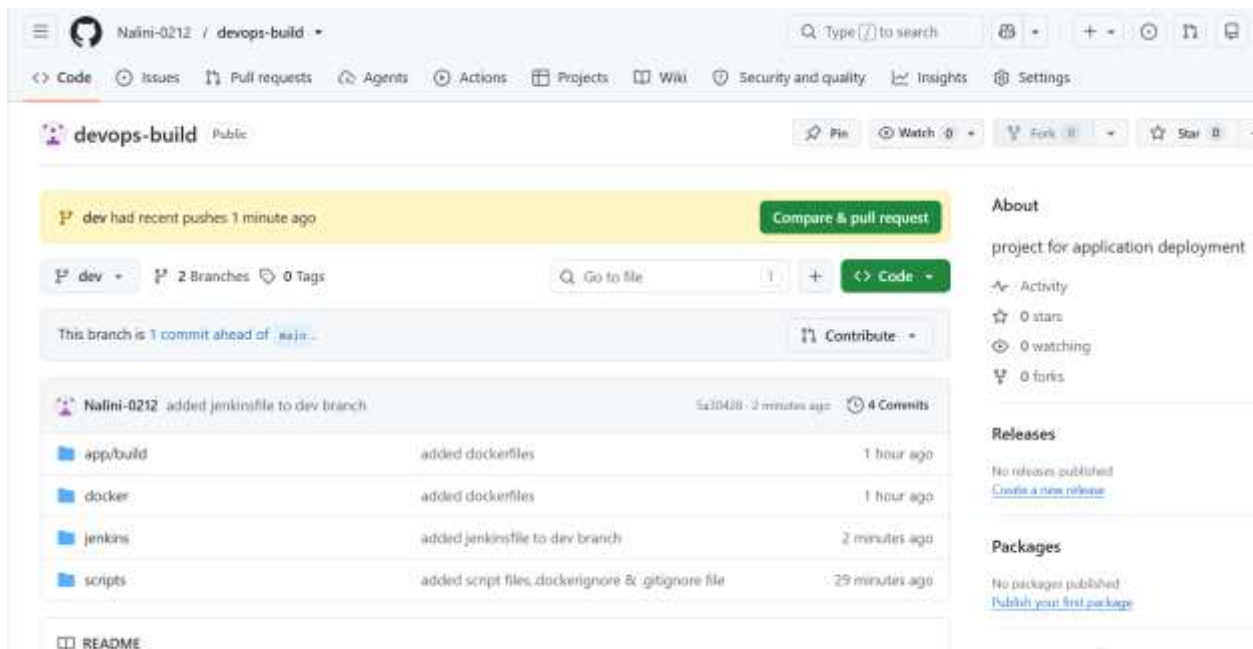

Now go and configure jenkins

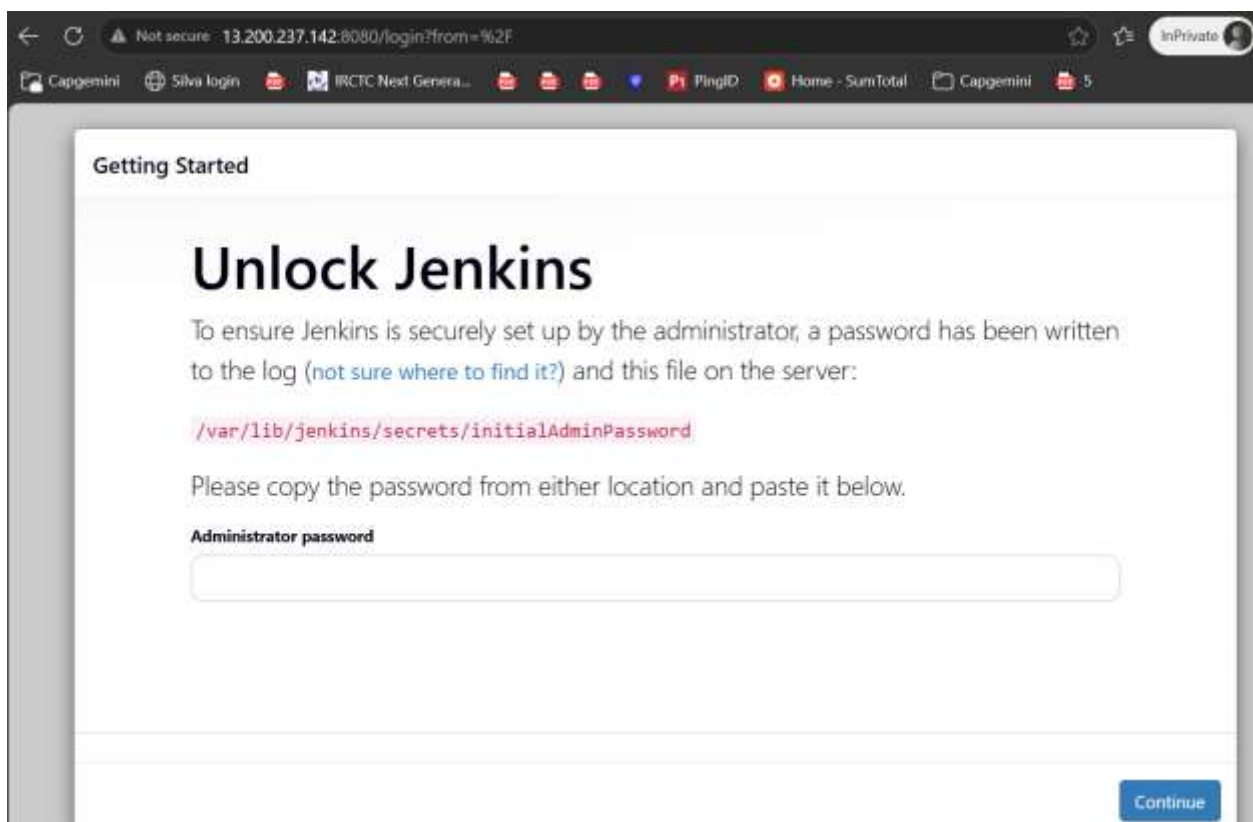


```
ubuntu@ip-172-31-4-192: ~
System load: 0.15          Processes: 121
Usage of /: 5.5% of 66.75GB Users logged in: 0
Memory usage: 57%         IPv4 address for enX0: 172.31.4.192
Swap usage: 0%

Expanded Security Maintenance for Applications is not enabled.

12 updates can be applied immediately.
To see these additional updates run: apt list --upgradable

Enable ESM Apps to receive additional future security updates.
See https://ubuntu.com/esm or run: sudo pro status

*** System restart required ***
Last login: Thu Jul  9 06:11:37 2026 from 167.103.89.101
ubuntu@ip-172-31-4-192:~$
ubuntu@ip-172-31-4-192:~$
ubuntu@ip-172-31-4-192:~$ sudo cat /var/lib/jenkins/secrets/initialAdminPassword
[REDACTED]
```

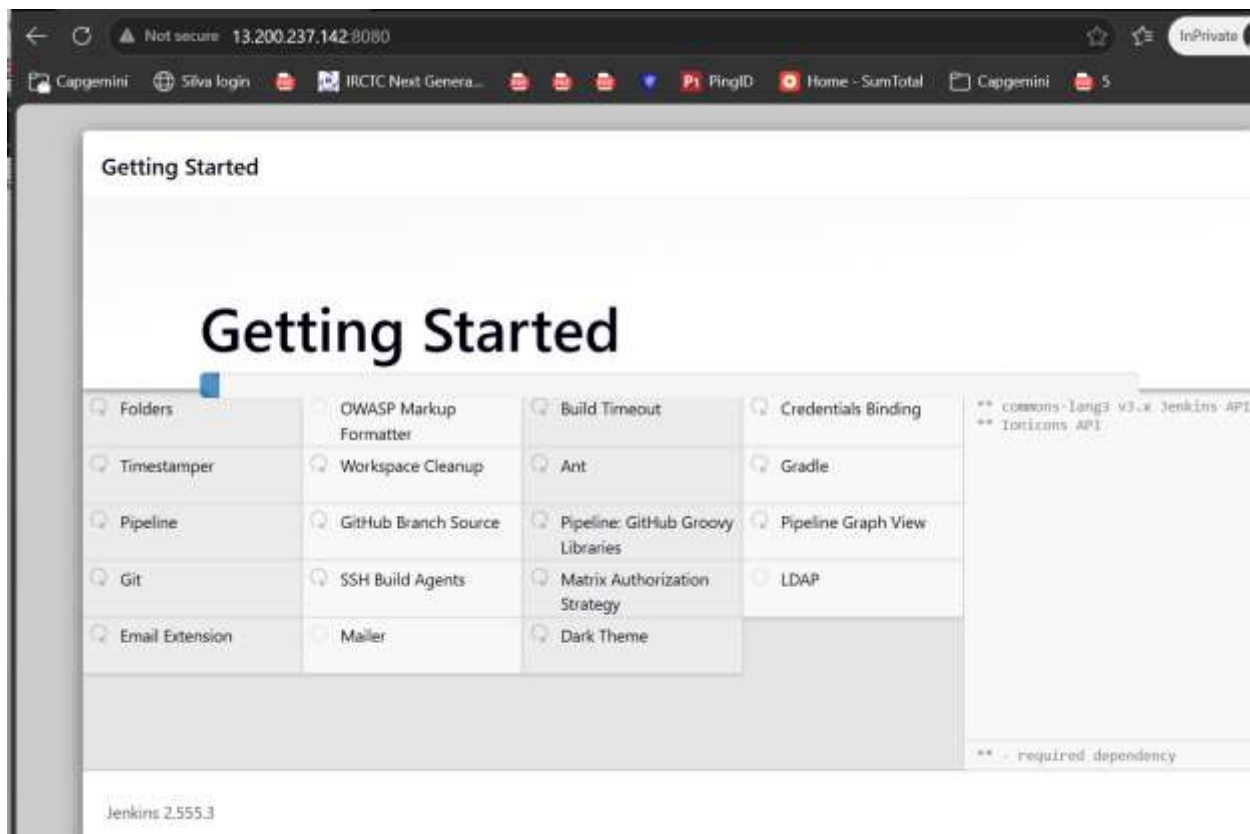

← ↻ ⚠ Not secure 13.200.237.142:8080 ☆ ☆ InPrivate

Capgemini Silva login IRCTC Next Genera... PingID Home - SumTotal Capgemini 5

Getting Started

Create First Admin User

Username

Password

Confirm password

Full name

Jenkins 2.555.3

[Skip and continue as admin](#) [Save and Continue](#)

← ↻ ⚠ Not secure 13.200.237.142:8080 ☆ ☆ InPrivate

Capgemini Silva login IRCTC Next Genera... PingID Home - SumTotal Capgemini 5

Getting Started

Create First Admin User

Username



Password


Confirm password

Full name


Jenkins 2.555.3

[Skip and continue as admin](#) [Save and Continue](#)

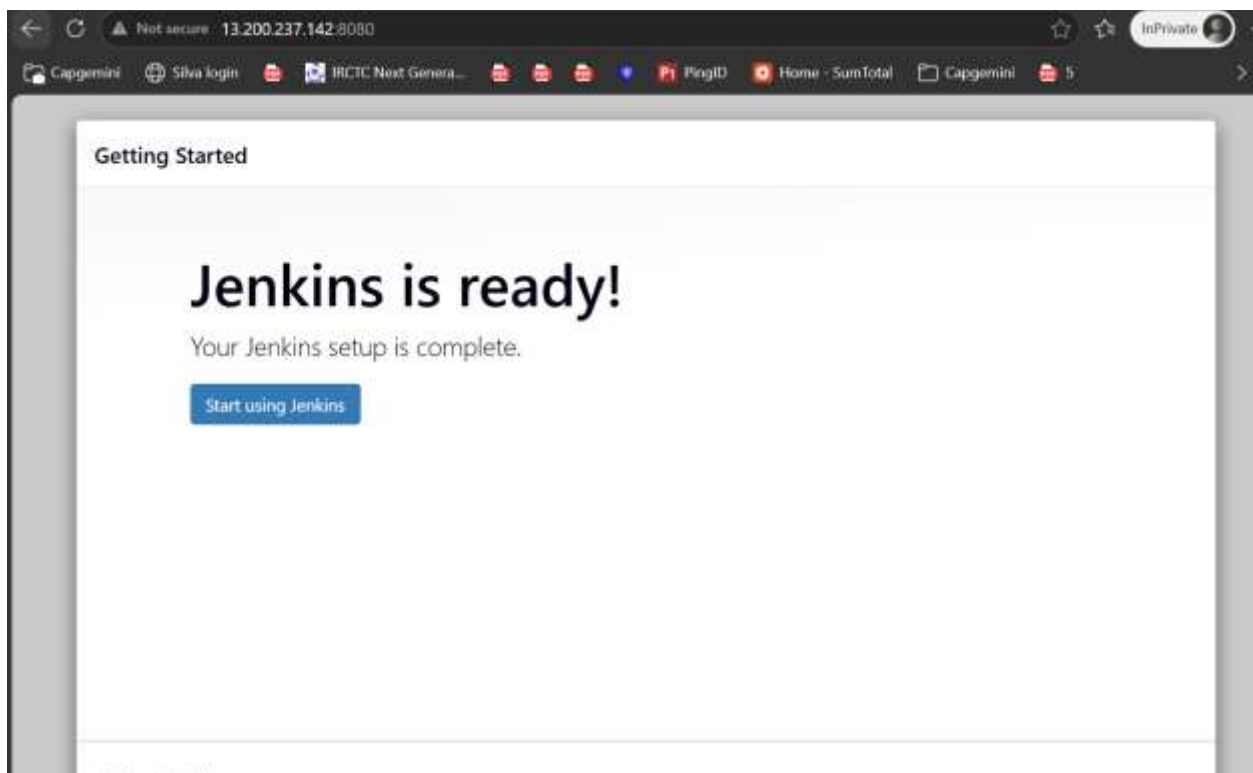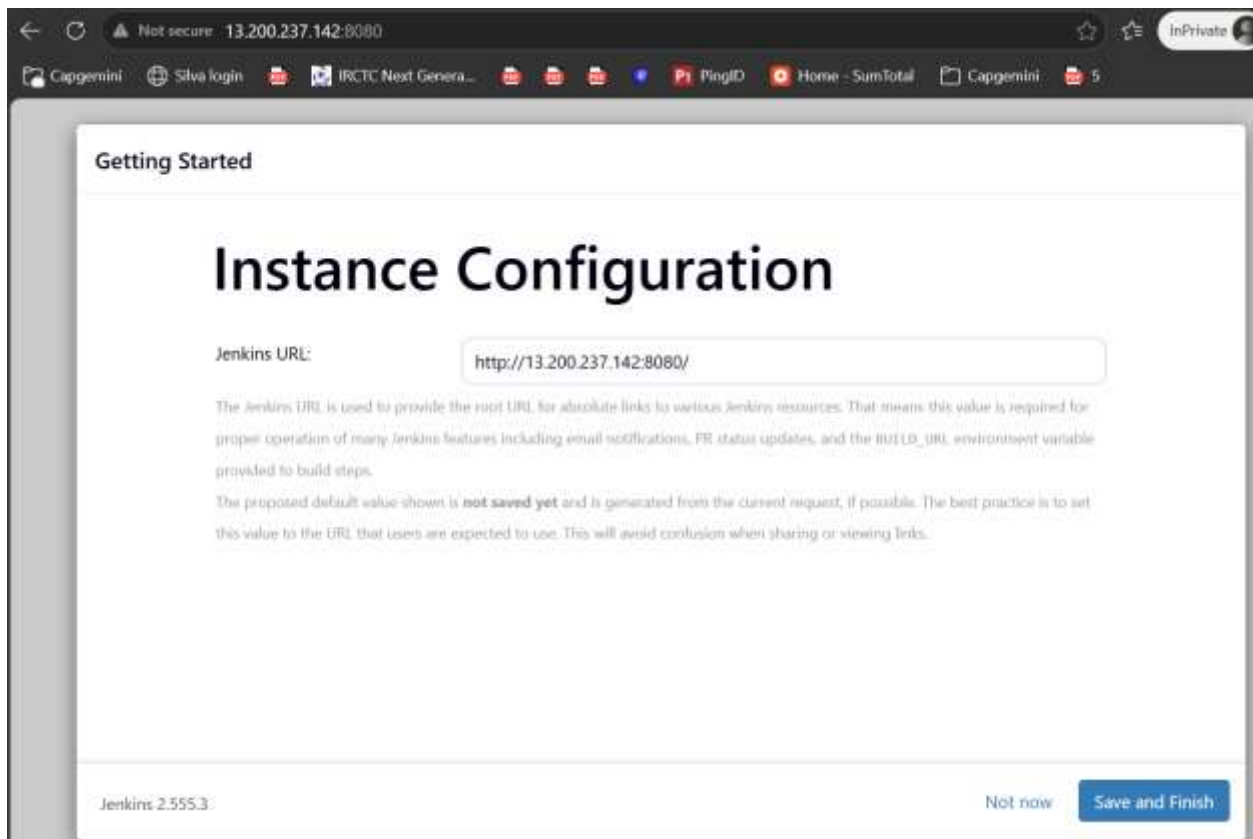

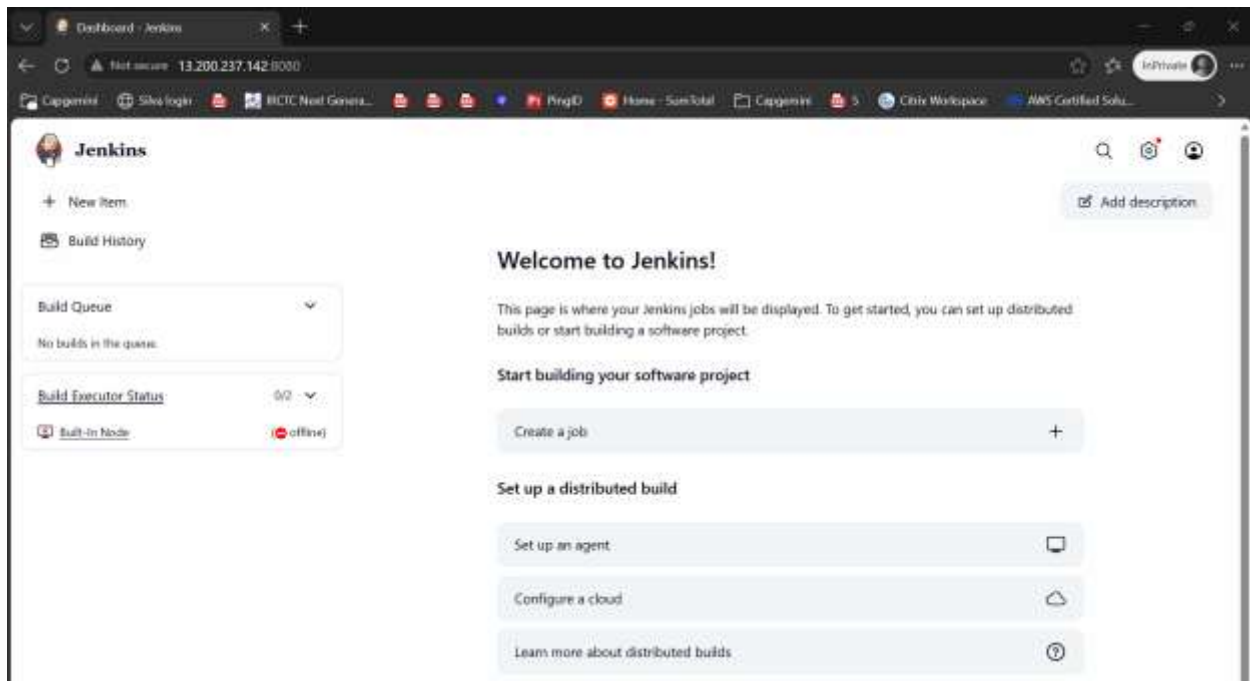

As build-in-node is offline as we used t2.micro bring back online follow below

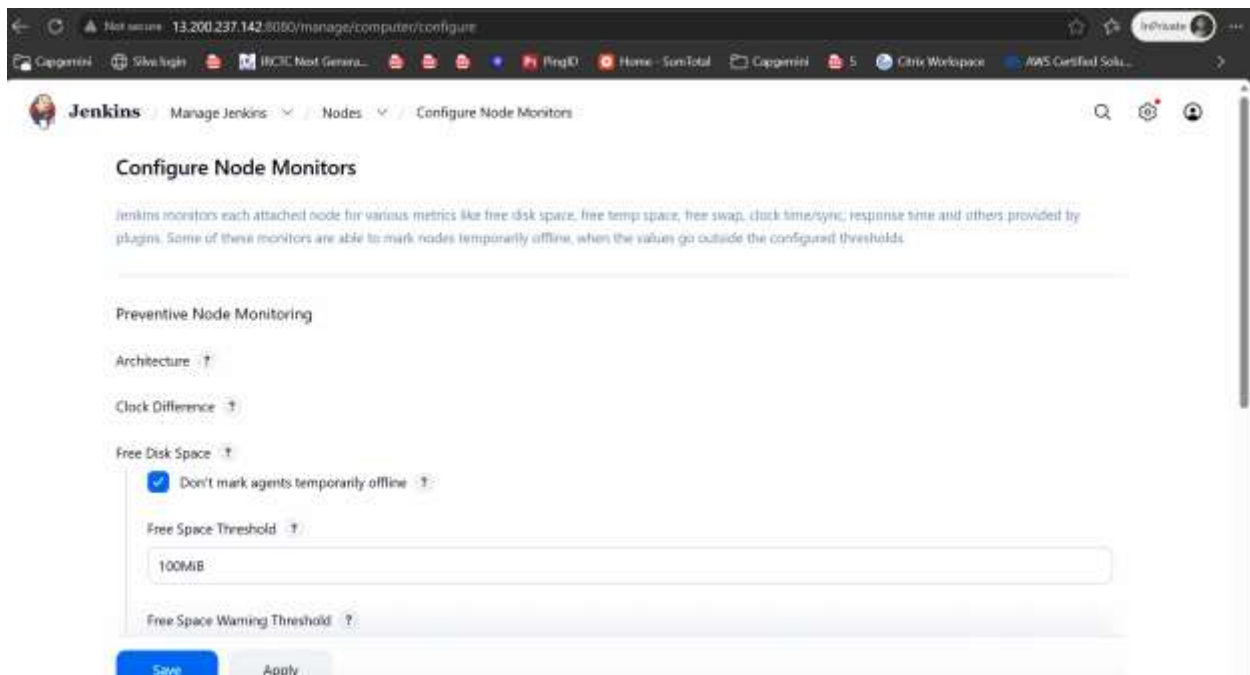

Free Space Warning Threshold ?

200MiB

Free Swap Space ?

Free Temp Space ?

☒ Don't mark agents temporarily offline ?

Free Space Threshold ?

100MiB

Free Space Warning Threshold ?

200MiB

Response Time ?

☒ Don't mark agents temporarily offline ?

Save Apply

Click on save

Go to build-in-node and then bring back to online.

Nodes + New Node Configure Monitors Refresh


Add, remove, control and monitor the various nodes that Jenkins runs jobs on.

S	Name	Architecture	Clock Difference	Free Disk Space	Free Swap Space	Free Temp Space	Response Time
	Built-In Node	Linux (amd64)	In sync	62.86 GiB	0 B	471.27 MiB	0ms
Data obtained		21 sec	21 sec	21 sec	21 sec	21 sec	21 sec


Icons: S M L Legend

Create github and dockerhub token

Go to github setting ->developer setting ->Token classic & generate tokens

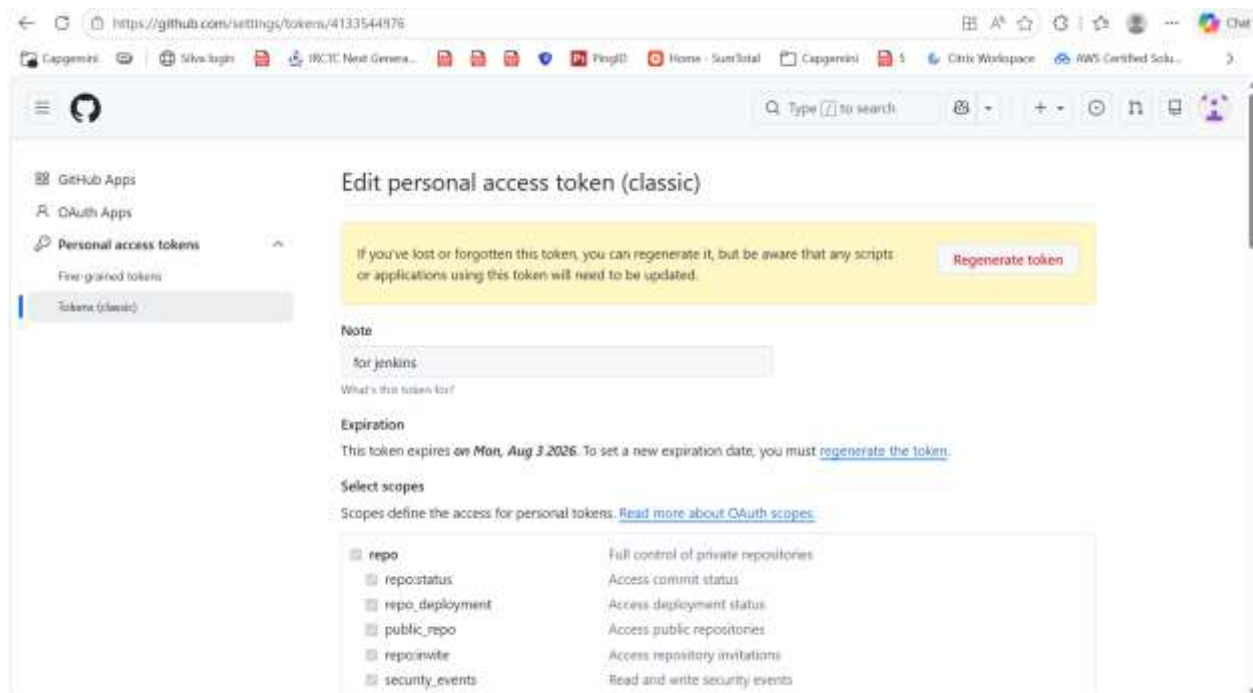


Regenerate token

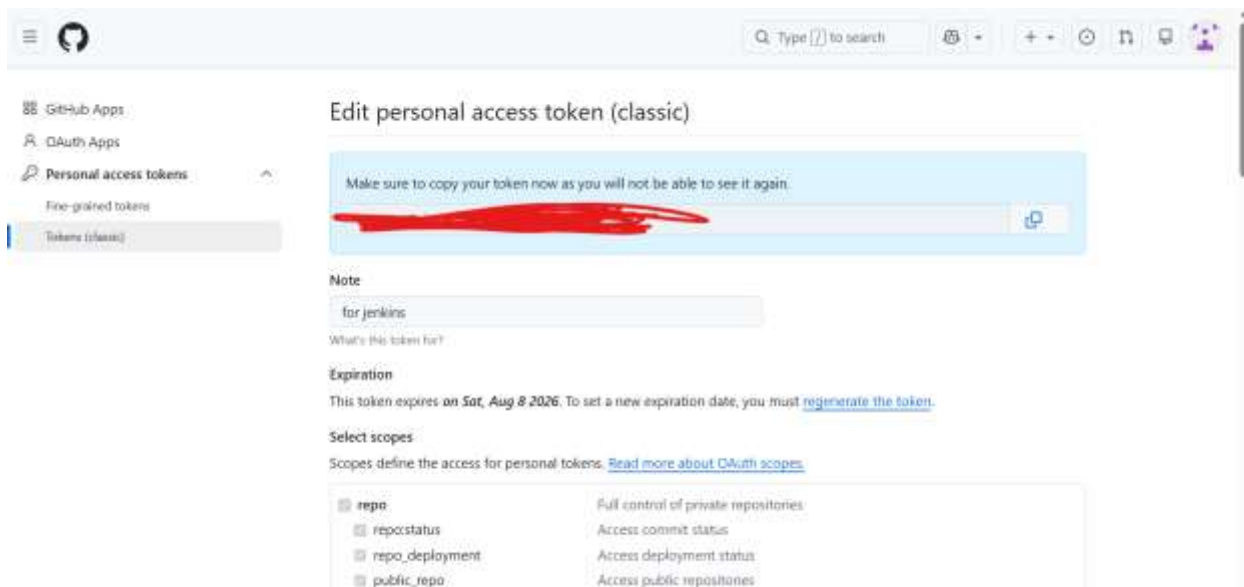


Go to dockerhub and generate tokens

Setting -> personal access tokens

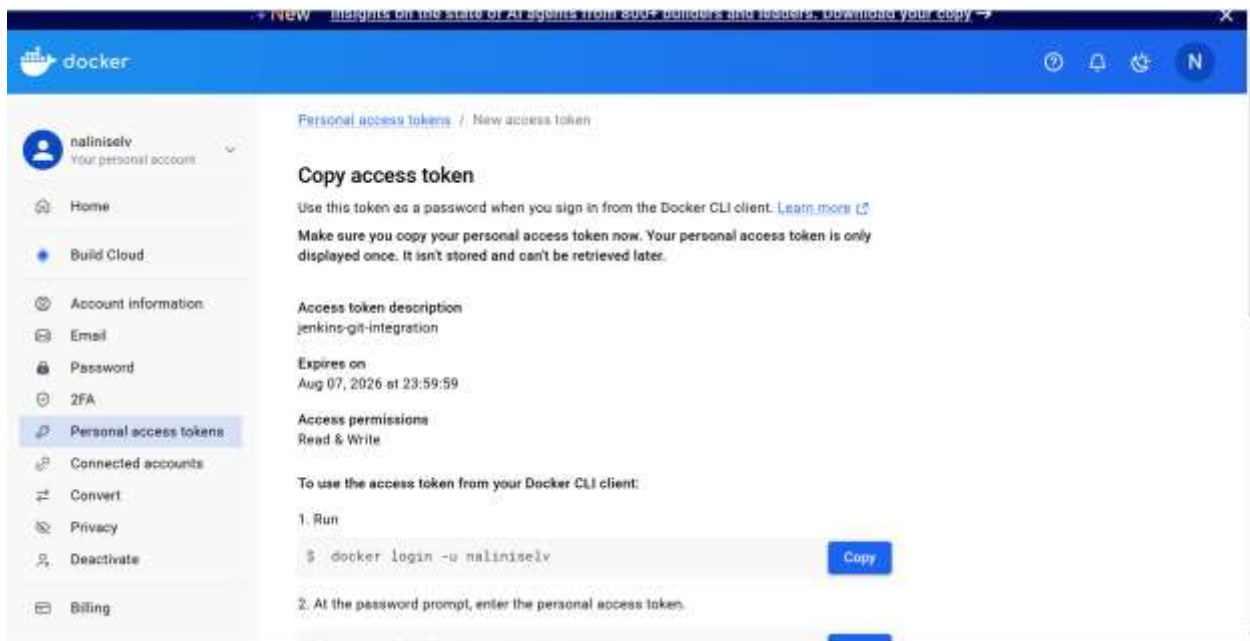

Go to jenkins install plugins like pipeline stage view, pipeline utility steps , rebuilder, blue ocean

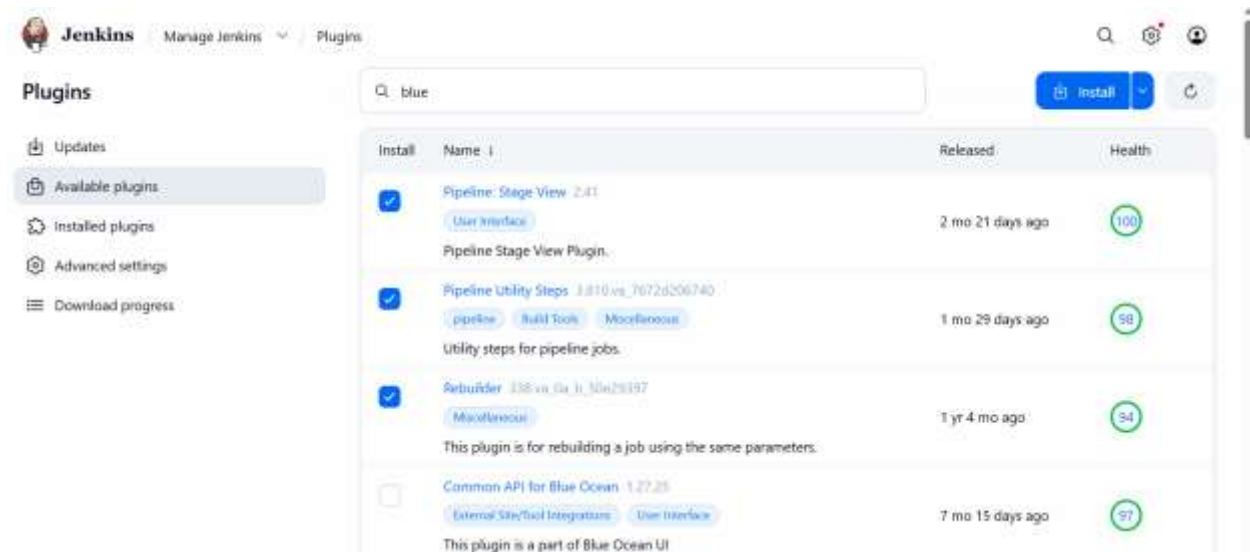

Jenkins

Manage Jenkins

Plugins

Updates

Available plugins

Installed plugins

Advanced settings

Download progress

13.200.237.142:8080

commonjs-lang3 v3.x Jenkins API

✓ Success

Icons API

✓ Success

Folders

✓ Success

OWASP Markup Formatter

✓ Success

ASM API

✓ Success

JSON Path API

✓ Success

Structs

✓ Success

Pipeline: Step API

✓ Success

commons-text API

✓ Success

Token Macro

✓ Success

Build Timeout

✓ Success

bouncycastle API

✓ Success

Credentials

✓ Success

Plain Credentials

✓ Success

Variant

✓ Success

SSH Credentials

✓ Success

Credentials Binding

✓ Success

SCM API

✓ Success

• Checking update center connectivity

• Success

Jenkins

Manage Jenkins

Plugins

Updates

Available plugins

Installed plugins

Advanced settings

Download progress

GitHub Pipeline for Blue Ocean

✓ Success

Git Pipeline for Blue Ocean

✓ Success

Config API for Blue Ocean

✓ Success

Authentication Tokens API

✓ Success

commons-collections4 v4.x API Wrapper

✓ Success

Apache HttpClient Client 5.x API

✓ Success

Handy Uri Templates 2.x API

✓ Success

Bitbucket Branch Source

✓ Success

Bitbucket Pipeline for Blue Ocean

✓ Success

Dashboard for Blue Ocean

✓ Success

Personalization for Blue Ocean

✓ Success

Display URL for Blue Ocean

✓ Success

Server Sent Events (SSE) Gateway

✓ Success

Events API for Blue Ocean

✓ Success

Blue Ocean Pipeline Editor

✓ Success

ISn for Blue Ocean

✓ Success



Blue Ocean


✓ Success

Loading plugin extensions


✓ Success


Create job

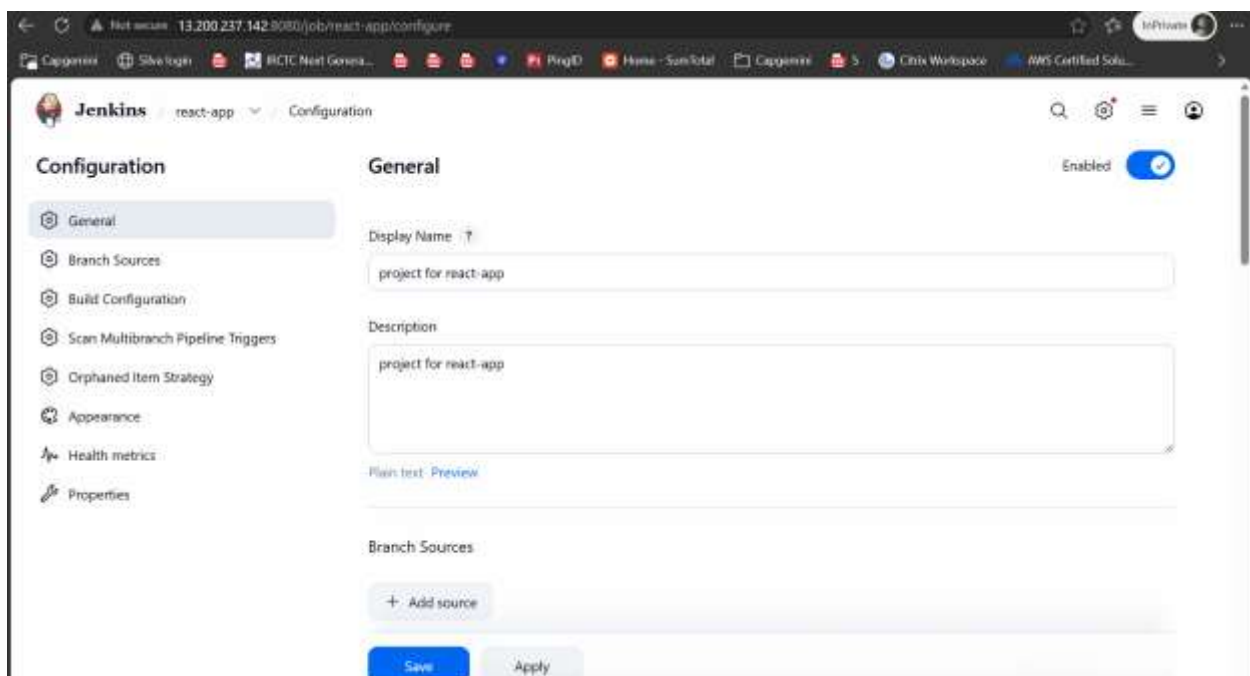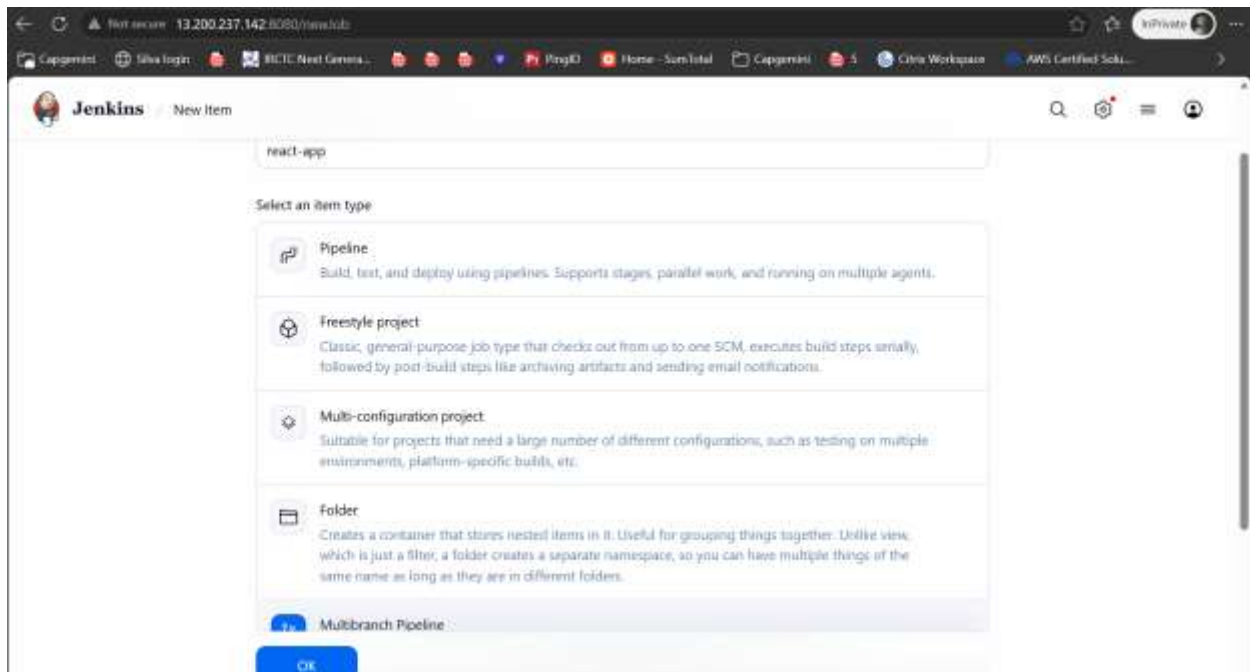

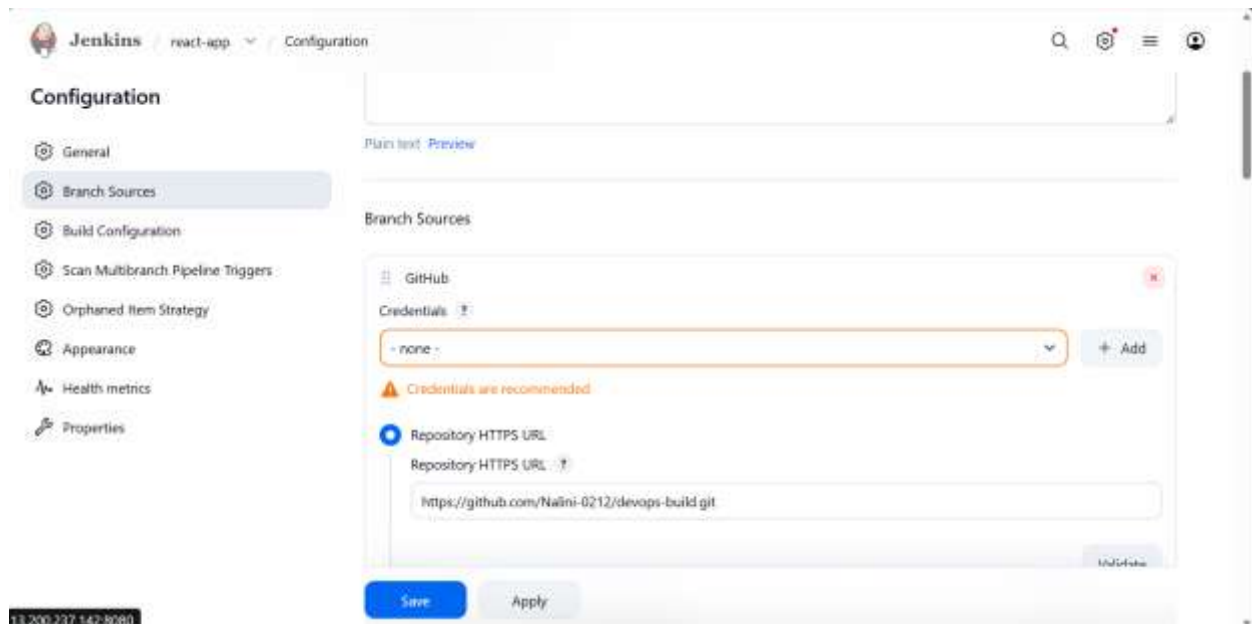


Add credentials by clicking on add


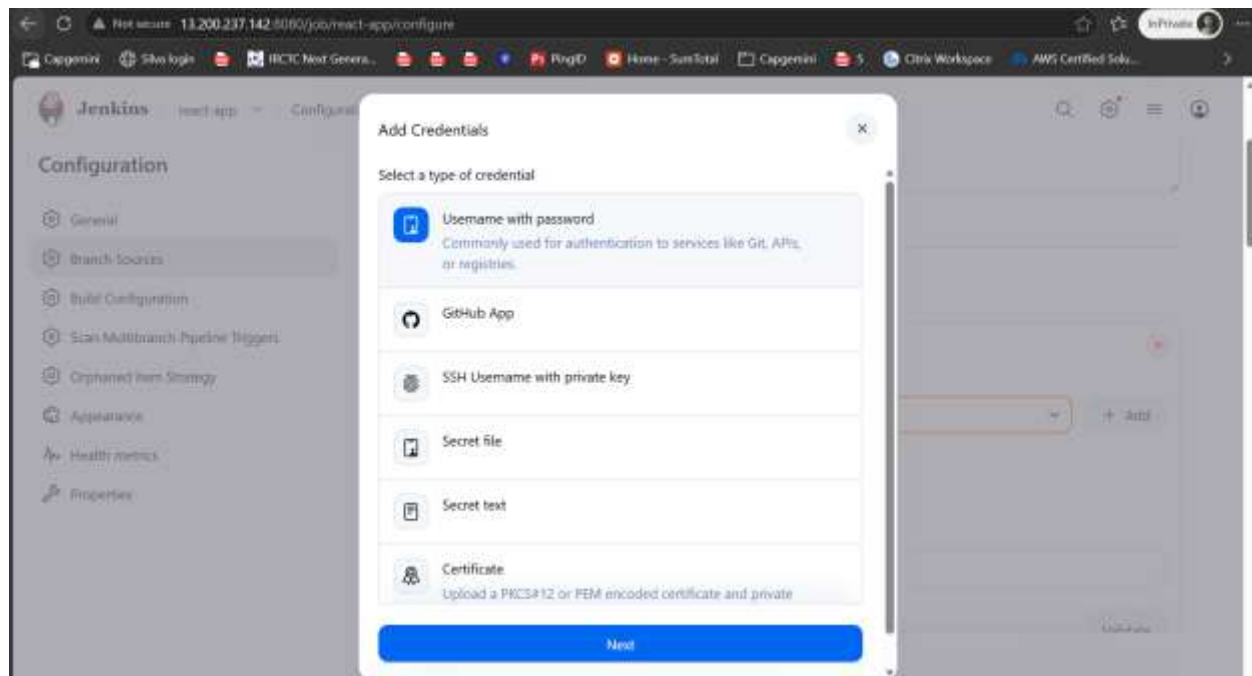


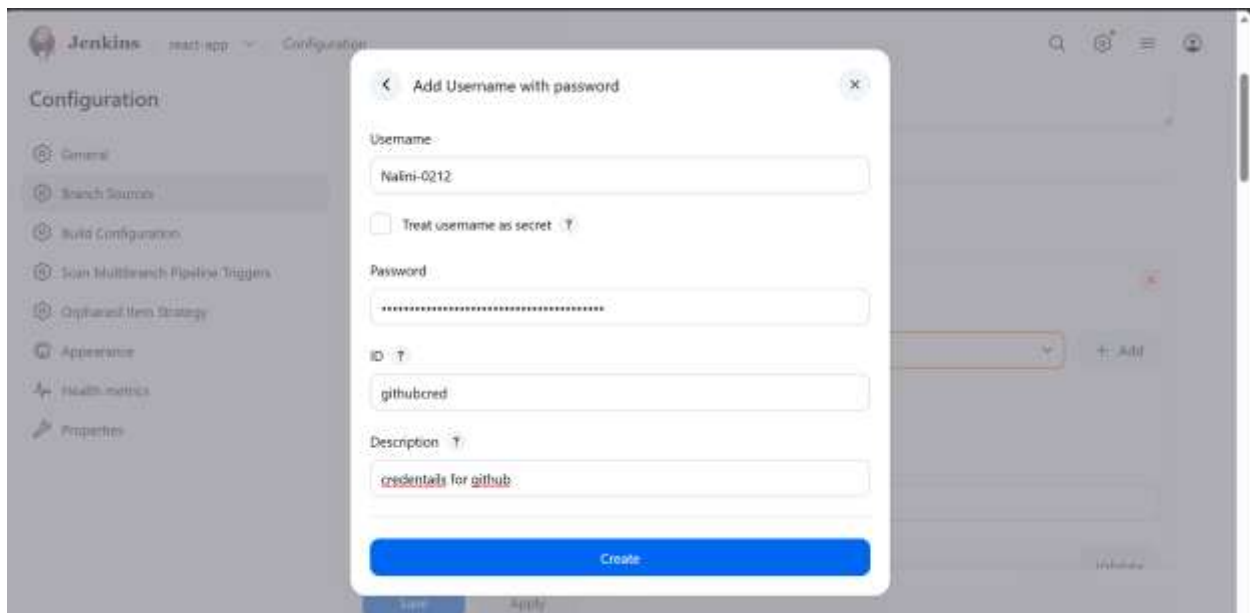

And click on create

And also add credentials of dockerhub

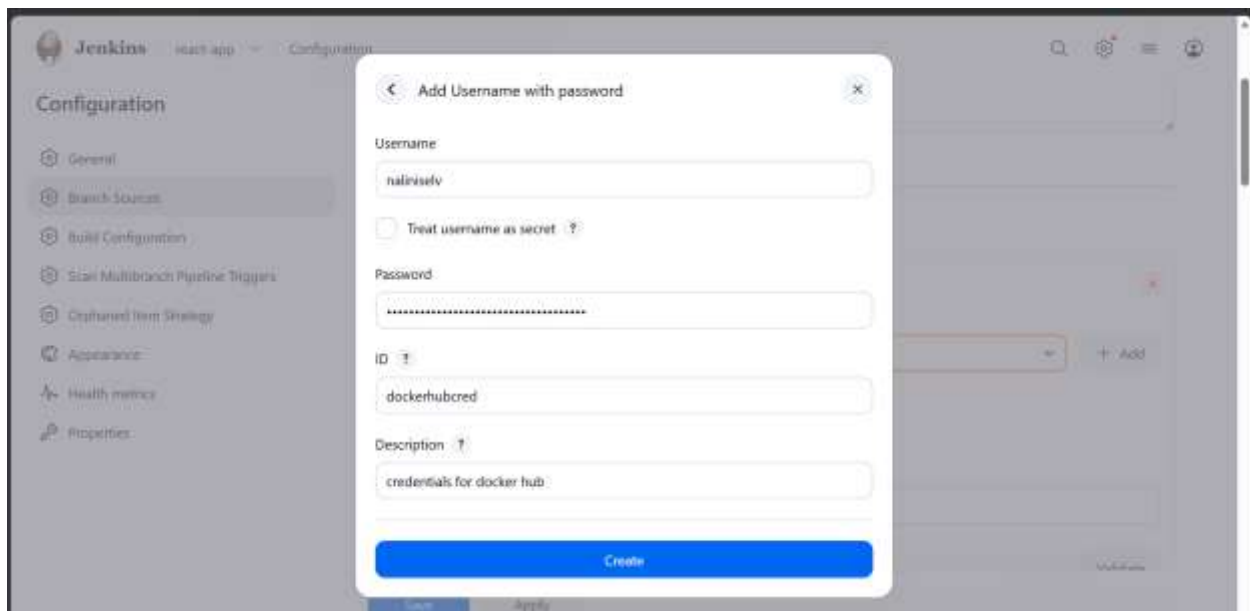

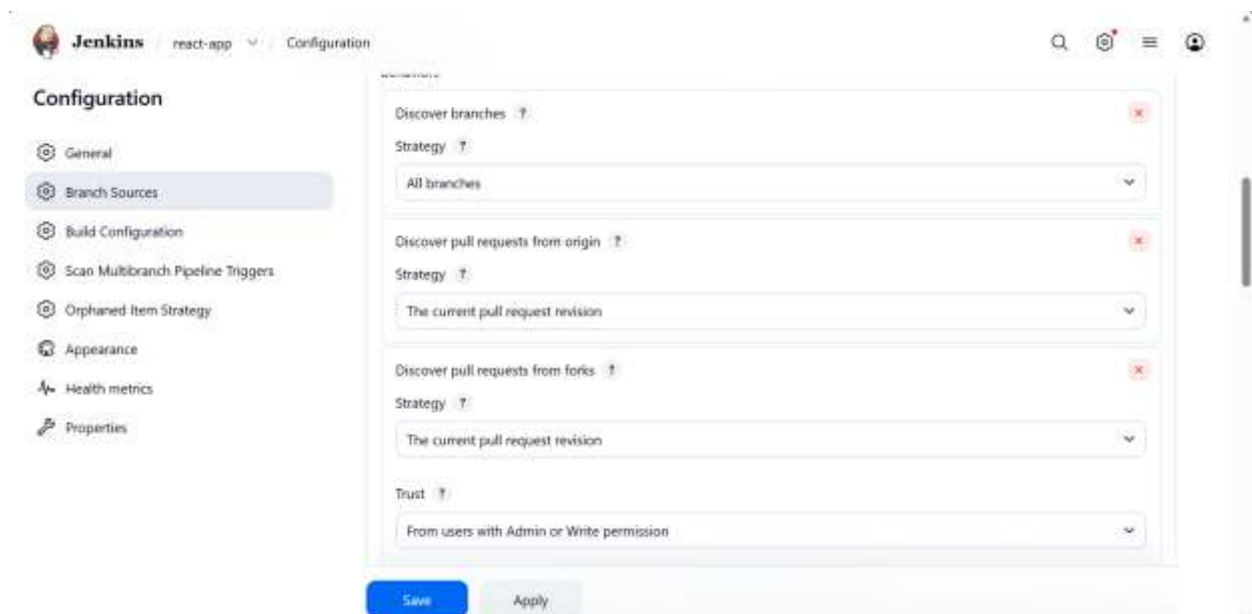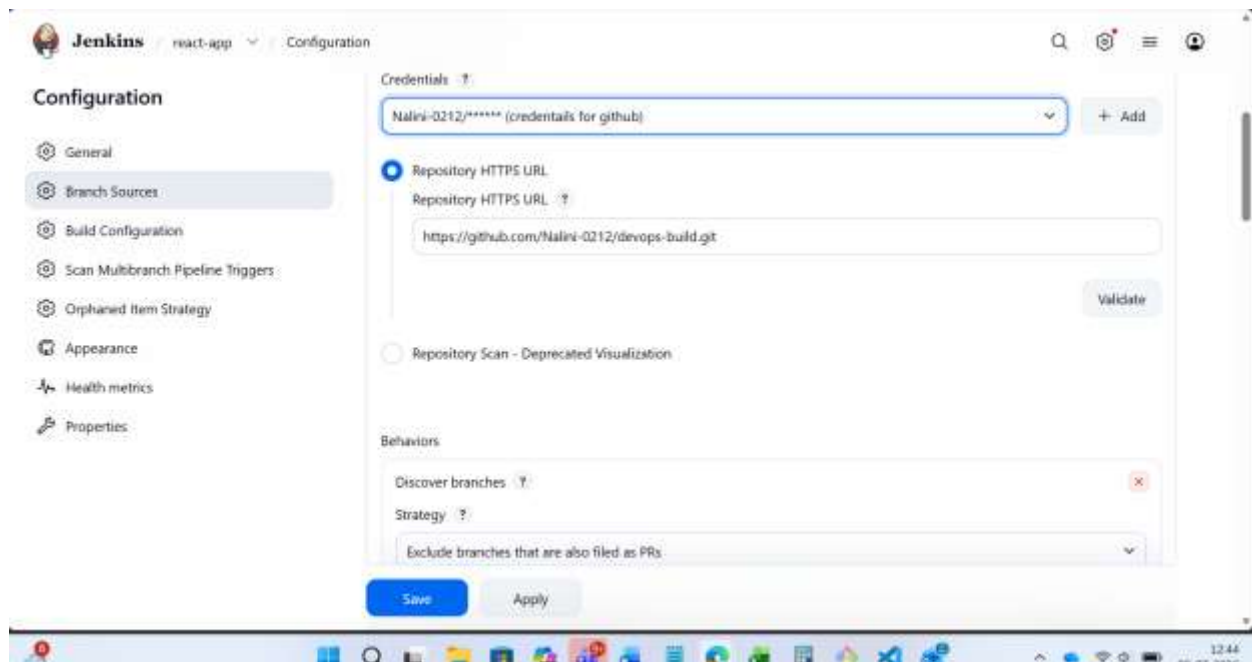



Jenkins

react-app

Configuration



Configuration

General

Branch Sources

Build Configuration

Scan Multibranch Pipeline Triggers

Orphaned Item Strategy

Appearance

Health metrics

Properties

+ Add property

+ Add source

Build Configuration

Mode

by Jenkinsfile

Script Path

jenkins/Jenkinsfile

Scan Multibranch Pipeline Triggers

Save

Apply

3 200 287 142 8088

Jenkins

react-app

Configuration

jenkins/jenkinsfile

Configuration

General

Branch Sources

Build Configuration

Scan Multibranch Pipeline Triggers

Orphaned Item Strategy

Appearance

Health metrics

Properties

Scan Multibranch Pipeline Triggers

☒ Periodically if not otherwise run

Interval

3 minutes

Orphaned Item Strategy

Jobs for removed SCM heads (i.e. deleted branches) can be removed immediately or kept based on a desired retention strategy. By default, jobs will be removed as soon as Jenkins determines their associated SCM head no longer exists. As an example, it may be useful to configure a different retention strategy to be able to examine build results of a branch after it has been removed.

☐ Abort builds

☒ Discard old items

Please see [Jenkins and Discard](#)

Save

Apply

Jenkins

react-app

Configuration

jenkins/jenkinsfile

Configuration

General

Branch Sources

Build Configuration

Scan Multibranch Pipeline Triggers

Orphaned Item Strategy

Appearance

Health metrics

Properties

Days to keep old items

if not empty, old items are only kept up to this number of days

3

Max # of old items to keep

if not empty, only up to this number of old items are kept

5

Appearance


Icon

Metadata Folder Icon


Health metrics

Save

Apply

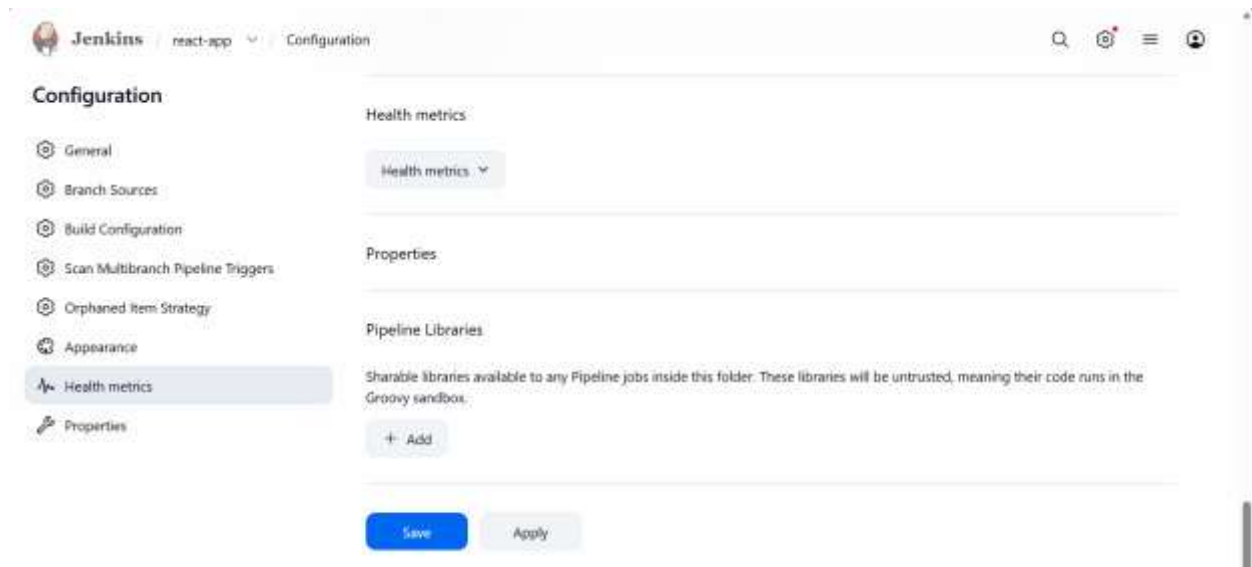

Now go to github . repo setting webhooks

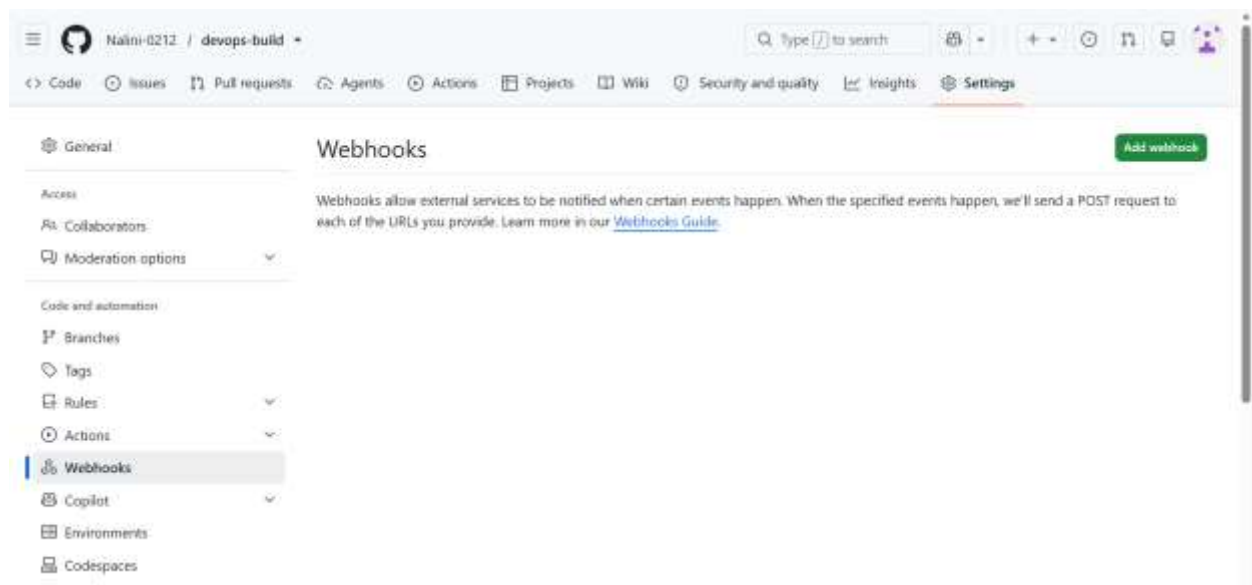

Add webhooks

The screenshot shows the 'Webhooks / Add webhook' configuration page in GitHub. On the left is a sidebar with navigation options: General, Access (Collaborators, Moderation options), Code and automation (Branches, Tags, Rules, Actions, Webhooks, Copilot, Environments, Codespaces, Pages), and Security and quality (Advanced Security, Deploy keys). The 'Webhooks' option is selected. The main content area is titled 'Webhooks / Add webhook' and contains the following fields and options:

- Webhooks / Add webhook**
- Text: "We'll send a POST request to the URL below with details of any subscribed events. You can also specify which data format you'd like to receive (JSON, x-www-form-urlencoded, etc). More information can be found in [our developer documentation](#)."
- Payload URL ***:
- Content type ***:
- Secret**:
- SSL verification**:
 - By default, we verify SSL certificates when delivering payloads.
 - ☒ Enable SSL verification
 - ☐ Disable (not recommended)
- Which events would you like to trigger this webhook?**
 - ☒ Just the push event.
 - ☐ Send me everything.

And save

The screenshot shows the 'Webhooks' configuration page in GitHub after saving. The top navigation bar includes: Code, Issues, Pull requests, Agents, Actions, Projects, Wiki, Security and quality, Insights, and Settings. The left sidebar is the same as in the previous image, with 'Webhooks' selected. The main content area is titled 'Webhooks' and includes an 'Add webhook' button. Below the title, there is explanatory text and a list of configured webhooks:

- Webhooks** (with an 'Add webhook' button)
- Text: "Webhooks allow external services to be notified when certain events happen. When the specified events happen, we'll send a POST request to each of the URLs you provide. [Learn more in our Webhooks Guide](#)."
- Webhook list:
 - ✓ <http://13.200.237.142:8080/github-.../push/> (push)
 - Last delivery was successful.
 - Buttons: Edit, Delete

Now go to that job and save the jenkins job

 Jenkins

project for react-app

Scan Repository

Status

Configure

Scan Repository Now

Scan Repository Log

View as plain text

Multibranch Pipeline Events

Delete Multibranch Pipeline

Build History

Favorite

Open Blue Ocean

Rename

Pipeline Syntax

Credentials

Scan Repository Log

Progress:

Started by user [admin](#)

[Thu Jul 09 07:21:52 UTC 2026] Starting branch indexing...

07:21:54 Connecting to <https://api.github.com> using [Nalini-8212/*****](#) (credentials for github)

Examining [Nalini-8212/devops-build](#)

Getting remote pull requests...

Checking branches...

Getting remote branches...

Checking branch [main](#)

'jenkins/Jenkinsfile' not found

Does not meet criteria

Checking branch [dev](#)

'jenkins/Jenkinsfile' found

Met criteria

Scheduled build for branch: dev

2 branches were processed

 Jenkins

project for react-app

dev

#1

Status

Changes

Console Output

Edit Build Information

Delete build '#1'

Git Build Data

Pipeline Overview

Rebuild

Open Blue Ocean

Restart from Stage

Replay

Pipeline Steps

Workspaces

Next Build

Console

Download

Copy

View as plain text

Branch indexing

07:21:56 Connecting to <https://api.github.com> using [Nalini-8212/*****](#) (credentials for github)

Obtained jenkins/Jenkinsfile from [5a30428c80f360d911ebc2a8af1daf6e2309e368](#)

[Pipeline] Start of Pipeline

[Pipeline] node

Running on [Jenkins](#) in [/var/lib/jenkins/workspace/react-app_dev](#)

[Pipeline] {

[Pipeline] stage

[Pipeline] { (Declarative: Checkout SCM)

[Pipeline] checkout

The recommended git tool is: NONE

using credential [githubcred](#)

Cloning the remote Git repository

Cloning with configured refspecs honoured and without tags

Cloning repository <https://github.com/Nalini-8212/devops-build.git>

> git init /var/lib/jenkins/workspace/react-app_dev # timeout=10

Fetching upstream changes from <https://github.com/Nalini-8212/devops-build.git>

> git --version # timeout=10

> git --version # 'git version 2.53.0'

using GIT_ASKPASS to set credentials [credentials for github](#)

> git fetch --no-tags --force --progress -- <https://github.com/Nalini-8212/devops-build.git>

13.200.237.142:8080



Jenkins

project for react-app

dev

#1

```
[Pipeline] cleanWs
[WS-CLEANUP] Deleting project workspace...
[WS-CLEANUP] Deferred wipeout is used...
[WS-CLEANUP] done
[Pipeline] echo
Pipeline completed successfully.
[Pipeline] }
[Pipeline] // stage
[Pipeline] }
[Pipeline] // withEnv
[Pipeline] }
[Pipeline] // withEnv
[Pipeline] }
[Pipeline] // node
[Pipeline] End of Pipeline

GitHub has been notified of this commit's build result

Finished: SUCCESS
```

Jenkins

project for react-app

Scan Repository

Delete Multibranch Pipeline

Build History

Favorite

Open Blue Ocean

Rename

Pipeline Syntax

Credentials

Build Queue

No builds in the queue.

Build Executor Status

1/2

project for react-app

#1

(Declarative: Checkout SCM)

project for react-app

#1

Checking branches...

Getting remote branches...

Checking branch **main**

'jenkins/Jenkinsfile' not found

Does not meet criteria

Checking branch **dev**

'jenkins/Jenkinsfile' found

Met criteria

Scheduled build for branch: dev

2 branches were processed

Checking pull-requests...

0 pull requests were processed

Finished examining Nalini-0212/devops-build

[Thu Jul 09 07:21:56 UTC 2026] Finished branch indexing. Indexing took 3.9 sec

Finished: SUCCESS

The screenshot shows the Jenkins web interface for a pipeline named 'dev'. The left sidebar contains navigation links: Status, Changes, Build Now, View Configuration, Full Stage View, Favorite, Open Blue Ocean, Stages, GitHub, and Pipeline Syntax. The main area displays the 'dev' pipeline status as 'Running' with a green checkmark. Below this, the 'Stage View' is shown, including a table of stage times and a 'Permalinks' section.

Stage View Table:

Stage	Declarative: Checkout SCM	Checkout Repository	Docker Login	Build Docker Image	Push Docker Image	Deploy Production	Declarative: Post Actions
Average stage times: (full run time: ~42s)	6s	1s	2s	6s	12s	0ms	1s
Build #1 (12:52)	6s	1s	2s	6s	12s		1s


Permalinks:

- Last build (#1), 42 sec ago
- Last stable build (#1), 42 sec ago
- Last successful build (#1), 42 sec ago
- Last completed build (#1), 42 sec ago


Above got triggered automatically when we create job.

When we made some changes and pushed to github

It failed as we don't see any credentials in global credential section . add credentials

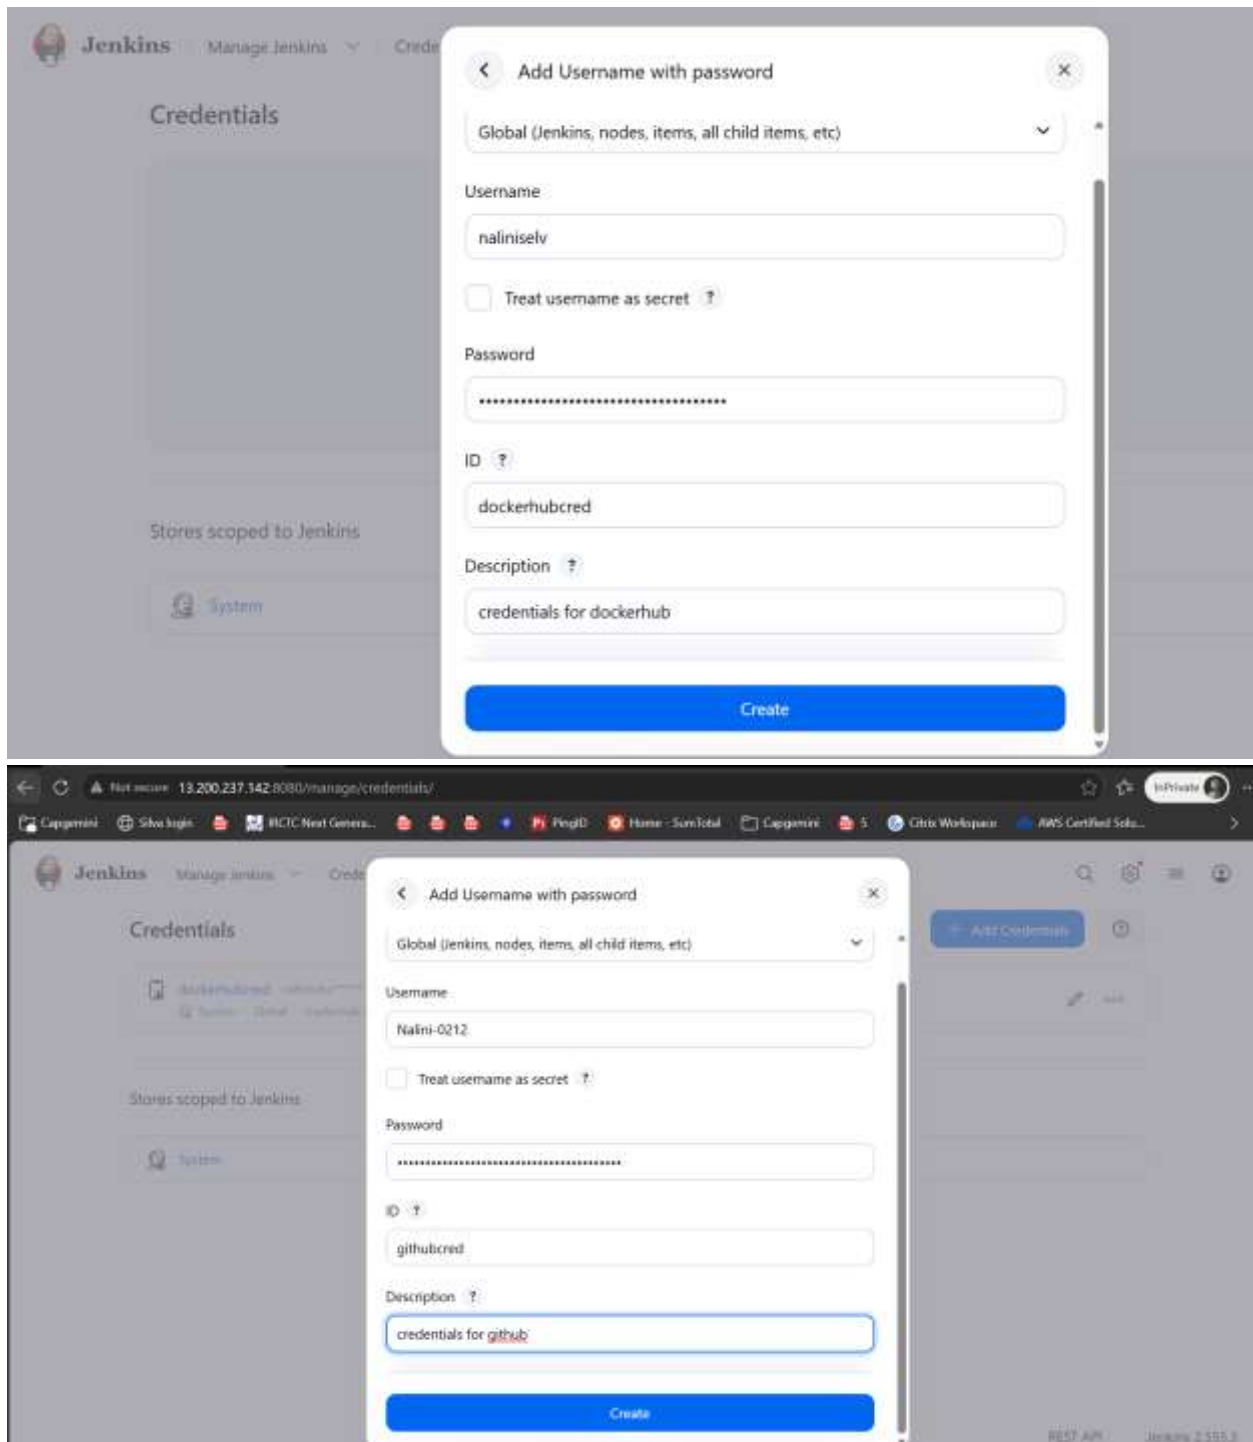

Now click create

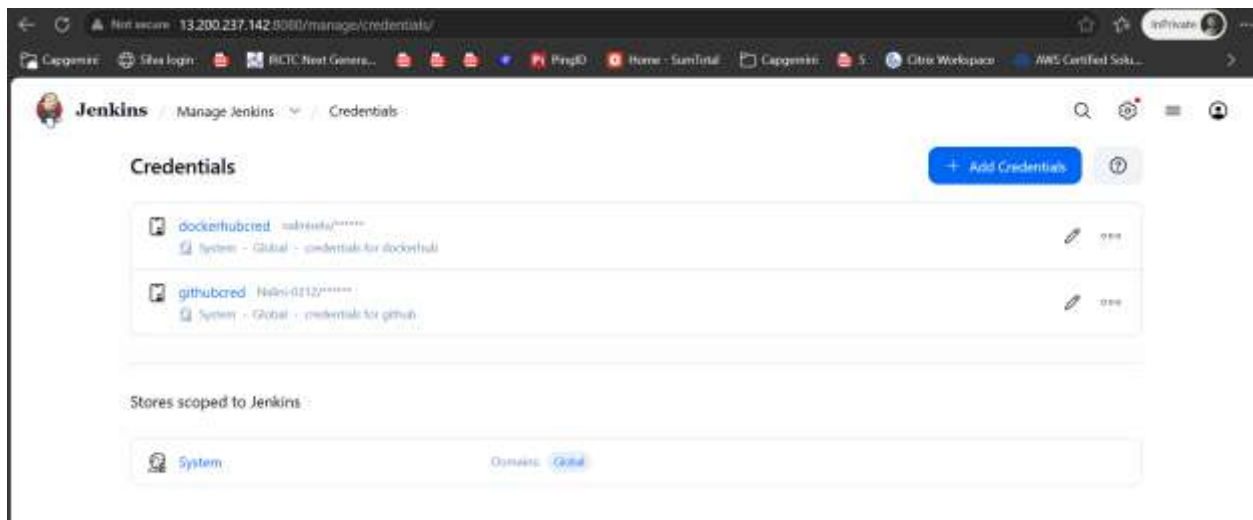

Now change something and push to git hub

```
CORP+nase1var@LIN-7DT7RJ4 MINGW64 ~/Downloads/devops-build (dev)
$ git add .

CORP+nase1var@LIN-7DT7RJ4 MINGW64 ~/Downloads/devops-build (dev)
$ git status
On branch dev
Your branch is up to date with 'origin/dev'.


Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
    CORP+nase1var@LIN-7DT7RJ4 MINGW64 ~/Downloads/devops-build (dev)
    $ git commit -m "modified again second jenkinsfile to dev branch"
    [dev 4f74224] modified again second jenkinsfile to dev branch
      1 file changed, 1 insertion(+), 1 deletion(-)

CORP+nase1var@LIN-7DT7RJ4 MINGW64 ~/Downloads/devops-build (dev)
$ git push -u origin dev
Enumerating objects: 7, done.
Counting objects: 100% (7/7), done.
Delta compression using up to 14 threads
Compressing objects: 100% (3/3), done.
Writing objects: 100% (4/4), 364 bytes | 182.00 KiB/s, done.
Total 4 (delta 2), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (2/2), completed with 2 local objects.
To https://github.com/Nalini-0212/devops-build.git
   c385940..4f74224 dev -> dev
branch 'dev' set up to track 'origin/dev'.


CORP+nase1var@LIN-7DT7RJ4 MINGW64 ~/Downloads/devops-build (dev)
$
```

Now dev pipeline should auto trigger

Pipeline completed successfully

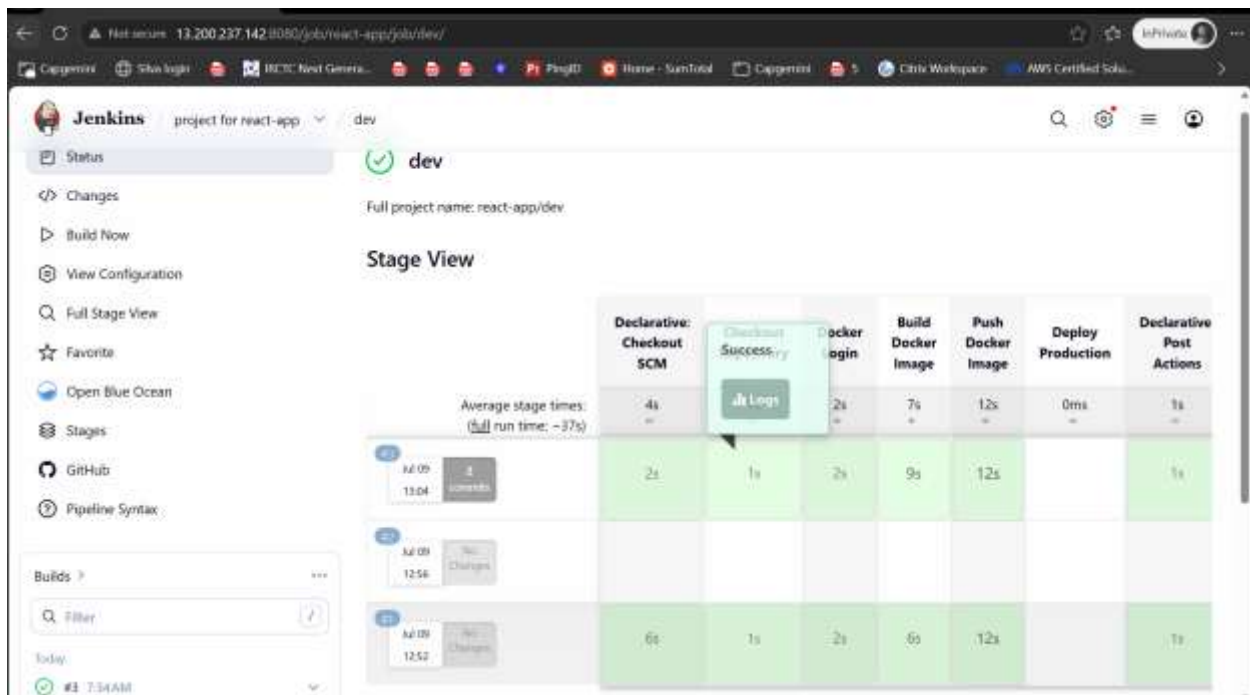

Below logs shows pipeline is successfull

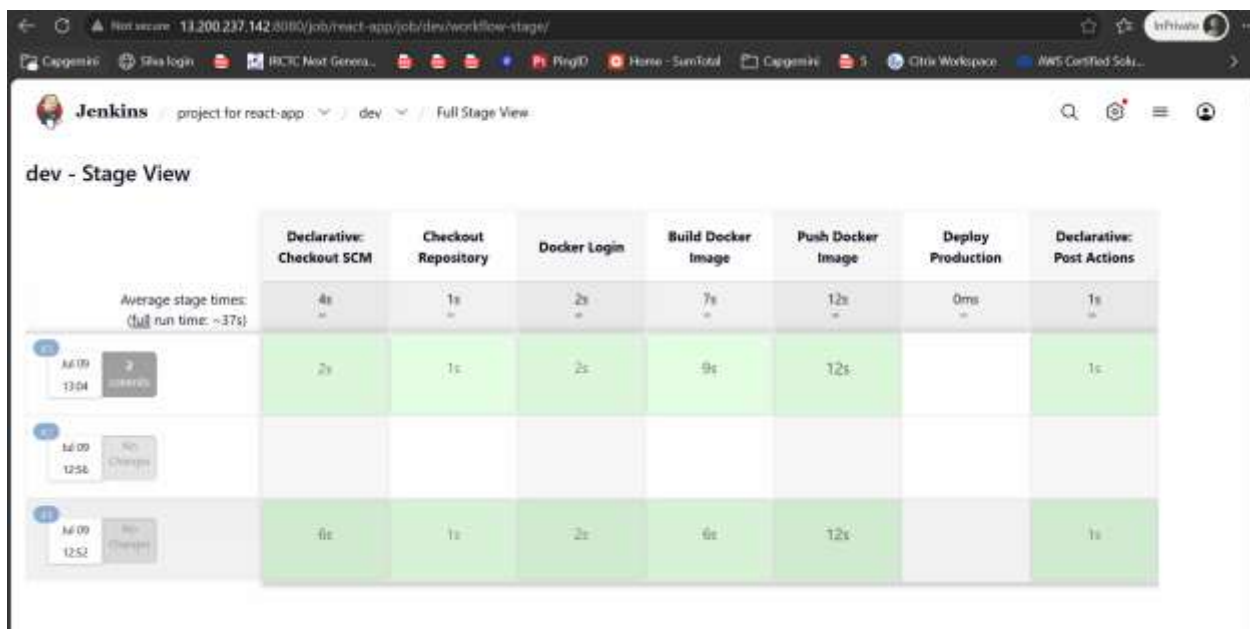

Below logs shows build & push to docker hub.


```
Jenkins project for react-app dev #3

Login Succeeded
[Pipeline] }
[Pipeline] // withCredentials
[Pipeline] }
[Pipeline] // stage
[Pipeline] stage
[Pipeline] { (Build Docker Image)
[Pipeline] script
[Pipeline] {
[Pipeline] sh
+ chmod +x scripts/build.sh
+ IMAGE_NAME=naliniselv/react-app-dev:latest ./scripts/build.sh
Building Docker image: naliniselv/react-app-dev:latest
#0 building with "default" instance using docker driver

#1 [internal] load build definition from Dockerfile
#1 transferring dockerfile: 1748 B.2s done
```

```
Jenkins project for react-app dev #3

[Pipeline] script
[Pipeline] {
[Pipeline] sh
+ echo Tagging DEV Image...
Tagging DEV Image...
+ docker tag naliniselv/react-app-dev:latest naliniselv/react-app-dev:3
+ echo Pushing DEV Images...
Pushing DEV Images...
+ docker push naliniselv/react-app-dev:latest
The push refers to repository [docker.io/naliniselv/react-app-dev]
f8ee5d51559e: Waiting
f8ee5d51559e: Waiting
e6f31ffc071e: Waiting
c16defe09b2f: Waiting
967885d218c5: Waiting
ab1fd9049751: Waiting
01bf363d61e6: Waiting
c75b9c33e8b0: Waiting
96e9a734a04c: Waiting
f8ee5d51559e: Waiting
```

Building naliniselv/react-app-dev:latest tag with naliniselv/react-app-dev:3 and push both to docker hub

```
Jenkins project for react-app dev #3

01bf363d61e6: Layer already exists
f8ee5d51559e: Waiting
f8ee5d51559e: Waiting
f8ee5d51559e: Pushed
latest: digest: sha256:b445ace814f7d745e8edf8890e58f7c093c94056362819ac0a6b3349e76d135 size: 856
+ docker push naliniselv/react-app-dev:3
The push refers to repository [docker.io/naliniselv/react-app-dev]
213efa3a6789: Waiting
c16defe09b2f: Waiting
9b429a43b8df: Waiting
01bf363d61e6: Waiting
96e9a734a04c: Waiting
f8ee5d51559e: Waiting
e6f31ffc071e: Waiting
967885d218c5: Waiting
ab1fd9049751: Waiting
.....
```

As screenshots we need to take many pasting logs here

Push event to branch dev

07:34:36 Connecting to <https://api.github.com> using Nalini-0212/***** (credentials for github)

Obtained jenkins/Jenkinsfile from 4f74224a55892e1619384fbe4bff416144e490c6

[Pipeline] Start of Pipeline

[Pipeline] node

Running on [Jenkins](#) in /var/lib/jenkins/workspace/react-app_dev

[Pipeline] {

[Pipeline] stage

[Pipeline] { (Declarative: Checkout SCM)

[Pipeline] checkout

The recommended git tool is: NONE

using credential githubcred

Cloning the remote Git repository

Cloning with configured refsspecs honoured and without tags

Cloning repository <https://github.com/Nalini-0212/devops-build.git>

> git init /var/lib/jenkins/workspace/react-app_dev # timeout=10

Fetching upstream changes from <https://github.com/Nalini-0212/devops-build.git>

> git --version # timeout=10

> git --version # 'git version 2.53.0'

using GIT_ASKPASS to set credentials credentials for github

> git fetch --no-tags --force --progress -- <https://github.com/Nalini-0212/devops-build.git>
+refs/heads/dev:refs/remotes/origin/dev # timeout=10

> git config remote.origin.url <https://github.com/Nalini-0212/devops-build.git> # timeout=10

```
> git config --add remote.origin.fetch +refs/heads/dev:refs/remotes/origin/dev #
timeout=10
```

Avoid second fetch

Checking out Revision 4f74224a55892e1619384fbe4bff416144e490c6 (dev)

```
> git config core.sparsecheckout # timeout=10
```

```
> git checkout -f 4f74224a55892e1619384fbe4bff416144e490c6 # timeout=10
```

Commit message: "modified again second jenkinsfile to dev branch"

```
> git rev-list --no-walk 5a30428c09f360d911ebc2a8af1daf6e2309e368 # timeout=10
```

```
[Pipeline] }
```

```
[Pipeline] // stage
```

```
[Pipeline] withEnv
```

```
[Pipeline] {
```

```
[Pipeline] withEnv
```

```
[Pipeline] {
```

```
[Pipeline] stage
```

```
[Pipeline] { (Checkout Repository)
```

```
[Pipeline] checkout
```

The recommended git tool is: NONE

using credential githubcred

```
> git rev-parse --resolve-git-dir /var/lib/jenkins/workspace/react-app_dev/.git # timeout=10
```

Fetching changes from the remote Git repository

```
> git config remote.origin.url https://github.com/Nalini-0212/devops-build.git # timeout=10
```

Fetching without tags

Fetching upstream changes from <https://github.com/Nalini-0212/devops-build.git>

```
> git --version # timeout=10
```

```
> git --version # 'git version 2.53.0'
```

using GIT_ASKPASS to set credentials credentails for github

```
> git fetch --no-tags --force --progress -- https://github.com/Nalini-0212/devops-build.git
+refs/heads/dev:refs/remotes/origin/dev # timeout=10
```

Checking out Revision 4f74224a55892e1619384fbe4bff416144e490c6 (dev)

```
> git config core.sparsecheckout # timeout=10
```

```
> git checkout -f 4f74224a55892e1619384fbe4bff416144e490c6 # timeout=10
```

Commit message: "modified again second jenkinsfile to dev branch"

[Pipeline] }

[Pipeline] // stage

[Pipeline] stage

[Pipeline] { (Docker Login)

[Pipeline] withCredentials

Masking supported pattern matches of \$DOCKERHUB_PASSWORD

[Pipeline] {

[Pipeline] sh

```
+ echo ****
```

```
+ docker login -u naliniselv --password-stdin
```

WARNING! Your credentials are stored unencrypted in '/var/lib/jenkins/.docker/config.json'.

Configure a credential helper to remove this warning. See

<https://docs.docker.com/go/credential-store/>

Login Succeeded

[Pipeline] }

[Pipeline] // withCredentials

[Pipeline] }

[Pipeline] // stage

[Pipeline] stage

[Pipeline] { (Build Docker Image)

[Pipeline] script

[Pipeline] {

[Pipeline] sh

+ chmod +x scripts/build.sh

+ IMAGE_NAME=naliniselv/react-app-dev:latest ./scripts/build.sh

Building Docker image: naliniselv/react-app-dev:latest

#0 building with "default" instance using docker driver

#1 [internal] load build definition from Dockerfile

#1 transferring dockerfile: 174B 0.2s done

#1 DONE 0.2s

#2 [internal] load metadata for docker.io/library/nginx:alpine

#2 ...

#3 [auth] library/nginx:pull token for registry-1.docker.io

#3 DONE 0.0s

#2 [internal] load metadata for docker.io/library/nginx:alpine

#2 DONE 2.3s

#4 [internal] load .dockerignore

#4 transferring context: 2B 0.1s done

#4 DONE 0.1s

#5 [1/3] FROM

docker.io/library/nginx:alpine@sha256:54f2a904c251d5a34adf545a72d32515a15e08418d
ae0266e23be2e18c66fefa

#5 resolve

docker.io/library/nginx:alpine@sha256:54f2a904c251d5a34adf545a72d32515a15e08418d
ae0266e23be2e18c66fefa

#5 ...

#6 [internal] load build context

#6 transferring context: 2.61MB 0.8s done

#6 DONE 1.8s

#5 [1/3] FROM

docker.io/library/nginx:alpine@sha256:54f2a904c251d5a34adf545a72d32515a15e08418d
ae0266e23be2e18c66fefa

#5 resolve

docker.io/library/nginx:alpine@sha256:54f2a904c251d5a34adf545a72d32515a15e08418d
ae0266e23be2e18c66fefa 2.2s done

#5 DONE 2.4s

#7 [2/3] RUN rm -rf /usr/share/nginx/html/*

#7 CACHED

#8 [3/3] COPY /app/build/ /usr/share/nginx/html

#8 CACHED

#9 exporting to image

#9 exporting layers 0.0s done

#9 exporting manifest

sha256:c17c6c11b164e9ff3a888f8c23ccfa0611f8234f700b18e5bb0277e18a84164f 0.0s
done

#9 exporting config

sha256:50ae53a3f58d6a51b481a9ed49343797631ddf9f543622a616f0d169daff39be

#9 exporting config

sha256:50ae53a3f58d6a51b481a9ed49343797631ddf9f543622a616f0d169daff39be done

#9 exporting attestation manifest

sha256:713d501990bb2e3ba1aa515c138b6d4a6fcddcb0c64d85ae9b35d9d22c456096
0.0s done

#9 exporting manifest list

sha256:b445ace814f7d745e8edf0890b58f7c093c94036362819ac0ba6b3349e76d133
0.0s done

#9 naming to docker.io/naliniselv/react-app-dev:latest done

#9 unpacking to docker.io/naliniselv/react-app-dev:latest

#9 unpacking to docker.io/naliniselv/react-app-dev:latest 0.2s done

#9 DONE 0.4s

[Pipeline] }

[Pipeline] // script

[Pipeline] }

[Pipeline] // stage

[Pipeline] stage

[Pipeline] { (Push Docker Image)

[Pipeline] script

[Pipeline] {

[Pipeline] sh

+ echo Tagging DEV Image...

Tagging DEV Image...

+ docker tag naliniselv/react-app-dev:latest naliniselv/react-app-dev:3

+ echo Pushing DEV Images...

Pushing DEV Images...

+ docker push naliniselv/react-app-dev:latest

The push refers to repository [docker.io/naliniselv/react-app-dev]

f8ee5d51559e: Waiting

f8ee5d51559e: Waiting

e6f31ffc071e: Waiting

c16defe09b2f: Waiting

967885d218c5: Waiting

ab1fd9049751: Waiting

01bf363d61e6: Waiting

c75b9c33e8b0: Waiting

96e9a734a04c: Waiting

f8ee5d51559e: Waiting

213efa3a6789: Waiting

5b429a43b8df: Waiting

ce42635eeddd: Waiting

c75b9c33e8b0: Waiting

96e9a734a04c: Waiting

f8ee5d51559e: Waiting

213efa3a6789: Waiting

5b429a43b8df: Waiting

ce42635eeddd: Waiting

e6f31ffc071e: Waiting
c16defe09b2f: Waiting
967885d218c5: Waiting
ab1fd9049751: Waiting
01bf363d61e6: Waiting
ab1fd9049751: Waiting
01bf363d61e6: Waiting
c75b9c33e8b0: Waiting
96e9a734a04c: Waiting
f8ee5d51559e: Waiting
213efa3a6789: Waiting
5b429a43b8df: Waiting
ce42635eeddd: Waiting
e6f31ffc071e: Waiting
c16defe09b2f: Waiting
967885d218c5: Waiting
01bf363d61e6: Waiting
c75b9c33e8b0: Waiting
96e9a734a04c: Waiting
f8ee5d51559e: Waiting
213efa3a6789: Waiting
5b429a43b8df: Waiting
ce42635eeddd: Waiting
e6f31ffc071e: Waiting
c16defe09b2f: Waiting
967885d218c5: Waiting

ab1fd9049751: Waiting

213efa3a6789: Waiting

5b429a43b8df: Waiting

ce42635eeddd: Waiting

e6f31ffc071e: Waiting

c16defe09b2f: Waiting

967885d218c5: Waiting

ab1fd9049751: Waiting

01bf363d61e6: Waiting

c75b9c33e8b0: Waiting

96e9a734a04c: Waiting

f8ee5d51559e: Waiting

c16defe09b2f: Waiting

967885d218c5: Waiting

ab1fd9049751: Waiting

01bf363d61e6: Waiting

c75b9c33e8b0: Waiting

96e9a734a04c: Waiting

f8ee5d51559e: Waiting

213efa3a6789: Waiting

5b429a43b8df: Waiting

ce42635eeddd: Waiting

e6f31ffc071e: Waiting

5b429a43b8df: Waiting

ce42635eeddd: Waiting

e6f31ffc071e: Waiting

c16defe09b2f: Waiting
967885d218c5: Waiting
ab1fd9049751: Waiting
01bf363d61e6: Waiting
c75b9c33e8b0: Waiting
96e9a734a04c: Waiting
f8ee5d51559e: Waiting
213efa3a6789: Waiting
01bf363d61e6: Waiting
c75b9c33e8b0: Waiting
96e9a734a04c: Waiting
f8ee5d51559e: Waiting
213efa3a6789: Waiting
5b429a43b8df: Waiting
ce42635eeddd: Waiting
e6f31ffc071e: Waiting
c16defe09b2f: Waiting
967885d218c5: Waiting
ab1fd9049751: Waiting
f8ee5d51559e: Waiting
213efa3a6789: Waiting
5b429a43b8df: Waiting
ce42635eeddd: Waiting
e6f31ffc071e: Waiting
c16defe09b2f: Waiting
967885d218c5: Waiting

ab1fd9049751: Waiting
01bf363d61e6: Waiting
c75b9c33e8b0: Waiting
96e9a734a04c: Waiting
ce42635eeddd: Waiting
e6f31ffc071e: Waiting
c16defe09b2f: Waiting
967885d218c5: Waiting
ab1fd9049751: Waiting
01bf363d61e6: Waiting
c75b9c33e8b0: Waiting
96e9a734a04c: Waiting
f8ee5d51559e: Waiting
213efa3a6789: Waiting
5b429a43b8df: Waiting
c16defe09b2f: Waiting
967885d218c5: Waiting
ab1fd9049751: Waiting
01bf363d61e6: Waiting
c75b9c33e8b0: Waiting
96e9a734a04c: Waiting
f8ee5d51559e: Waiting
213efa3a6789: Waiting
5b429a43b8df: Waiting
ce42635eeddd: Waiting
e6f31ffc071e: Waiting

01bf363d61e6: Waiting
c75b9c33e8b0: Layer already exists
96e9a734a04c: Waiting
f8ee5d51559e: Waiting
213efa3a6789: Waiting
5b429a43b8df: Waiting
ce42635eeddd: Layer already exists
e6f31ffc071e: Waiting
c16defe09b2f: Waiting
967885d218c5: Waiting
ab1fd9049751: Waiting
5b429a43b8df: Waiting
e6f31ffc071e: Waiting
c16defe09b2f: Waiting
967885d218c5: Waiting
ab1fd9049751: Waiting
01bf363d61e6: Waiting
96e9a734a04c: Waiting
f8ee5d51559e: Waiting
213efa3a6789: Waiting
f8ee5d51559e: Waiting
213efa3a6789: Waiting
5b429a43b8df: Waiting
e6f31ffc071e: Layer already exists
c16defe09b2f: Waiting
967885d218c5: Waiting

ab1fd9049751: Waiting

01bf363d61e6: Waiting

96e9a734a04c: Layer already exists

c16defe09b2f: Waiting

967885d218c5: Layer already exists

ab1fd9049751: Waiting

01bf363d61e6: Waiting

f8ee5d51559e: Waiting

213efa3a6789: Waiting

5b429a43b8df: Waiting

f8ee5d51559e: Waiting

213efa3a6789: Layer already exists

5b429a43b8df: Layer already exists

c16defe09b2f: Layer already exists

ab1fd9049751: Layer already exists

01bf363d61e6: Layer already exists

f8ee5d51559e: Waiting

f8ee5d51559e: Waiting

f8ee5d51559e: Pushed

latest: digest:

sha256:b445ace814f7d745e8edf0890b58f7c093c94036362819ac0ba6b3349e76d133

size: 856

+ docker push naliniselv/react-app-dev:3

The push refers to repository [docker.io/naliniselv/react-app-dev]

213efa3a6789: Waiting

c16defe09b2f: Waiting

5b429a43b8df: Waiting

01bf363d61e6: Waiting

96e9a734a04c: Waiting

f8ee5d51559e: Waiting

e6f31ffc071e: Waiting

967885d218c5: Waiting

ab1fd9049751: Waiting

ce42635eeddd: Waiting

c75b9c33e8b0: Waiting

967885d218c5: Waiting

ab1fd9049751: Waiting

ce42635eeddd: Waiting

c75b9c33e8b0: Waiting

213efa3a6789: Waiting

c16defe09b2f: Waiting

5b429a43b8df: Waiting

01bf363d61e6: Waiting

96e9a734a04c: Waiting

f8ee5d51559e: Waiting

e6f31ffc071e: Waiting

f8ee5d51559e: Waiting

e6f31ffc071e: Waiting

967885d218c5: Waiting

ab1fd9049751: Waiting

ce42635eeddd: Waiting

c75b9c33e8b0: Waiting

213efa3a6789: Waiting

c16defe09b2f: Waiting

5b429a43b8df: Waiting

01bf363d61e6: Waiting

96e9a734a04c: Waiting

213efa3a6789: Waiting

c16defe09b2f: Waiting

5b429a43b8df: Waiting

01bf363d61e6: Waiting

96e9a734a04c: Waiting

f8ee5d51559e: Waiting

e6f31ffc071e: Waiting

967885d218c5: Waiting

ab1fd9049751: Waiting

ce42635eeddd: Waiting

c75b9c33e8b0: Waiting

f8ee5d51559e: Waiting

e6f31ffc071e: Waiting

967885d218c5: Waiting

ab1fd9049751: Waiting

ce42635eeddd: Waiting

c75b9c33e8b0: Waiting

213efa3a6789: Waiting

c16defe09b2f: Waiting

5b429a43b8df: Waiting

01bf363d61e6: Waiting

96e9a734a04c: Waiting

01bf363d61e6: Waiting

96e9a734a04c: Waiting

f8ee5d51559e: Waiting

e6f31ffc071e: Waiting

967885d218c5: Waiting

ab1fd9049751: Waiting

ce42635eeddd: Waiting

c75b9c33e8b0: Waiting

213efa3a6789: Waiting

c16defe09b2f: Waiting

5b429a43b8df: Waiting

213efa3a6789: Waiting

c16defe09b2f: Waiting

5b429a43b8df: Waiting

01bf363d61e6: Waiting

96e9a734a04c: Waiting

f8ee5d51559e: Waiting

e6f31ffc071e: Waiting

967885d218c5: Waiting

ab1fd9049751: Waiting

ce42635eeddd: Waiting

c75b9c33e8b0: Waiting

213efa3a6789: Waiting

c16defe09b2f: Waiting

5b429a43b8df: Waiting

01bf363d61e6: Waiting

96e9a734a04c: Waiting

f8ee5d51559e: Waiting

e6f31ffc071e: Waiting

967885d218c5: Waiting

ab1fd9049751: Waiting

ce42635eeddd: Waiting

c75b9c33e8b0: Waiting

f8ee5d51559e: Waiting

e6f31ffc071e: Waiting

967885d218c5: Waiting

ab1fd9049751: Waiting

ce42635eeddd: Waiting

c75b9c33e8b0: Waiting

213efa3a6789: Waiting

c16defe09b2f: Waiting

5b429a43b8df: Waiting

01bf363d61e6: Waiting

96e9a734a04c: Waiting

f8ee5d51559e: Waiting

e6f31ffc071e: Waiting

967885d218c5: Waiting

ab1fd9049751: Waiting

ce42635eeddd: Waiting

c75b9c33e8b0: Waiting

213efa3a6789: Waiting

c16defe09b2f: Waiting

5b429a43b8df: Waiting
01bf363d61e6: Waiting
96e9a734a04c: Waiting
e6f31ffc071e: Waiting
967885d218c5: Waiting
ab1fd9049751: Waiting
ce42635eeddd: Waiting
c75b9c33e8b0: Waiting
213efa3a6789: Waiting
c16defe09b2f: Waiting
5b429a43b8df: Waiting
01bf363d61e6: Waiting
96e9a734a04c: Waiting
f8ee5d51559e: Waiting
5b429a43b8df: Waiting
01bf363d61e6: Waiting
96e9a734a04c: Waiting
f8ee5d51559e: Waiting
e6f31ffc071e: Waiting
967885d218c5: Waiting
ab1fd9049751: Layer already exists
ce42635eeddd: Waiting
c75b9c33e8b0: Layer already exists
213efa3a6789: Waiting
c16defe09b2f: Waiting
f8ee5d51559e: Waiting

e6f31ffc071e: Waiting
967885d218c5: Waiting
ce42635eeddd: Waiting
213efa3a6789: Waiting
c16defe09b2f: Waiting
5b429a43b8df: Waiting
01bf363d61e6: Waiting
96e9a734a04c: Waiting
f8ee5d51559e: Waiting
e6f31ffc071e: Waiting
967885d218c5: Waiting
ce42635eeddd: Waiting
213efa3a6789: Waiting
c16defe09b2f: Waiting
5b429a43b8df: Waiting
01bf363d61e6: Waiting
96e9a734a04c: Layer already exists
5b429a43b8df: Waiting
01bf363d61e6: Waiting
f8ee5d51559e: Waiting
e6f31ffc071e: Waiting
967885d218c5: Waiting
ce42635eeddd: Waiting
213efa3a6789: Waiting
c16defe09b2f: Waiting
f8ee5d51559e: Already exists

e6f31ffc071e: Layer already exists

967885d218c5: Layer already exists

ce42635eeddd: Layer already exists

213efa3a6789: Layer already exists

c16defe09b2f: Layer already exists

5b429a43b8df: Layer already exists

01bf363d61e6: Layer already exists

3: digest:

sha256:b445ace814f7d745e8edf0890b58f7c093c94036362819ac0ba6b3349e76d133

size: 856

[Pipeline] }

[Pipeline] // script

[Pipeline] }

[Pipeline] // stage

[Pipeline] stage

[Pipeline] { (Deploy Production)

Stage "Deploy Production" skipped due to when conditional

[Pipeline] getContext

[Pipeline] }

[Pipeline] // stage

[Pipeline] stage

[Pipeline] { (Declarative: Post Actions)

[Pipeline] sh

+ docker logout

Removing login credentials for <https://index.docker.io/v1/>

+ docker image prune -af

Deleted Images:

untagged: naliniselv/react-app-dev:3

untagged: naliniselv/react-app-dev:latest

deleted:

sha256:b445ace814f7d745e8edf0890b58f7c093c94036362819ac0ba6b3349e76d133

deleted:

sha256:c17c6c11b164e9ff3a888f8c23ccfa0611f8234f700b18e5bb0277e18a84164f

deleted:

sha256:713d501990bb2e3ba1aa515c138b6d4a6fcddcb0c64d85ae9b35d9d22c456096

Total reclaimed space: 2.714MB

+ docker container prune -f

Total reclaimed space: 0B

+ docker volume prune -f

Total reclaimed space: 0B

[Pipeline] script

[Pipeline] {

[Pipeline] sh

+ docker rmi -f naliniselv/react-app-dev:latest

Error response from daemon: No such image: naliniselv/react-app-dev:latest

+ docker rmi -f naliniselv/react-app-dev:3

Error response from daemon: No such image: naliniselv/react-app-dev:3

[Pipeline] }

[Pipeline] // script

[Pipeline] cleanWs

[WS-CLEANUP] Deleting project workspace...

[WS-CLEANUP] Deferred wipeout is used...

[WS-CLEANUP] done

[Pipeline] echo

Pipeline completed successfully...

[Pipeline] }

[Pipeline] // stage

[Pipeline] }

[Pipeline] // withEnv

[Pipeline] }

[Pipeline] // withEnv

[Pipeline] }

[Pipeline] // node


[Pipeline] End of Pipeline

GitHub has been notified of this commit's build result

Finished: SUCCESS

Dev is successful


we see jenkins pipeline for dev branch is triggered by below screenshot

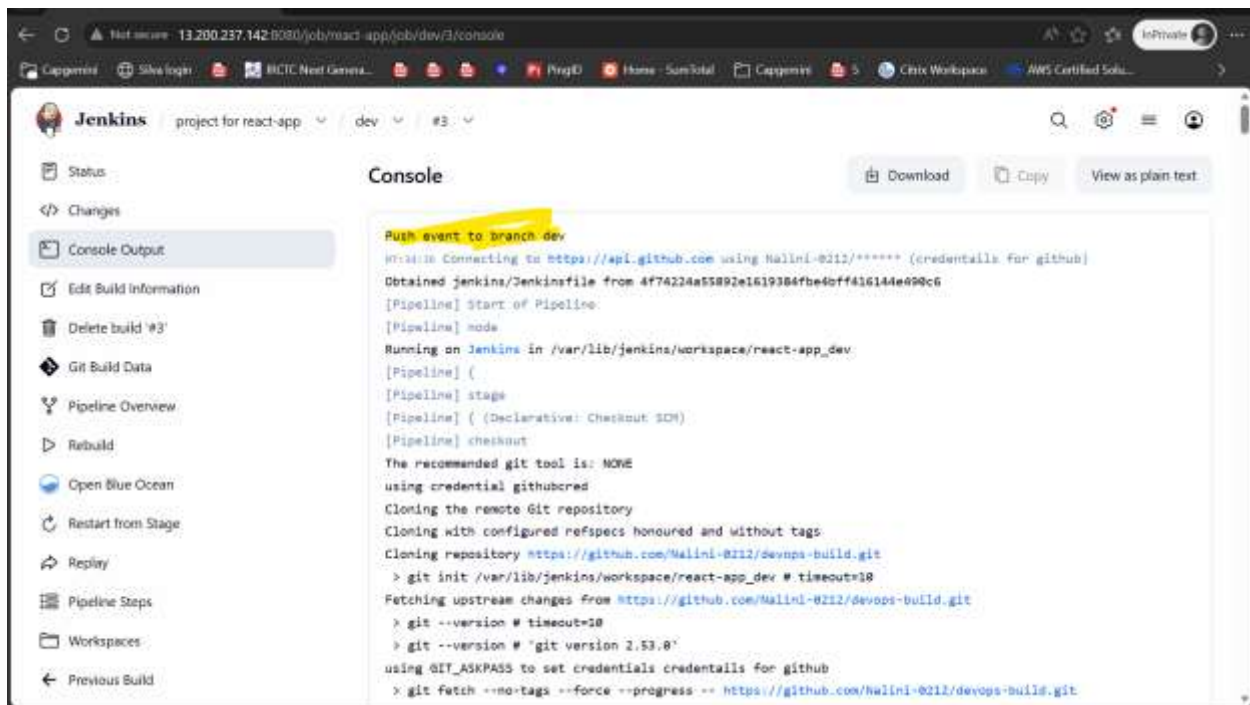

We see below image in docker hub repo

Repo name: naliniselv/react-app-dev

We see 2 images as per latest build 3 & latest one

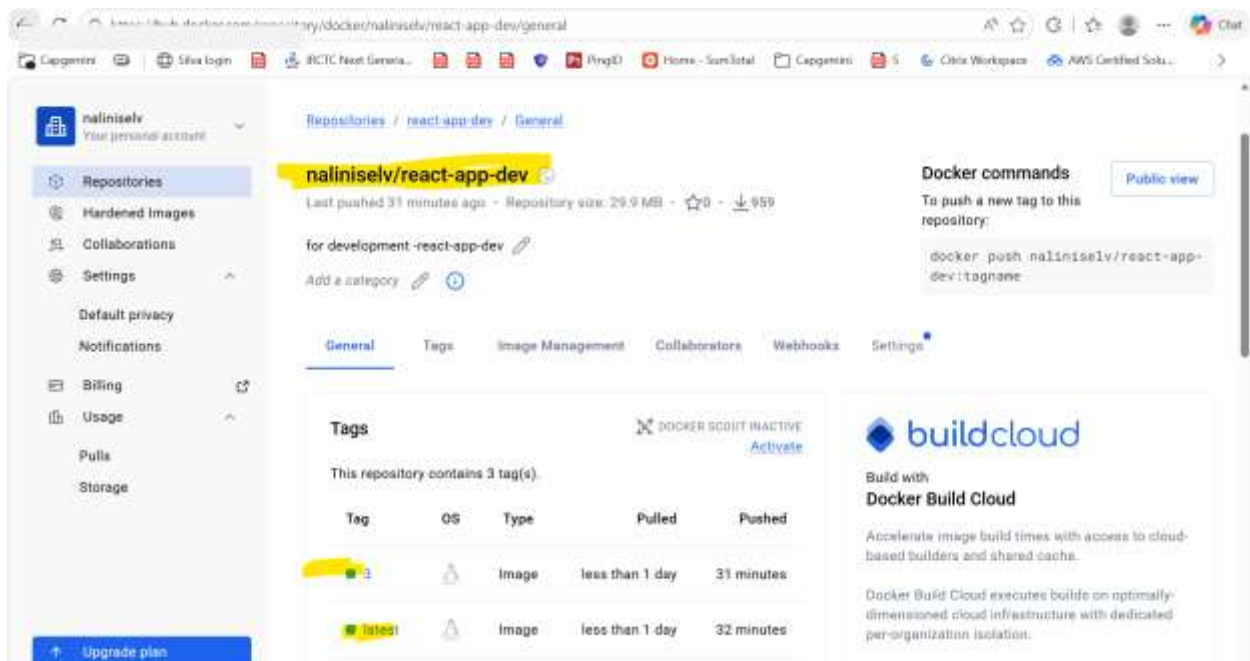


We try to deploy this image in jenkins server and check

Login to jenkins server and clone repo and try to run deploy.sh script . getting error as dokcer compose file as react-app:v1

```
ubuntu@ip-172-31-4-192:~$ ls
ubuntu@ip-172-31-4-192:~$ git clone https://github.com/nalini-0212/devops-build.git
Cloning into 'devops-build'...
remote: Enumerating objects: 45, done.
remote: Counting objects: 100% (45/45), done.
remote: Compressing objects: 100% (38/38), done.
remote: Total 45 (delta 6), reused 42 (delta 3), pack-reused 0 (from 0)
Receiving objects: 100% (45/45), 723.08 KiB | 7.18 MiB/s, done.
Resolving deltas: 100% (6/6), done.
ubuntu@ip-172-31-4-192:~$ cd devops-build/
ubuntu@ip-172-31-4-192:~/devops-build$ docker ps
CONTAINER ID   IMAGE     COMMAND   CREATED   STATUS    PORTS   NAMES
ubuntu@ip-172-31-4-192:~/devops-build$ ls -la
total 24
drwxr-xr-x 6 ubuntu ubuntu 4096 Jul  9 08:15 .
drwxr-xr-x 6 ubuntu ubuntu 4096 Jul  9 08:15 ..
drwxr-xr-x 7 ubuntu ubuntu 4096 Jul  9 08:15 .git
drwxr-xr-x 3 ubuntu ubuntu 4096 Jul  9 08:15 app
drwxr-xr-x 2 ubuntu ubuntu 4096 Jul  9 08:15 docker
drwxr-xr-x 2 ubuntu ubuntu 4096 Jul  9 08:15 scripts
ubuntu@ip-172-31-4-192:~/devops-build$ IMAGE_NAME=nalini0212/react-app-dev ./scripts/deploy.sh
bash: ./scripts/deploy.sh: Permission denied
ubuntu@ip-172-31-4-192:~/devops-build$ cd scripts/
ubuntu@ip-172-31-4-192:~/devops-build/scripts$ ls
build.sh  deploy.sh
ubuntu@ip-172-31-4-192:~/devops-build/scripts$ ls -la deploy.sh
-rwxr-xr-x 1 ubuntu ubuntu 275 Jul  9 08:15 deploy.sh
ubuntu@ip-172-31-4-192:~/devops-build/scripts$ chmod +x deploy.sh
ubuntu@ip-172-31-4-192:~/devops-build/scripts$ ls -la deploy.sh
-rwxr-xr-x 1 ubuntu ubuntu 275 Jul  9 08:15 deploy.sh
ubuntu@ip-172-31-4-192:~/devops-build/scripts$ cd ..
ubuntu@ip-172-31-4-192:~/devops-build$ IMAGE_NAME=nalini0212/react-app-dev ./scripts/deploy.sh
pulling latest image...
using default tag: latest
latest: Pulling from nalini0212/react-app-dev
Digest: sha256:b445ace814f7d745e8edf0690b56f7c093c94036362819ac0a6b3349e76d133
Status: Downloaded newer image for nalini0212/react-app-dev:latest
docker: io/nalini0212/react-app-dev:latest
Stopping existing container...
WARN[0000] /home/ubuntu/devops-build/docker/docker-compose.yml: the attribute 'version' is obsolete, it will be ignored, please remove it to avoid potential confusion
[+] down 1/1
- network docker_default removed
Starting replication
WARN[0000] /home/ubuntu/devops-build/docker/docker-compose.yml: the attribute 'version' is obsolete, it will be ignored, please remove it to avoid potential confusion
[+] up 1/1
x Image react-app:v1 Error pull access denied for react-app, repository does not exist or may require 'docker login'
Error response from daemon: pull access denied for react-app, repository does not exist or may require 'docker login'
ubuntu@ip-172-31-4-192:~/devops-build$ docker ps
CONTAINER ID   IMAGE     COMMAND   CREATED   STATUS    PORTS   NAMES
ubuntu@ip-172-31-4-192:~/devops-build$ docker login
Authentication with existing credentials... (Username: nalini0212)
Info - To login with a different account, run 'docker logout' followed by 'docker login'
```

So just change to IMAGE_NAME and push to git hub

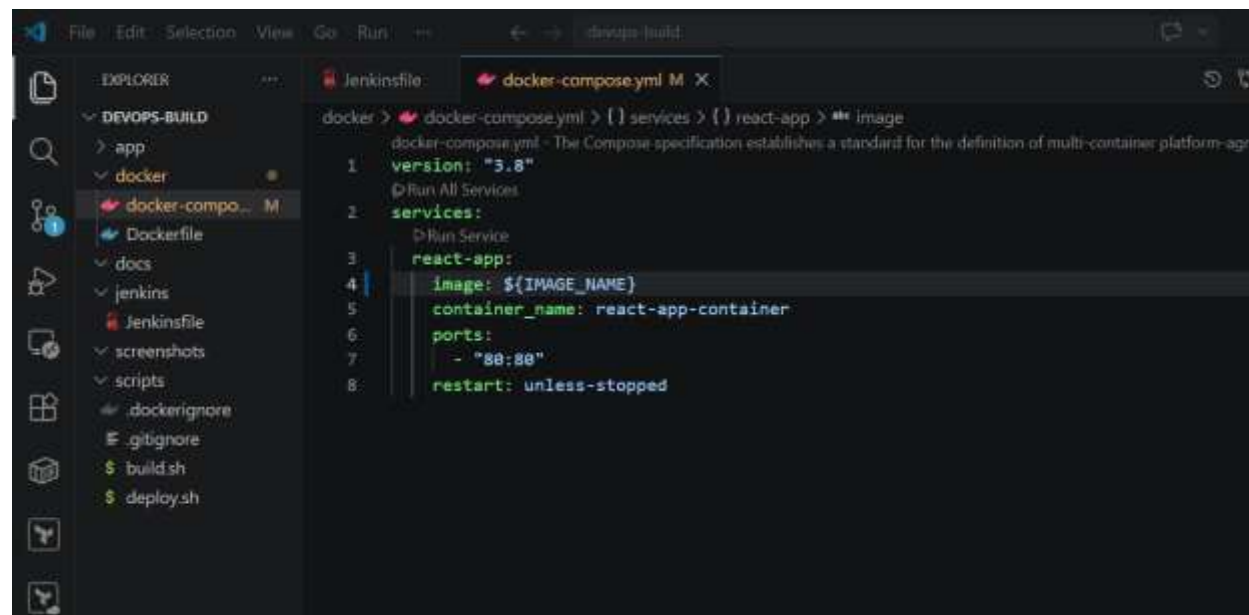

```
docker > docker-compose.yml > {} services > {} react-app > ** image
docker-compose.yml - The Compose specification establishes a standard for the definition of multi-container platform-agnostic applications.
1 version: "3.8"
2 services:
3   react-app:
4     image: ${IMAGE_NAME}
5     container_name: react-app-container
6     ports:
7       - "80:80"
8     restart: unless-stopped
```

```

CORP+nase1var@LIN-7DT7RJ4 MINGW64 ~/Downloads/devops-build (dev)
$ git add .


CORP+nase1var@LIN-7DT7RJ4 MINGW64 ~/Downloads/devops-build (dev)
$ git commit -m "modified scripts to dev branch"

CORP+nase1var@LIN-7DT7RJ4 MINGW64 ~/Downloads/devops-build (dev)
$ git push -u origin dev
Enumerating objects: 7, done.
Counting objects: 100% (7/7), done.
Delta compression using up to 14 threads
Compressing objects: 100% (4/4), done.
Writing objects: 100% (4/4), 397 bytes | 132.00 KiB/s, done.
Total 4 (delta 2), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (2/2), completed with 2 local objects.
To https://github.com/Nalini-0212/devops-build.git
  4f74224..94126bd dev -> dev
branch 'dev' set up to track 'origin/dev'.

CORP+nase1var@LIN-7DT7RJ4 MINGW64 ~/Downloads/devops-build (dev)
$

```

Now try to clone latest repo and then try to give execute permission and deploy in jenkins server from dev repo. We see dev pipeline is triggered now and latest image is 4 and latest pushed to dev repo.

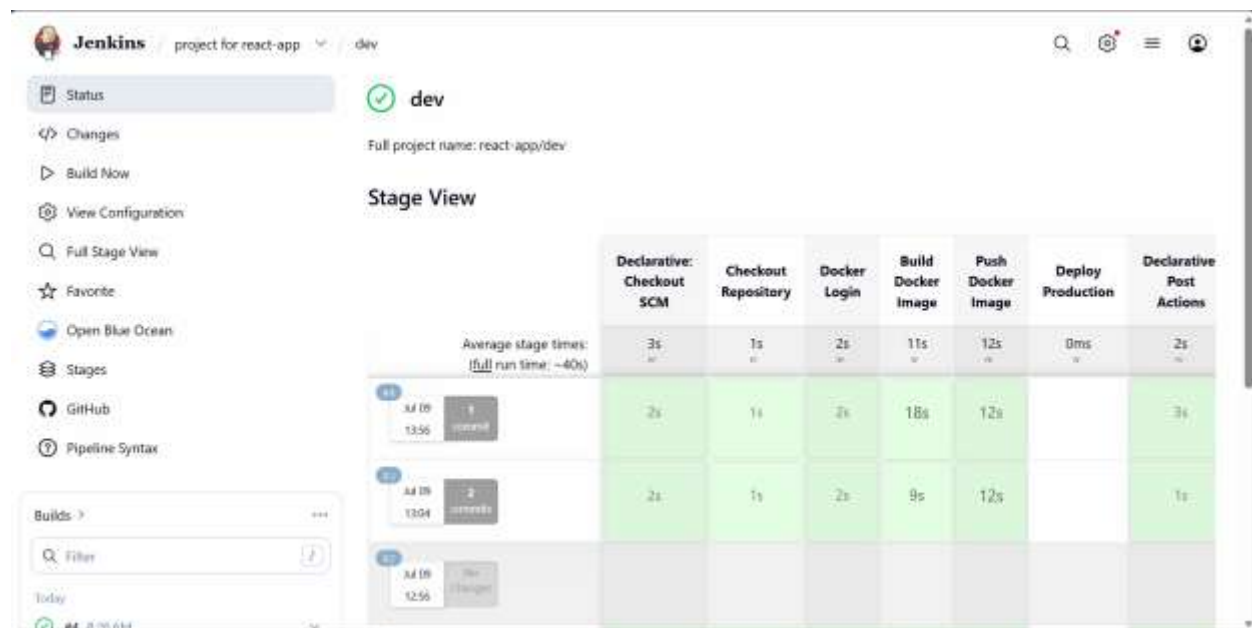


Login to jenkins server and deploy by cloning repo

```
ubuntu@ip-172-31-4-192:~$ git clone -b dev https://github.com/nalini-0232/devops-build.git
Cloning into 'devops-build'...
remote: Enumerating objects: 49, done.
remote: Counting objects: 100% (49/49), done.
remote: Compressing objects: 100% (38/38), done.
remote: Total 49 (delta 8); reused 46 (delta 3), pack-reused 0 (from 0)
Receiving objects: 100% (49/49), 723.40 KiB | 4.16 MiB/s, done.
Resolving deltas: 100% (8/8), done.
ubuntu@ip-172-31-4-192:~$ cd devops-build/
ubuntu@ip-172-31-4-192:~/devops-build$ ls
app  docker  Jenkins  scripts
ubuntu@ip-172-31-4-192:~/devops-build$ cd scripts/
ubuntu@ip-172-31-4-192:~/devops-build/scripts$ ls
build.sh  deploy.sh
ubuntu@ip-172-31-4-192:~/devops-build/scripts$ ls -la deploy.sh
-rwxr-xr-x 1 ubuntu ubuntu 275 Jul  9 08:30 deploy.sh
ubuntu@ip-172-31-4-192:~/devops-build/scripts$ chmod +x deploy.sh
ubuntu@ip-172-31-4-192:~/devops-build/scripts$ ls -la deploy.sh
-rwxr-xr-x 1 ubuntu ubuntu 275 Jul  9 08:30 deploy.sh
ubuntu@ip-172-31-4-192:~/devops-build/scripts$ cd ..
ubuntu@ip-172-31-4-192:~/devops-build$ IMAGE_NAME=nalini0232/react-app-dev4 ./scripts/deploy.sh
Pulling latest image...
4: Pulling from nalini0232/react-app-dev
113e7a3a678b: Pull complete
969a734a04c: Pull complete
3cf2c8ba233e: Download complete
Digest: sha256:f19b4ff1aed2c0310f0b0dd3c959af10491cb4097af540ad3bc6490f3ffec6c
Status: Downloaded newer image for nalini0232/react-app-dev:4
docker.io/nalini0232/react-app-dev:4
Stopping existing container...
WARN[0000] /home/ubuntu/devops-build/docker/docker-compose.yml: the attribute `version` is obsolete, it will be ignored, please remove it to avoid potential confusion
Starting application...
WARN[0000] /home/ubuntu/devops-build/docker/docker-compose.yml: the attribute `version` is obsolete, it will be ignored, please remove it to avoid potential confusion
(*) up 2/2
✔ Network docker_default Created
✔ Container react-app-container Started
ubuntu@ip-172-31-4-192:~/devops-build$ docker ps
CONTAINER ID        IMAGE               COMMAND                  CREATED             STATUS              PORTS
d0fab6b960fe        nalini0232/react-app-dev:4   "/docker-entrypoint..."  14 seconds ago      Up 12 seconds      0.0.0.0:80->80/tcp, [::]:80->80/tcp
ubuntu@ip-172-31-4-192:~/devops-build$
```

Try to browse URL now

Now able to access application

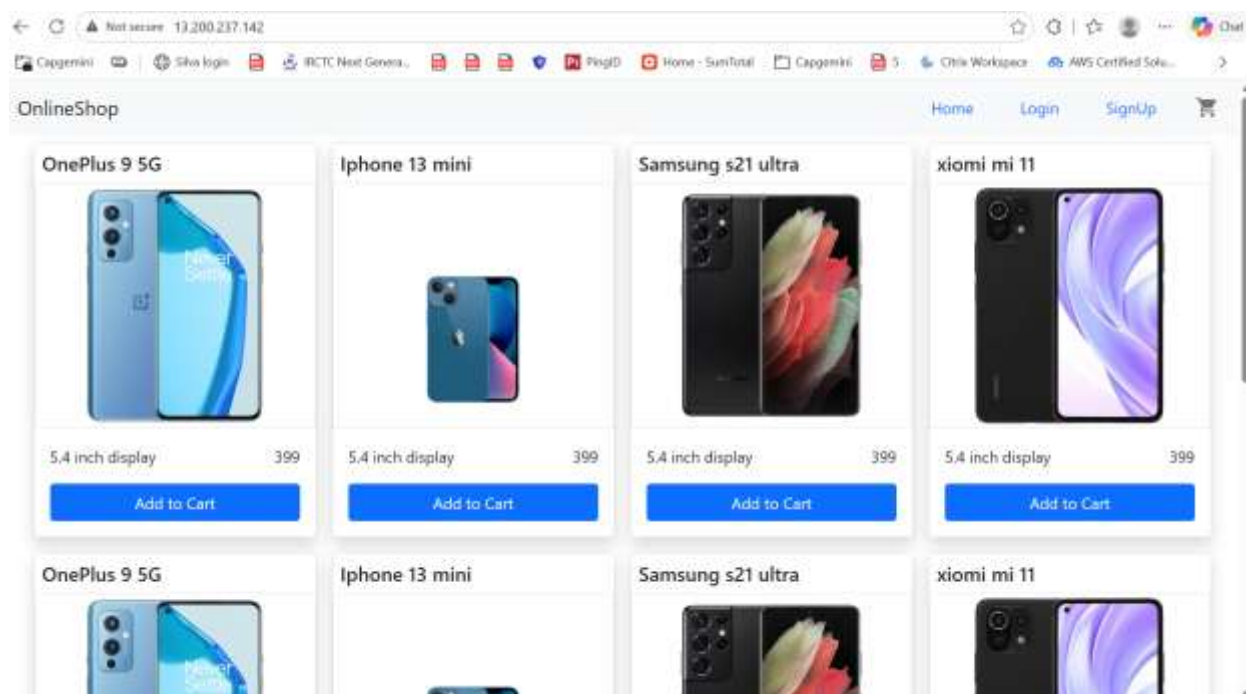

Now remove container and image


```

shuntu@ip-172-31-4-192:~/devops-build$ docker ps
CONTAINER ID   IMAGE                                COMMAND                  CREATED        STATUS        PORTS                    NAMES
daba8c8900fe  nalinise/v/react-app-dev:4         "/docker-entrypoint..." 14 seconds ago Up 12 seconds 0.0.0.0:80->80/tcp, [::]:80->80/tcp react-app-container
shuntu@ip-172-31-4-192:~/devops-build$ cd ..
shuntu@ip-172-31-4-192:~/devops-build$ docker ps
CONTAINER ID   IMAGE                                COMMAND                  CREATED        STATUS        PORTS                    NAMES
daba8c8900fe  nalinise/v/react-app-dev:4         "/docker-entrypoint..." 7 minutes ago  Up 7 minutes  0.0.0.0:80->80/tcp, [::]:80->80/tcp react-app-container
shuntu@ip-172-31-4-192:~/devops-build$ docker rm -f react-app-container
react-app-container
shuntu@ip-172-31-4-192:~/devops-build$ docker images
IMAGE ID          DISK USAGE  CONTENT SIZE  EXTRA
nalinese/v/react-app-dev:4  f19b6ff18edf  95.9kB       26.7MB
shuntu@ip-172-31-4-192:~/devops-build$ docker rmi nalinise/v/react-app-dev:4
Untagged: nalinise/v/react-app-dev:4
Deleted: sha256:f19b6ff18edf2c03190b0d3c959af10491cb6897af580ad3bc6498f3fface6c
shuntu@ip-172-31-4-192:~/devops-build$ docker images
IMAGE ID          DISK USAGE  CONTENT SIZE  EXTRA
shuntu@ip-172-31-4-192:~/devops-build$ docker ps
CONTAINER ID   IMAGE                                COMMAND                  CREATED        STATUS        PORTS                    NAMES
shuntu@ip-172-31-4-192:~/devops-build$


```

Try to raise pull request in git hub to merge dev and main branch


Main branch below:

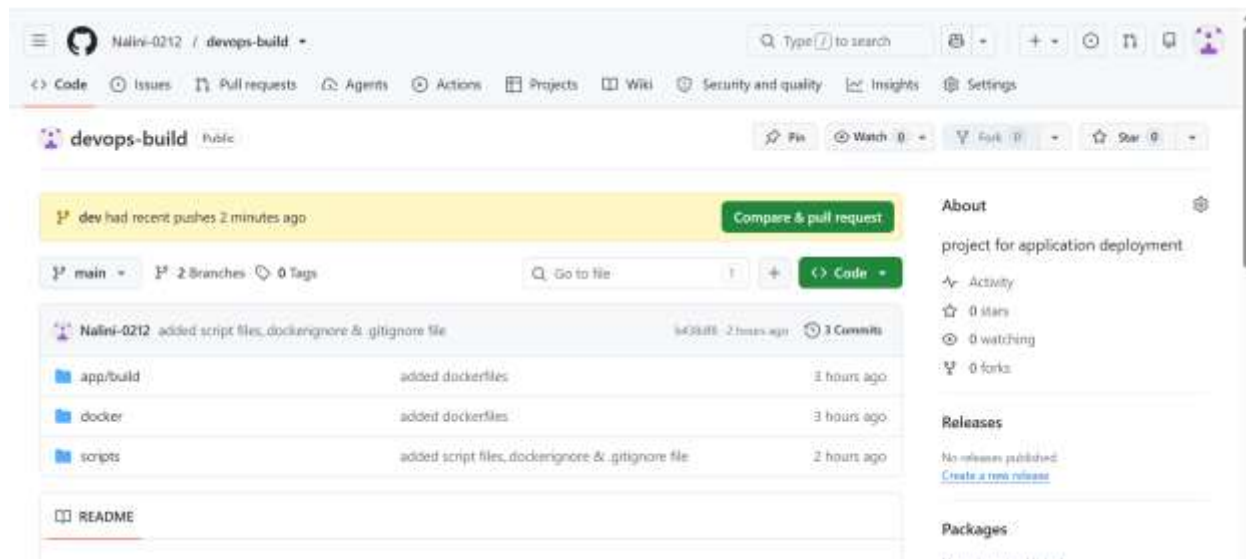


Dev branch:

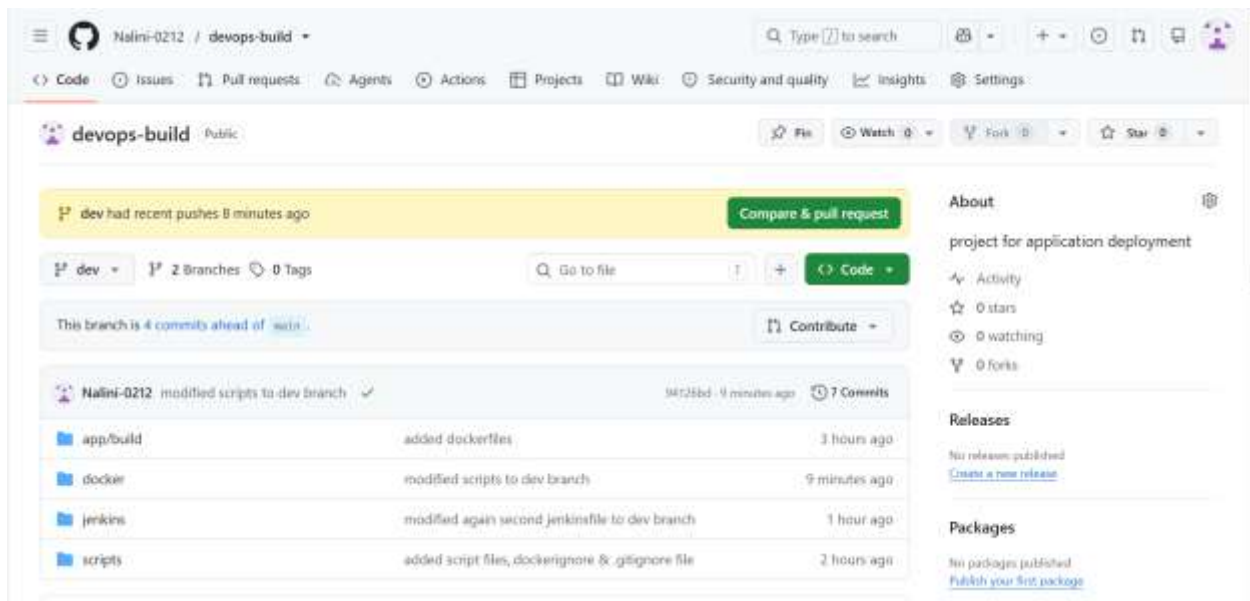


Compare & pull request

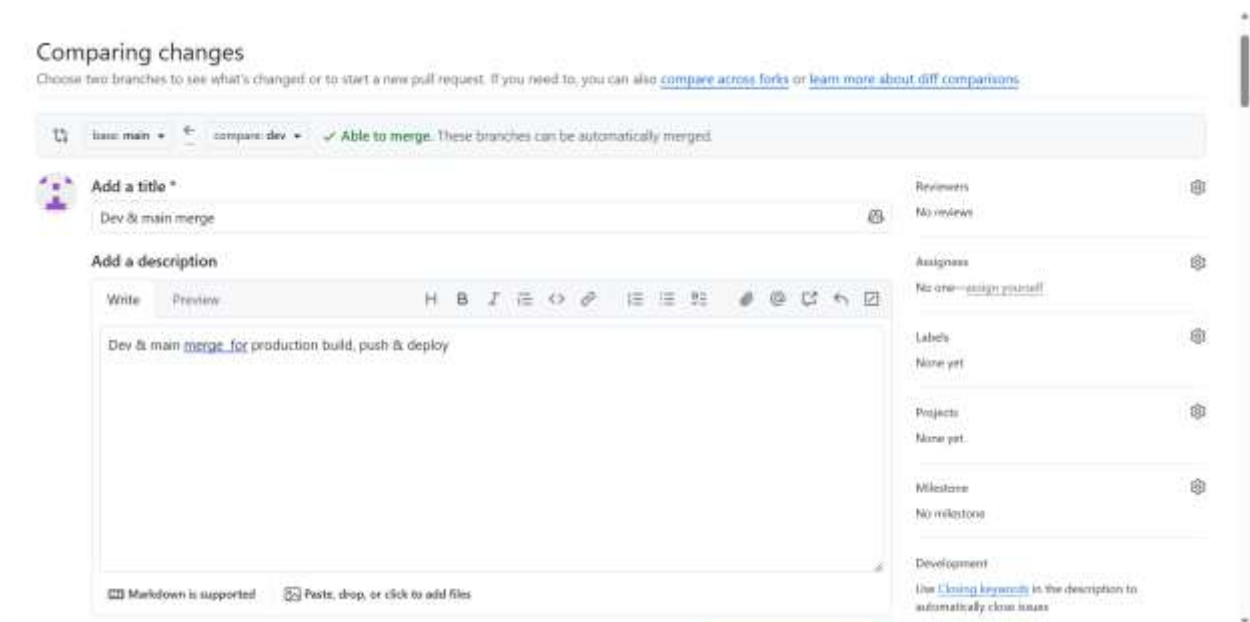


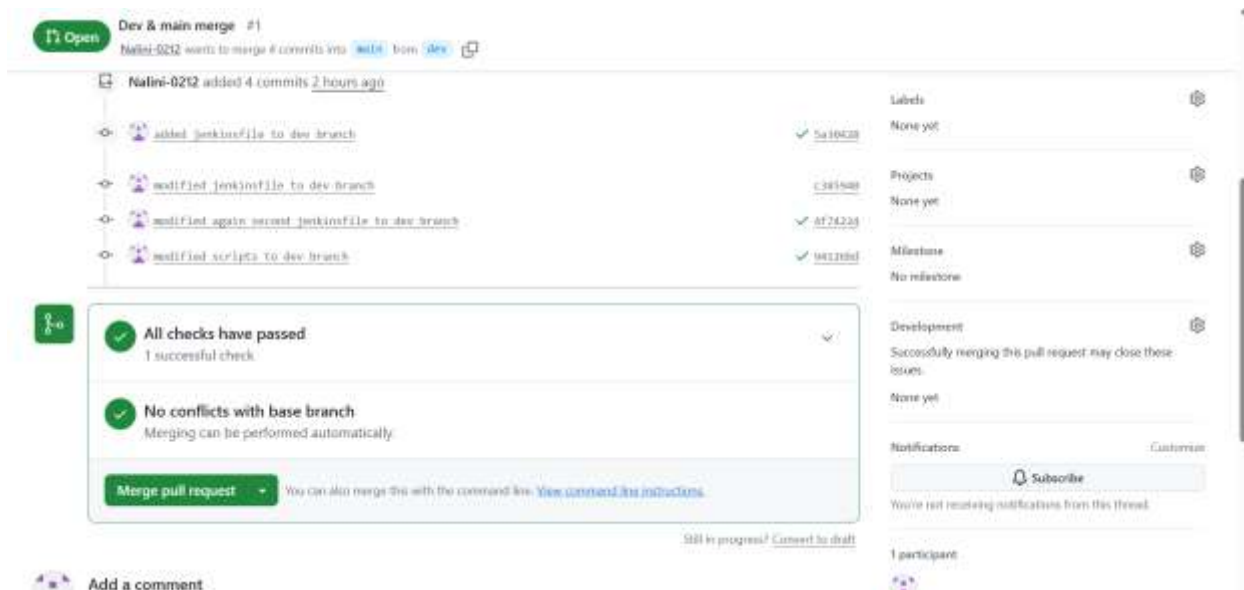


Now we are going to shutdown server so ips can change both powering on we will note down ip

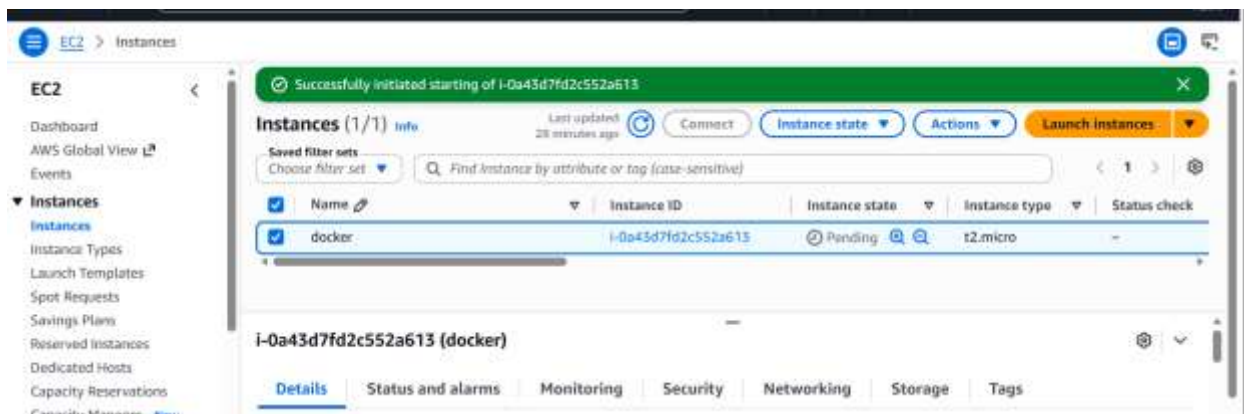


Below is jenkins server IP now

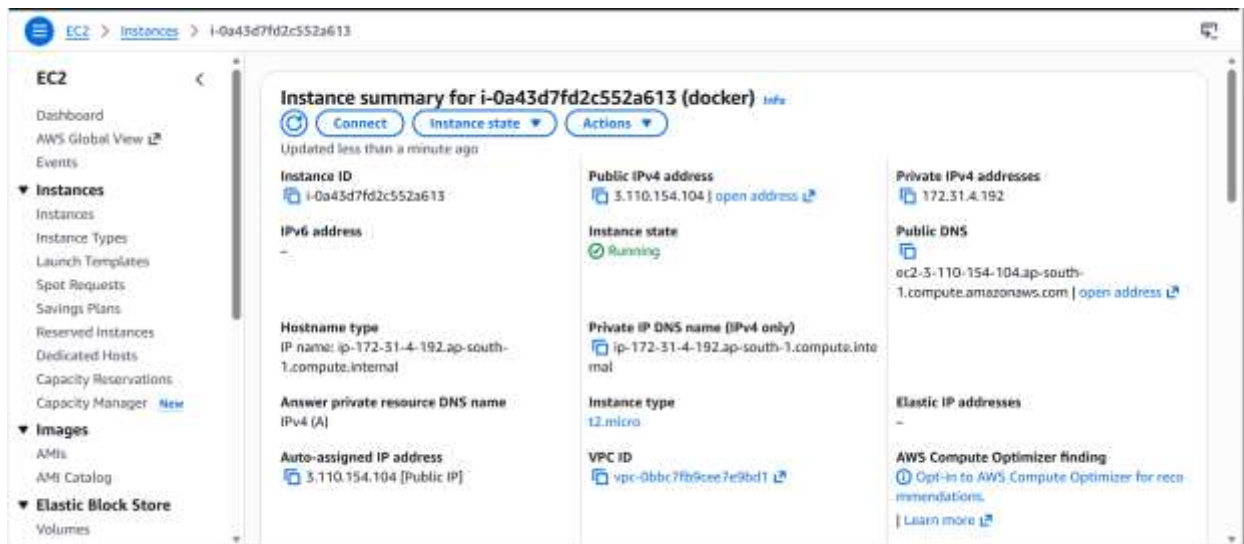


And also try to change webhook url as server was powered off and powered on now

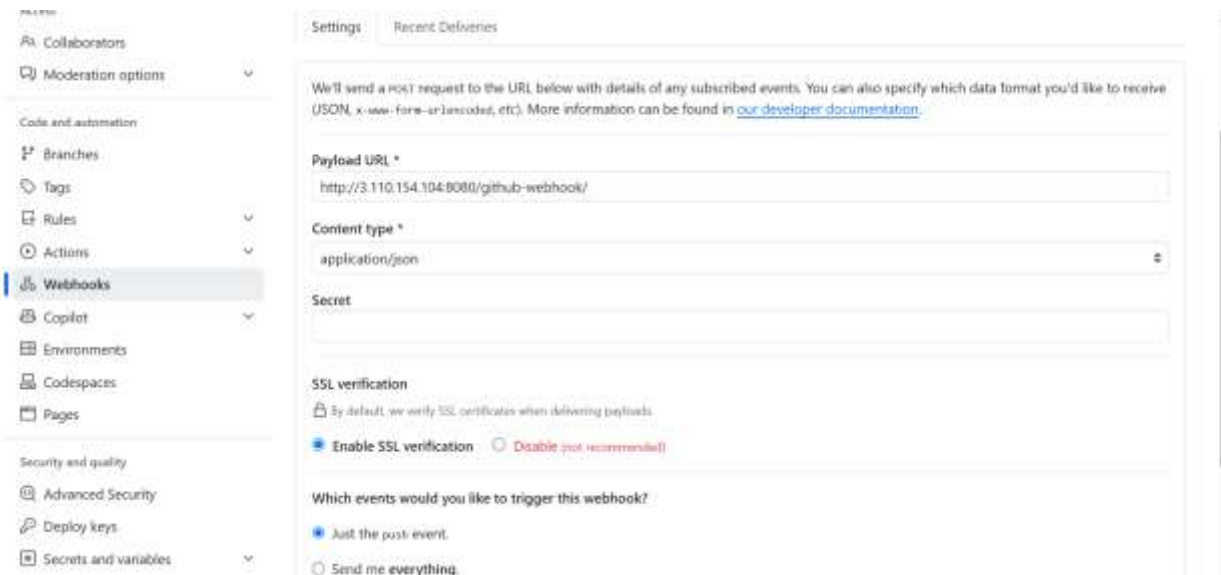

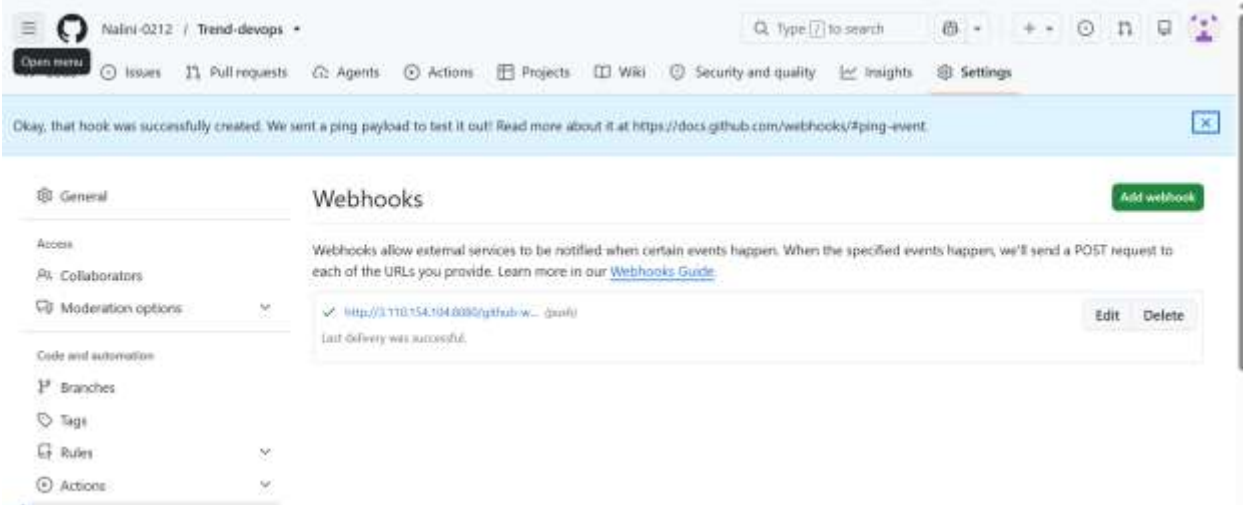

now try to accept merge request

Press confirm merge

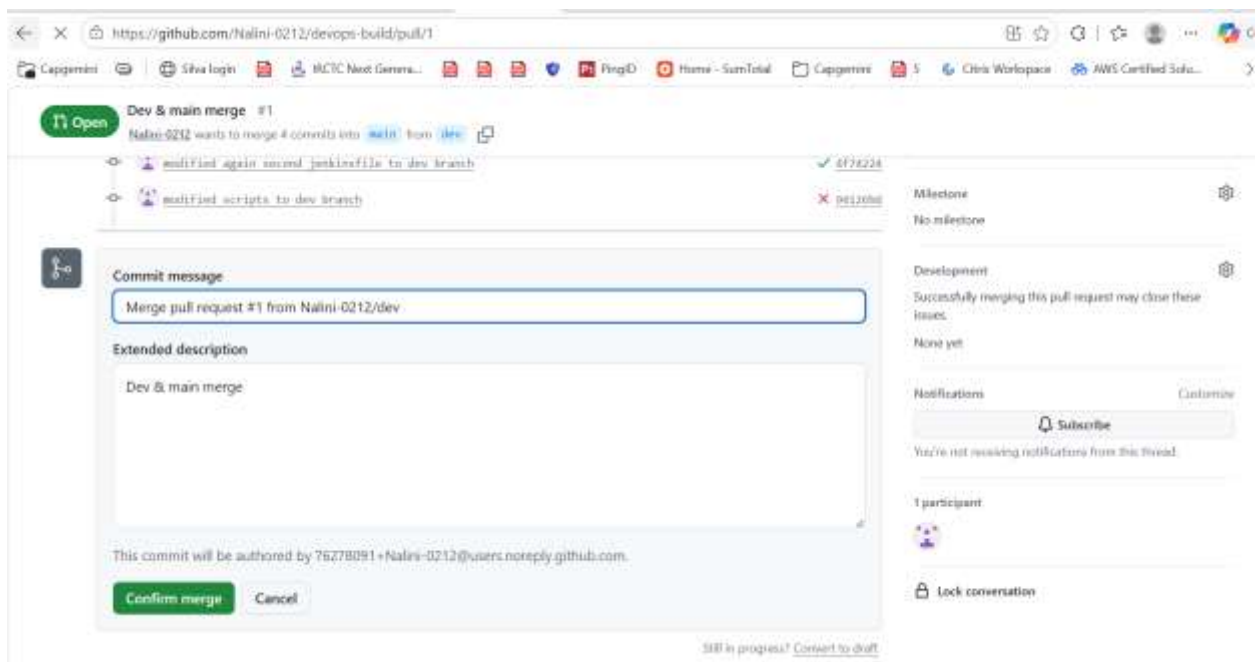

The image shows two screenshots from a GitHub repository named 'devops-build'.


The top screenshot is a pull request titled 'Dev & main merge: #1'. It shows a merge of commit '91126b6' from the 'dev' branch into the 'main' branch. The pull request is successfully merged and closed. Below the merge information, there is a section for adding a comment, with a text area and a 'Delete branch' button. The right sidebar shows the 'Development' branch and a 'Notifications' section with an 'Unsubscribe' button.

The bottom screenshot is the repository page for 'devops-build'. It shows the 'main' branch with 2 branches and 0 tags. The repository is public. The 'About' section describes it as a 'project for application deployment'. The 'Releases' section shows 'No releases published' and a link to 'Create a new release'. The 'Files' section lists the following files and their commit history:


File	Commit	Time
app/build	added dockerfiles	4 hours ago
docker	modified scripts to dev branch	1 hour ago
jenkins	modified again second jenkinsfile to dev branch	1 hour ago
scripts	added script files, dockerignore & gitignore file	3 hours ago


Now go to jenkins and we see it auto triggered

Pipeline is successful

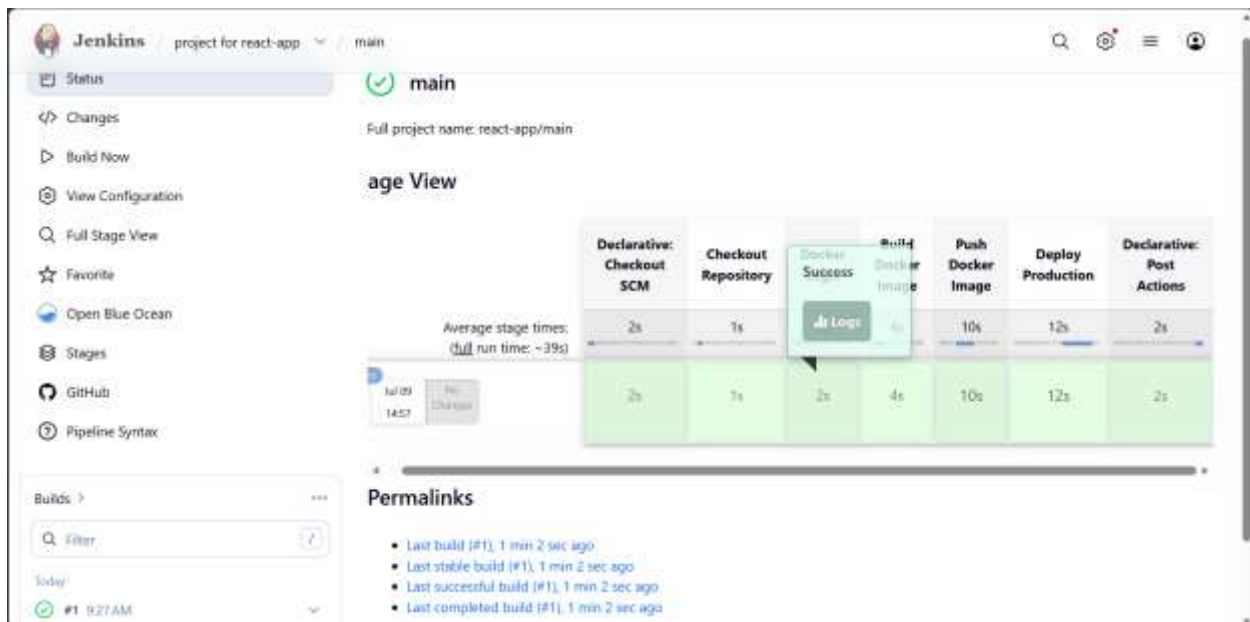

Below screenshot shows it is triggered by merge request

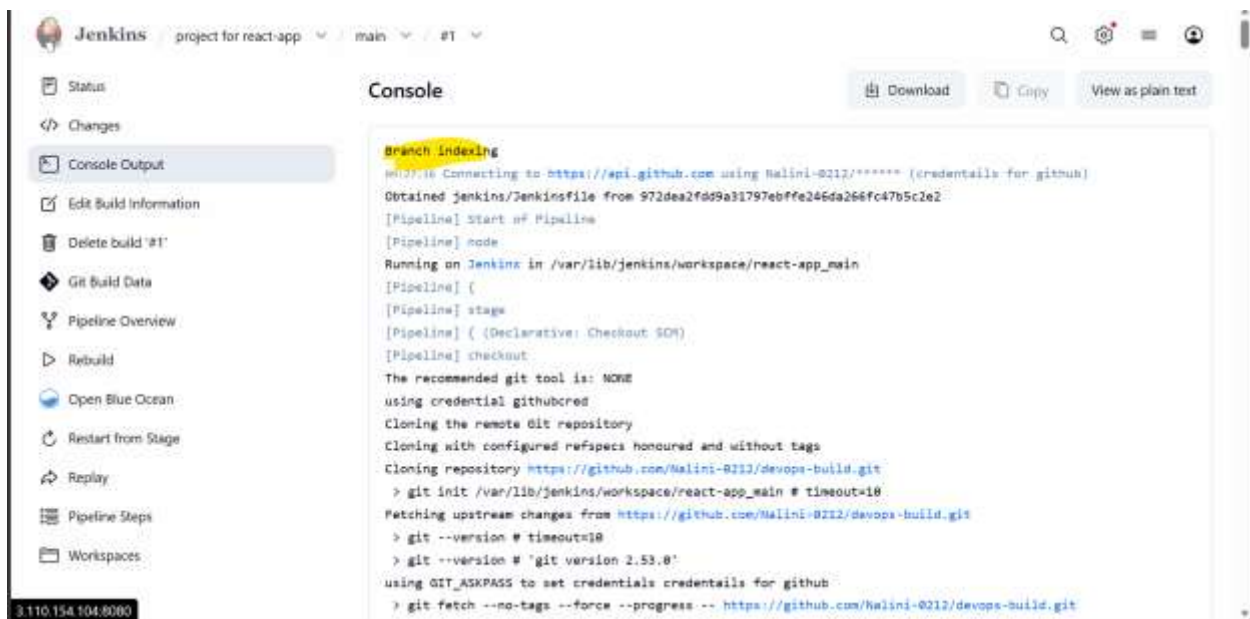

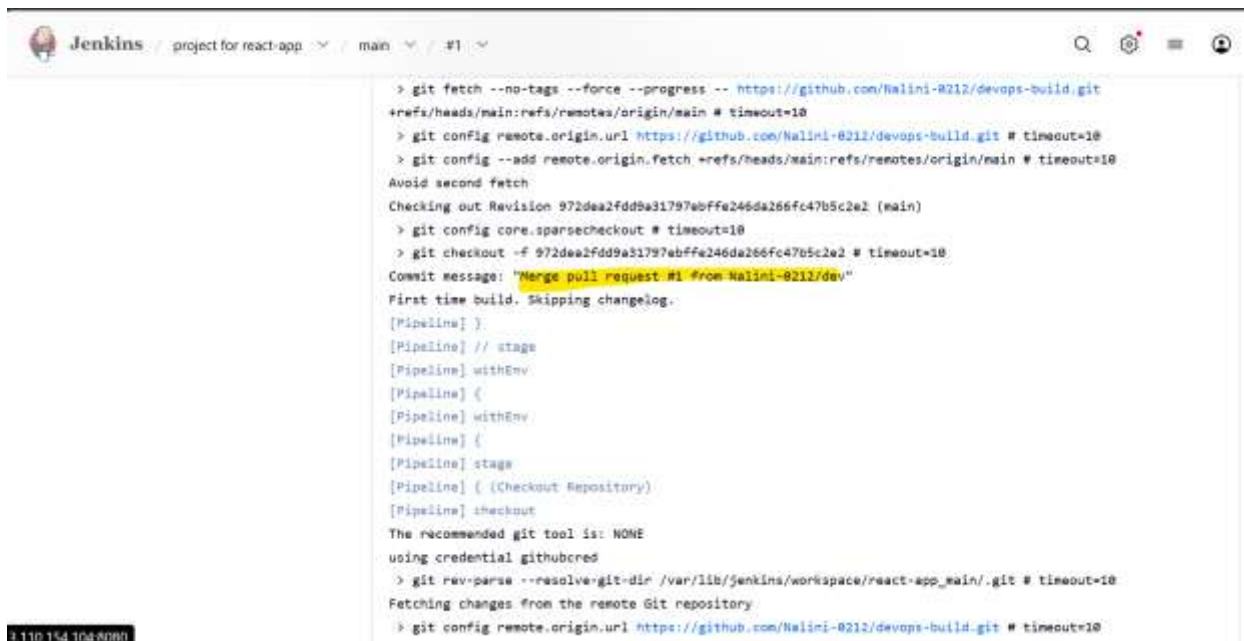

Jenkins console output for a pipeline. The interface shows the Jenkins logo, the project name 'project for react-app', the branch 'main', and the build number '#1'. The console log displays the following steps:

```
> git fetch --no-tags --force --progress -- https://github.com/Nalini-0212/devops-build.git
+refs/heads/main:refs/remotes/origin/main # timeout=10
> git config remote.origin.url https://github.com/Nalini-0212/devops-build.git # timeout=10
> git config --add remote.origin.fetch +refs/heads/main:refs/remotes/origin/main # timeout=10
Avoid second fetch
Checking out Revision 972dea2fdd9a31797ebffe246da266fc47b5c2e2 (main)
> git config core.sparsecheckout # timeout=10
> git checkout -f 972dea2fdd9a31797ebffe246da266fc47b5c2e2 # timeout=10
Commit message: "Merge pull request #1 from Nalini-0212/dev"
First time build. Skipping changelog.
[Pipeline] }
[Pipeline] // stage
[Pipeline] withEnv
[Pipeline] {
[Pipeline] withEnv
[Pipeline] {
[Pipeline] stage
[Pipeline] { (Checkout Repository)
[Pipeline] checkout
The recommended git tool is: NONE
using credential githubcred
> git rev-parse --resolve-git-dir /var/lib/jenkins/workspace/react-app_main/.git # timeout=10
Fetching changes from the remote Git repository
> git config remote.origin.url https://github.com/Nalini-0212/devops-build.git # timeout=10
```

Building docker image



Jenkins console output for a pipeline. The interface shows the Jenkins logo, the project name 'project for react-app', the branch 'main', and the build number '#1'. The console log displays the following steps:

```
[Pipeline] }
[Pipeline] // withCredentials
[Pipeline] }
[Pipeline] // stage
[Pipeline] stage
[Pipeline] { (Build Docker Image)
[Pipeline] script
[Pipeline] {
[Pipeline] sh
# chmod +x scripts/build.sh
+ IMAGE_NAME=naliniselv/react-app-prod:latest ./scripts/build.sh
Building Docker image: naliniselv/react-app-prod:latest
#0 building with "default" instance using docker driver

#1 [internal] load build definition from Dockerfile
#1 transferring dockerfile: 1748 B.0s done
#1 DONE 0.1s

#2 [internal] load metadata for docker.io/library/nginx:alpine
#2 ...

#3 [auth] library/nginx:pull token for registry-1.docker.io
#3 DONE 0.0s
```

Tagging and pushing to dockerhub private naliniselv/react-app-prod

```
Jenkins / project for react-app / main / #1

[Pipeline] { (Push Docker Image)
[Pipeline] script
[Pipeline] {
[Pipeline] sh
+ echo Tagging PROD Image...
Tagging PROD Image...
+ docker tag naliniselv/react-app-prod:latest naliniselv/react-app-prod:1
+ echo Pushing PROD Images...
Pushing PROD Images...
+ docker push naliniselv/react-app-prod:latest
The push refers to repository [docker.io/naliniselv/react-app-prod]
213efa3a6789: Waiting
c15defe09b2f: Waiting
ce42635eeddd: Waiting
01bf363d61e6: Waiting
c75b9c33e8b8: Waiting
d7b2db8b9841: Waiting
a6f31ffc071e: Waiting
5b429a43b8df: Waiting
967885d218c5: Waiting
ab1fd9049751: Waiting
96e9a734a04c: Waiting
01bf363d61e6: Waiting
}
```

Push to dockerhub with tag 1 naliniselv/react-app-prod:1

```
Jenkins / project for react-app / main / #1

213efa3a6789: Mounted from naliniselv/react-app-dev
96e9a734a04c: Waiting
96e9a734a04c: Mounted from naliniselv/react-app-dev
d7b2db8b9841: Pushed
latest: digest: sha256:66fc21b23b247330f92277d958566e2ae20e6008104388f5b3430a6736c60d6b size: 856
+ docker push naliniselv/react-app-prod:1
The push refers to repository [docker.io/naliniselv/react-app-prod]
d7b2db8b9841: Waiting
213efa3a6789: Waiting
a6f31ffc071e: Waiting
c15defe09b2f: Waiting
ab1fd9049751: Waiting
ce42635eeddd: Waiting
5b429a43b8df: Waiting
967885d218c5: Waiting
01bf363d61e6: Waiting
c75b9c33e8b8: Waiting
96e9a734a04c: Waiting
a6f31ffc071e: Waiting
c15defe09b2f: Waiting
ab1fd9049751: Waiting
ce42635eeddd: Waiting
5b429a43b8df: Waiting
```

Stopping existing container and starting new container

```
Jenkins / project for react-app / main / #1


[Pipeline] stage
[Pipeline] { (Deploy Production)
[Pipeline] sh
+ chmod +x scripts/deploy.sh
+ IMAGE_NAME=nalinisely/react-app-prod:latest ./scripts/deploy.sh
Pulling latest image...
latest: Pulling from nalinisely/react-app-prod
Digest: sha256:66fc21b23b247338f92277d958568e2ae28e688184388f5b3436a6716c6096b
Status: Image is up to date for nalinisely/react-app-prod:latest
docker.io/nalinisely/react-app-prod:latest
Stopping existing container...
time="2026-07-09T09:27:45Z" level=warning msg="/var/lib/jenkins/workspace/react-app_main/docker/docker-compose.yml: the attribute 'version' is obsolete, it will be ignored, please remove it to avoid potential confusion"
Network docker_default Removing
Network docker_default Removed
Starting application...
time="2026-07-09T09:27:45Z" level=warning msg="/var/lib/jenkins/workspace/react-app_main/docker/docker-compose.yml: the attribute 'version' is obsolete, it will be ignored, please remove it to avoid potential confusion"
Network docker_default Creating
Network docker_default Created
Container react-app-container Creating
Container react-app-container Created
```

Creating containers

```
Jenkins / project for react-app / main / #1

Starting application...
time="2026-07-09T09:27:45Z" level=warning msg="/var/lib/jenkins/workspace/react-app_main/docker/docker-compose.yml: the attribute 'version' is obsolete, it will be ignored, please remove it to avoid potential confusion"
Network docker_default Creating
Network docker_default Created
Container react-app-container Creating
Container react-app-container Created
Container react-app-container Starting
Container react-app-container Started
[Pipeline] }
[Pipeline] // stage
[Pipeline] stage
[Pipeline] { (Declarative: Post Actions)
[Pipeline] sh
+ docker logout
Removing login credentials for https://index.docker.io/v1/
+ docker image prune -af
Deleted images:
untagged: nalinisely/react-app-prod:1

Total reclaimed space: 88
+ docker container prune -f
Total reclaimed space: 88
```

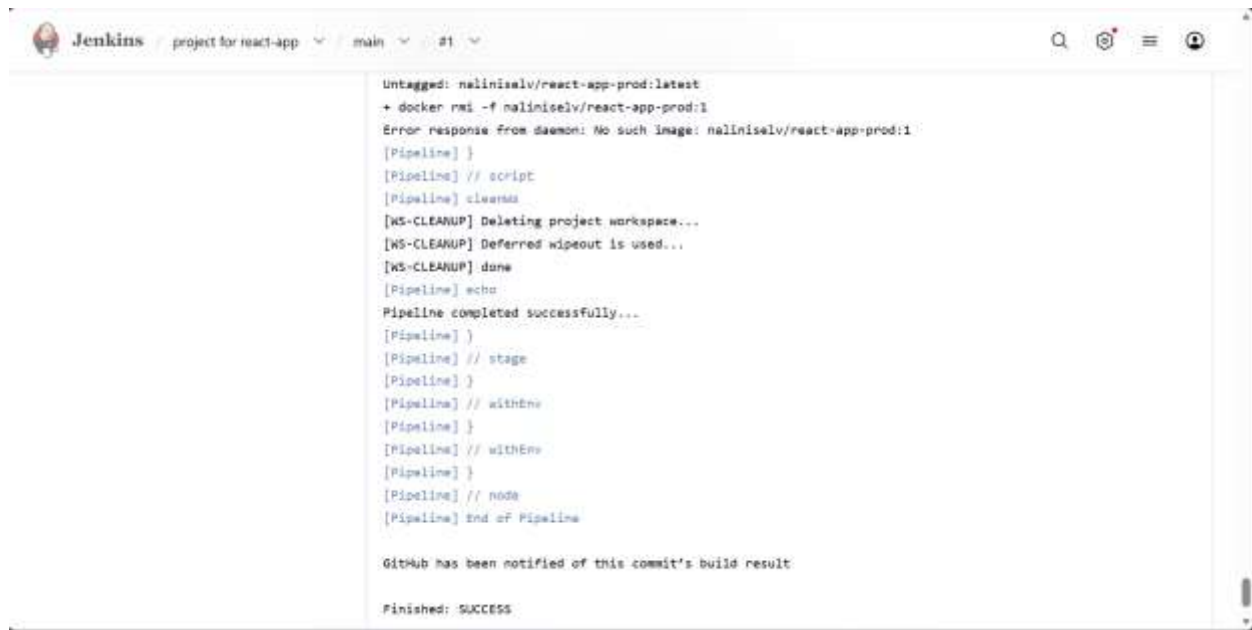
A screenshot of the Jenkins web interface showing a console log for a pipeline build. The top bar indicates the project is 'project for react-app', the branch is 'main', and the build number is '#1'. The console output shows a Docker command to remove an image, an error message about a missing image, and various pipeline stages including cleanup and echoing. The build ends with a success message and a notification to GitHub.

```
Untagged: nalinisylv/react-app-prod:latest
+ docker rmi -f nalinisylv/react-app-prod:1
Error response from daemon: No such image: nalinisylv/react-app-prod:1

[Pipeline] }
[Pipeline] // script
[Pipeline] cleanup
[WS-CLEANUP] Deleting project workspace...
[WS-CLEANUP] Deferred wipeout is used...
[WS-CLEANUP] done
[Pipeline] echo
Pipeline completed successfully...
[Pipeline] }
[Pipeline] // stage
[Pipeline] }
[Pipeline] // withEnv
[Pipeline] }
[Pipeline] // withEnv
[Pipeline] }
[Pipeline] // node
[Pipeline] end of Pipeline

GitHub has been notified of this commit's build result

Finished: SUCCESS
```

Console output below:

Branch indexing

09:27:18 Connecting to <https://api.github.com> using Nalini-0212/***** (credentials for github)

Obtained jenkins/Jenkinsfile from 972dea2fdd9a31797ebffe246da266fc47b5c2e2

[Pipeline] Start of Pipeline

[Pipeline] node

Running on [Jenkins](#) in /var/lib/jenkins/workspace/react-app_main

[Pipeline] {

[Pipeline] stage

[Pipeline] { (Declarative: Checkout SCM)

[Pipeline] checkout

The recommended git tool is: NONE

using credential githubcred

Cloning the remote Git repository

Cloning with configured refsspecs honoured and without tags

Cloning repository <https://github.com/Nalini-0212/devops-build.git>

```
> git init /var/lib/jenkins/workspace/react-app_main # timeout=10
```

Fetching upstream changes from <https://github.com/Nalini-0212/devops-build.git>

```
> git --version # timeout=10
```

```
> git --version # 'git version 2.53.0'
```

using GIT_ASKPASS to set credentials credentails for github

```
> git fetch --no-tags --force --progress -- https://github.com/Nalini-0212/devops-build.git
+refs/heads/main:refs/remotes/origin/main # timeout=10
```

```
> git config remote.origin.url https://github.com/Nalini-0212/devops-build.git # timeout=10
```

```
> git config --add remote.origin.fetch +refs/heads/main:refs/remotes/origin/main #
timeout=10
```

Avoid second fetch

Checking out Revision 972dea2fdd9a31797ebffe246da266fc47b5c2e2 (main)

```
> git config core.sparsecheckout # timeout=10
```

```
> git checkout -f 972dea2fdd9a31797ebffe246da266fc47b5c2e2 # timeout=10
```

Commit message: "Merge pull request #1 from Nalini-0212/dev"

First time build. Skipping changelog.

```
[Pipeline] }
```

```
[Pipeline] // stage
```

```
[Pipeline] withEnv
```

```
[Pipeline] {
```

```
[Pipeline] withEnv
```

```
[Pipeline] {
```

```
[Pipeline] stage
```

```
[Pipeline] { (Checkout Repository)
```

```
[Pipeline] checkout
```

The recommended git tool is: NONE

using credential githubcred

```
> git rev-parse --resolve-git-dir /var/lib/jenkins/workspace/react-app_main/.git #  
timeout=10
```

Fetching changes from the remote Git repository

```
> git config remote.origin.url https://github.com/Nalini-0212/devops-build.git # timeout=10
```

Fetching without tags

Fetching upstream changes from <https://github.com/Nalini-0212/devops-build.git>

```
> git --version # timeout=10
```

```
> git --version # 'git version 2.53.0'
```

using GIT_ASKPASS to set credentials credentails for github

```
> git fetch --no-tags --force --progress -- https://github.com/Nalini-0212/devops-build.git  
+refs/heads/main:refs/remotes/origin/main # timeout=10
```

Checking out Revision 972dea2fdd9a31797ebffe246da266fc47b5c2e2 (main)

```
> git config core.sparsecheckout # timeout=10
```

```
> git checkout -f 972dea2fdd9a31797ebffe246da266fc47b5c2e2 # timeout=10
```

Commit message: "Merge pull request #1 from Nalini-0212/dev"

[Pipeline]}

[Pipeline] // stage

[Pipeline] stage

[Pipeline] { (Docker Login)

[Pipeline] withCredentials

Masking supported pattern matches of \$DOCKERHUB_PASSWORD

[Pipeline] {

[Pipeline] sh

```
+ echo ****
```

```
+ docker login -u naliniselv --password-stdin
```

WARNING! Your credentials are stored unencrypted in '/var/lib/jenkins/.docker/config.json'.

Configure a credential helper to remove this warning. See

<https://docs.docker.com/go/credential-store/>

Login Succeeded

[Pipeline] }

[Pipeline] // withCredentials

[Pipeline] }

[Pipeline] // stage

[Pipeline] stage

[Pipeline] { (Build Docker Image)

[Pipeline] script

[Pipeline] {

[Pipeline] sh

+ chmod +x scripts/build.sh

+ IMAGE_NAME=naliniselv/react-app-prod:latest ./scripts/build.sh

Building Docker image: naliniselv/react-app-prod:latest

#0 building with "default" instance using docker driver

#1 [internal] load build definition from Dockerfile

#1 transferring dockerfile: 174B 0.0s done

#1 DONE 0.1s

#2 [internal] load metadata for docker.io/library/nginx:alpine

#2 ...

#3 [auth] library/nginx:pull token for registry-1.docker.io

#3 DONE 0.0s

#2 [internal] load metadata for docker.io/library/nginx:alpine

#2 DONE 1.4s

#4 [internal] load .dockerignore

#4 transferring context: 2B done

#4 DONE 0.0s

#5 [internal] load build context

#5 transferring context: 2.61MB 0.1s done

#5 DONE 0.2s

#6 [1/3] FROM

docker.io/library/nginx:alpine@sha256:54f2a904c251d5a34adf545a72d32515a15e08418d
ae0266e23be2e18c66fefa

#6 resolve

docker.io/library/nginx:alpine@sha256:54f2a904c251d5a34adf545a72d32515a15e08418d
ae0266e23be2e18c66fefa 0.2s done

#6 DONE 0.2s

#7 [2/3] RUN rm -rf /usr/share/nginx/html/*

#7 CACHED

#8 [3/3] COPY /app/build/ /usr/share/nginx/html

#8 CACHED

#9 exporting to image

#9 exporting layers 0.0s done

#9 exporting manifest

sha256:c17c6c11b164e9ff3a888f8c23ccfa0611f8234f700b18e5bb0277e18a84164f 0.0s
done

#9 exporting config

sha256:50ae53a3f58d6a51b481a9ed49343797631ddf9f543622a616f0d169daff39be

#9 exporting config

sha256:50ae53a3f58d6a51b481a9ed49343797631ddf9f543622a616f0d169daff39be done

#9 exporting attestation manifest

sha256:e833b75a9e7a5be2371dc8aba2fdb9d30afb54e5eb0825e92a5cc0f9136f605a 0.0s
done

#9 exporting manifest list

sha256:66fc21b23b247330f92277d958568e2ae20e6808184388f5b3436a6716c60d6b
0.0s done

#9 naming to docker.io/naliniselv/react-app-prod:latest 0.0s done

#9 unpacking to docker.io/naliniselv/react-app-prod:latest

#9 unpacking to docker.io/naliniselv/react-app-prod:latest 0.2s done

#9 DONE 0.4s

[Pipeline] }

[Pipeline] // script

[Pipeline] }

[Pipeline] // stage

[Pipeline] stage

[Pipeline] { (Push Docker Image)

[Pipeline] script

[Pipeline] {

[Pipeline] sh

+ echo Tagging PROD Image...

Tagging PROD Image...

+ docker tag naliniselv/react-app-prod:latest naliniselv/react-app-prod:1

+ echo Pushing PROD Images...

Pushing PROD Images...

+ docker push naliniselv/react-app-prod:latest

The push refers to repository [docker.io/naliniselv/react-app-prod]

213efa3a6789: Waiting

c16defe09b2f: Waiting

ce42635eeddd: Waiting

01bf363d61e6: Waiting

c75b9c33e8b0: Waiting

d7b2db8b9841: Waiting

e6f31ffc071e: Waiting

5b429a43b8df: Waiting

967885d218c5: Waiting

ab1fd9049751: Waiting

96e9a734a04c: Waiting

01bf363d61e6: Waiting

c75b9c33e8b0: Waiting

d7b2db8b9841: Waiting

e6f31ffc071e: Waiting

5b429a43b8df: Waiting

967885d218c5: Waiting

ab1fd9049751: Waiting

96e9a734a04c: Waiting
213efa3a6789: Waiting
c16defe09b2f: Waiting
ce42635eeddd: Waiting
ce42635eeddd: Waiting
01bf363d61e6: Waiting
c75b9c33e8b0: Waiting
d7b2db8b9841: Waiting
e6f31ffc071e: Waiting
5b429a43b8df: Waiting
967885d218c5: Waiting
ab1fd9049751: Waiting
96e9a734a04c: Waiting
213efa3a6789: Waiting
c16defe09b2f: Waiting
01bf363d61e6: Waiting
c75b9c33e8b0: Waiting
d7b2db8b9841: Waiting
e6f31ffc071e: Waiting
5b429a43b8df: Waiting
967885d218c5: Waiting
ab1fd9049751: Waiting
96e9a734a04c: Waiting
213efa3a6789: Waiting
c16defe09b2f: Waiting
ce42635eeddd: Waiting

967885d218c5: Waiting
ab1fd9049751: Waiting
96e9a734a04c: Waiting
213efa3a6789: Waiting
c16defe09b2f: Waiting
ce42635eeddd: Waiting
01bf363d61e6: Waiting
c75b9c33e8b0: Waiting
d7b2db8b9841: Waiting
e6f31ffc071e: Waiting
5b429a43b8df: Waiting
d7b2db8b9841: Waiting
e6f31ffc071e: Waiting
5b429a43b8df: Waiting
967885d218c5: Waiting
ab1fd9049751: Waiting
96e9a734a04c: Waiting
213efa3a6789: Waiting
c16defe09b2f: Waiting
ce42635eeddd: Waiting
01bf363d61e6: Waiting
c75b9c33e8b0: Waiting
ce42635eeddd: Waiting
01bf363d61e6: Waiting
c75b9c33e8b0: Waiting
d7b2db8b9841: Waiting

e6f31ffc071e: Waiting
5b429a43b8df: Waiting
967885d218c5: Waiting
ab1fd9049751: Waiting
96e9a734a04c: Waiting
213efa3a6789: Waiting
c16defe09b2f: Waiting
c16defe09b2f: Waiting
ce42635eeddd: Waiting
01bf363d61e6: Waiting
c75b9c33e8b0: Waiting
d7b2db8b9841: Waiting
e6f31ffc071e: Waiting
5b429a43b8df: Waiting
967885d218c5: Waiting
ab1fd9049751: Waiting
96e9a734a04c: Waiting
213efa3a6789: Waiting
d7b2db8b9841: Waiting
e6f31ffc071e: Waiting
5b429a43b8df: Waiting
967885d218c5: Waiting
ab1fd9049751: Waiting
96e9a734a04c: Waiting
213efa3a6789: Waiting
c16defe09b2f: Waiting

ce42635eeddd: Waiting
01bf363d61e6: Waiting
c75b9c33e8b0: Waiting
d7b2db8b9841: Waiting
e6f31ffc071e: Waiting
5b429a43b8df: Waiting
967885d218c5: Waiting
ab1fd9049751: Waiting
96e9a734a04c: Waiting
213efa3a6789: Waiting
c16defe09b2f: Waiting
ce42635eeddd: Waiting
01bf363d61e6: Waiting
c75b9c33e8b0: Waiting
213efa3a6789: Waiting
c16defe09b2f: Waiting
ce42635eeddd: Waiting
01bf363d61e6: Waiting
c75b9c33e8b0: Waiting
d7b2db8b9841: Waiting
e6f31ffc071e: Waiting
5b429a43b8df: Waiting
967885d218c5: Waiting
ab1fd9049751: Waiting
96e9a734a04c: Waiting
213efa3a6789: Waiting

c16defe09b2f: Waiting
ce42635eeddd: Waiting
01bf363d61e6: Waiting
c75b9c33e8b0: Waiting
d7b2db8b9841: Waiting
e6f31ffc071e: Waiting
5b429a43b8df: Waiting
967885d218c5: Waiting
ab1fd9049751: Waiting
96e9a734a04c: Waiting
e6f31ffc071e: Layer already exists
5b429a43b8df: Waiting
967885d218c5: Waiting
ab1fd9049751: Waiting
96e9a734a04c: Waiting
213efa3a6789: Waiting
c16defe09b2f: Waiting
ce42635eeddd: Waiting
01bf363d61e6: Waiting
c75b9c33e8b0: Waiting
d7b2db8b9841: Waiting
967885d218c5: Waiting
ab1fd9049751: Waiting
96e9a734a04c: Waiting
213efa3a6789: Waiting
c16defe09b2f: Waiting

ce42635eeddd: Waiting
01bf363d61e6: Waiting
c75b9c33e8b0: Waiting
d7b2db8b9841: Waiting
5b429a43b8df: Waiting
ce42635eeddd: Waiting
01bf363d61e6: Layer already exists
c75b9c33e8b0: Layer already exists
d7b2db8b9841: Waiting
5b429a43b8df: Layer already exists
967885d218c5: Waiting
ab1fd9049751: Layer already exists
96e9a734a04c: Waiting
213efa3a6789: Waiting
c16defe09b2f: Layer already exists
967885d218c5: Layer already exists
96e9a734a04c: Waiting
213efa3a6789: Waiting
ce42635eeddd: Layer already exists
d7b2db8b9841: Waiting
96e9a734a04c: Waiting
213efa3a6789: Waiting
213efa3a6789: Mounted from naliniselv/react-app-dev
96e9a734a04c: Waiting
96e9a734a04c: Mounted from naliniselv/react-app-dev
d7b2db8b9841: Pushed

latest: digest:

sha256:66fc21b23b247330f92277d958568e2ae20e6808184388f5b3436a6716c60d6b

size: 856

+ docker push naliniselv/react-app-prod:1

The push refers to repository [docker.io/naliniselv/react-app-prod]

d7b2db8b9841: Waiting

213efa3a6789: Waiting

e6f31ffc071e: Waiting

c16defe09b2f: Waiting

ab1fd9049751: Waiting

ce42635eeddd: Waiting

5b429a43b8df: Waiting

967885d218c5: Waiting

01bf363d61e6: Waiting

c75b9c33e8b0: Waiting

96e9a734a04c: Waiting

e6f31ffc071e: Waiting

c16defe09b2f: Waiting

ab1fd9049751: Waiting

ce42635eeddd: Waiting

5b429a43b8df: Waiting

967885d218c5: Waiting

01bf363d61e6: Waiting

c75b9c33e8b0: Waiting

96e9a734a04c: Waiting

d7b2db8b9841: Waiting

213efa3a6789: Waiting

213efa3a6789: Waiting
e6f31ffc071e: Waiting
c16defe09b2f: Waiting
ab1fd9049751: Waiting
ce42635eeddd: Waiting
5b429a43b8df: Waiting
967885d218c5: Waiting
01bf363d61e6: Waiting
c75b9c33e8b0: Waiting
96e9a734a04c: Waiting
d7b2db8b9841: Waiting
5b429a43b8df: Waiting
967885d218c5: Waiting
01bf363d61e6: Waiting
c75b9c33e8b0: Waiting
96e9a734a04c: Waiting
d7b2db8b9841: Waiting
213efa3a6789: Waiting
e6f31ffc071e: Waiting
c16defe09b2f: Waiting
ab1fd9049751: Waiting
ce42635eeddd: Waiting
e6f31ffc071e: Waiting
c16defe09b2f: Waiting
ab1fd9049751: Waiting
ce42635eeddd: Waiting

5b429a43b8df: Waiting
967885d218c5: Waiting
01bf363d61e6: Waiting
c75b9c33e8b0: Waiting
96e9a734a04c: Waiting
d7b2db8b9841: Waiting
213efa3a6789: Waiting
d7b2db8b9841: Waiting
213efa3a6789: Waiting
e6f31ffc071e: Waiting
c16defe09b2f: Waiting
ab1fd9049751: Waiting
ce42635eeddd: Waiting
5b429a43b8df: Waiting
967885d218c5: Waiting
01bf363d61e6: Waiting
c75b9c33e8b0: Waiting
96e9a734a04c: Waiting
5b429a43b8df: Waiting
967885d218c5: Waiting
01bf363d61e6: Waiting
c75b9c33e8b0: Waiting
96e9a734a04c: Waiting
d7b2db8b9841: Waiting
213efa3a6789: Waiting
e6f31ffc071e: Waiting

c16defe09b2f: Waiting
ab1fd9049751: Waiting
ce42635eeddd: Waiting
c16defe09b2f: Waiting
ab1fd9049751: Waiting
ce42635eeddd: Waiting
5b429a43b8df: Waiting
967885d218c5: Waiting
01bf363d61e6: Waiting
c75b9c33e8b0: Waiting
96e9a734a04c: Waiting
d7b2db8b9841: Waiting
213efa3a6789: Waiting
e6f31ffc071e: Waiting
d7b2db8b9841: Waiting
213efa3a6789: Waiting
e6f31ffc071e: Waiting
c16defe09b2f: Waiting
ab1fd9049751: Waiting
ce42635eeddd: Waiting
5b429a43b8df: Waiting
967885d218c5: Waiting
01bf363d61e6: Waiting
c75b9c33e8b0: Waiting
96e9a734a04c: Waiting
d7b2db8b9841: Waiting

213efa3a6789: Waiting
e6f31ffc071e: Waiting
c16defe09b2f: Waiting
ab1fd9049751: Waiting
ce42635eeddd: Waiting
5b429a43b8df: Waiting
967885d218c5: Waiting
01bf363d61e6: Waiting
c75b9c33e8b0: Waiting
96e9a734a04c: Waiting
c16defe09b2f: Waiting
ab1fd9049751: Waiting
ce42635eeddd: Waiting
5b429a43b8df: Waiting
967885d218c5: Waiting
01bf363d61e6: Waiting
c75b9c33e8b0: Waiting
96e9a734a04c: Layer already exists
d7b2db8b9841: Waiting
213efa3a6789: Waiting
e6f31ffc071e: Waiting
5b429a43b8df: Waiting
967885d218c5: Waiting
01bf363d61e6: Waiting
c75b9c33e8b0: Waiting
d7b2db8b9841: Waiting

213efa3a6789: Waiting

e6f31ffc071e: Layer already exists

c16defe09b2f: Layer already exists

ab1fd9049751: Waiting

ce42635eeddd: Waiting

d7b2db8b9841: Waiting

213efa3a6789: Waiting

ab1fd9049751: Waiting

ce42635eeddd: Waiting

5b429a43b8df: Waiting

967885d218c5: Waiting

01bf363d61e6: Waiting

c75b9c33e8b0: Waiting

5b429a43b8df: Layer already exists

967885d218c5: Waiting

01bf363d61e6: Waiting

c75b9c33e8b0: Layer already exists

d7b2db8b9841: Already exists

213efa3a6789: Waiting

ab1fd9049751: Layer already exists

ce42635eeddd: Layer already exists

967885d218c5: Layer already exists

01bf363d61e6: Layer already exists

213efa3a6789: Layer already exists

1: digest:

sha256:66fc21b23b247330f92277d958568e2ae20e6808184388f5b3436a6716c60d6b

size: 856

```
[Pipeline] }
```

```
[Pipeline] // script
```

```
[Pipeline] }
```

```
[Pipeline] // stage
```

```
[Pipeline] stage
```

```
[Pipeline] { (Deploy Production)
```

```
[Pipeline] sh
```

```
+ chmod +x scripts/deploy.sh
```

```
+ IMAGE_NAME=naliniselv/react-app-prod:latest ./scripts/deploy.sh
```

```
Pulling latest image...
```

```
latest: Pulling from naliniselv/react-app-prod
```

```
Digest:
```

```
sha256:66fc21b23b247330f92277d958568e2ae20e6808184388f5b3436a6716c60d6b
```

```
Status: Image is up to date for naliniselv/react-app-prod:latest
```

```
docker.io/naliniselv/react-app-prod:latest
```

```
Stopping existing container...
```

```
time="2026-07-09T09:27:45Z" level=warning msg="/var/lib/jenkins/workspace/react-app_main/docker/docker-compose.yml: the attribute `version` is obsolete, it will be ignored, please remove it to avoid potential confusion"
```

```
Network docker_default Removing
```

```
Network docker_default Removed
```

```
Starting application...
```

```
time="2026-07-09T09:27:45Z" level=warning msg="/var/lib/jenkins/workspace/react-app_main/docker/docker-compose.yml: the attribute `version` is obsolete, it will be ignored, please remove it to avoid potential confusion"
```

```
Network docker_default Creating
```

```
Network docker_default Created
```

Container react-app-container Creating

Container react-app-container Created

Container react-app-container Starting

Container react-app-container Started

[Pipeline] }

[Pipeline] // stage

[Pipeline] stage

[Pipeline] { (Declarative: Post Actions)

[Pipeline] sh

+ docker logout

Removing login credentials for <https://index.docker.io/v1/>

+ docker image prune -af

Deleted Images:

untagged: naliniselv/react-app-prod:1

Total reclaimed space: 0B

+ docker container prune -f

Total reclaimed space: 0B

+ docker volume prune -f

Total reclaimed space: 0B

[Pipeline] script

[Pipeline] {

[Pipeline] sh

+ docker rmi -f naliniselv/react-app-prod:latest

Untagged: naliniselv/react-app-prod:latest

+ docker rmi -f naliniselv/react-app-prod:1

Error response from daemon: No such image: naliniselv/react-app-prod:1

[Pipeline] }

[Pipeline] // script

[Pipeline] cleanWs

[WS-CLEANUP] Deleting project workspace...

[WS-CLEANUP] Deferred wipeout is used...

[WS-CLEANUP] done

[Pipeline] echo

Pipeline completed successfully...

[Pipeline] }

[Pipeline] // stage

[Pipeline] }

[Pipeline] // withEnv

[Pipeline] }

[Pipeline] // withEnv

[Pipeline] }

[Pipeline] // node

[Pipeline] End of Pipeline


GitHub has been notified of this commit's build result

Finished: SUCCESS

Now try to access application with ec2 server ip:80

Ip of server is 3.110.154.104

Access below URL <http://3.110.154.104:80>

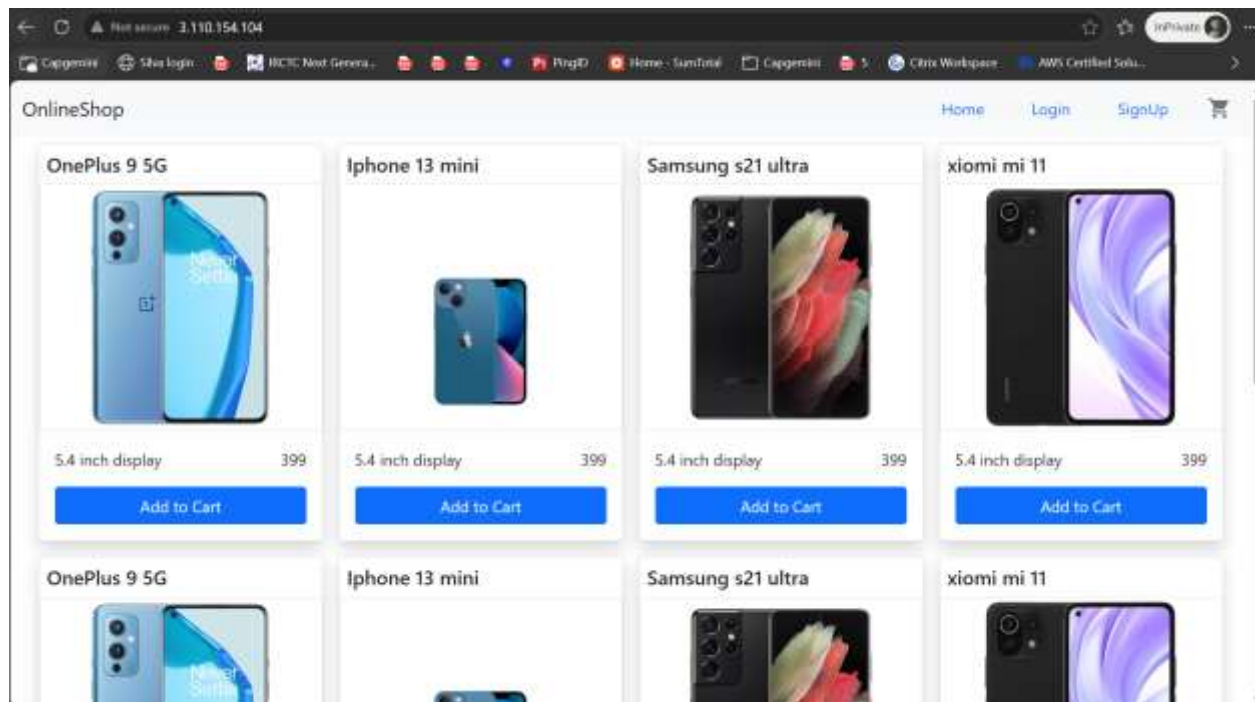

Now monitor application

Setup a monitoring system to check the health status of application (open source).

sending notification only if the application goes down is highly appreciable.

As here we need to monitor health status of application we use prometheus and blackbox exporter which will do end point monitoring and Grafana for dashboard visualization

Create ec2 server with SG that allows 3 ports 9090-prometheus , 9093- alert manager and 9115 - blackbox exporter and Grafana port 3000

EC2 > Instances > Launch an instance

Launch an instance

Amazon EC2 allows you to create virtual machines, or instances, that run on the AWS Cloud. Quickly get started by following the simple steps below.

Name and tags

Name

Monitoring

Add additional tags

Application and OS Images (Amazon Machine Image)

An AMI contains the operating system, application server, and applications for your instance. If you don't see a suitable AMI below, use the search field or choose [Browse more AMIs](#).

Q Search our full catalog including 1000s of application and OS images

Recents

Quick Start

Amazon Linux

macOS

Ubuntu

Windows

Red Hat

SUSE Linux

Browse more AMIs including AMIs from

Cancel

Launch instance

Preview code

EC2 > Instances > Launch an instance

64-bit (...)

ami-171a3d7b/62f4e058441

2020-05-04

ubuntu

Launch an instance

Instance type

Info | Get advice

Instance type

t5.micro

Family: t5 - 2 vCPU 1 GiB Memory - Current generations: true

On-Demand Linux base pricing: 0.0112 USD per Hour

On-Demand SUSE base pricing: 0.0112 USD per Hour

On-Demand Windows base pricing: 0.0204 USD per Hour

On-Demand Ubuntu Pro base pricing: 0.0147 USD per Hour

On-Demand RHEL base pricing: 0.04 USD per Hour

All generations

Compare instance types

Additional costs apply for AMIs with pre-installed software

Key pair (login)

Info

You can use a key pair to securely connect to your instance. Ensure that you have access to the selected key pair before you launch the instance.

Key pair name - required

bol

Create new key pair

Cancel

Launch instance

Preview code

Type	Protocol	Port range
ssh	TCP	22
Source type	Name	Description - optional
My IP	202.91.137.205/32	e.g. SSH for admin desktop
▼ Security group rule 2 (TCP, 9090, 202.91.137.205/32) Remove		
Custom TCP	TCP	9090
Source type	Name	Description - optional
My IP	202.91.137.205/32	e.g. SSH for admin desktop
▼ Security group rule 3 (TCP, 9093, 202.91.137.205/32) Remove		
Custom TCP	TCP	9093

Summary

Cancel

202.91.137.205/32

▼ Security group rule 3 (TCP, 9093, 202.91.137.205/32) Remove

Type	Protocol	Port range
Custom TCP	TCP	9093
Source type	Name	Description - optional
My IP	202.91.137.205/32	e.g. SSH for admin desktop
▼ Security group rule 4 (TCP, 3000, 202.91.137.205/32) Remove		
Custom TCP	TCP	3000
Source type	Name	Description - optional
My IP	202.91.137.205/32	e.g. SSH for admin desktop

[Add security group rule](#)

Summary

Cancel

Launch instance

[Preview code](#)

EC2 > Instances > Launch an instance

Custom TCP TCP 3000

Source type info My IP Name info Add CIDR, prefix list or security Description - optional info e.g. SSH for admin desktop 202.91.117.205/32

Add security group rule

▼ Configure storage info Advanced

1x 64 GiB gp3 Root volume, 3000 IOPS, Not encrypted

Add new volume

The selected AMI contains instance store volumes, however the instance does not allow any instance store volumes. None of the instance store volumes from the AMI will be accessible from the instance.

Click refresh to view backup information

The tags that you assign determine whether the instance will be backed up by any Data Lifecycle Manager policies.

Summary

Cancel Launch instance Preview code

Launch server and login and install prometheus

Use below link and install prometheus

[Download | Prometheus](https://prometheus.io/download/)

https://prometheus.io/download/

Prometheus Docs Download Community Support & Training Blog Search / Ask AI Ctrl + K

The Prometheus monitoring system and time series database. prometheus/prometheus

3.13.0 / 2026-07-01 **LATEST** LTS [Release notes](#)

File name	OS	Arch	Size	SHA256 Checksum
prometheus-3.13.0.darwin-amd64.tar.gz	darwin	amd64	105.25 MiB	c30bcfb55906a6809347d55a1e0ba67d1882125475cc25b866e41e0d945ab
prometheus-3.13.0.darwin-arm64.tar.gz	darwin	arm64	98.91 MiB	151e59d73b2bae9ff1dadae6fb22183de0435051397a01e77a1c95b3433269
prometheus-3.13.0.linux-amd64.tar.gz	linux	amd64	99.65 MiB	744d93326cc02482009921737bd797474d7f1e5dbb01c6b387bd250538cb9
prometheus-3.13.0.windows-amd64.zip	windows	amd64	102.40 MiB	5c8a6f4529833aeb5301944020a22a88b1e2d634e36702c408528b05db0f3d3

3.5.5 / 2026-07-09 LTS [Release notes](#)

File name	OS	Arch	Size	SHA256 Checksum
prometheus-3.5.5.darwin-amd64.tar.gz	darwin	amd64	117.94 MiB	8c66dfe25d0e5fd79bc45a000b193aace60164564d4cae89f032c9941be
prometheus-3.5.5.darwin-arm64.tar.gz	darwin	arm64	112.42 MiB	2D543aee193abfalecaa71e180264f5418ff8f38892ed3e8cd039af171812
prometheus-3.5.5.linux-amd64.tar.gz	linux	amd64	110.40 MiB	64d0eadd73272db51a01d941668ce052c7e2e5b23075c16050b15b1630c577
prometheus-3.5.5.windows-amd64.zip	windows	amd64	114.03 MiB	6b26c39244e05a7963cc04016d31b99074b1b1107677eadd788b3e1b37e35d


```

ubuntu@ip-172-31-9-40:~$ mkdir -p /var/lib/alertmanager
mkdir: Permission denied
ubuntu@ip-172-31-9-40:~$ sudo mkdir -p /var/lib/alertmanager
ubuntu@ip-172-31-9-40:~$ sudo mkdir -p /etc/alertmanager
ubuntu@ip-172-31-9-40:~$ ls
alertmanager-0.33.1.linux-amd64      blackbox_exporter-0.28.0.linux-amd64      prometheus-3.5.5.linux-amd64
alertmanager-0.33.1.linux-amd64.tar.gz  blackbox_exporter-0.28.0.linux-amd64.tar.gz  prometheus-3.5.5.linux-amd64.tar.gz
ubuntu@ip-172-31-9-40:~$ cd alertmanager-0.33.1.linux-amd64/
ubuntu@ip-172-31-9-40:~/alertmanager-0.33.1.linux-amd64$ sudo cp alertmanager.yml /etc/alertmanager/
ubuntu@ip-172-31-9-40:~/alertmanager-0.33.1.linux-amd64$ |

```

And copy alertmanager.yml to /etc/alertmanager/alertmanager.yml

```

ubuntu@ip-172-31-9-40:~$ cd alertmanager-0.33.1.linux-amd64/
ubuntu@ip-172-31-9-40:~/alertmanager-0.33.1.linux-amd64$ sudo cp alertmanager.yml /etc/alertmanager/
ubuntu@ip-172-31-9-40:~/alertmanager-0.33.1.linux-amd64$ sudo nano /etc/alertmanager/alertmanager.yml
ubuntu@ip-172-31-9-40:~/alertmanager-0.33.1.linux-amd64$ sudo nano /etc/systemd/system/alertmanager.service

```

Open /etc/systemd/system/alertmanager.service

```

GNU nano 8.7.1 /etc/systemd/system/alertmanager.service
[Unit]
Description=Prometheus Alertmanager
Documentation=https://prometheus.io/docs/alerting/latest/alertmanager/
After=network-online.target
Wants=network-online.target

[Service]
User=alertmanager
Group=alertmanager
Type=simple

ExecStart=/usr/local/bin/alertmanager \
  --config.file=/etc/alertmanager/alertmanager.yml \
  --storage.path=/var/lib/alertmanager

Restart=always
RestartSec=5s

[Install]
WantedBy=multi-user.target

```

Reload daemons

```

ubuntu@ip-172-31-9-40:~/alertmanager-0.33.1.linux-amd64$ sudo nano /etc/systemd/system/alertmanager.service
ubuntu@ip-172-31-9-40:~/alertmanager-0.33.1.linux-amd64$ sudo systemctl daemon-reload
ubuntu@ip-172-31-9-40:~/alertmanager-0.33.1.linux-amd64$ |

```

Create alerts.yml in Prometheus directory when alerts should be triggered


```

GNU nano 2.7.1 alerts.yml
groups:
- name: application-alerts
  rules:
  - alert: ApplicationDown
    expr: probe_success == 0
    for: 1m
    labels:
      severity: critical
    annotations:
      summary: Host Application Down
      description: Application is unreachable for more than 1 minute.

```

Save and exist and also modify Prometheus.yml file to use alerts.yml

```

GNU nano 2.7.1 prometheus.yml
# my global config
global:
  scrape_interval: 15s # Set the scrape interval to every 15 seconds. Default is every 1 minute.
  evaluation_interval: 15s # Evaluate rules every 15 seconds. The default is every 1 minute.
  # scrape_timeout is set to the global default (10s).

# Alertmanager configuration
alerting:
  alertmanagers:
    - static_configs:
        - targets:
            - localhost:9093

# Load rules once and periodically evaluate them according to the global 'evaluation_interval'.
rule_files:
  - "alerts.yml"
  # - "second_rules.yml"

# A scrape configuration containing exactly one endpoint to scrape:
# Here it's Prometheus itself.
scrape_configs:
  # The job name is added as a label 'job=<job_name>' to any timeseries scraped from this config.
  - job_name: "prometheus"

    # metrics_path defaults to '/metrics'
    # scheme defaults to 'http'.

    static_configs:
      - targets: ["localhost:9090"]
        # The label name is added as a label 'label_name=<label_value>' to any timeseries scraped from this config.
        labels:
          app: "prometheus"

  - job_name: "blackbox-http"

    metrics_path: /probe

    params:

```

Modify the alertmanager.yml to below (whom should mail go when alerts triggered)


```

subunit@ip-172-31-9-40: ~$ systemctl enable 0.33.1.linux-amd64 ic
Warning: Not a unit file: alertmanager.yml --no-act
subunit@ip-172-31-9-40: ~$ systemctl enable alertmanager
subunit@ip-172-31-9-40: ~$ systemctl status alertmanager
● alertmanager.service - Prometheus Alertmanager
   Loaded: loaded (/etc/systemd/system/alertmanager.service; disabled; preset: enabled)
   Active: active (running) since Thu 2026-07-09 10:48:45 UTC; 21s ago
   Invocation: a322ac015b84c758819e9c8b96b79d
     Ccex: https://prometheus.io/docs/alerting/latest/alertmanager/
   Main PID: 2759 (alertmanager)
     Tasks: 7 (limit: 827)
    Memory: 10.3M (peak: 10.3M)
       CPU: 93ms
   CGroup: /system.slice/alertmanager.service
           └─2759 /usr/local/bin/alertmanager --config.file=/etc/alertmanager/alertmanager.yml --storage.path=/var/lib/alertmanager

Jul 09 10:48:45 ip-172-31-9-40 systemd[1]: Started alertmanager.service - Prometheus Alertmanager.
Jul 09 10:48:45 ip-172-31-9-40 alertmanager[2759]: time=2026-07-09T10:48:45.918Z level=INFO source=main.go:136 msg="Starting Alertmanager" version="(version=0.33.1, branch=main, build=)"
Jul 09 10:48:45 ip-172-31-9-40 alertmanager[2759]: time=2026-07-09T10:48:45.918Z level=INFO source=main.go:139 msg="Build context" build_context="(goos=linux, platform=linux, arch=amd64, compiler=gc, ldflags=-s -w)"
Jul 09 10:48:45 ip-172-31-9-40 alertmanager[2759]: time=2026-07-09T10:48:45.920Z level=INFO source=cluster.go:192 msg="Setting advertise address explicitly" component=cluster
Jul 09 10:48:45 ip-172-31-9-40 alertmanager[2759]: time=2026-07-09T10:48:45.922Z level=INFO source=cluster.go:682 msg="Waiting for gossip to settle..." component=cluster
Jul 09 10:48:45 ip-172-31-9-40 alertmanager[2759]: time=2026-07-09T10:48:45.959Z level=INFO source=tls.config.go:354 msg="Listening on" address[0]:9093
Jul 09 10:48:45 ip-172-31-9-40 alertmanager[2759]: time=2026-07-09T10:48:45.959Z level=INFO source=tls.config.go:357 msg="TLS is disabled. http://false address[0]:9093"
Jul 09 10:48:45 ip-172-31-9-40 alertmanager[2759]: time=2026-07-09T10:48:47.922Z level=INFO source=cluster.go:707 msg="gossip not settled" component=cluster poll=1s before
Jul 09 10:48:55 ip-172-31-9-40 alertmanager[2759]: time=2026-07-09T10:48:55.920Z level=INFO source=cluster.go:699 msg="gossip settled; proceeding" component=cluster elapsed=10s
subunit@ip-172-31-9-40: ~$ systemctl enable alertmanager
Created symlink /etc/systemd/system/multi-user.target.wants/alertmanager.service → /etc/systemd/system/alertmanager.service.
subunit@ip-172-31-9-40: ~$ systemctl status alertmanager
● alertmanager.service - Prometheus Alertmanager
   Loaded: loaded (/etc/systemd/system/alertmanager.service; enabled; preset: enabled)
   Active: active (running) since Thu 2026-07-09 10:48:45 UTC; 46s ago
   Invocation: a322ac015b84c758819e9c8b96b79d
     Ccex: https://prometheus.io/docs/alerting/latest/alertmanager/
   Main PID: 2759 (alertmanager)
     Tasks: 7 (limit: 827)
    Memory: 10.1M (peak: 10.3M)
       CPU: 115ms
   CGroup: /system.slice/alertmanager.service
           └─2759 /usr/local/bin/alertmanager --config.file=/etc/alertmanager/alertmanager.yml --storage.path=/var/lib/alertmanager

Jul 09 10:48:45 ip-172-31-9-40 systemd[1]: Started alertmanager.service - Prometheus Alertmanager.
Jul 09 10:48:45 ip-172-31-9-40 alertmanager[2759]: time=2026-07-09T10:48:45.918Z level=INFO source=main.go:136 msg="Starting Alertmanager" version="(version=0.33.1, branch=main, build=)"
Jul 09 10:48:45 ip-172-31-9-40 alertmanager[2759]: time=2026-07-09T10:48:45.918Z level=INFO source=main.go:139 msg="Build context" build_context="(goos=linux, platform=linux, arch=amd64, compiler=gc, ldflags=-s -w)"
Jul 09 10:48:45 ip-172-31-9-40 alertmanager[2759]: time=2026-07-09T10:48:45.920Z level=INFO source=cluster.go:192 msg="Setting advertise address explicitly" component=cluster
Jul 09 10:48:45 ip-172-31-9-40 alertmanager[2759]: time=2026-07-09T10:48:45.922Z level=INFO source=cluster.go:682 msg="Waiting for gossip to settle..." component=cluster
Jul 09 10:48:45 ip-172-31-9-40 alertmanager[2759]: time=2026-07-09T10:48:45.959Z level=INFO source=tls.config.go:354 msg="Listening on" address[0]:9093
Jul 09 10:48:45 ip-172-31-9-40 alertmanager[2759]: time=2026-07-09T10:48:45.959Z level=INFO source=tls.config.go:357 msg="TLS is disabled. http://false address[0]:9093"
Jul 09 10:48:47 ip-172-31-9-40 alertmanager[2759]: time=2026-07-09T10:48:47.922Z level=INFO source=cluster.go:707 msg="gossip not settled" component=cluster poll=1s before
Jul 09 10:48:57 ip-172-31-9-40 alertmanager[2759]: time=2026-07-09T10:48:55.920Z level=INFO source=cluster.go:699 msg="gossip settled; proceeding" component=cluster elapsed=10s

```

Then start Prometheus now

```
buntu@ip-172-31-9-40:/alertmanager-0.33.1-linux-amd64 cd ..  
buntu@ip-172-31-9-40:-$ ls  
alertmanager-0.33.1-linux-amd64 blackbox_exporter-0.28.0-linux-amd64 prometheus-3.5.5-linux-amd64  
alertmanager-0.33.1-linux-amd64.tar.gz blackbox_exporter-0.28.0-linux-amd64.tar.gz prometheus-3.5.5-linux-amd64.tar.gz  
buntu@ip-172-31-9-40:-$ cd prometheus-3.5.5-linux-amd64/  
buntu@ip-172-31-9-40:/prometheus-3.5.5-linux-amd64 /prometheus --config.file=prometheus.yml &  
[+] SSSS  
buntu@ip-172-31-9-40:/prometheus-3.5.5-linux-amd64 time=2016-07-09T10:52:04.832Z level=INFO source=main.go:1544 msg="updated GOGC" c1m=100 newM=1  
time=2016-07-09T10:52:04.832Z level=INFO source=main.go:678 msg="Leaving GOMAXPROCS=2; CPU quota undefined" component'automaxprocs'  
time=2016-07-09T10:52:04.842Z level=INFO source=main.go:190 msg="GOXMMINT is updated" component'automemlimit' gackagegithub.com/KimMachineGun/automemlimit/memlimit GO  
XMMINT=0x7f9018 previous=0x23377600 new=0x7f9018  
time=2016-07-09T10:52:04.842Z level=INFO source=main.go:718 msg="No time or size retention was set so using the default time retention" duration=15d  
time=2016-07-09T10:52:04.832Z level=INFO source=main.go:769 msg="Starting Prometheus Server" mode=servers version="(version=3.5.3, branch=HEAD, revision=0077b138e51896b3d)  
ada12b177cf45e9c1913"  
time=2016-07-09T10:52:04.832Z level=INFO source=main.go:774 msg="Operational information" build_contexts="{go=go1.15.12, platform=linux/amd64, user=root@202510087ca, date=1  
52976075438, arch=amd64, compiler='gcc', ldflags=['-X=github.com/prometheus/common/cmds -ldflags=-w'], flags=[], gcflags=[]}" fd_limits  
time=2016-07-09T10:52:04.832Z level=INFO source=web.go:618 msg="Start listening for connections" component'web' address=0.0.0.0:9090  
time=2016-07-09T10:52:04.840Z level=INFO source=main.go:1188 msg="Starting TSDB ..."   
time=2016-07-09T10:52:04.847Z level=INFO source=tsdb_config.go:347 msg="Listening on" component'web' address=[::]:9090  
time=2016-07-09T10:52:04.847Z level=INFO source=tsdb_config.go:350 msg="'TLS is disabled.' component'web' http://localhost:9090  
time=2016-07-09T10:52:04.852Z level=INFO source=tsdb.go:103 msg="Replaying on-disk memory possible chunks if any" component'tsdb'  
time=2016-07-09T10:52:04.861Z level=INFO source=head.go:744 msg="On-disk memory possible chunks replay completed" component'tsdb' duration=13.189us  
time=2016-07-09T10:52:04.861Z level=INFO source=head.go:752 msg="Replaying WAL. This may take a while" component'tsdb'  
time=2016-07-09T10:52:04.863Z level=INFO source=head.go:825 msg="WAL segment loaded" component'tsdb' segment=0 maxSegment=0 duration=1.706957ms  
time=2016-07-09T10:52:04.863Z level=INFO source=head.go:825 msg="WAL replay completed" component'tsdb' checkpoint_replay_duration=9.305us wal_replay_duration=1.57748ms wal  
replay_duration=1.57748ms chunk_snapshot_load_duration=1.894us chunk_replay_duration=1.894us total_replay_duration=375533ns  
time=2016-07-09T10:52:04.866Z level=INFO source=main.go:1309 msg="Filesystem information" fs_type=EXT4_SUPER_MAGIC  
time=2016-07-09T10:52:04.866Z level=INFO source=main.go:1312 msg="TSDB started"  
time=2016-07-09T10:52:04.866Z level=INFO source=main.go:1497 msg="Loading configuration file" filename=prometheus.yml  
time=2016-07-09T10:52:04.873Z level=INFO source=main.go:1504 msg="Completed loading of configuration file" d_storage=1.075us remote_storage=1.204us web_handler=626ms query  
engine=85ms tsdb=1.204us rules=1.23453ms scrape_manager=1.566ms filename=prometheus.yml totalDuration=7.27573ms  
time=2016-07-09T10:52:04.873Z level=INFO source=manager.go:1273 msg="Server is ready to receive web requests."  
time=2016-07-09T10:52:04.873Z level=INFO source=manager.go:1278 msg="Starting rule manager..." component'rule manager'
```

Started Prometheus on port 9090


Verify if all 3 ports 9090 ,9093& 9115 are all listening

```
ubuntu@ip-172-31-9-40:~$ sudo ss -tulnp | grep -E "9090|9093|9115"
tcp        LISTEN 0      4096      *:9115      *:9115      users:(("blackbox_export",pid=2591,fd=3))
tcp        LISTEN 0      4096      *:9093      *:9093      users:(("alermanager",pid=2759,fd=8))
tcp        LISTEN 0      4096      *:9090      *:9090      users:(("prometheus",pid=2925,fd=7))
ubuntu@ip-172-31-9-40:~$
```



Verify Prometheus is healthy or not

```
ubuntu@ip-172-31-9-40:~$ curl http://localhost:9090/-/healthy
Prometheus Server is Healthy.
ubuntu@ip-172-31-9-40:~$
```

Try to browse URL with port 9090

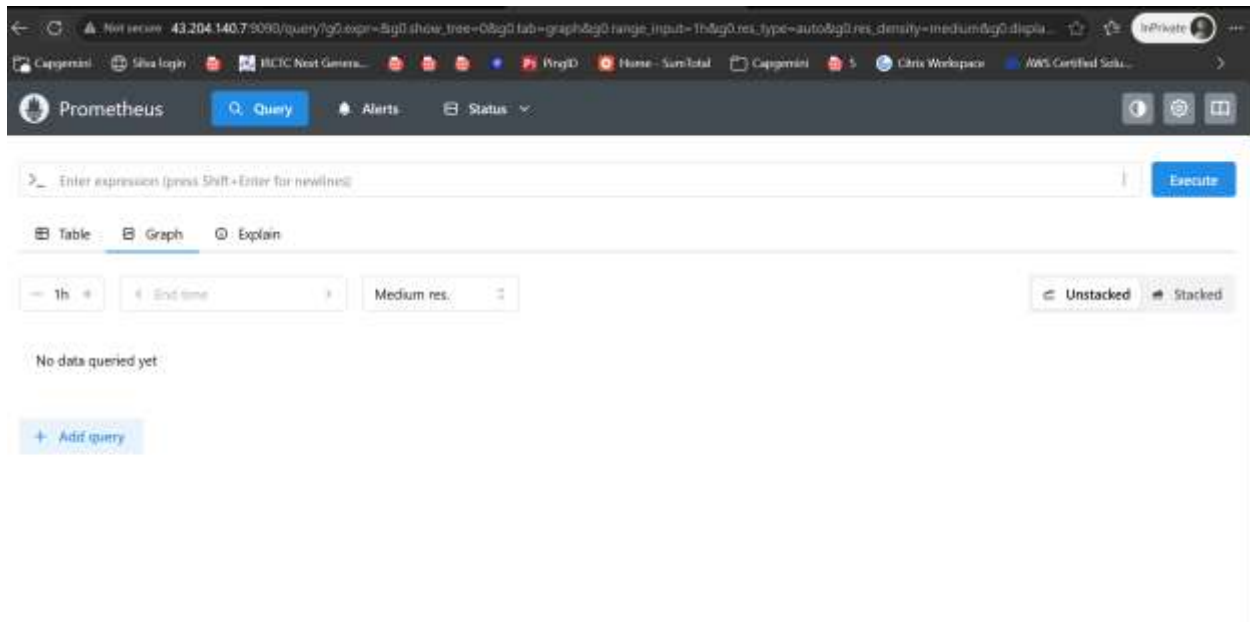

Prometheus targets

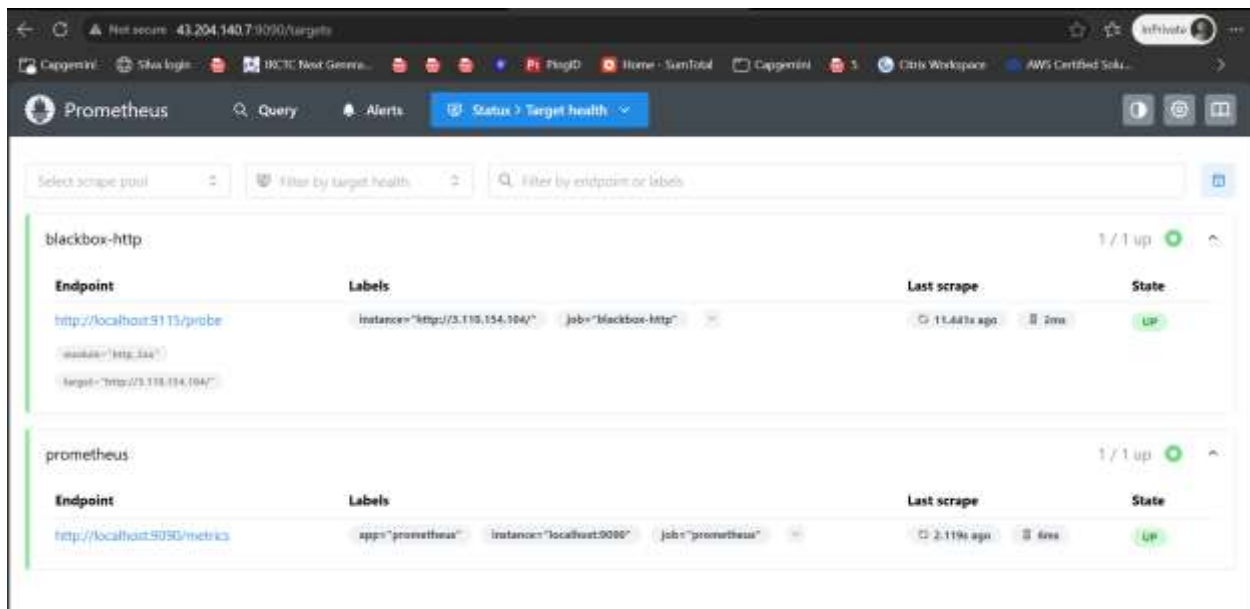

Check if blackbox exporter is working

```
shuntu@ip-172-31-9-40:~$ curl http://localhost:9115/metrics
# HELP blackbox_exporter_build_info A metric with a constant '1' value labeled by version, revision, branch, goversion from which blackbox_exporter was built, and the goos
and goarch for the build.
# TYPE blackbox_exporter_build_info gauge
blackbox_exporter_build_info{branch="HEAD",goarch="amd64",goos="linux",goversion="go1.25.5",revision="5a059bea8d8ffa4e75947c5055f90abeefc582e6",tags="unknown",version="0.28
.0"} 1
# HELP blackbox_exporter_config_last_reload_success_timestamp_seconds Timestamp of the last successful configuration reload.
# TYPE blackbox_exporter_config_last_reload_success_timestamp_seconds gauge
blackbox_exporter_config_last_reload_success_timestamp_seconds 1.78359301728805074e+09
# HELP blackbox_exporter_config_last_reload_successful Blackbox exporter config loaded successfully.
# TYPE blackbox_exporter_config_last_reload_successful gauge
blackbox_exporter_config_last_reload_successful 1
# HELP blackbox_module_unknown_total Count of unknown modules requested by probes
# TYPE blackbox_module_unknown_total counter
blackbox_module_unknown_total 0
# HELP go_gc_duration_seconds A summary of the wall-time pause (stop-the-world) duration in garbage collection cycles.
# TYPE go_gc_duration_seconds summary
go_gc_duration_seconds{quantile="0"} 2.9371e-05
go_gc_duration_seconds{quantile="0.25"} 5.4091e-05
go_gc_duration_seconds{quantile="0.5"} 9.2218e-05
go_gc_duration_seconds{quantile="0.75"} 0.000102566
go_gc_duration_seconds{quantile="1"} 0.00034471
go_gc_duration_seconds_sum 0.001077574
go_gc_duration_seconds_count 7
# HELP go_gc_gogc_percent Heap size target percentage configured by the user, otherwise 100, this value is set by the GOGC environment variable, and the runtime/debug.SetGC
Percent function. Sourced from /gc/gogc.percent.
# TYPE go_gc_gogc_percent gauge
go_gc_gogc_percent 100
# HELP go_gc_gomemlimit_bytes Go runtime memory limit configured by the user, otherwise math.MaxInt64. This value is set by the GOMEMLIMIT environment variable, and the run
time/debug.SetMemoryLimit function. Sourced from /gc/gomemlimit.bytes.
# TYPE go_gc_gomemlimit_bytes gauge
go_gc_gomemlimit_bytes 9.213372036854774e+18
# HELP go_goroutines Number of goroutines that currently exist.
# TYPE go_goroutines gauge
go_goroutines 11
# HELP go_info Information about the Go environment.
# TYPE go_info gauge
go_info{version="go1.25.5"} 1
# HELP go_memstats_alloc_bytes Number of bytes allocated in heap and currently in use. Equals to /memory/classes/heap/objects.bytes.
# TYPE go_memstats_alloc_bytes gauge
go_memstats_alloc_bytes 2.889391e+06
# HELP go_memstats_alloc_bytes_total Total number of bytes allocated in heap until now, even if released already. Equals to /gc/heap/allocs.bytes.
```

```

# HELP go_memstats_gc_sys_bytes Number of bytes used for garbage collection system metadata. Equals to /memory/classes/metadata/other:bytes.
# TYPE go_memstats_gc_sys_bytes gauge
go_memstats_gc_sys_bytes 3.07688e+00
# HELP go_memstats_heap_alloc_bytes Number of heap bytes allocated and currently in use, same as go_memstats_alloc_bytes. Equals to /memory/classes/heap/objects:bytes.
# TYPE go_memstats_heap_alloc_bytes gauge
go_memstats_heap_alloc_bytes 2.959392e+06
# HELP go_memstats_heap_idle_bytes Number of heap bytes waiting to be used. Equals to /memory/classes/heap/released:bytes + /memory/classes/heap/free:bytes.
# TYPE go_memstats_heap_idle_bytes gauge
go_memstats_heap_idle_bytes 1.17030e+06
# HELP go_memstats_heap_inuse_bytes Number of heap bytes that are in use. Equals to /memory/classes/heap/objects:bytes + /memory/classes/heap/unused:bytes
# TYPE go_memstats_heap_inuse_bytes gauge
go_memstats_heap_inuse_bytes 4.56294e+06
# HELP go_memstats_heap_objects Number of currently allocated objects. Equals to /gc/heap/objects:objects.
# TYPE go_memstats_heap_objects gauge
go_memstats_heap_objects 5688
# HELP go_memstats_heap_released_bytes Number of heap bytes released to OS. Equals to /memory/classes/heap/released:bytes.
# TYPE go_memstats_heap_released_bytes gauge
go_memstats_heap_released_bytes 1.203648e+06
# HELP go_memstats_heap_sys_bytes Number of heap bytes obtained from system. Equals to /memory/classes/heap/objects:bytes + /memory/classes/heap/unused:bytes + /memory/classes/heap/released:bytes + /memory/classes/heap/free:bytes.
# TYPE go_memstats_heap_sys_bytes gauge
go_memstats_heap_sys_bytes 7.75248e+06
# HELP go_memstats_last_gc_time_seconds Number of seconds since 1970 of last garbage collection.
# TYPE go_memstats_last_gc_time_seconds gauge
go_memstats_last_gc_time_seconds 1.7835950318904548e+09
# HELP go_memstats_mallocs_total Total number of heap objects allocated, both live and gc-ed. Semantically a counter version for go_memstats_heap_objects gauge. Equals to /gc/heap/allocs:objects + /gc/heap/frees:objects.
# TYPE go_memstats_mallocs_total counter
go_memstats_mallocs_total 66460
# HELP go_memstats_mcache_inuse_bytes Number of bytes in use by mcache structures. Equals to /memory/classes/metadata/mcache/inuse:bytes.
# TYPE go_memstats_mcache_inuse_bytes gauge
go_memstats_mcache_inuse_bytes 2436
# HELP go_memstats_mcache_sys_bytes Number of bytes used for mcache structures obtained from system. Equals to /memory/classes/metadata/mcache/inuse:bytes + /memory/classes/metadata/mcache/free:bytes.
# TYPE go_memstats_mcache_sys_bytes gauge
go_memstats_mcache_sys_bytes 15704
# HELP go_memstats_mspan_inuse_bytes Number of bytes in use by mspan structures. Equals to /memory/classes/metadata/mspan/inuse:bytes.
# TYPE go_memstats_mspan_inuse_bytes gauge
go_memstats_mspan_inuse_bytes 72540
# HELP go_memstats_mspan_sys_bytes Number of bytes used for mspan structures obtained from system. Equals to /memory/classes/metadata/mspan/inuse:bytes + /memory/classes/metadata/mspan/free:bytes.
# TYPE go_memstats_mspan_sys_bytes gauge
go_memstats_mspan_sys_bytes 61600
# HELP go_memstats_next_gc_bytes Number of heap bytes when next garbage collection will take place. Equals to /gc/heap/goal:bytes.
# TYPE go_memstats_next_gc_bytes gauge
go_memstats_next_gc_bytes 5.988076e+06
# HELP go_memstats_other_sys_bytes Number of bytes used for other system allocations. Equals to /memory/classes/other:bytes.
# TYPE go_memstats_other_sys_bytes gauge
go_memstats_other_sys_bytes 705071
# HELP go_memstats_stack_inuse_bytes Number of bytes obtained from system for stack allocator in non-OS environments. Equals to /memory/classes/heap/stacks:bytes.
# TYPE go_memstats_stack_inuse_bytes gauge
go_memstats_stack_inuse_bytes 651360
# HELP go_memstats_stack_sys_bytes Number of bytes obtained from system for stack allocator. Equals to /memory/classes/heap/stacks:bytes + /memory/classes/os-stacks:bytes.
# TYPE go_memstats_stack_sys_bytes gauge

```

```

# HELP go_threads Number of OS threads created.
# TYPE go_threads gauge
go_threads 8
# HELP net_conntrack_dialer_conn_attempted_total Total number of connections attempted by the given dialer a given name.
# TYPE net_conntrack_dialer_conn_attempted_total counter
net_conntrack_dialer_conn_attempted_total[dialer_name="http_probe"] 48
# HELP net_conntrack_dialer_conn_closed_total Total number of connections closed which originated from the dialer of a given name.
# TYPE net_conntrack_dialer_conn_closed_total counter
net_conntrack_dialer_conn_closed_total[dialer_name="http_probe"] 48
# HELP net_conntrack_dialer_conn_established_total Total number of connections successfully established by the given dialer a given name.
# TYPE net_conntrack_dialer_conn_established_total counter
net_conntrack_dialer_conn_established_total[dialer_name="http_probe"] 48
# HELP net_conntrack_dialer_conn_failed_total Total number of connections failed to dial by the dialer a given name.
# TYPE net_conntrack_dialer_conn_failed_total counter
net_conntrack_dialer_conn_failed_total[dialer_name="http_probe",reason="refused"] 0
net_conntrack_dialer_conn_failed_total[dialer_name="http_probe",reason="resolution"] 0
net_conntrack_dialer_conn_failed_total[dialer_name="http_probe",reason="timeout"] 0
net_conntrack_dialer_conn_failed_total[dialer_name="http_probe",reason="unknown"] 0
# HELP process_cpu_seconds_total Total user and system CPU time spent in seconds.
# TYPE process_cpu_seconds_total counter
process_cpu_seconds_total 0.14
# HELP process_max_fds Maximum number of open file descriptors.
# TYPE process_max_fds gauge
process_max_fds 524287
# HELP process_network_receive_bytes_total Number of bytes received by the process over the network.
# TYPE process_network_receive_bytes_total counter
process_network_receive_bytes_total 2.15679397e+08
# HELP process_network_transmit_bytes_total Number of bytes sent by the process over the network.
# TYPE process_network_transmit_bytes_total counter
process_network_transmit_bytes_total 7.761403e+06
# HELP process_open_fds Number of open file descriptors.
# TYPE process_open_fds gauge
process_open_fds 8
# HELP process_resident_memory_bytes Resident memory size in bytes.
# TYPE process_resident_memory_bytes gauge
process_resident_memory_bytes 2.116562e+07
# HELP process_start_time_seconds Start time of the process since unix epoch in seconds.
# TYPE process_start_time_seconds gauge
process_start_time_seconds 1.78359391687e+09
# HELP process_virtual_memory_bytes Virtual memory size in bytes.
# TYPE process_virtual_memory_bytes gauge
process_virtual_memory_bytes 1.28028262e+09
# HELP process_virtual_memory_max_bytes Maximum amount of virtual memory available in bytes.
# TYPE process_virtual_memory_max_bytes gauge
process_virtual_memory_max_bytes 1.8446744073709552e+19
# HELP promhttp_metric_handler_requests_in_flight Current number of scrapes being served.
# TYPE promhttp_metric_handler_requests_in_flight gauge
promhttp_metric_handler_requests_in_flight 1
# HELP promhttp_metric_handler_requests_total Total number of scrapes by HTTP status code.
# TYPE promhttp_metric_handler_requests_total counter
promhttp_metric_handler_requests_total[code="200"] 0
promhttp_metric_handler_requests_total[code="500"] 0
promhttp_metric_handler_requests_total[code="503"] 0
ubuntu@ip-172-31-9-401:~$

```

Do manual http probe

curl "http://localhost:9115/probe?target=http://3.110.154.104:80&module=http_2xx"

```

ubuntu@ip-172-31-9-40:~$ curl "http://localhost:9115/probe?target=http://3.110.154.104:80&module=http_1xx"
# HELP probe_dns_lookup_time_seconds Returns the time taken for probe dns lookup in seconds
# TYPE probe_dns_lookup_time_seconds gauge
probe_dns_lookup_time_seconds 3.188e-06
# HELP probe_duration_seconds Returns how long the probe took to complete in seconds
# TYPE probe_duration_seconds gauge
probe_duration_seconds 0.001471137
# HELP probe_failed_due_to_regex Indicates if probe failed due to regex
# TYPE probe_failed_due_to_regex gauge
probe_failed_due_to_regex 0
# HELP probe_http_content_length Length of http content response
# TYPE probe_http_content_length gauge
probe_http_content_length 961
# HELP probe_http_duration_seconds Duration of http request by phase, summed over all redirects
# TYPE probe_http_duration_seconds gauge
probe_http_duration_seconds{phase="connect"} 0.000590367
probe_http_duration_seconds{phase="processing"} 0.00010661
probe_http_duration_seconds{phase="resolve"} 3.288e-06
probe_http_duration_seconds{phase="tls"} 0
probe_http_duration_seconds{phase="transfer"} 0.000126176
# HELP probe_http_last_modified_timestamp_seconds Returns the Last-Modified HTTP response header in unixtime
# TYPE probe_http_last_modified_timestamp_seconds gauge
probe_http_last_modified_timestamp_seconds 1.783581737e+09
# HELP probe_http_redirects The number of redirects
# TYPE probe_http_redirects gauge
probe_http_redirects 0
# HELP probe_http_ssl Indicates if SSL was used for the final redirect
# TYPE probe_http_ssl gauge
probe_http_ssl 0
# HELP probe_http_status_code Response HTTP status code
# TYPE probe_http_status_code gauge
probe_http_status_code 200
# HELP probe_http_uncompressed_body_length Length of uncompressed response body
# TYPE probe_http_uncompressed_body_length gauge
probe_http_uncompressed_body_length 961
# HELP probe_http_version Returns the version of HTTP of the probe response
# TYPE probe_http_version gauge
probe_http_version 1.1
# HELP probe_ip_addr_hash Specifies the hash of IP address. It's useful to detect if the IP address changes.
# TYPE probe_ip_addr_hash gauge
probe_ip_addr_hash 3.604870022e+09
# HELP probe_ip_protocol Specifies whether probe ip protocol is IP4 or IP6
# TYPE probe_ip_protocol gauge
probe_ip_protocol 4
# HELP probe_success Displays whether or not the probe was a success
# TYPE probe_success gauge
probe_success 1
ubuntu@ip-172-31-9-40:~$

```

Probe_success=1 that means application is healthy no issues


Verify alert manager

```

ubuntu@ip-172-31-9-40:~$ curl http://localhost:9093/-/healthy
OKubuntu@ip-172-31-9-40:~$

```

Try to browse url on port 9093

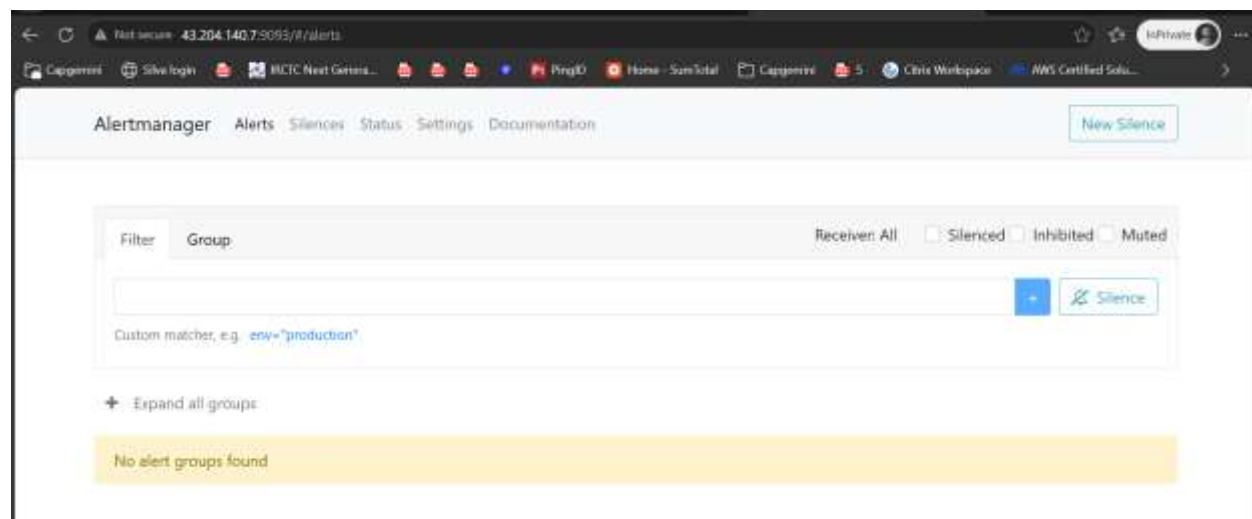

Install Grafana

[Download Grafana](#)

Use below

Standalone Linux Binaries(64

Bit)SHA256: 4f562bb224b8bb758b47789381babb284cb41687da8d714f2ff0e118e945e775

wget

[https://dl.grafana.com/grafana/release/13.1.0/grafana_13.1.0_28013217238_linux_amd64.](https://dl.grafana.com/grafana/release/13.1.0/grafana_13.1.0_28013217238_linux_amd64.tar.gz)

tar.gz

tar -zxvf grafana_13.1.0_28013217238_linux_amd64.tar.gz


```
ubuntu@ip-172-31-9-40: ~$  
grafana-13.1.0/public/build/mixedPlugin-react19.008abc809cd4d32a728b.js.map  
grafana-13.1.0/public/build/5364-react19.ee57623287c439212029.js.map  
grafana-13.1.0/public/build/AlertingDisabled-react19.7518799cbccc264f8ca6.js  
grafana-13.1.0/public/build/dashListPanel.5a2d57c9101dfa994ab6.js  
grafana-13.1.0/public/build/2169-react19.0af6e96833276ff5664c.js  
grafana-13.1.0/public/build/3720.5898e0deffd16777849f.js.map  
grafana-13.1.0/public/build/NewReceiverView-react19.41f39b58cfc9a2f9c6dd.js  
grafana-13.1.0/public/build/1914.187717bb40530569ba43.js  
grafana-13.1.0/public/build/3062.3e5401e5ec55c98028f2.js  
grafana-13.1.0/public/build/EditContactPoint-react19.e2aefab6a8d59e4cb9a9.js.map  
grafana-13.1.0/public/build/grafana.geomapPanel.0057d984fa972bb207ec.css  
grafana-13.1.0/public/build/420-react19.07fe91ba0e627ec91d73.js.map  
grafana-13.1.0/public/build/5308-react19.6dca0814de33631e3c0a.js.map  
grafana-13.1.0/public/build/3501.94509059e424b3a26579.js.map  
grafana-13.1.0/public/build/MigrateToCloud-react19.ce7fbecb69169441598b.js  
grafana-13.1.0/public/build/2094-react19.f703a2a14aca4a23066c.js.map  
grafana-13.1.0/public/build/4203-react19.e5e5d040bfaed382f9ec.js.map  
grafana-13.1.0/public/build/4630.336b18aa08a443031be8.js.map  
grafana-13.1.0/public/build/HistoryPage.bbe67e7e08cf6e4b6d8a.js.map  
grafana-13.1.0/public/build/AlertingGroupEdit.79389685acf5eb599bbc.js.map  
grafana-13.1.0/public/build/8017-react19.f237fd78970d211b93bc.js.map  
grafana-13.1.0/public/build/barChartPanel.2a2fc2b8f44e79c9cc.js  
grafana-13.1.0/public/build/ServiceAccountCreatePage.feb61098710a96cf4bee.js  
grafana-13.1.0/public/build/3143-react19.122f226a42b3277bdc32.js  
grafana-13.1.0/public/build/7836.220e1af88e8417503b9a.js  
grafana-13.1.0/public/build/AlertingImportFromDSRules-react19.3bd10265a7d1fc7cd5dc.js.map  
grafana-13.1.0/public/build/cloudwatchPlugin-react19.8b8d851720fefda2de52.js.map  
grafana-13.1.0/public/build/UserProfileEditPage-react19.6cc224baa7dd8b215d7f.js  
grafana-13.1.0/public/build/8902-react19.dal377be3c9de02691ac.js  
grafana-13.1.0/public/build/pieChartPanel.e44cf0fed6dfe0086a9.js  
grafana-13.1.0/public/build/8373.2f4d332c61313a04cc7a.js  
grafana-13.1.0/public/build/DashboardListPage-react19.3890e8f88611a2c2552f.js  
grafana-13.1.0/public/build/8542-react19.0bd331c5b3650f8c6e0a.js  
grafana-13.1.0/public/build/Connections.c271d55ff9faf0fea163.js.map  
grafana-13.1.0/public/build/AlertingDisabled-react19.7518799cbccc264f8ca6.js.map  
grafana-13.1.0/public/build/8332-react19.ae2bbe84509473c5361.js  
grafana-13.1.0/public/build/AlertingHome.5db9a70a4b1e2e5758ff.js  
grafana-13.1.0/public/build/509.d108b6c18ef87c17206d.js  
grafana-13.1.0/public/build/PlaylistStartPage.7fa0fba8e7319eef8d6d.js.map  
grafana-13.1.0/public/build/453.2bbf8aaa3630ba444252.js  
grafana-13.1.0/public/build/FileStatusPage.355121945f666d3bf6b7.js.map  
grafana-13.1.0/public/build/PublicDashboardPage-react19.465ff9b0116aa4ffe96e.js  
grafana-13.1.0/public/build/8113.eebc2563fdad4a3a8d0a.js  
grafana-13.1.0/public/build/PolicyPage.0105db47650af86d4993.js.map  
grafana-13.1.0/public/build/candlestickPanel.e5953ab8c606f042b201.js.map  
grafana-13.1.0/public/build/5942.6a9e09161fdb87071afa.js  
grafana-13.1.0/public/build/2536.977eacff1590d5583cec.js.map  
grafana-13.1.0/public/build/5085.ce3d0ff09ed0f2a186.js  
grafana-13.1.0/public/build/4327-react19.a0c11f66593db390ddc9.js  
grafana-13.1.0/public/build/prometheusPlugin.a285991944e1827e16e8.js.map  
grafana-13.1.0/public/build/5465.f60c35bb1b4965a3a45b.js  
grafana-13.1.0/public/build/6029.ced17922ce65e4fd1ef9.js.map  
grafana-13.1.0/README.md  
ubuntu@ip-172-31-9-40: ~$
```


start Grafana service


```



INFO [07-09 11:30:15] Updating plugin
INFO [07-09 11:30:15] Plugin process exited
INFO [07-09 11:30:15] Downloaded and extracted elasticsearch v7.10.4 zip successfully to /home/ubuntu/grafana-13.1.0/data/plugins-elasticsearch logger=installer.fs
INFO [07-09 11:30:15] Plugin registered
INFO [07-09 11:30:15] Plugin successfully installed
INFO [07-09 11:30:15] Installing plugin
INFO [07-09 11:30:15] Updating plugin
INFO [07-09 11:30:15] Plugin process exited
INFO [07-09 11:30:15] Downloaded and extracted zipkin v12.4.5 zip successfully to /home/ubuntu/grafana-13.1.0/data/plugins/zipkin logger=installer.fs
INFO [07-09 11:30:15] Plugin registered
INFO [07-09 11:30:15] Plugin successfully installed
INFO [07-09 11:30:15] Installing plugin
INFO [07-09 11:30:15] Installing plugin
INFO [07-09 11:30:15] Downloaded and extracted grafana-lokiexplore-app v2.2.0 zip successfully to /home/ubuntu/grafana-13.1.0/data/plugins/grafana-lokiexplore-app logger=installer.fs
INFO [07-09 11:30:15] Plugin registered
INFO [07-09 11:30:15] Plugin successfully installed
INFO [07-09 11:30:15] Installing plugin
INFO [07-09 11:30:15] Installing plugin
INFO [07-09 11:30:15] Downloaded and extracted grafana-pyroscope-app v2.5.0 zip successfully to /home/ubuntu/grafana-13.1.0/data/plugins/grafana-pyroscope-app logger=installer.fs
INFO [07-09 11:30:15] Plugin registered
INFO [07-09 11:30:15] Plugin successfully installed
INFO [07-09 11:30:15] Installing plugin
INFO [07-09 11:30:15] Installing plugin
INFO [07-09 11:30:15] Downloaded and extracted grafana-explorettraces-app v2.1.0 zip successfully to /home/ubuntu/grafana-13.1.0/data/plugins/grafana-explorettraces-app logger=installer.fs
INFO [07-09 11:30:15] Plugin registered
INFO [07-09 11:30:15] Plugin successfully installed
INFO [07-09 11:30:15] Installing plugin
INFO [07-09 11:30:15] Installing plugin
INFO [07-09 11:30:15] Downloaded and extracted grafana-metricsdrilldown-app v2.2.0 zip successfully to /home/ubuntu/grafana-13.1.0/data/plugins/grafana-metricsdrilldown-app logger=installer.fs
INFO [07-09 11:30:15] Plugin registered
INFO [07-09 11:30:15] Plugin successfully installed
INFO [07-09 11:30:15] Building index using memory
INFO [07-09 11:31:03] Finished building index
INFO [07-09 11:31:03] Plugin installed in cache
INFO [07-09 11:31:03] (NameSpace=default group=provisioning.grafana.app Resource=repositories) expiration=2026-07-09T11:41:03.075922562Z
INFO [07-09 11:31:03] Building index using memory
INFO [07-09 11:31:03] Finished building index
INFO [07-09 11:31:03] Plugin installed in cache
INFO [07-09 11:31:03] (NameSpace=default group=provisioning.grafana.app Resource=playlists) expiration=2026-07-09T11:41:03.074300392Z
INFO [07-09 11:31:03] Building index using memory
INFO [07-09 11:31:03] Finished building index
INFO [07-09 11:31:03] Plugin installed in cache
INFO [07-09 11:31:03] (NameSpace=default group=provisioning.grafana.app Resource=folders) expiration=2026-07-09T11:41:03.074521432Z
INFO [07-09 11:31:03] Usage stats are ready to report



```


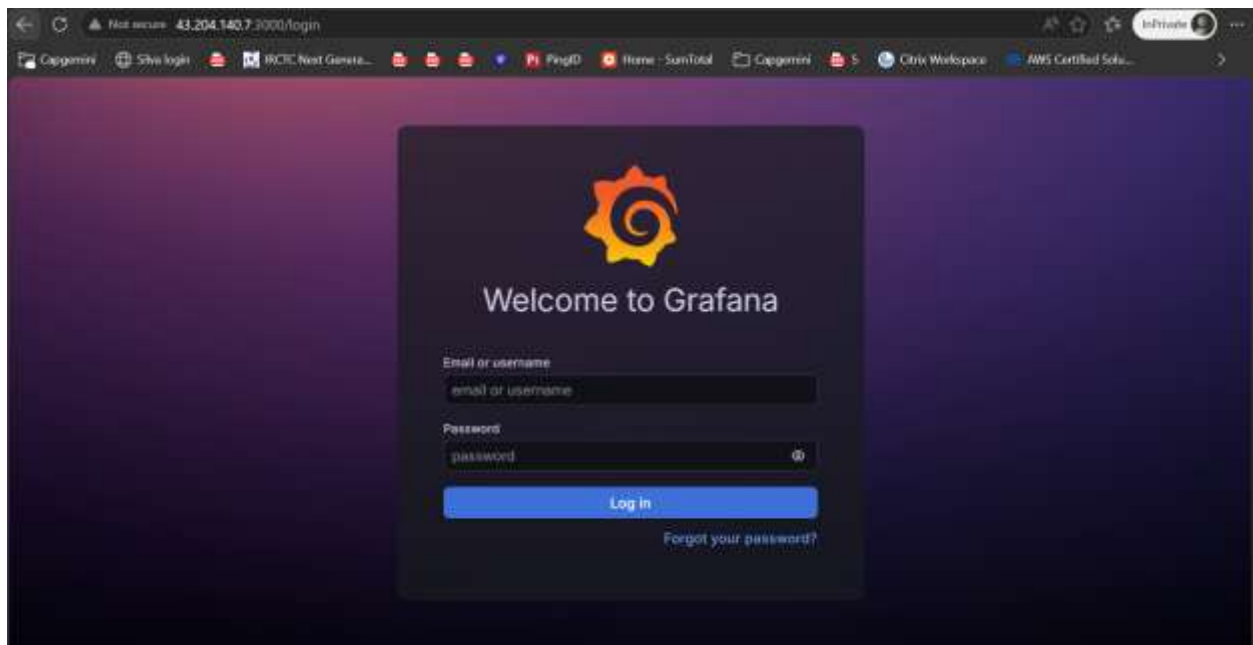


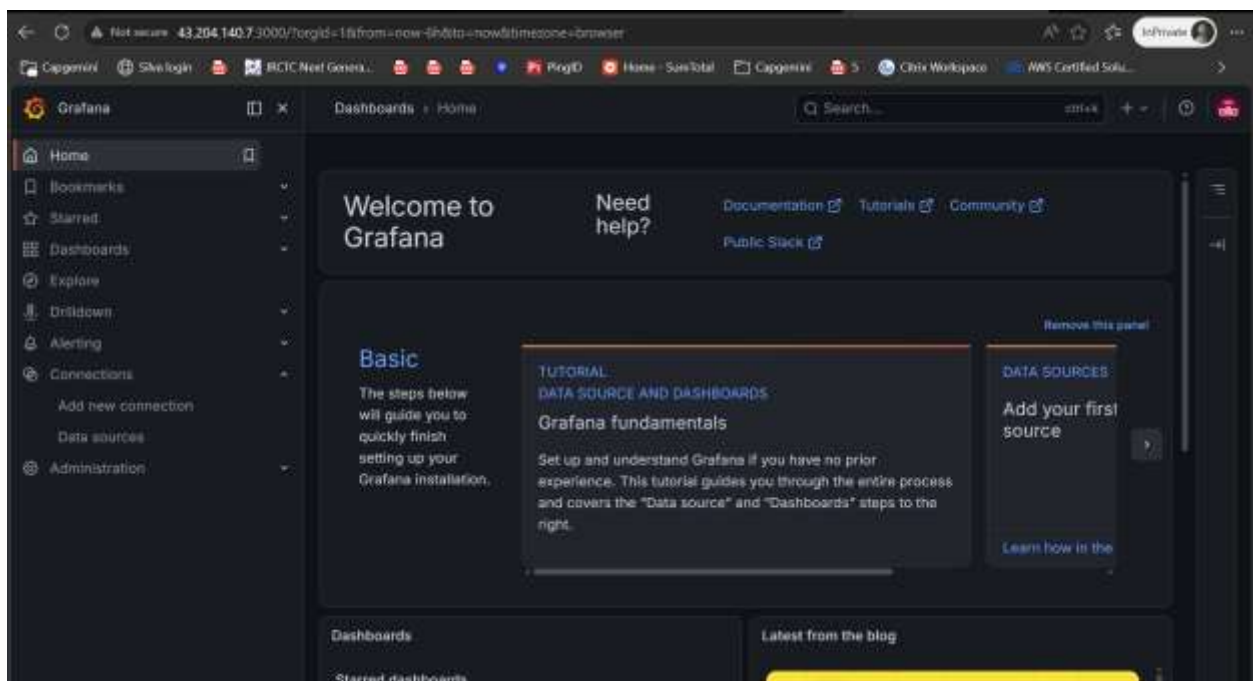

Add datasource

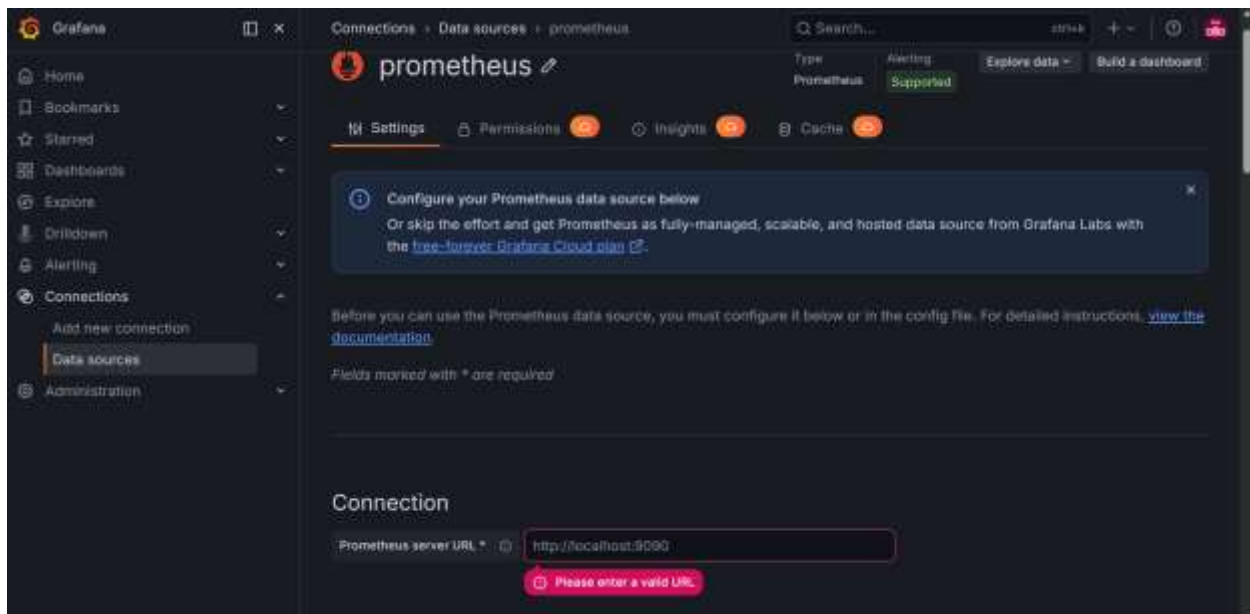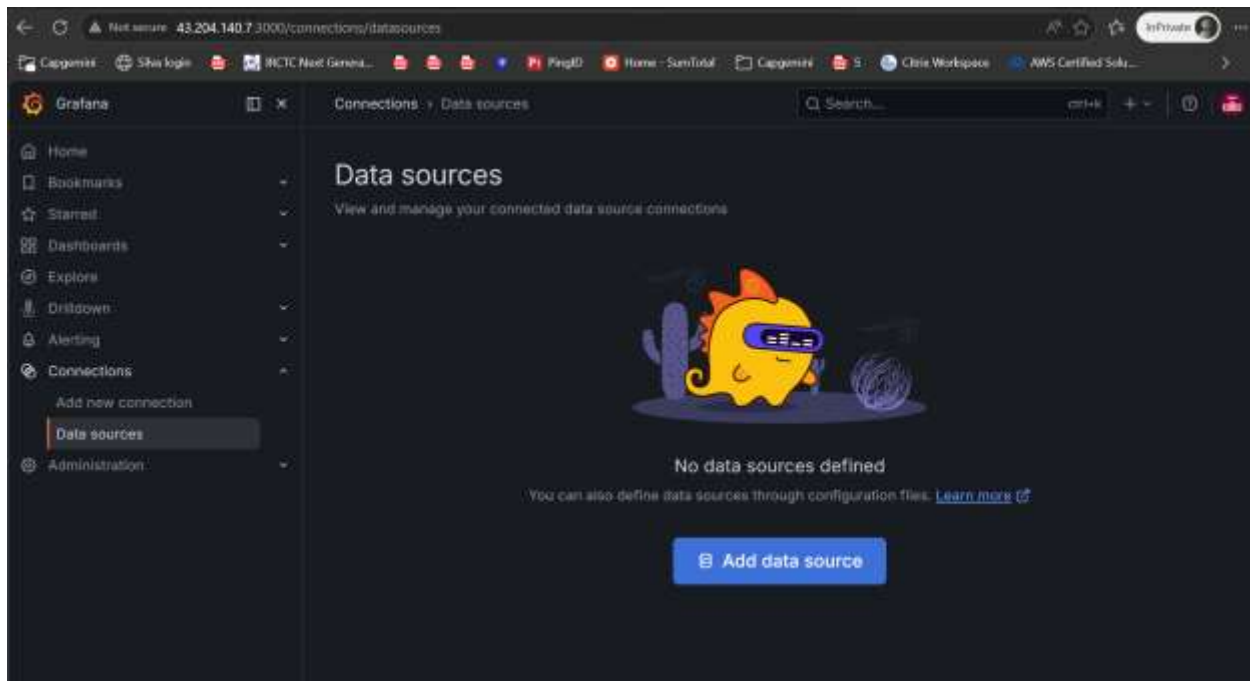


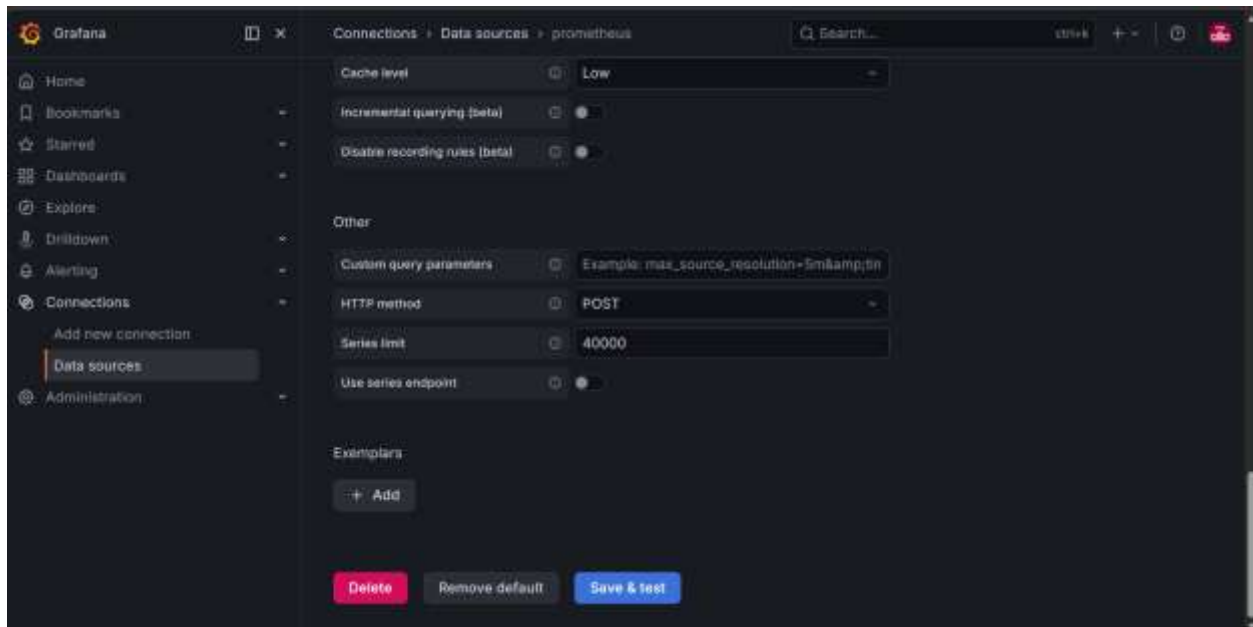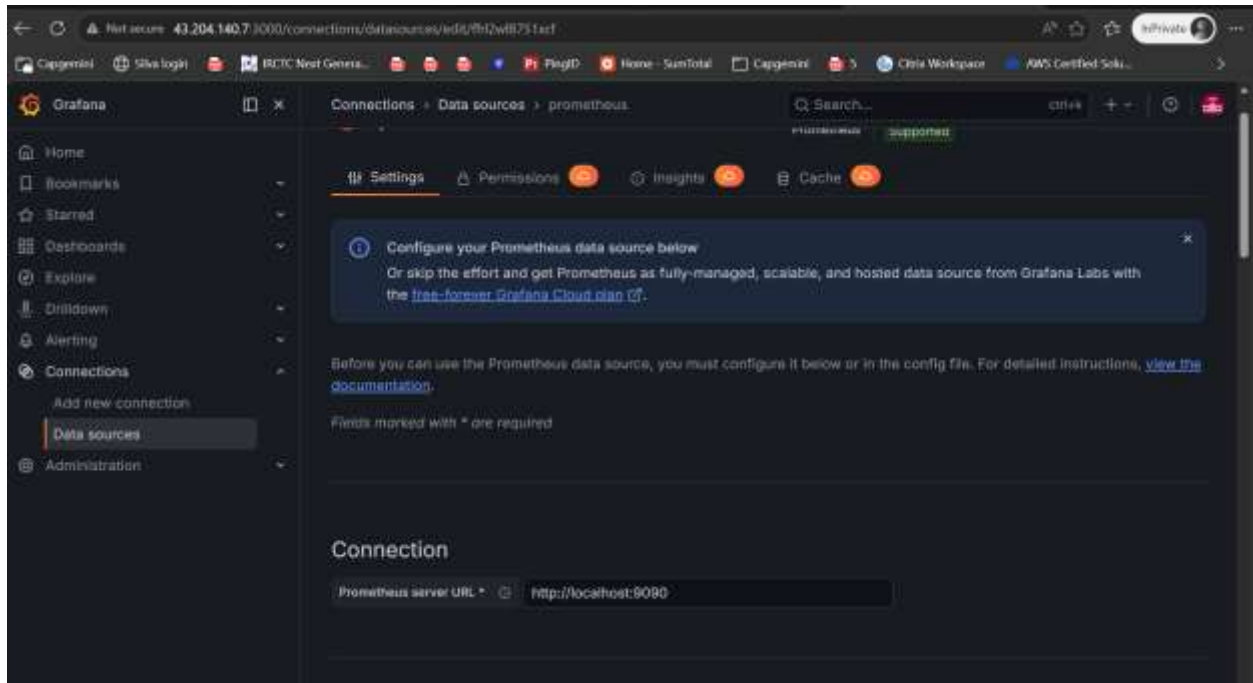

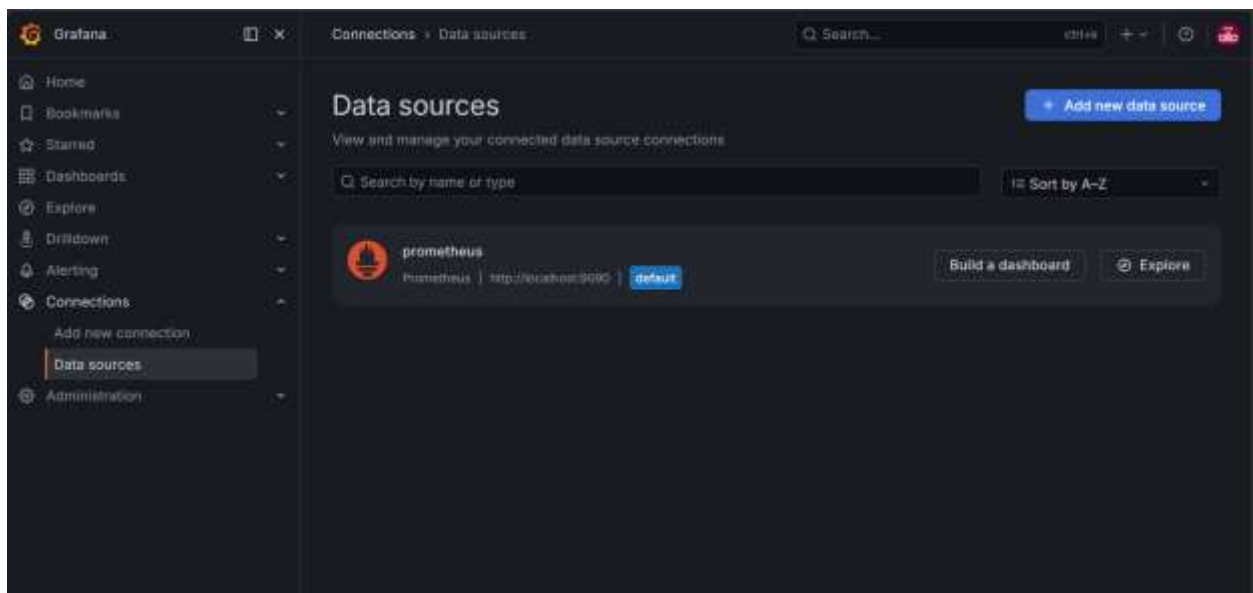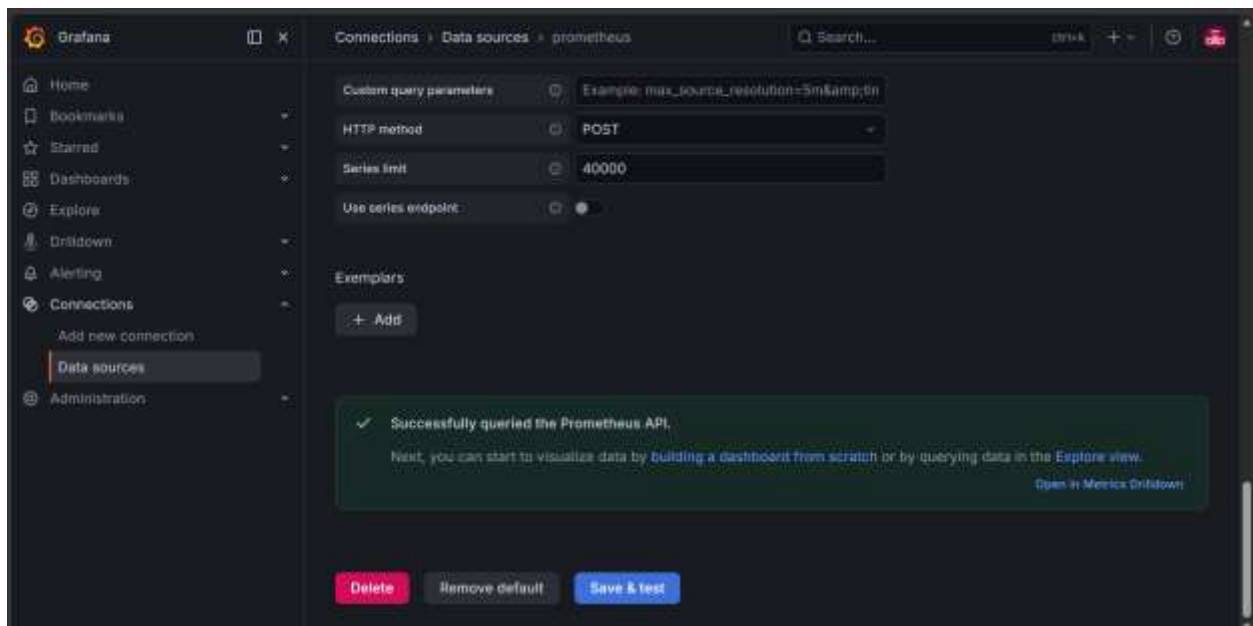


Build dashboard


Go to dashboard

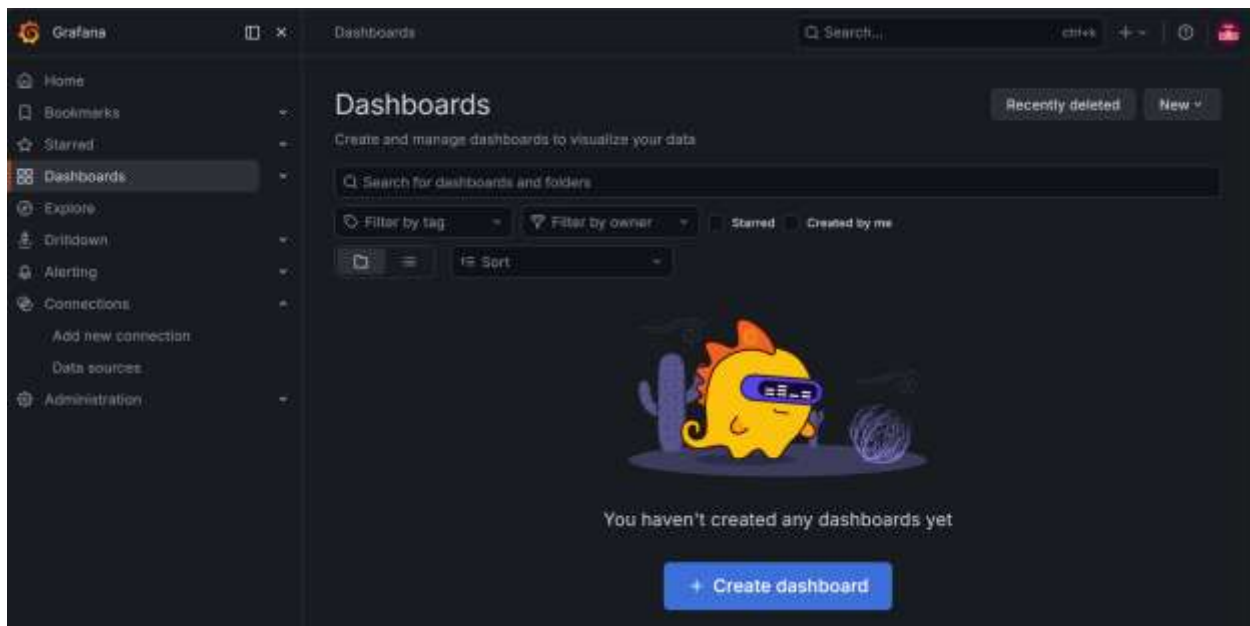


Create dashboard

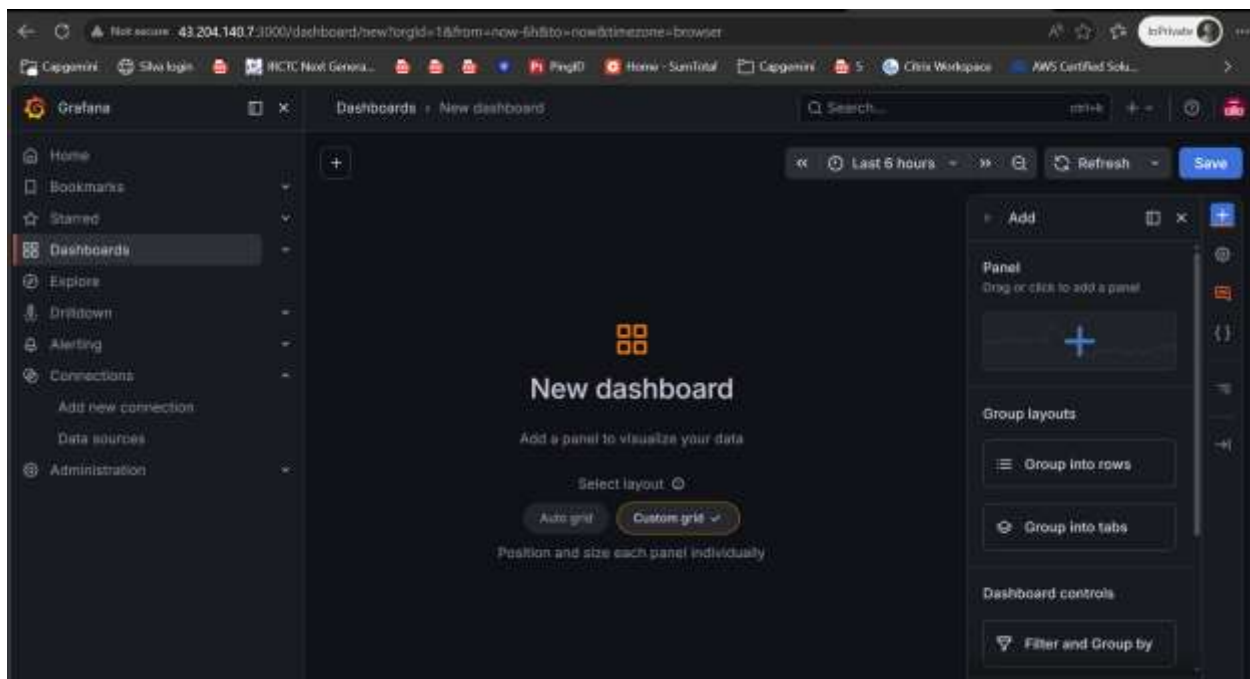


Click on + icon

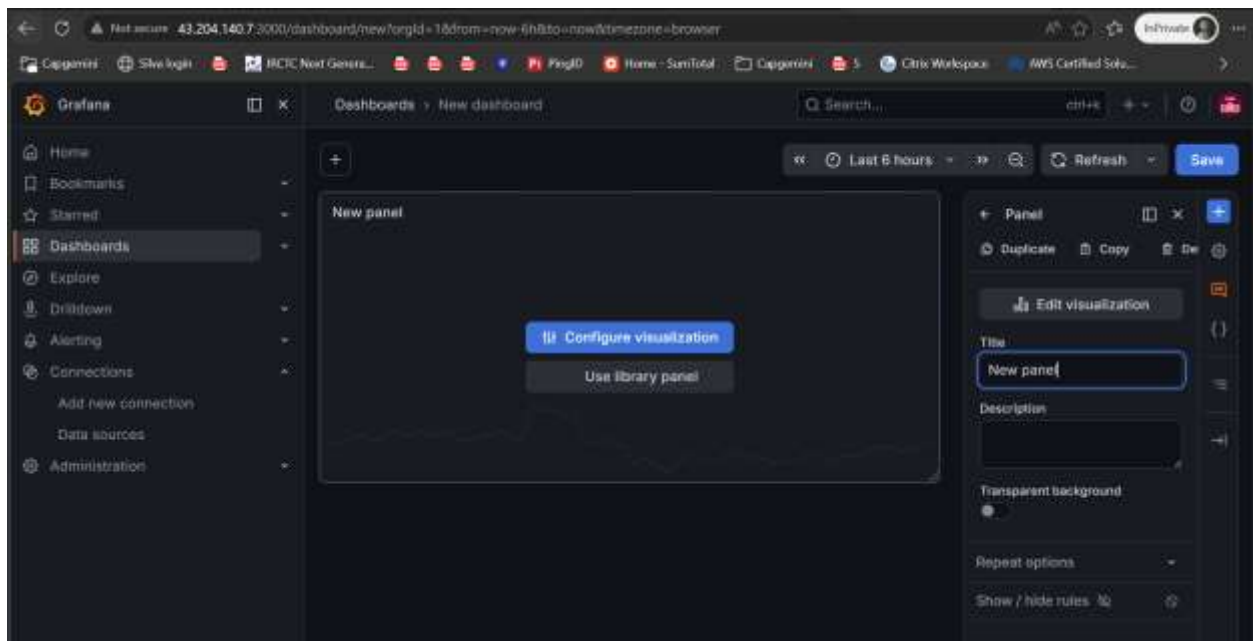


Click configure visualization

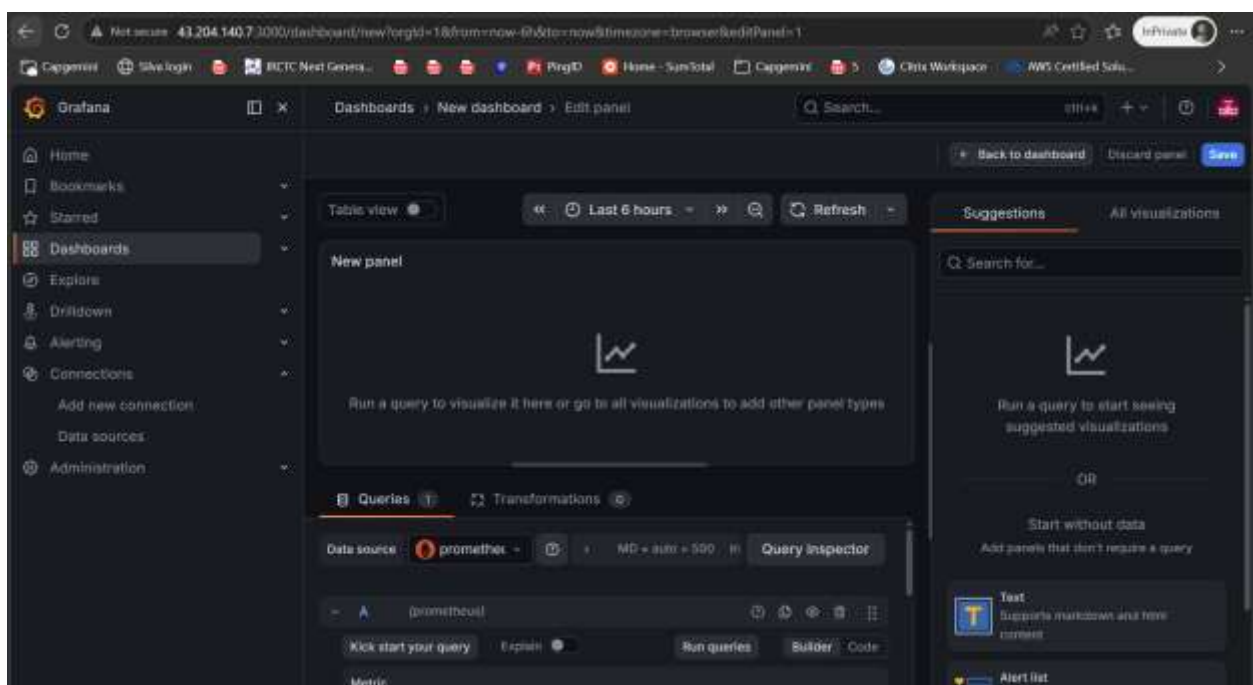

Add datasource as Prometheus

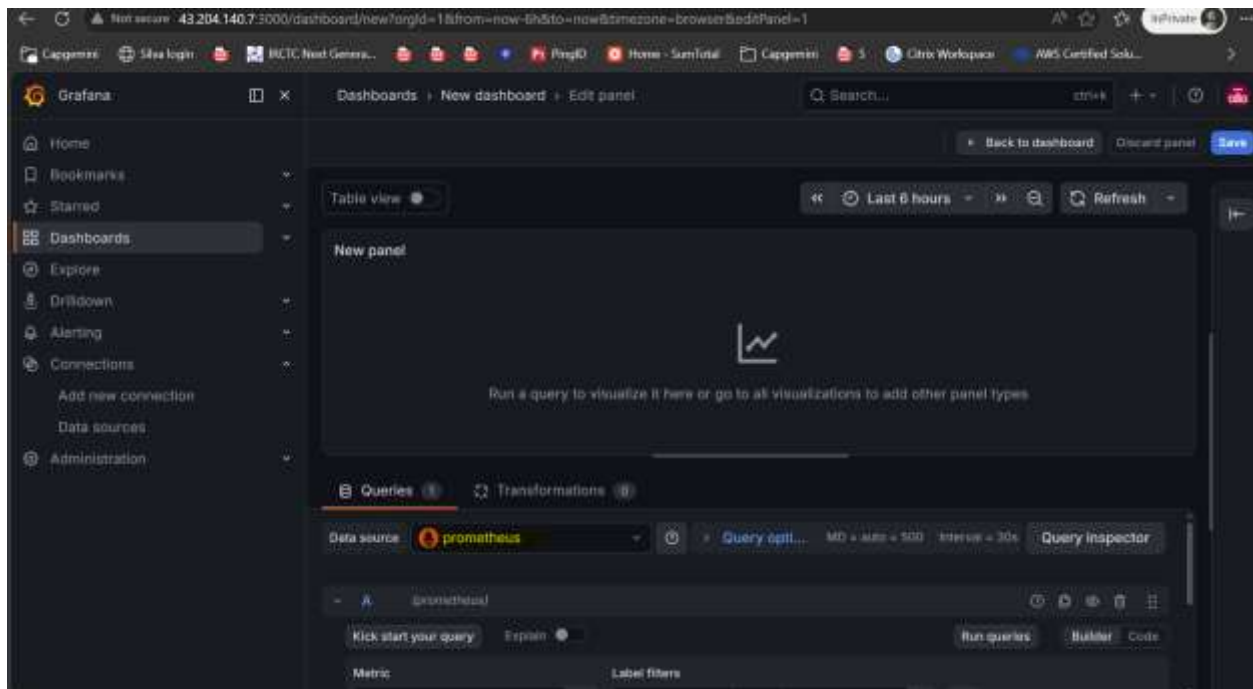


Metric : change to probe_success

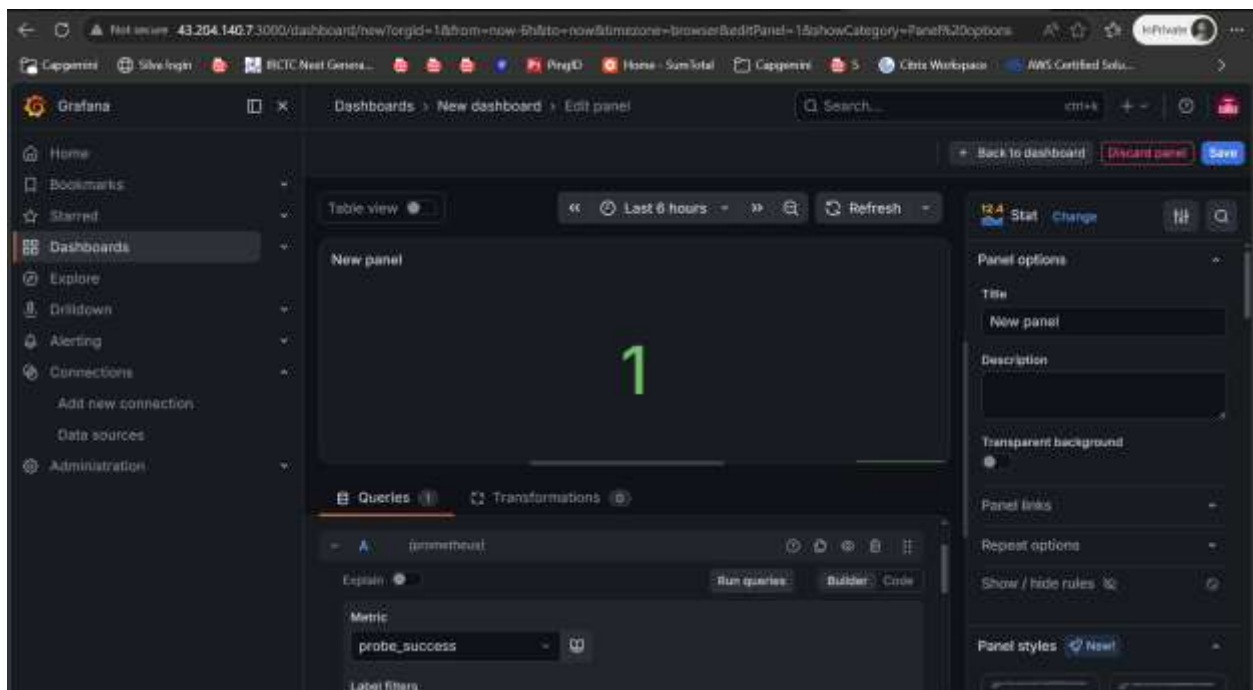




Click on all visualization->stat and run query . now you see 1 means application is healthy

Go to title and modify as below


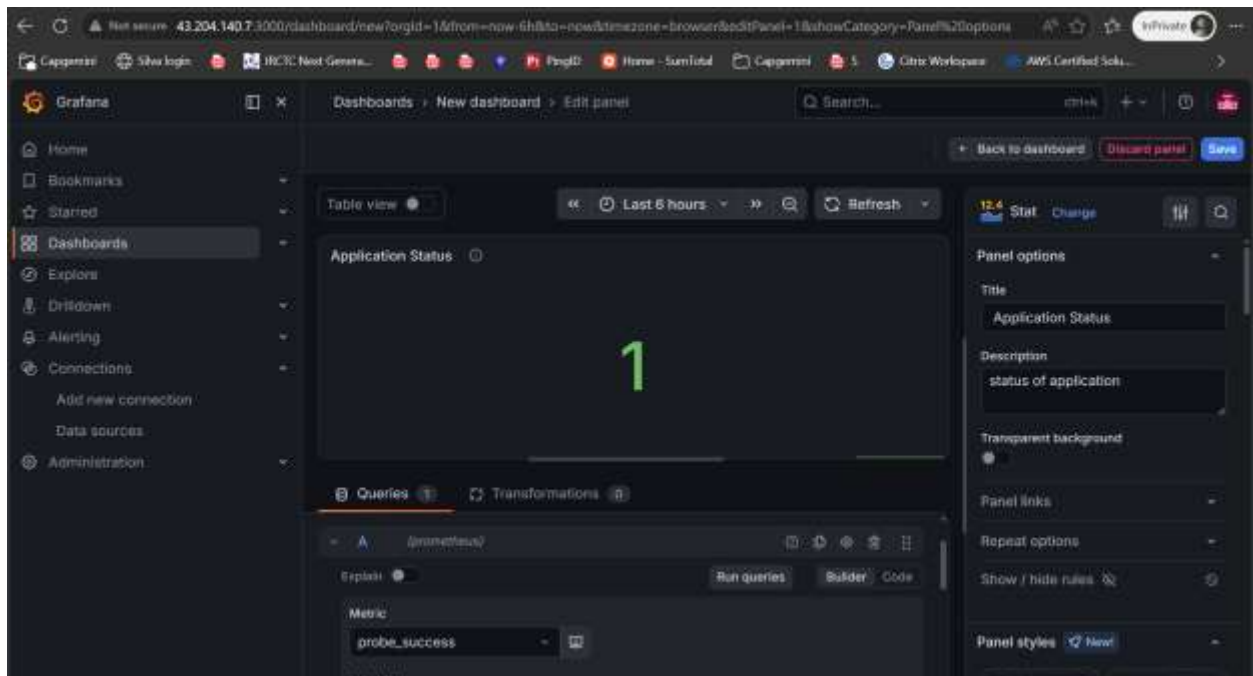


And also click on value mapping

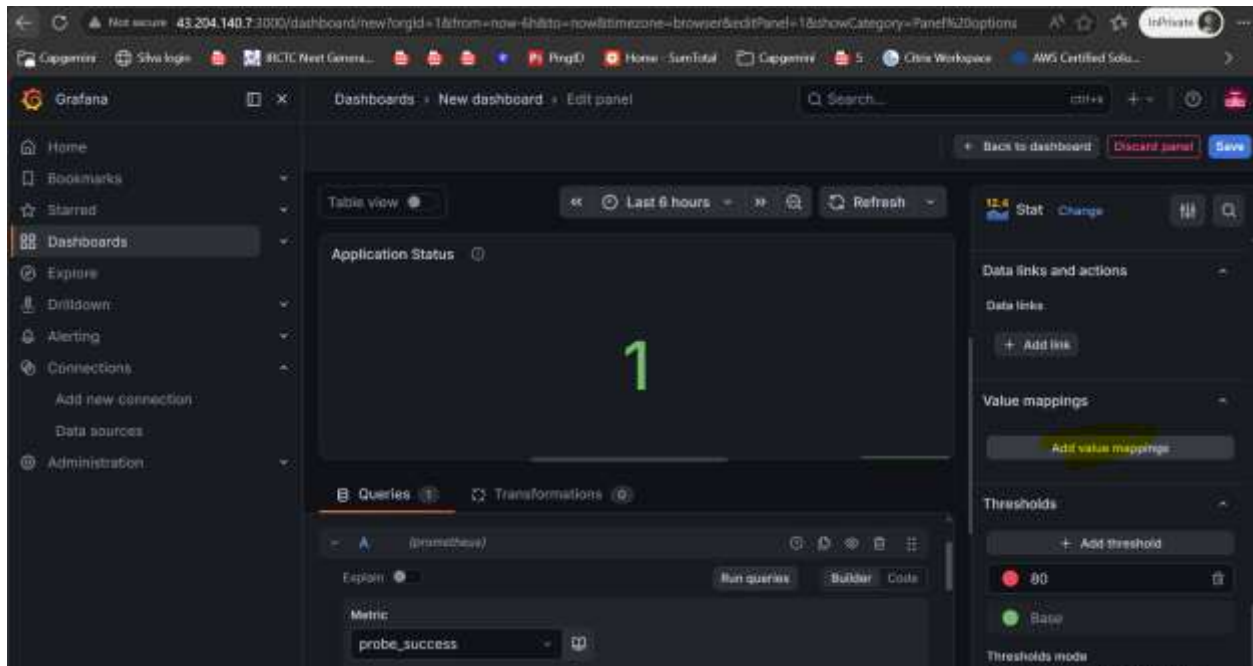


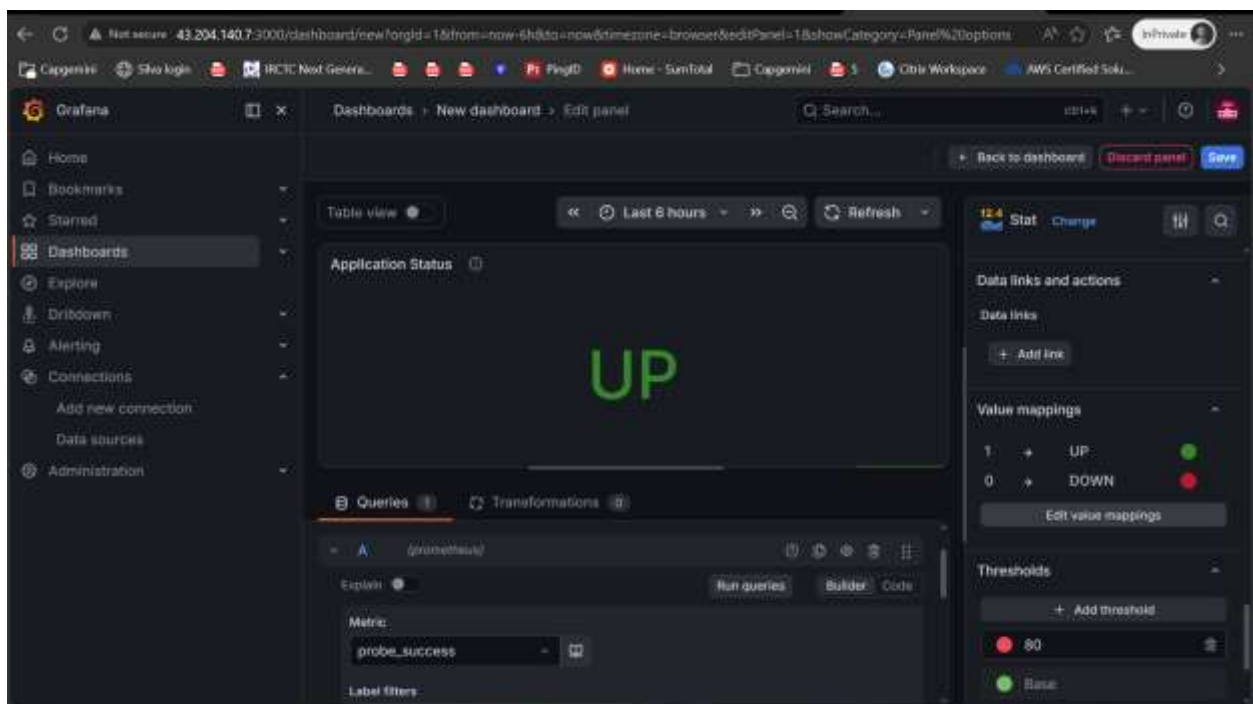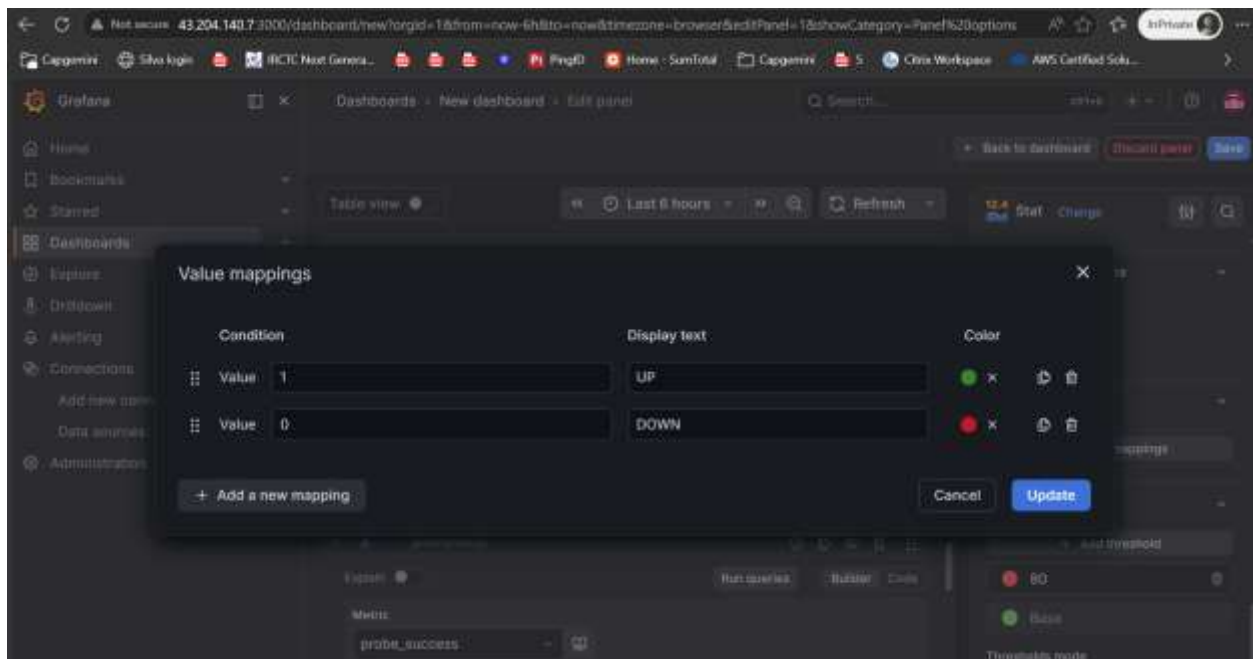


save panel

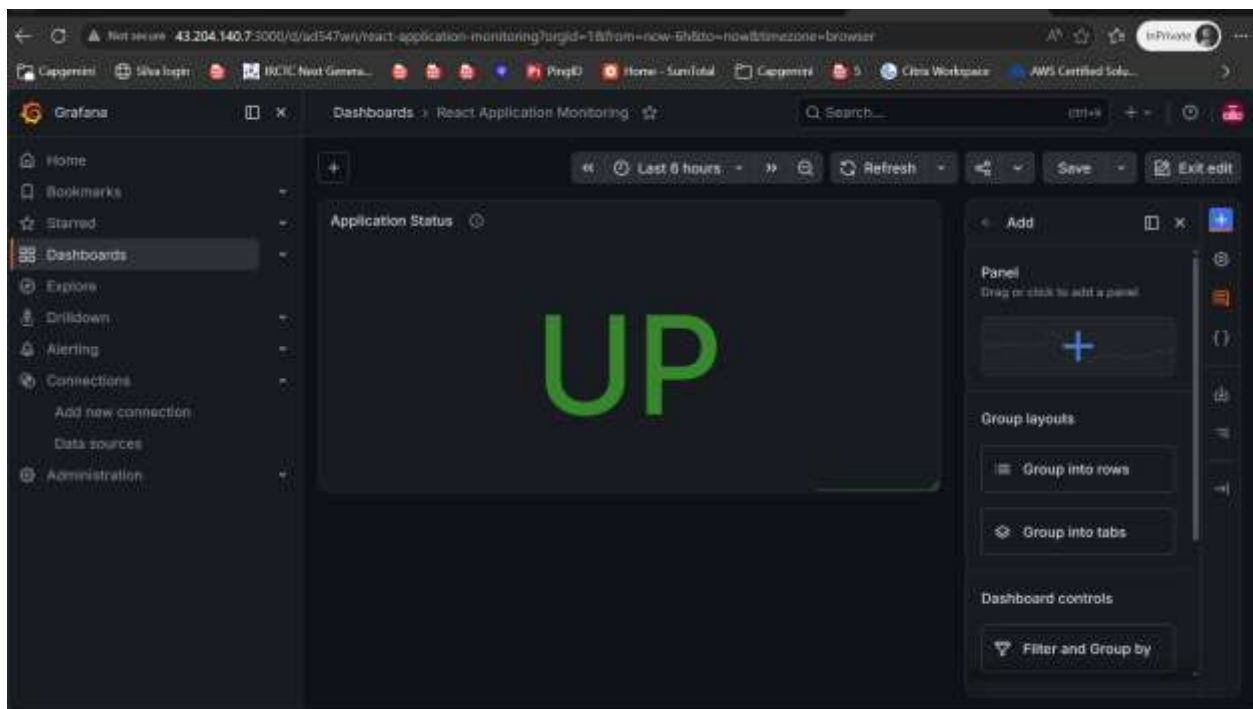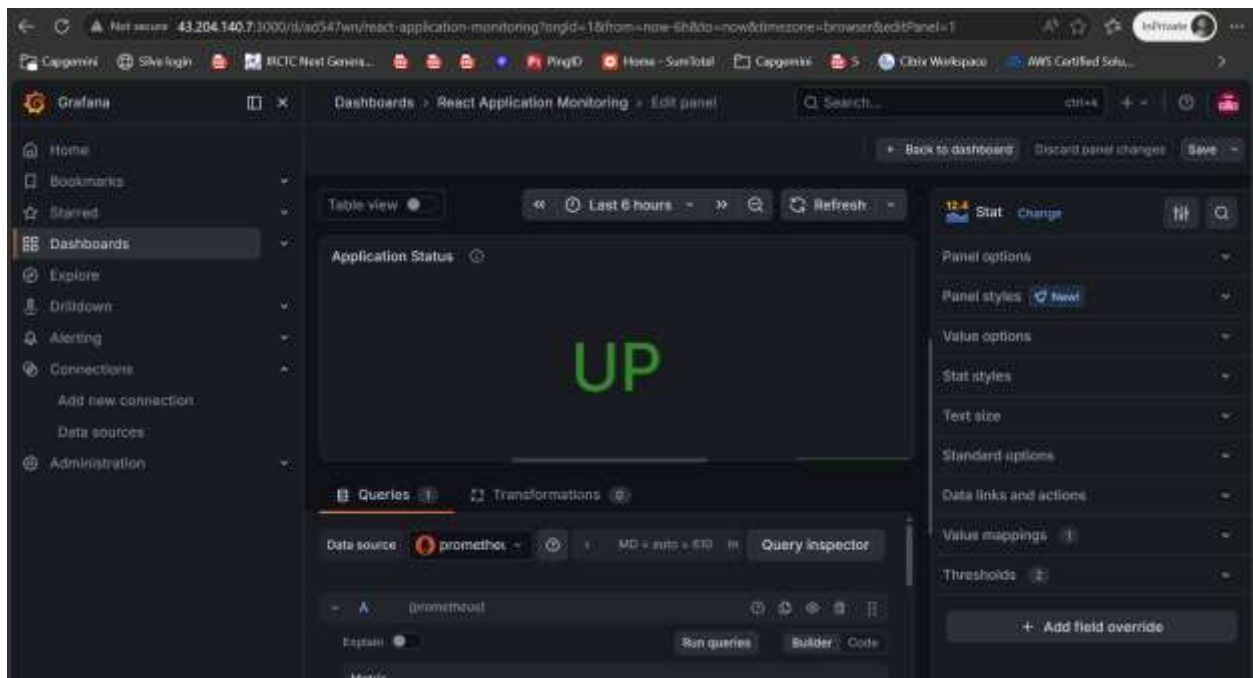


Add another panel

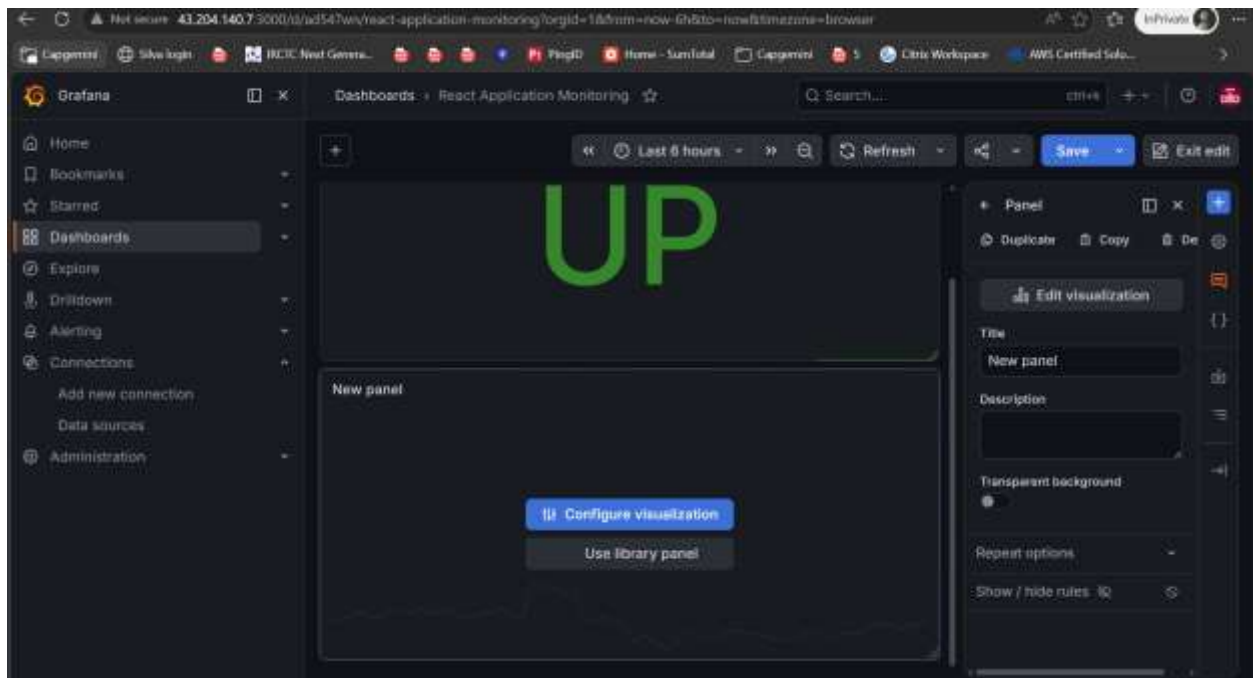


Select probe_duration_seconds

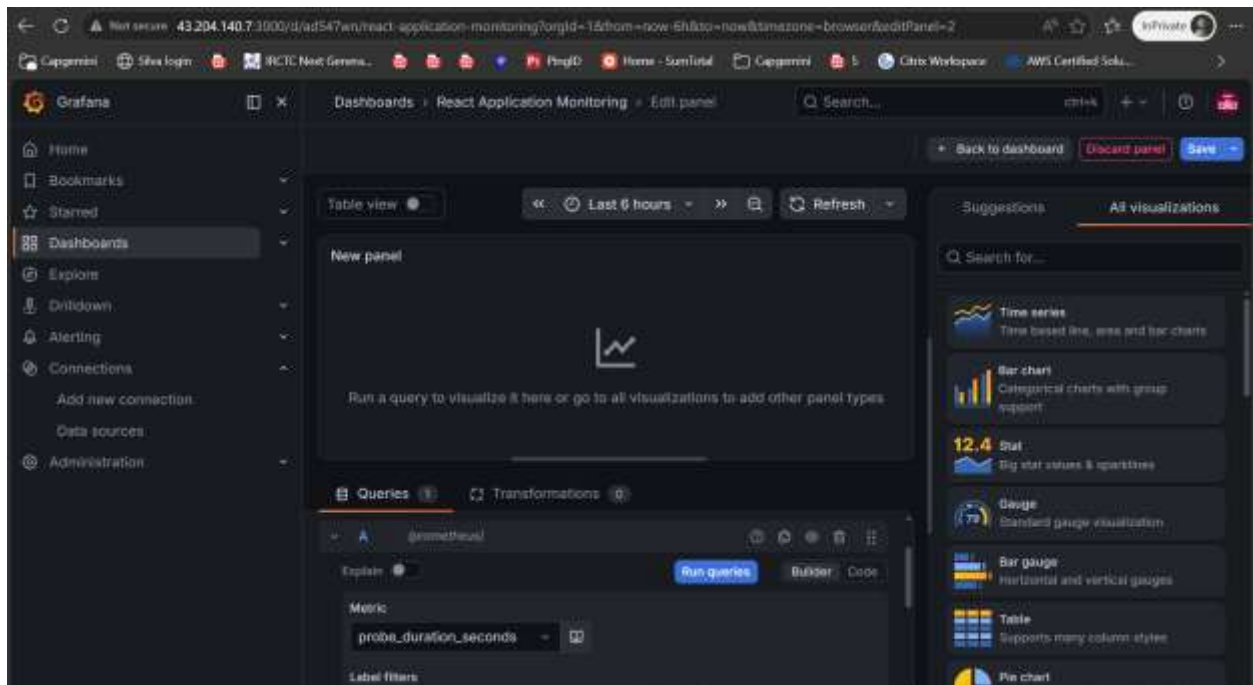


Select timeseries

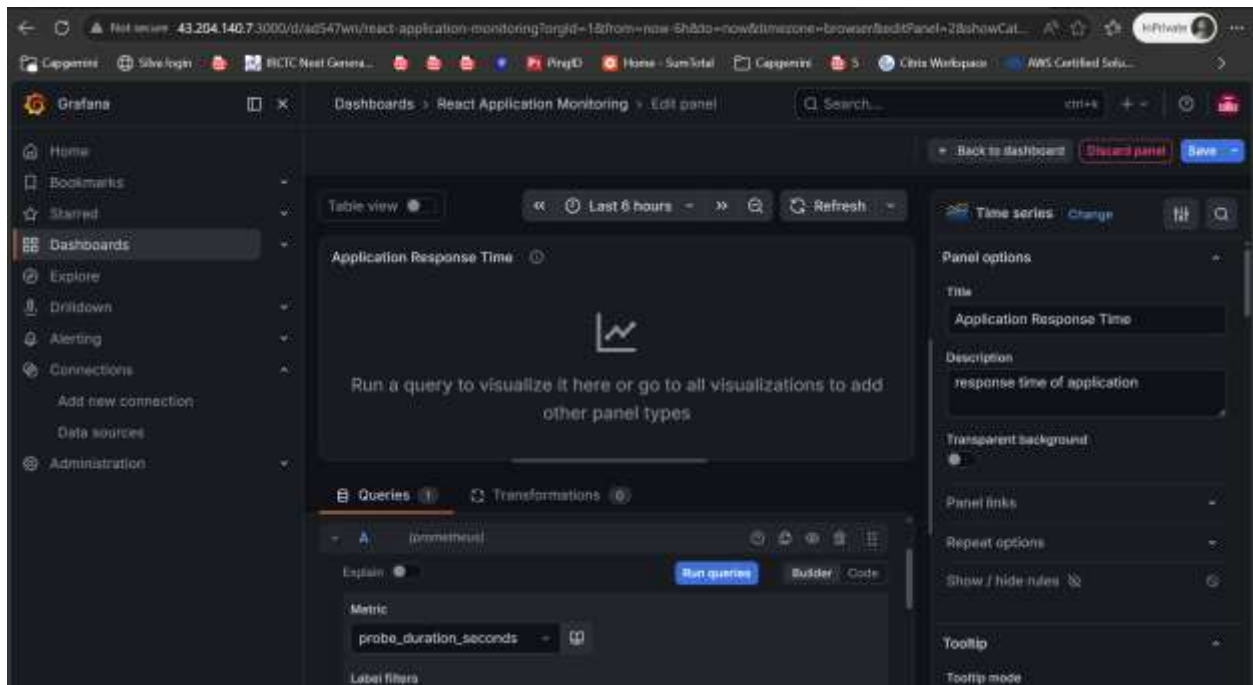

And save

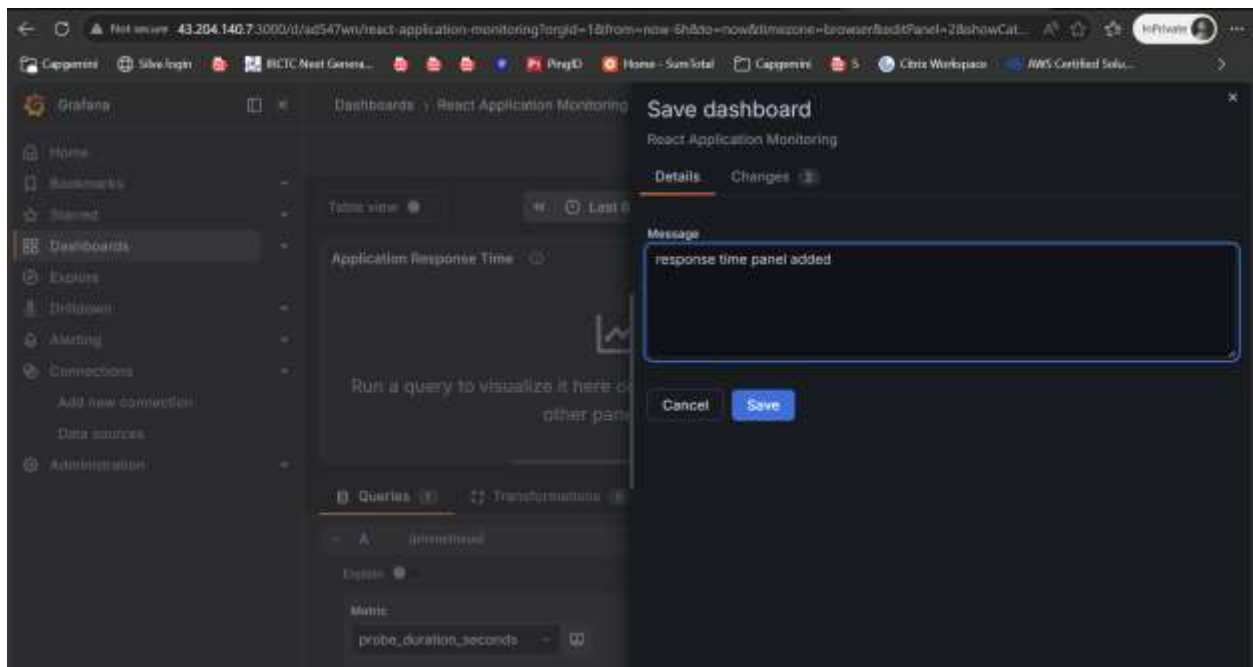

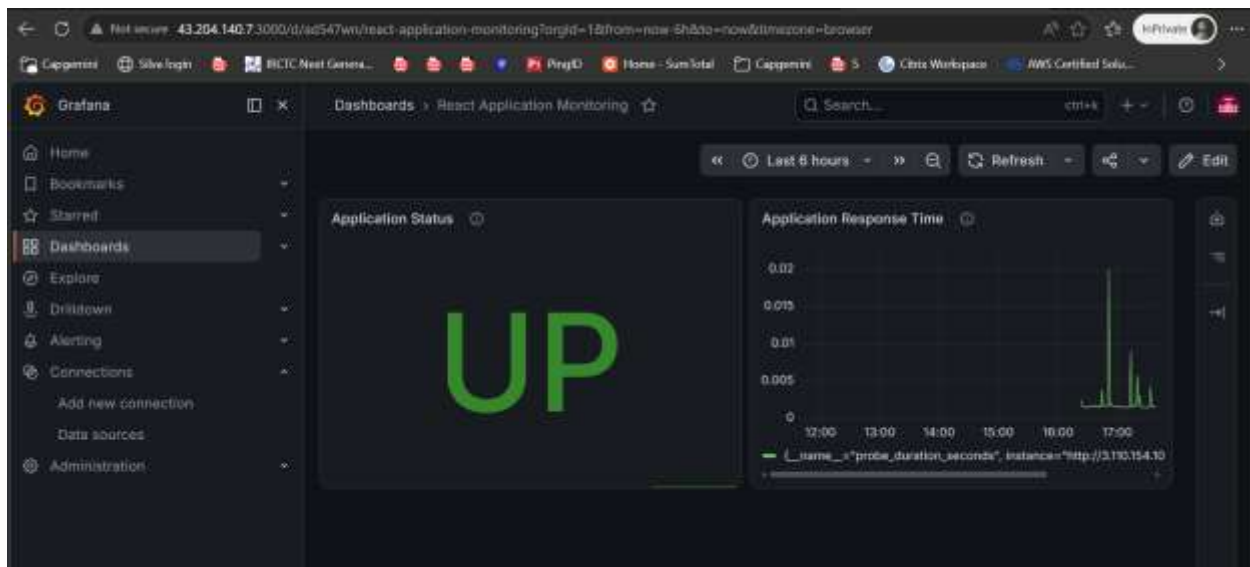

Now try to stop docker container running in application server

Login to jenkins server or application server where docker is running

Now we have stopped docker container

```
Expanded Security Maintenance for Applications is not enabled.
12 updates can be applied immediately.
To see these additional updates run: apt list --upgradable

Enable ESM Apps to receive additional future security updates.
See https://ubuntu.com/esm or run: sudo pro status

Last login: Thu Jul  9 08:15:23 2026 from 136.226.244.103
ubuntu@ip-172-31-4-192:~$ exit
logout
Connection to 3.110.154.104 closed.

CORP-HASELVARWIN-7C77X14 MINGW64 /c:/users/nasehvar/Downloads
$ ssh -i .pem ubuntu@3.110.154.104
Welcome to Ubuntu 26.04 LTS (GNU/Linux 7.0.0-1008-aws x86_64)

 * Documentation:  https://docs.ubuntu.com
 * Management:    https://landscape.canonical.com
 * Support:        https://ubuntu.com/pro

System information as of Thu Jul  9 12:10:26 UTC 2026


System load: 0.13          Processes:            126
Usage of /:  5.9% of 66.75GB Users logged in:             0
Memory usage: 87%          IPv4 address for eno1: 172.31.4.192
Swap usage:   0%

Expanded Security Maintenance for Applications is not enabled.
12 updates can be applied immediately.
To see these additional updates run: apt list --upgradable


Enable ESM Apps to receive additional future security updates.
See https://ubuntu.com/esm or run: sudo pro status

Last login: Thu Jul  9 11:20:42 2026 from 167.103.7.72
ubuntu@ip-172-31-4-192:~$ ls
devops-build
ubuntu@ip-172-31-4-192:~$ docker ps
CONTAINER ID   IMAGE          COMMAND                  CREATED    STATUS    PORTS    NAMES
d46daaff71de   66fc11b23b24   "/docker-entrypoint..." 3 hours ago Up 3 hours 0.0.0.0:80->80/tcp, [::]:80->80/tcp react-app-container
ubuntu@ip-172-31-4-192:~$ docker stop react-app-container
ubuntu@ip-172-31-4-192:~$ docker ps -a
CONTAINER ID   IMAGE          COMMAND                  CREATED    STATUS    PORTS    NAMES
d46daaff71de   66fc11b23b24   "/docker-entrypoint..." 3 hours ago Exited (0) 5 seconds ago          react-app-container
ubuntu@ip-172-31-4-192:~$
```


Server is not accessible

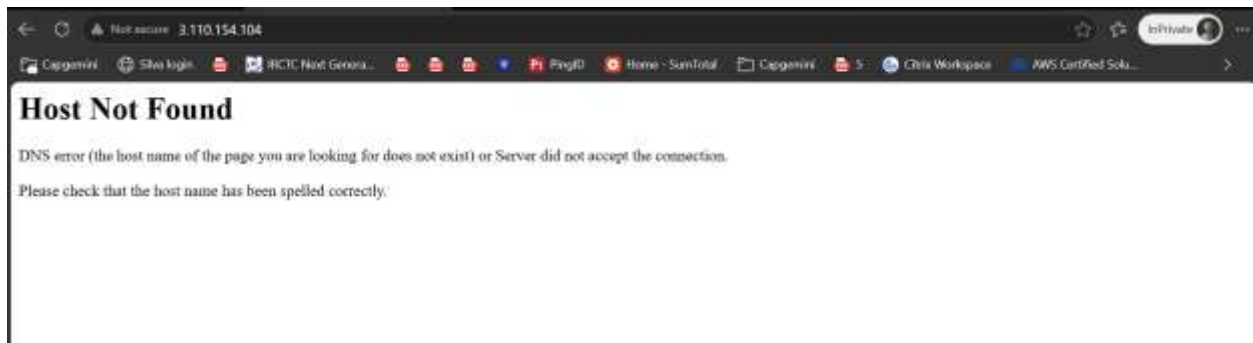


In Prometheus we see alert

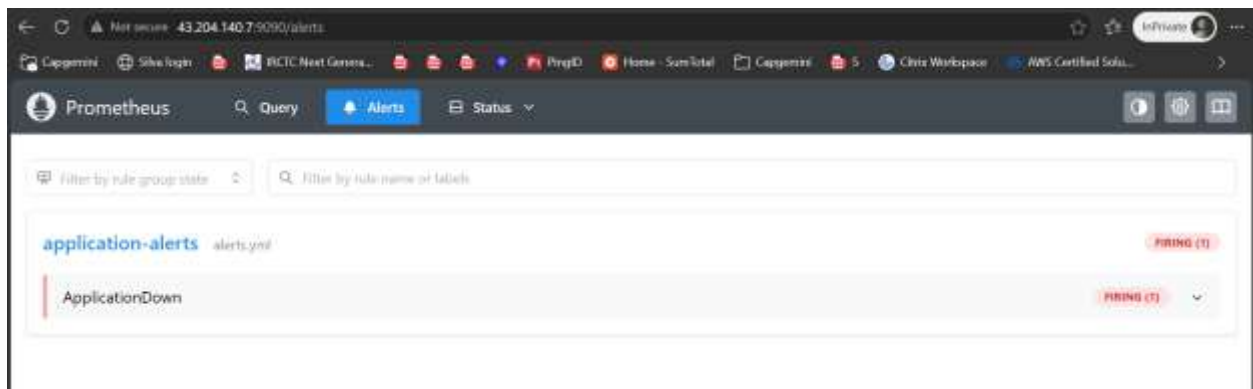


In alert manager we see alert also

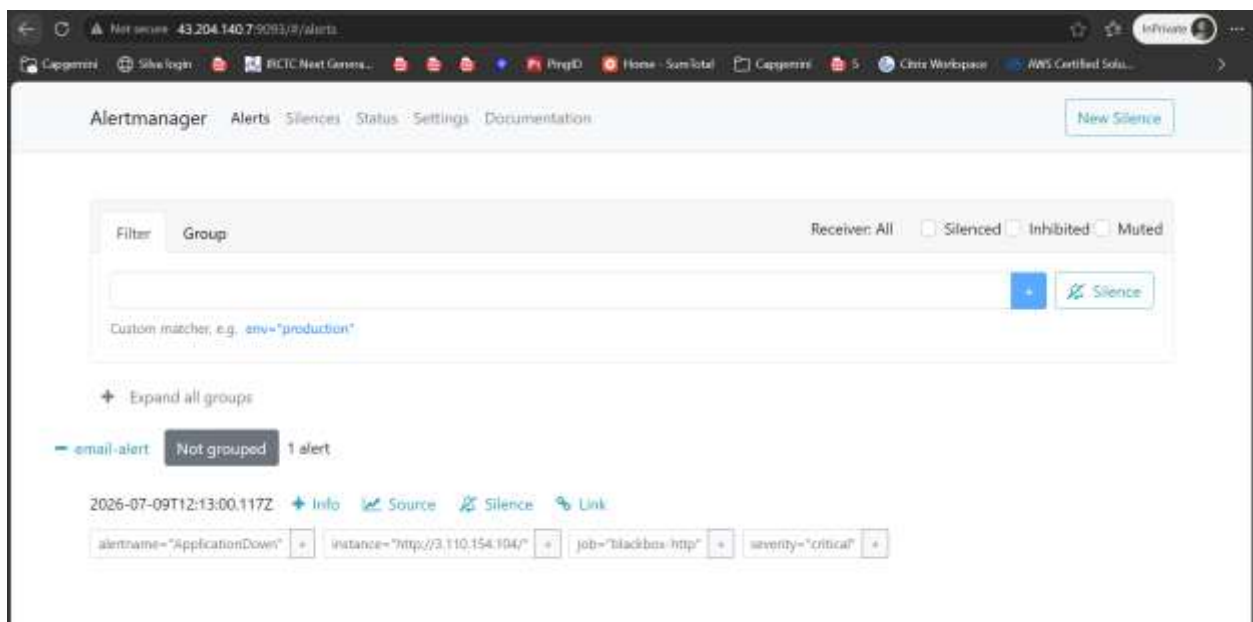

And also we received email

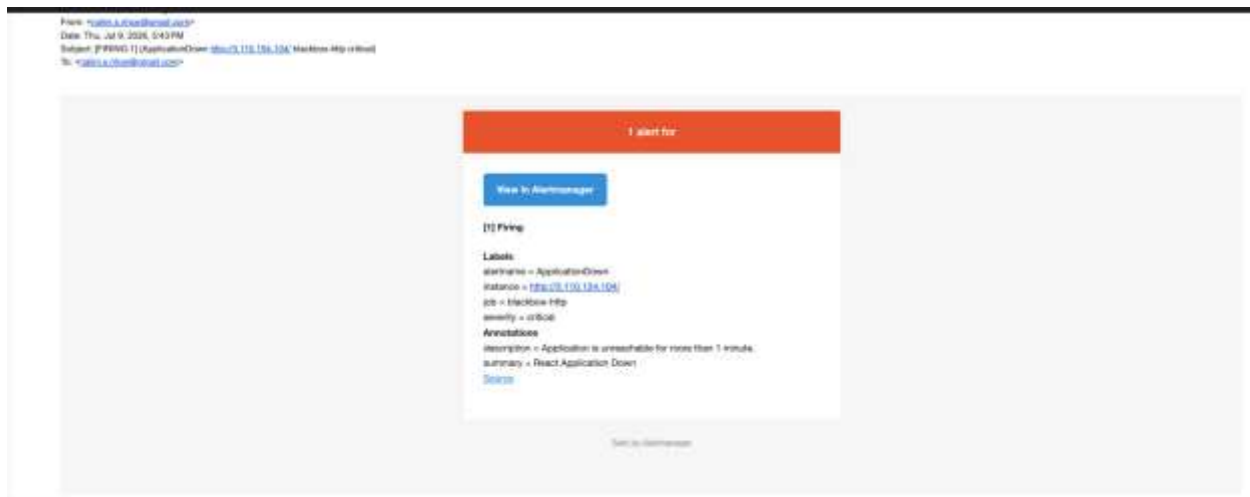

And also we see in Grafana dashboard

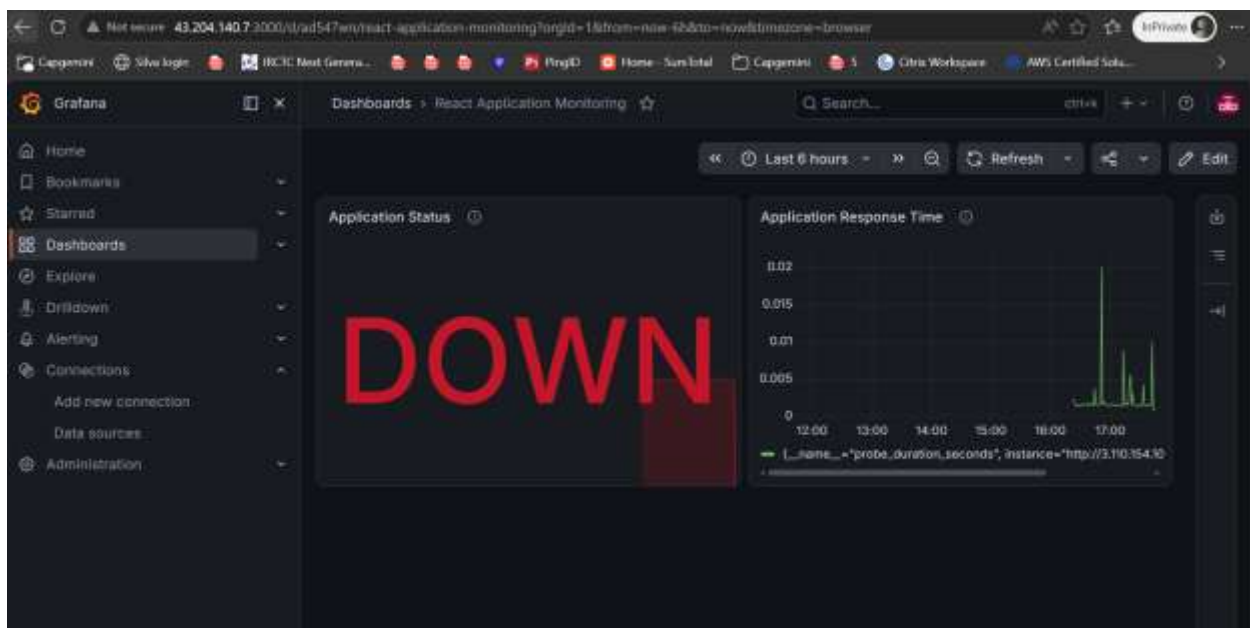

We tried to start now docker container manually


```

d46daaff773de 66fc22b23b24 /docker-entrypoint... 3 hours ago Exited (0) 3 seconds ago react-app-container
ubuntu@ip-172-31-4-192:~$ docker start react-app-container
react-app-container
ubuntu@ip-172-31-4-192:~$ docker ps -a
CONTAINER ID   IMAGE     COMMAND                  CREATED    STATUS    PORTS
d46daaff773de 66fc22b23b24  "/docker-entrypoint..." 3 hours ago    Up 6 seconds    0.0.0.0:80->80/tcp, [::]:80->80/tcp
ubuntu@ip-172-31-4-192:~$


```

See Prometheus ,alert manager and Grafana now


Now we see inactive

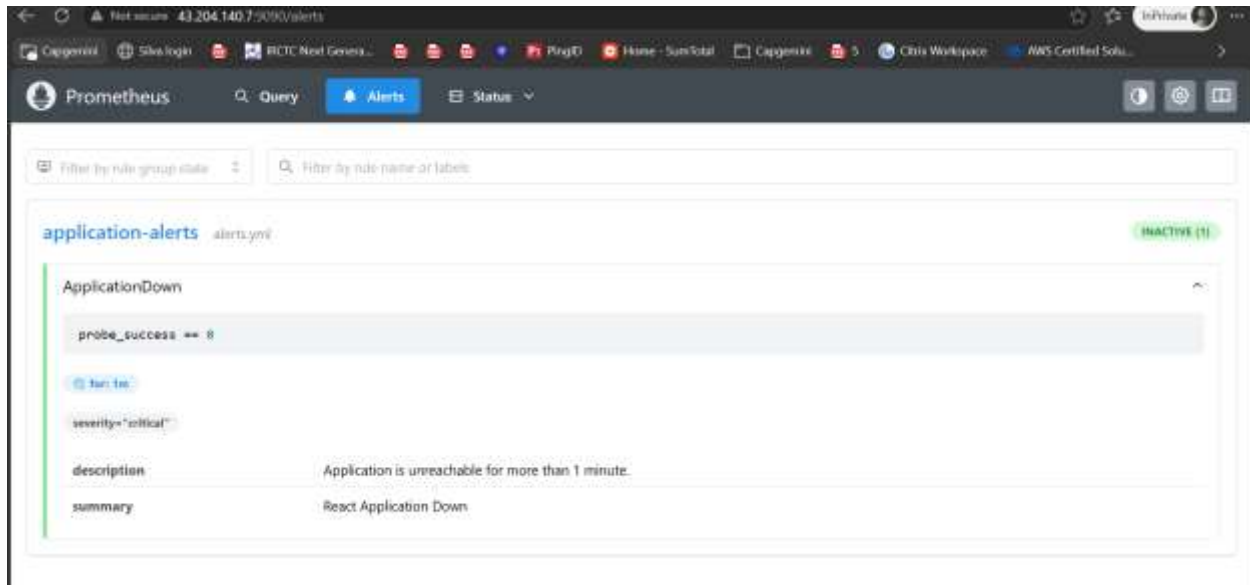


Alert has gone

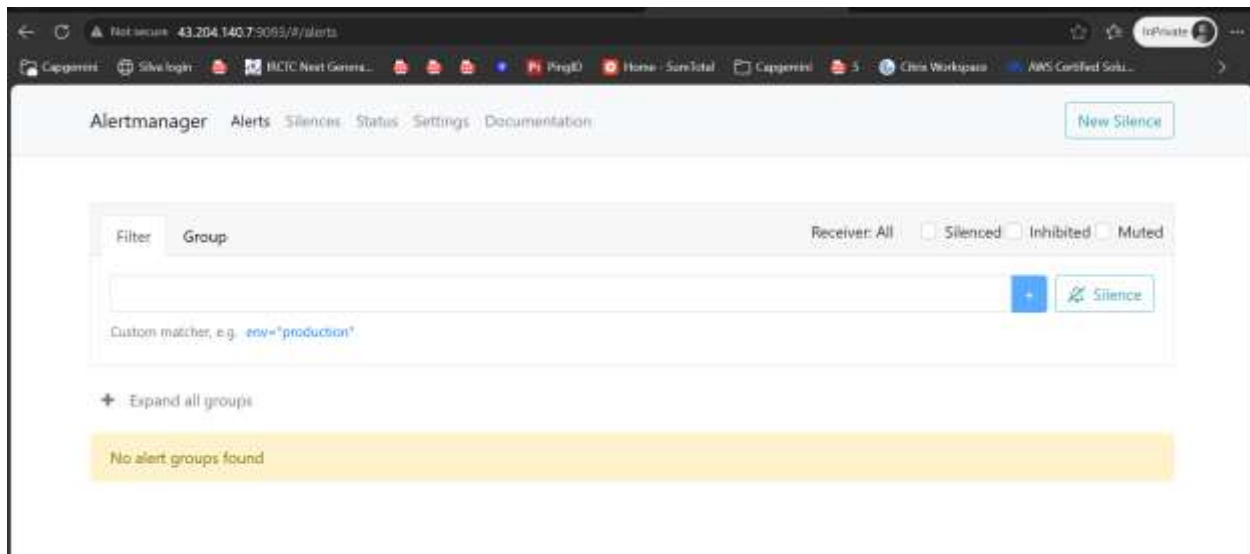


And also we received email about resolution

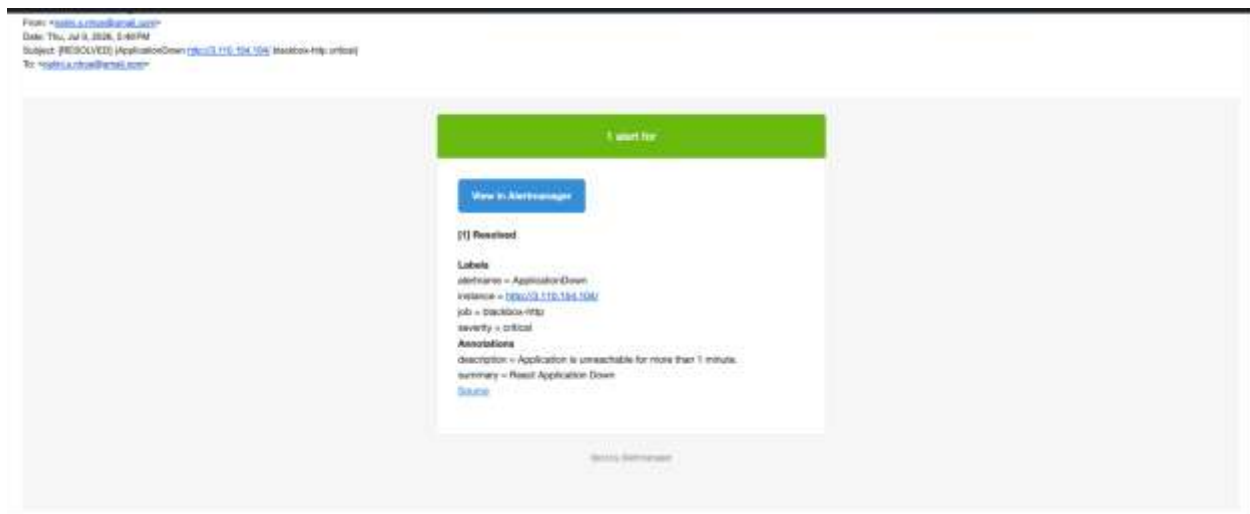

And also Grafana dashboard is up now

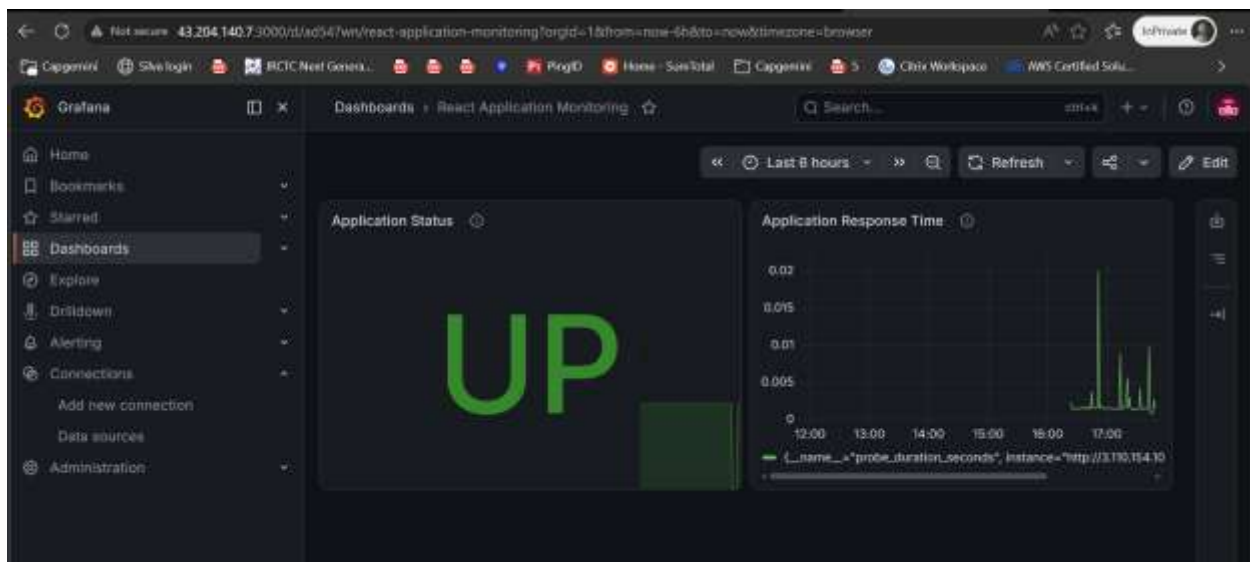

App URL also accessible

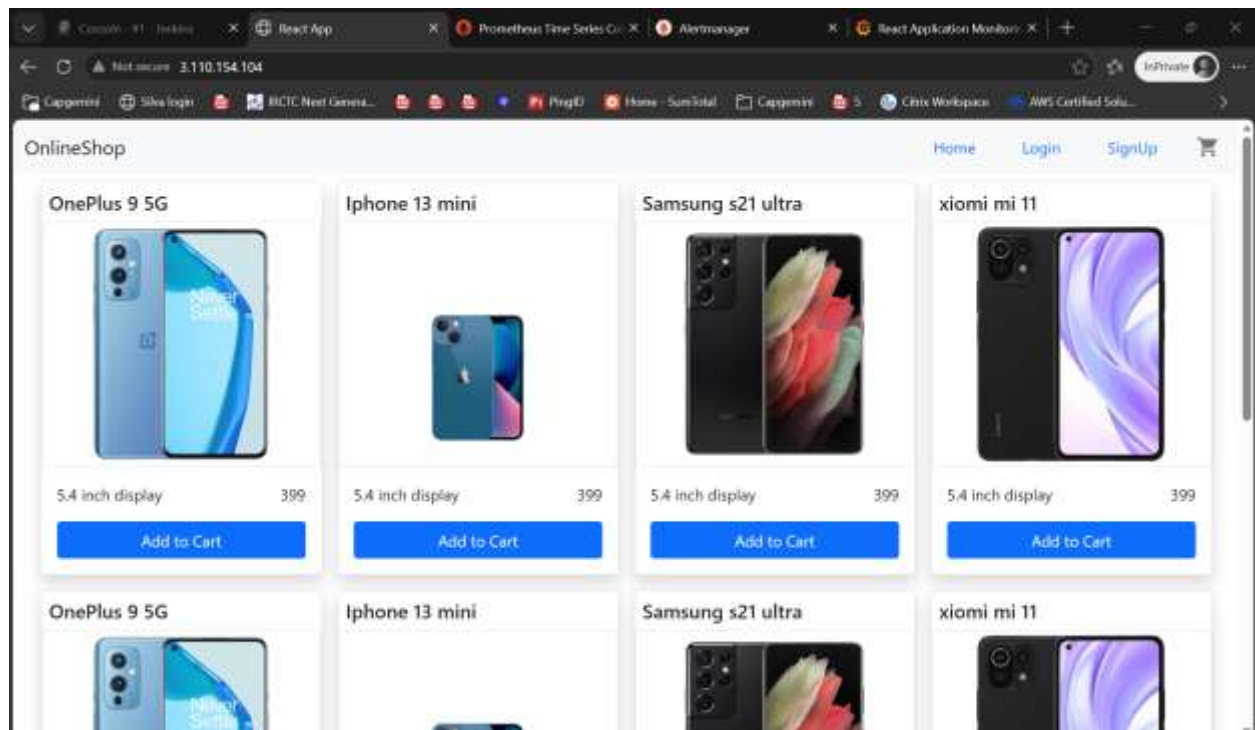

Application URL:

[http:// 3.110.154.104:80/](http://3.110.154.104:80/)

Prometheus URL

<http://43.204.140.7:9090/>


Grafana url:

<http://43.204.140.7:3000/>

Alert manager URL:

<http://43.204.140.7:9093/>

below is structure

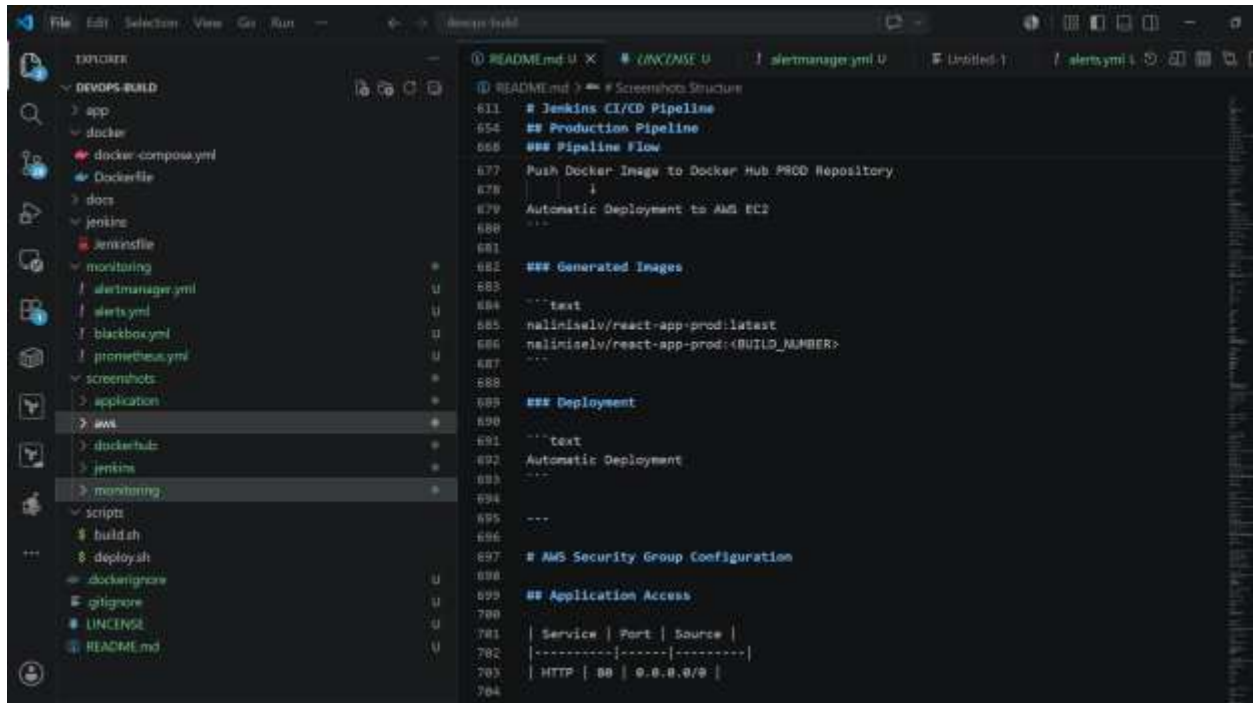

Try to stage and commit changes and push to git hub.

