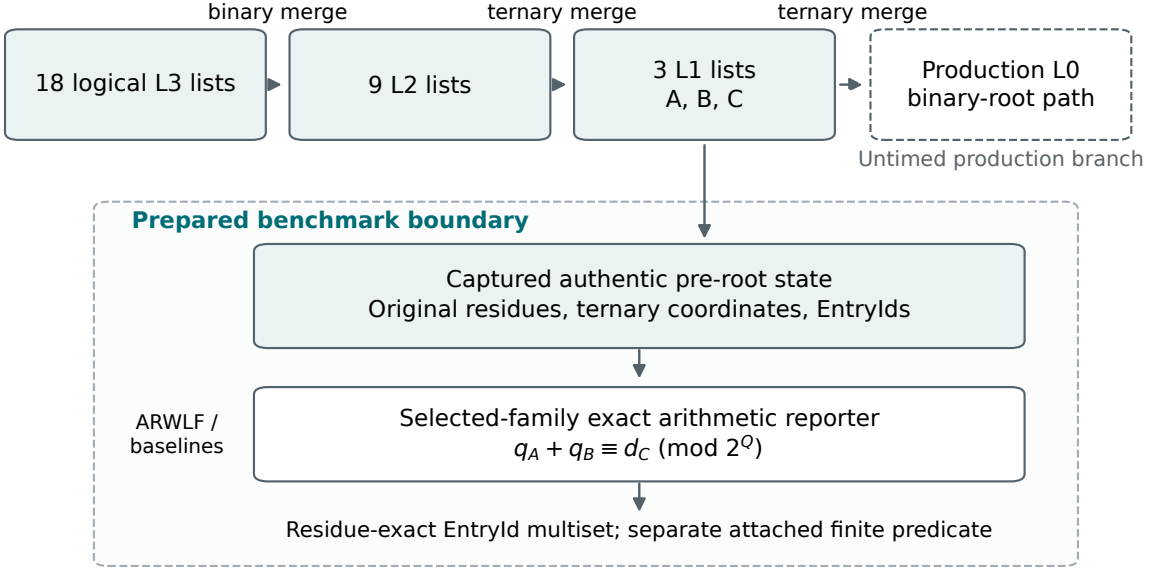
Complete native construction and isolated reporting boundary
binary merge
ternary merge
ternary merge
18 logical L3 lists
9 L2 lists
3 L1 lists
A, B, C
Production L0
binary-root path
Untimed production branch
Prepared benchmark boundary
Captured authentic pre-root state
Original residues, ternary coordinates, EntryIds
ARWLF /
baselines
Selected-family exact arithmetic reporter
$q_A + q_B \equiv d_C \pmod{2^Q}$
Residue-exact EntryId multiset; separate attached finite predicate