
Project Management with Git

INTRODUCTION TO VERSION CONTROL AND GIT

- Login to Github.com
- Settings>DeveloperSettings> Personal Access Tokens
- Generate Token for general use
- Write a note like “first token”
- Choose all the options
- Generate Token
- Copy token and save in notepad

Tools > Options > Authentication > Add

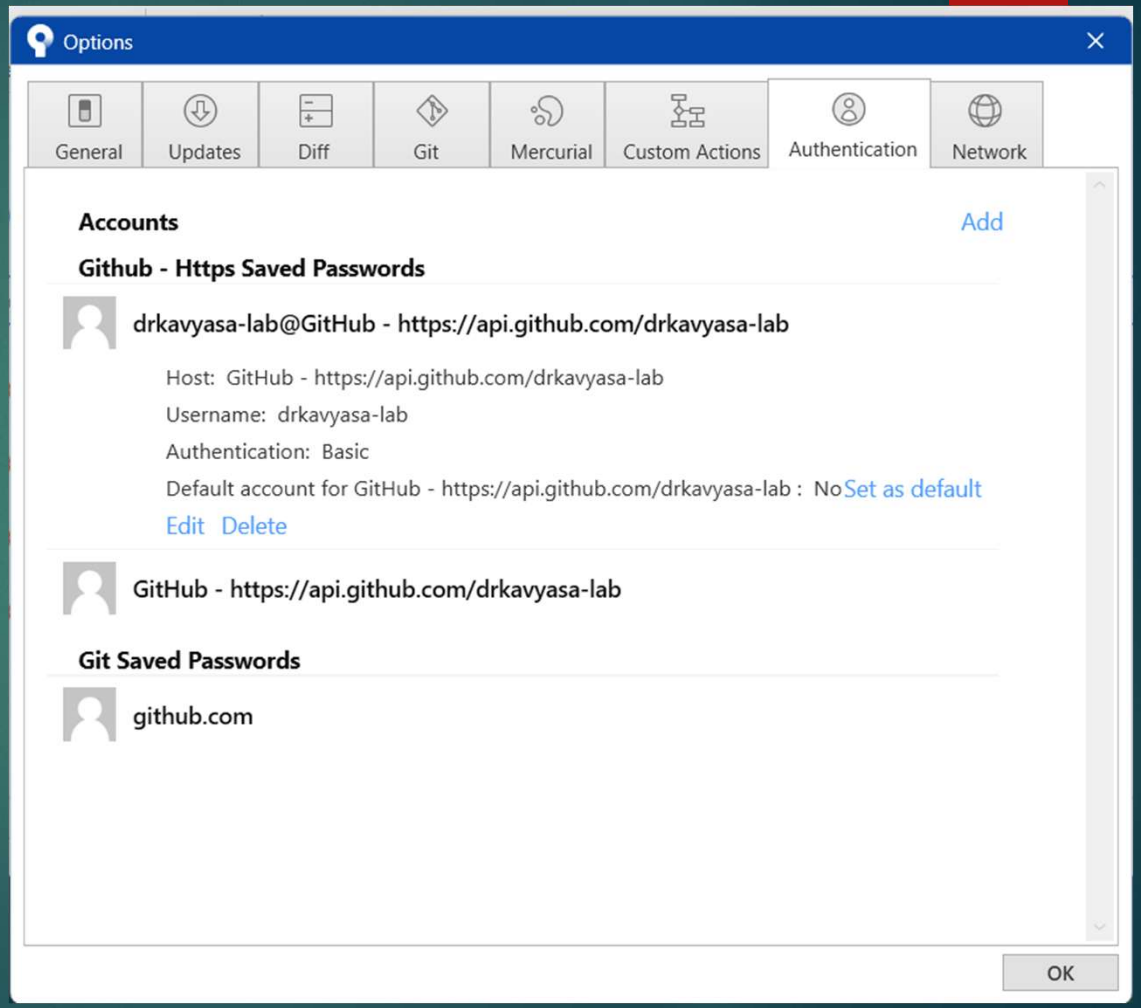



Generate new personal access token on Github

- **Creating a Personal Access Token (Classic)**
- Verify your email address if it is not yet verified.
- Click your **profile picture** and select **Settings**.
- In the left sidebar, click **Developer settings**.
- Under **Personal access tokens**, click **Tokens (classic)**.
- Click **Generate new token**, then **Generate new token (classic)**.
- Enter a descriptive **Note** and select an **Expiration(any)**.
- Select the scopes you want to grant (e.g., **repo** for repository access).
- Click **Generate token**.

Choose Personal Access Token Option

Click on Refresh Personal Access Toke

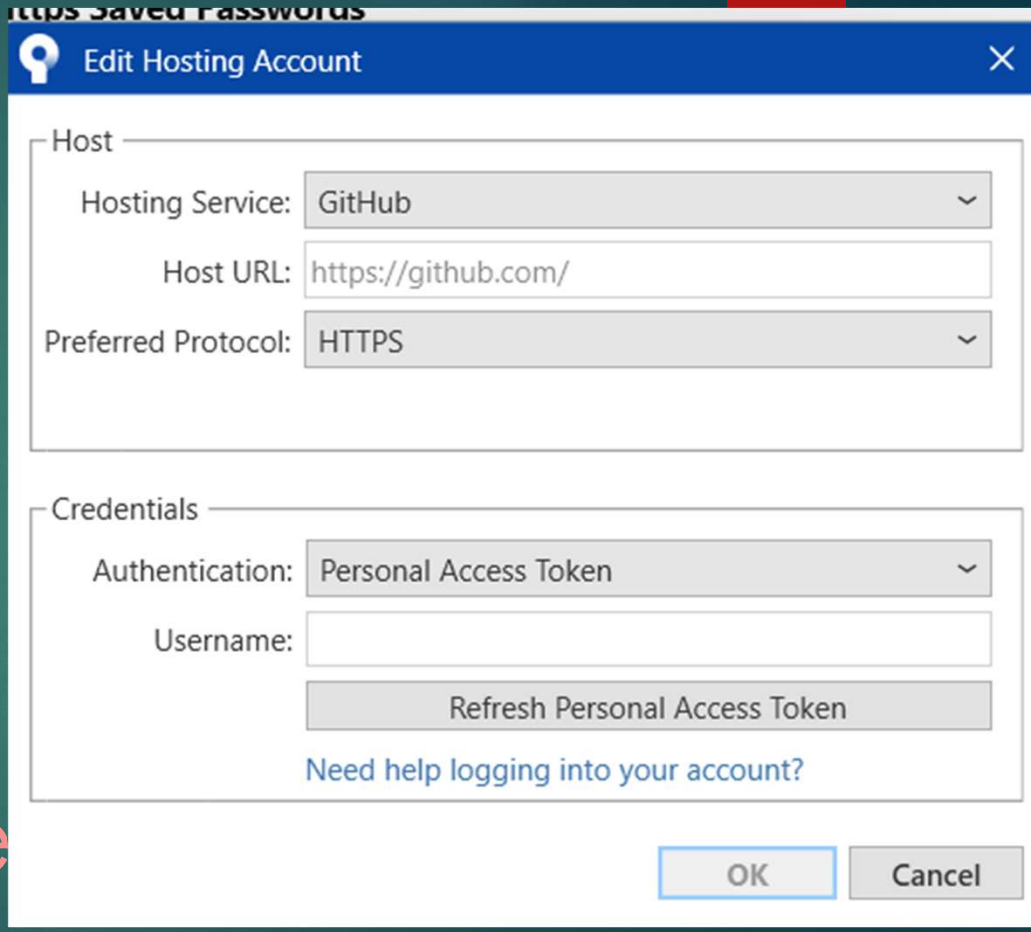

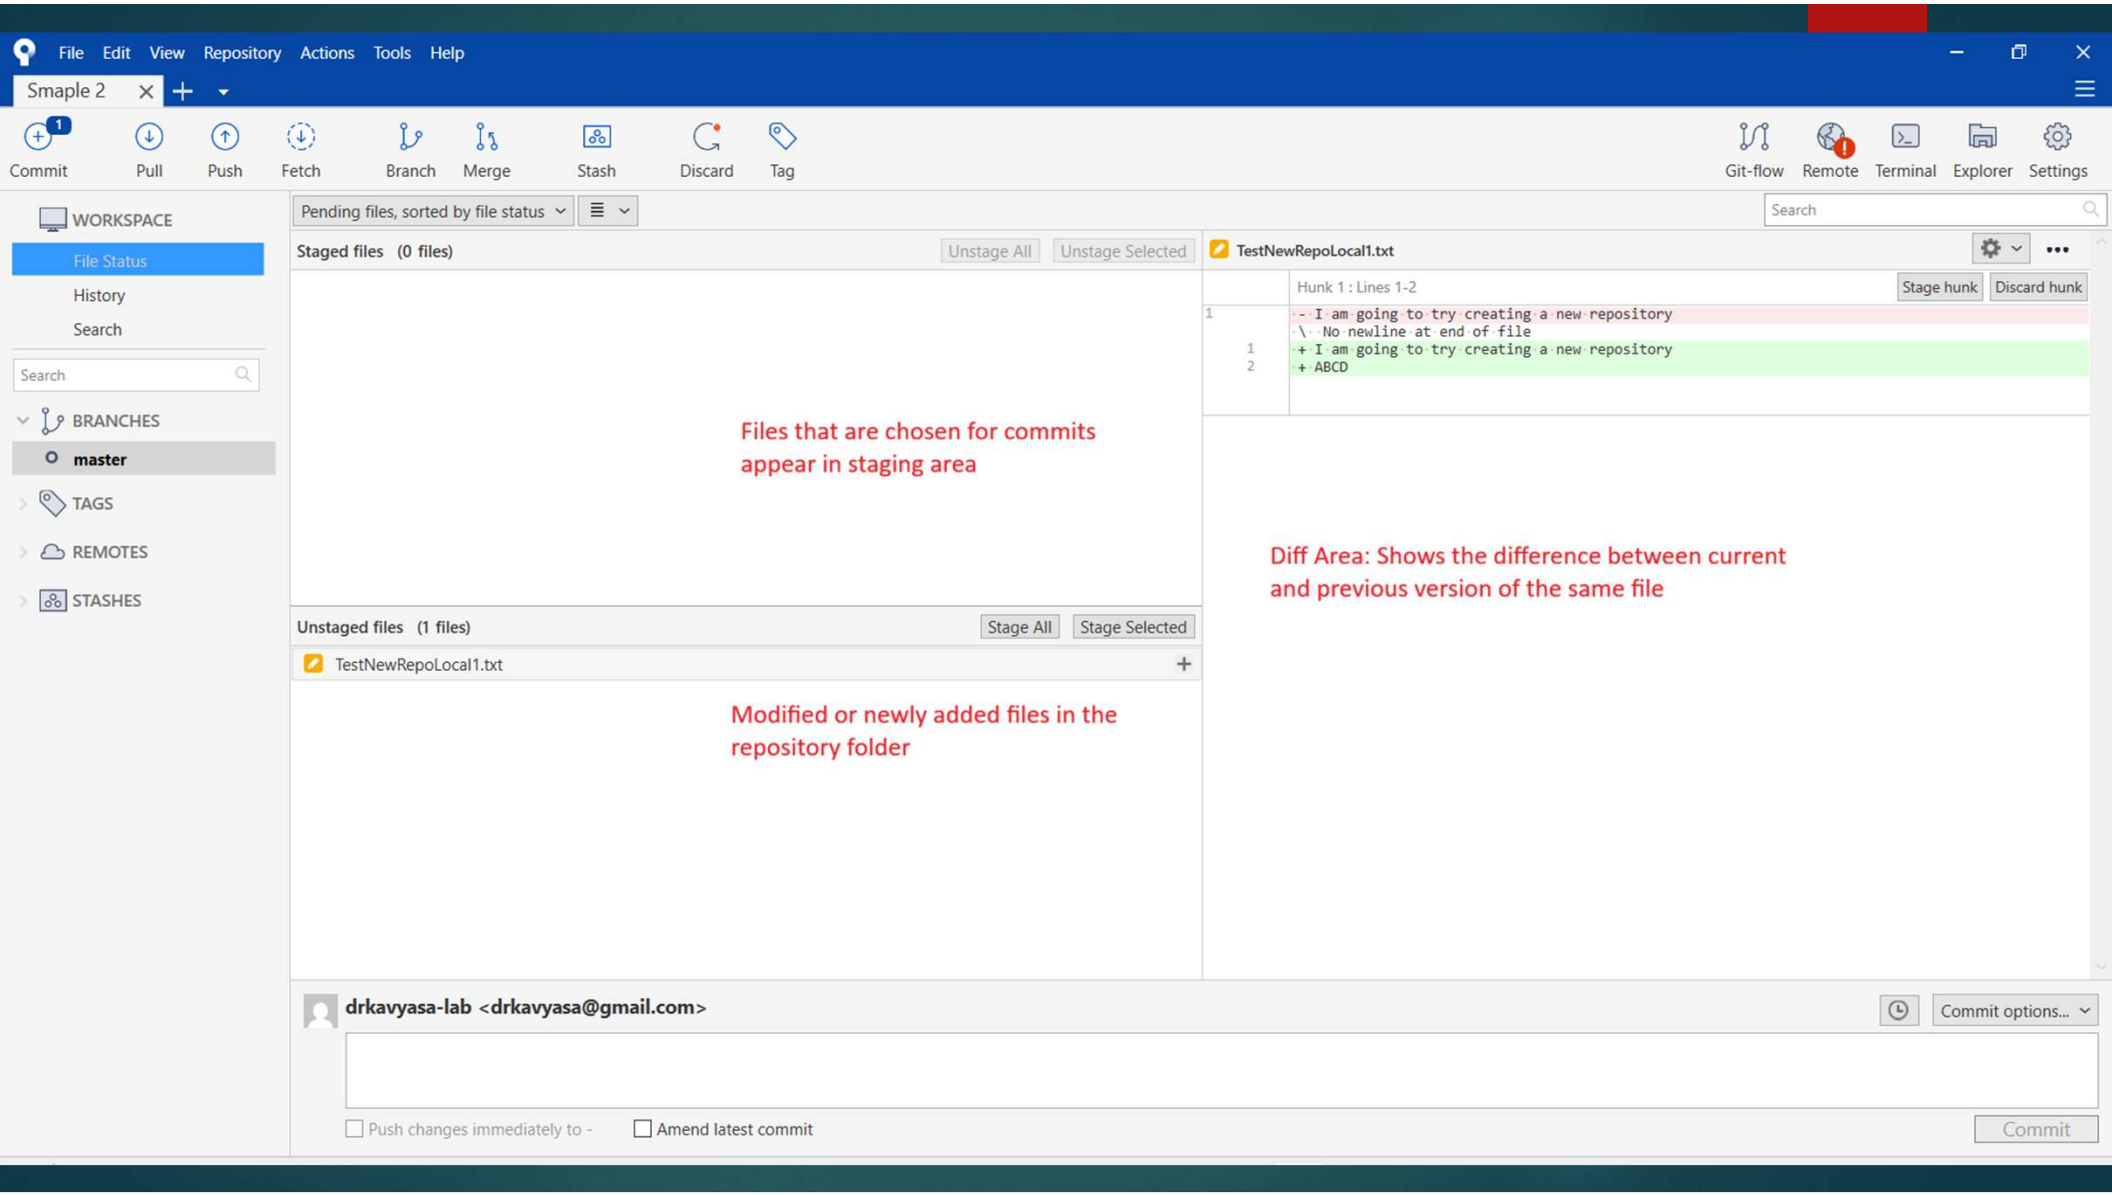
File Edit View Repository Actions Tools Help
Smaple 2
Commit
Pull
Push
Fetch
Branch
Merge
Stash
Discard
Tag
Git-flow
Remote
Terminal
Explorer
Settings
WORKSPACE
File Status
History
Search
BRANCHES
master
TAGS
REMOTES
STASHES
Pending files, sorted by file status
Search
Staged files (0 files)
Unstage All
Unstage Selected
Files that are chosen for commits appear in staging area
Unstaged files (1 files)
Stage All
Stage Selected
TestNewRepoLocal1.txt
Modified or newly added files in the repository folder
TestNewRepoLocal1.txt
Hunk 1 : Lines 1-2
Stage hunk
Discard hunk
- I am going to try creating a new repository
\ No newline at end of file
+ I am going to try creating a new repository
+ ABCD
Diff Area: Shows the difference between current and previous version of the same file
drkavyasa-lab <drkavyasa@gmail.com>
Commit options...
Push changes immediately to -
Amend latest commit
Commit

Activity

- Download Git
- Download Source Tree
- Create a new local repository (This will create a new folder if it doesn't exist)
- If you don't have a git hub account create one (use the same account you used to sign in to source tree)
- Create a new repository
- Go to settings in source tree and add remote repository

Activity

- Add text files Test1.txt and Test2.txt type random text like “Testing git or my initial trial setup”
- Stage Test1.txt and commit
- Go to terminal and type “git status”
- Note down the status - A
- Commit Test2.txt , check git status again
- Note down the status and compare with A. What is your observation?