

CTF 6 — Active or Inactive?

Goal: Display different UI depending on a student's status using Angular's conditional rendering.

School Request

"Some students are inactive."

Today's mission introduces `*ngIf`, one of Angular's most important directives. Instead of showing everything all the time, your Student Portal should decide what appears based on data.

You'll also prepare your app for real-world situations like empty lists and loading screens.

Flag 1 — Prepare Your Mission

Objective: Create a new branch for today's challenge.

Create and switch to a new Git branch.

Branch name:

`feature/conditional-ui`

Screenshot:

- The command used to create and switch to the new branch.

```
Student@COLLEGEPC-9 MINGW64 ~/my-first-angular-app (feature/event-binding)
● $ git checkout -b feature/conditional-ui
Switched to a new branch 'feature/conditional-ui'
```

Flag 2 — Give Students a Status

Objective: Add an **active** property to every student.

Each student object should now include a boolean status.

Example idea:

- **true**
- **false**

Make sure some students are active while others are inactive.

Screenshot:

- Your student data showing the new **active** property.

```
students = [  
  {  
    name: 'Jownie Ann D. Malate',  
    course: 'BSIT',  
    year: '4th Year',  
    isFavorite: false,  
    active: true  
  },  
  {  
    name: 'Mary Beth D. Gracia',  
    course: 'BSIT',  
    year: '4th Year',  
    isFavorite: false,  
    active: false  
  },  
  {  
    name: 'Kurt Wojtyle S. Rizal',  
    course: 'BSCS',  
    year: '1st Year',  
    isFavorite: false,  
    active: true  
  },  
  {  
    name: 'Niel Jhon E. Celocia',  
    course: 'BSIT',  
    year: '4th Year',  
    isFavorite: false,  
    active: false  
  }  
];
```

Flag 3 — Reveal Active Students


Objective: Display an "Active" badge only for active students.

Use Angular's `*ngIf` directive.

Hint: The badge should only appear when a student's status is `true`.

Screenshot:

- An active student displaying the badge.

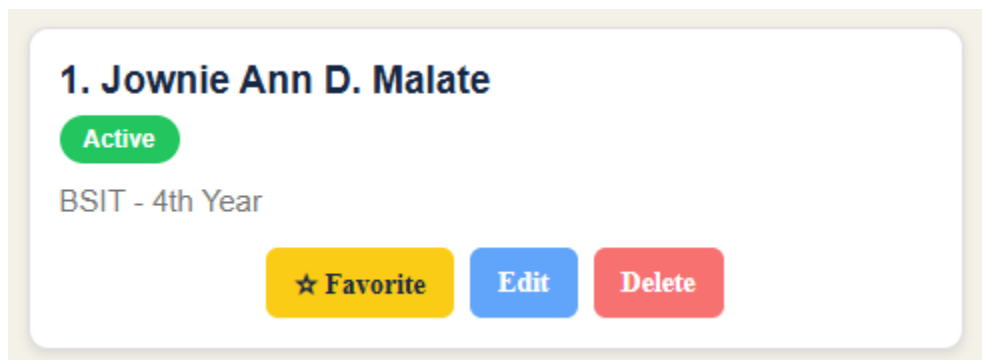

Flag 4 — Expose Inactive Students

Objective: Show a different badge for inactive students.

If a student isn't active, display something like:

- Inactive
- Disabled
- Offline

Use Angular's `else` template with `*ngIf`.

Screenshot:

- One active student.
- One inactive student.



Flag 5 — Lock Inactive Actions

Objective: Prevent inactive students from using actions.

Choose one action button such as:


- Edit
- Favorite
- Delete

Only show or enable that button when the student is active.

Hint: `*ngIf` can hide elements completely.

Screenshot:

- Active student with the button visible.
- Inactive student with the button hidden or disabled.

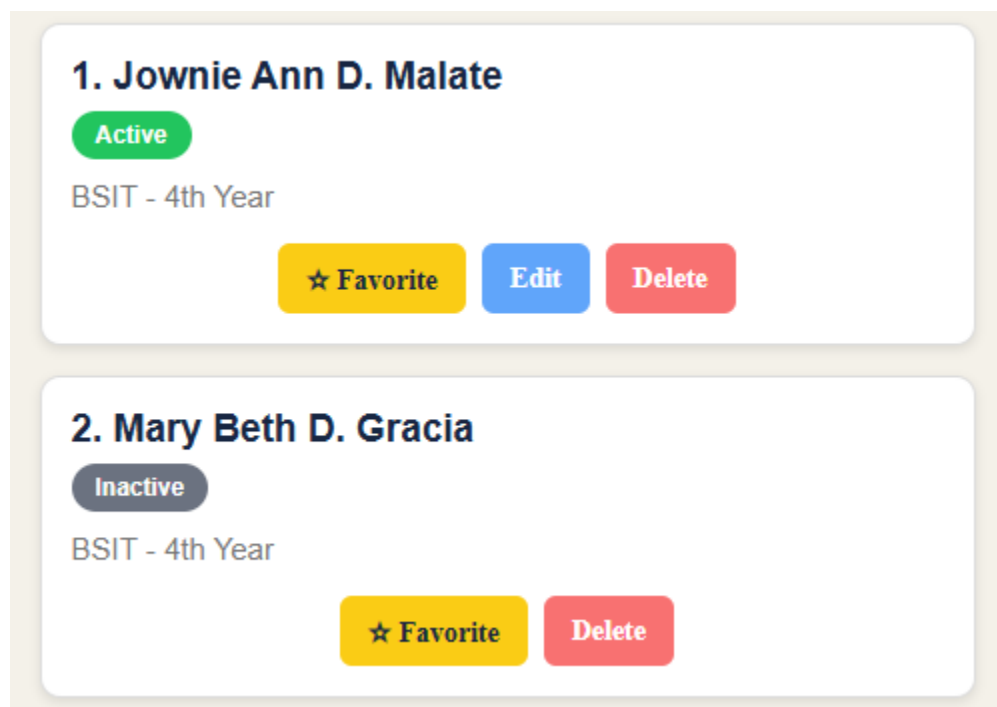

Flag 6 — Build an Empty State

Objective: Prepare for when there are no students.

If the student list becomes empty, display a friendly message instead of blank space.

Example ideas:



No students found.

Add your first student.

Hint: Check the array's length with `*ngIf`.

Screenshot:

- Student list before becoming empty.
- Empty-state message after removing all students.

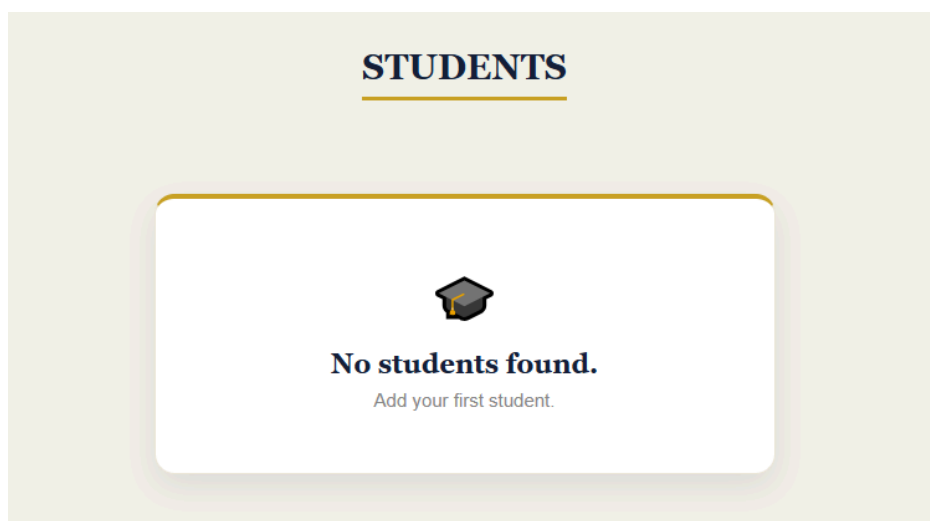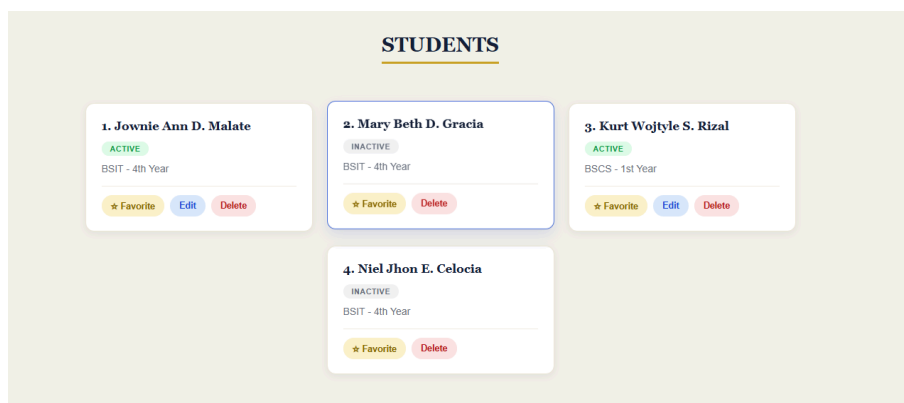

Flag 7 — Simulate Loading

Objective: Create a fake loading screen.

Before displaying the Student Portal, show a loading message.

Ideas:



- Loading students...
- Spinner icon
- Skeleton cards

After changing the loading variable, the student list should appear.

Hint: Use a boolean variable with `*ngIf`.

Screenshot:

- Loading screen.
- Student Portal after loading.

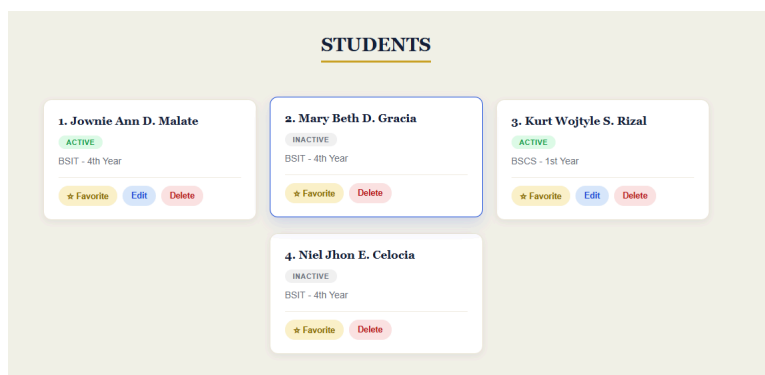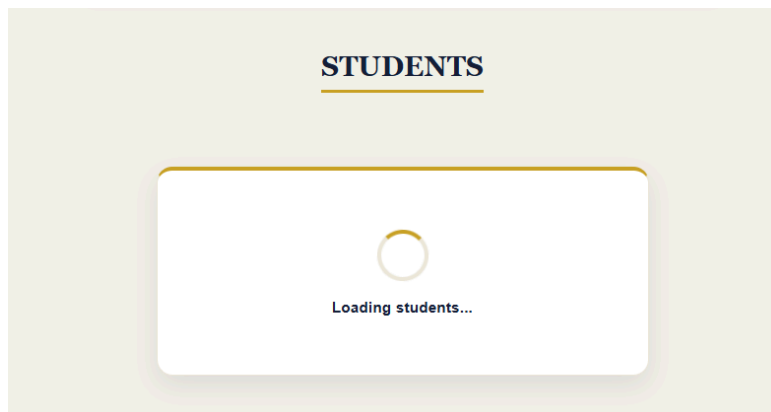

Flag 8 — Mission Complete


Objective: Your Student Portal should now display a different UI depending on its current state.



Checklist

- Students have an **active** property.
- Active students display an Active badge.
- Inactive students display an Inactive badge.
- At least one action changes based on student status.
- An empty-state message appears when no students exist.
- A loading screen appears before the student list.

Screenshot:

- Your completed Student Portal showing active and inactive students, conditional badges, loading state, and empty state working correctly.

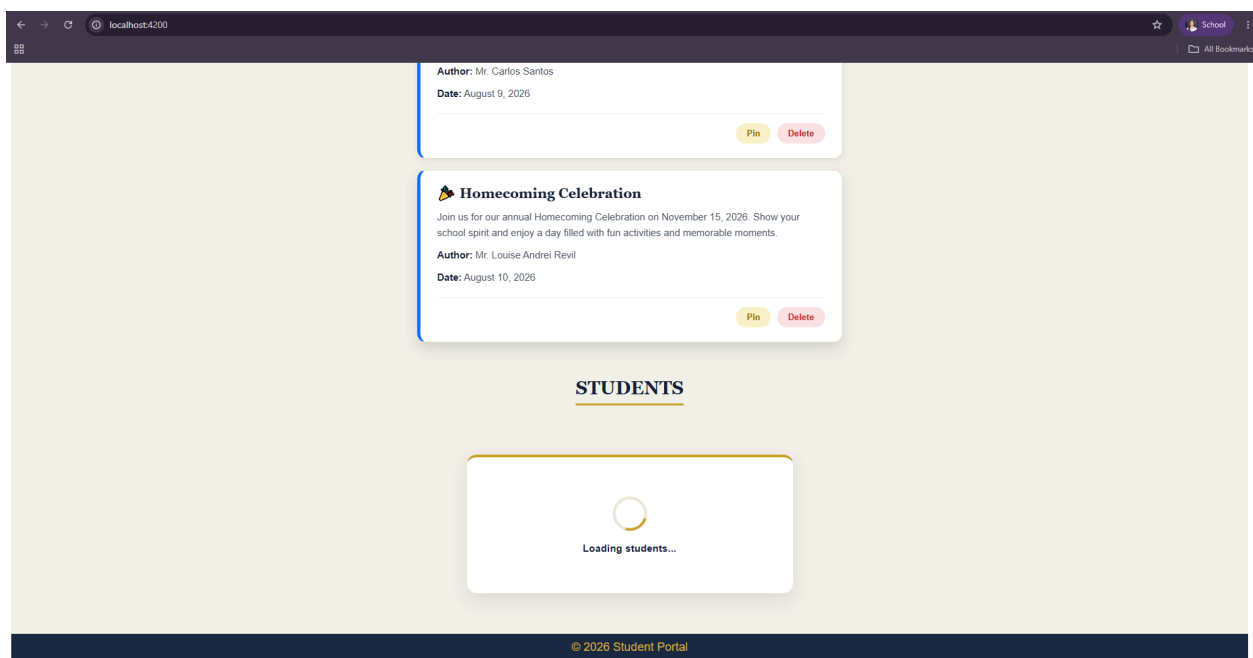

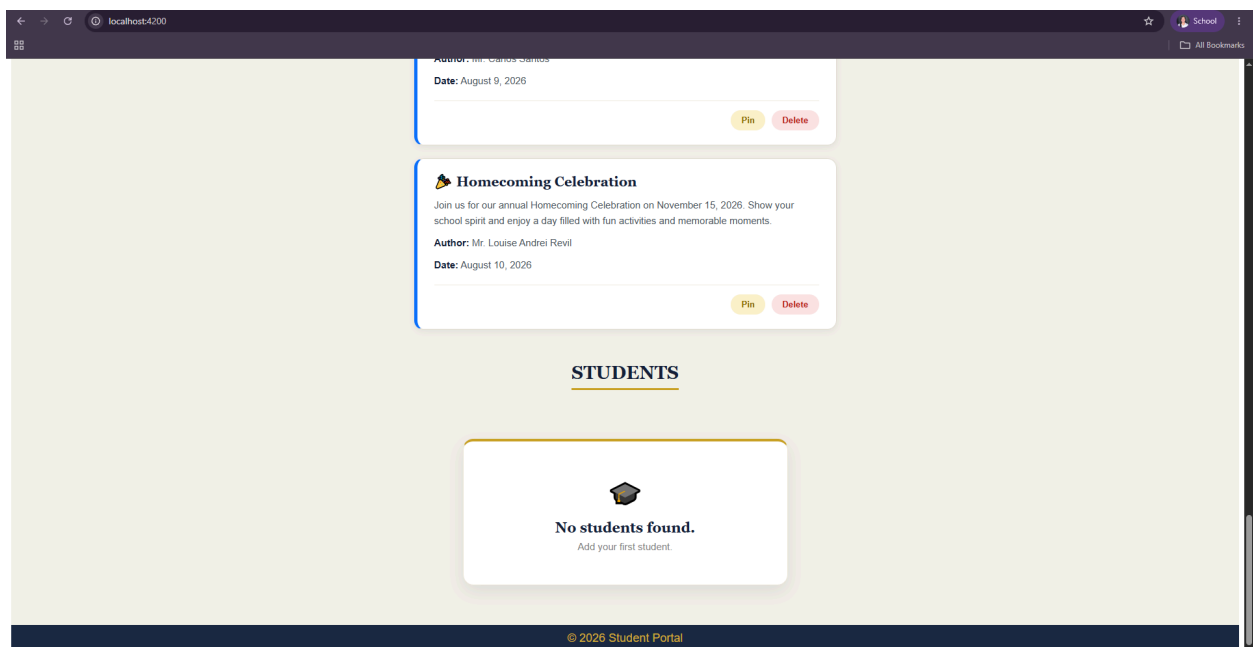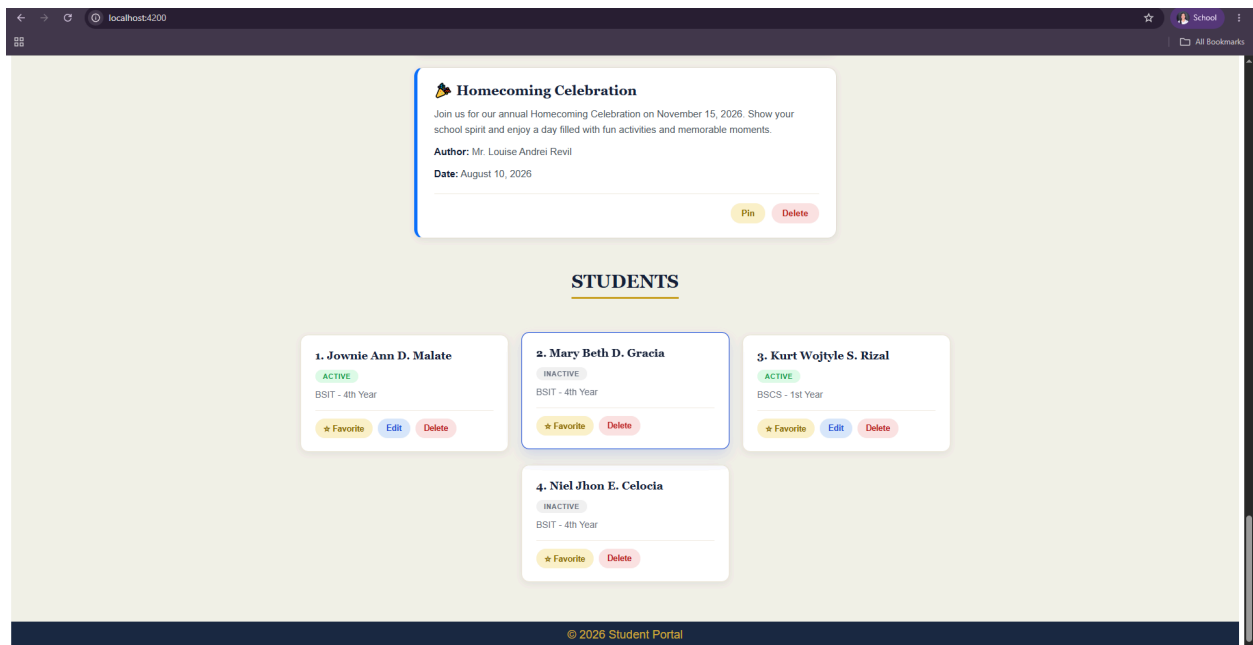

Flag 9 — Commit Your Progress

Final Flag Screenshot

Successful push to `feature/conditional-ui`

Student@COLLEGEPC-9 MINGW64 ~/my-first-angular-app (feature/conditional-ui)

\$ git commit -m "Activity: Conditional UI"

7 files changed, 391 insertions(+), 191 deletions(-)

Student@COLLEGEPC-9 MINGW64 ~/my-first-angular-app (feature/conditional-ui)

● \$ git push -u origin feature/conditional-ui

Enumerating objects: 31, done.

Counting objects: 100% (31/31), done.

Delta compression using up to 12 threads

Compressing objects: 100% (15/15), done.

Writing objects: 100% (16/16), 4.65 KiB | 2.32 MiB/s, done.

Total 16 (delta 7), reused 0 (delta 0), pack-reused 0 (from 0)

remote: Resolving deltas: 100% (7/7), completed with 7 local objects.

remote:

remote: Create a pull request for 'feature/conditional-ui' on GitHub by visiting:

remote: https://github.com/Nami19/ITFE403A_Pitogo/pull/new/feature/conditional-ui

remote:

To https://github.com/Nami19/ITFE403A_Pitogo.git

* [new branch] feature/conditional-ui -> feature/conditional-ui

branch 'feature/conditional-ui' set up to track 'origin/feature/conditional-ui'.

