

Instruction 1





```
namratha_18bc0803@Namratha-18bc0803-MacBook-Pro DevOps % git add .
namratha_18bc0803@Namratha-18bc0803-MacBook-Pro DevOps % git status
On branch master
Initial commit

Changes to be committed:
(use "git rm --cached <file>..." to unstage)

    new file:  SNamratha1.txt
    new file:  SNamratha2.txt

namratha_18bc0803@Namratha-18bc0803-MacBook-Pro DevOps % git status
On branch master
Initial commit

Changes to be committed:
(use "git rm --cached <file>..." to unstage)

    new file:  SNamratha1.txt
    new file:  SNamratha2.txt

namratha_18bc0803@Namratha-18bc0803-MacBook-Pro DevOps % git status
On branch master
Initial commit

Changes to be committed:
(use "git rm --cached <file>..." to unstage)


    new file:  SNamratha1.txt
    new file:  SNamratha2.txt

namratha_18bc0803@Namratha-18bc0803-MacBook-Pro DevOps % git status
On branch master
Initial commit

Changes to be committed:
(use "git rm --cached <file>..." to unstage)

    new file:  SNamratha1.txt
    new file:  SNamratha2.txt

namratha_18bc0803@Namratha-18bc0803-MacBook-Pro DevOps % git commit -m "added files"
[master (root-commit) 8187966] added files
 2 files changed, 2 insertions(+)
 create mode 100644 SNamratha1.txt
 create mode 100644 SNamratha2.txt
namratha_18bc0803@Namratha-18bc0803-MacBook-Pro DevOps % git remote add origin https://github.com/Namratha-shivaraju/Team30-DevOps.git
namratha_18bc0803@Namratha-18bc0803-MacBook-Pro DevOps % git push -u origin master
Counting objects: 4, done.
Delta compression using up to 4 threads.
Compressing objects: 100% (2/2), done.
Writing objects: 100% (4/4) 268 bytes | 0 bytes/s, done.
Total 4 (delta 0), reused 0 (delta 0)
To https://github.com/Namratha-shivaraju/Team30-DevOps.git
 * [new branch]  master -> master
Branch master set up to track remote branch master from origin.
namratha_18bc0803@Namratha-18bc0803-MacBook-Pro DevOps % git log
commit 818796699417313ca24986301eb178867b198c79 (HEAD --> master, origin/master)
Author: Namratha-shivaraju <s.namratha0705@gmail.com>
Date:   Thu Aug 26 17:20:17 2021 +0530
[snip]
    added files
namratha_18bc0803@Namratha-18bc0803-MacBook-Pro DevOps %
```

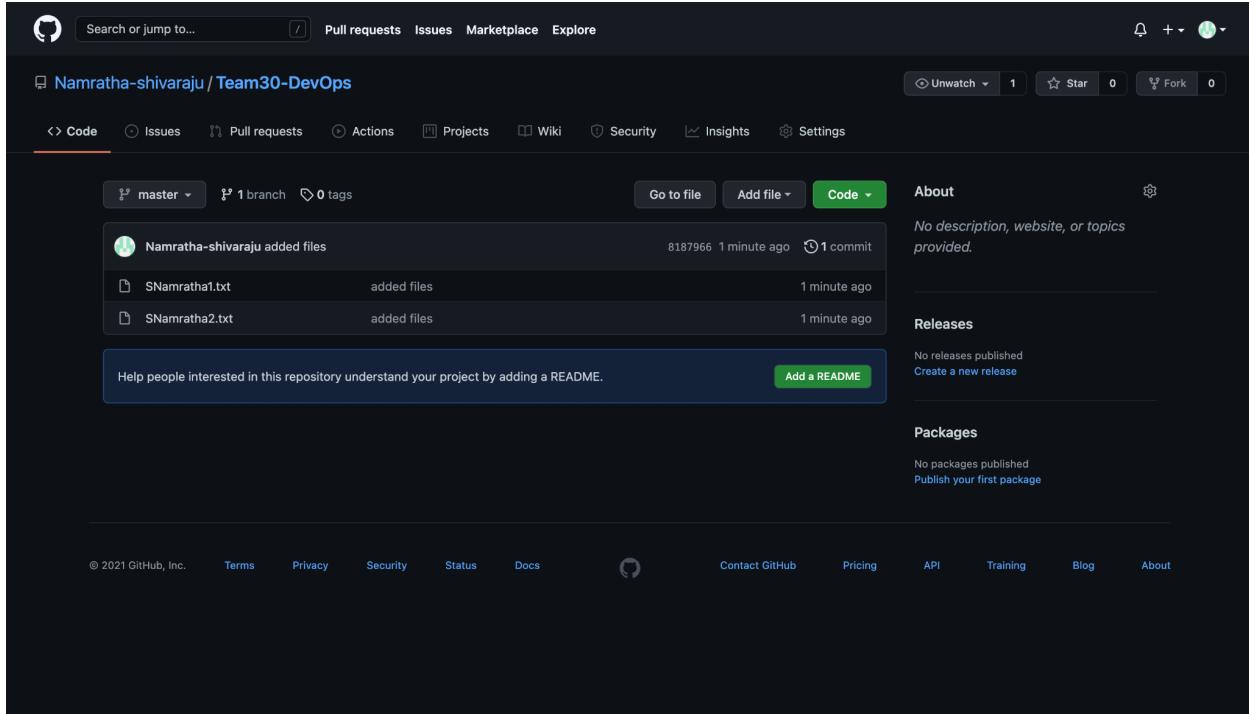

Instruction 2

```
|Author: Namratha-shivaraju <s.namratha0705@gmail.com>
|Date:   Thu Aug 26 17:36:31 2021 +0530
|
|  files modified
|commit b335c083e6dabb9e2b0ac4bfc6fe2f7ccae00
|Author: Namratha-shivaraju <s.namratha0705@gmail.com>
|Date:   Thu Aug 26 17:33:49 2021 +0530
|
|    Profit-loss module added
|
|commit 818796699417313ca24986301eb178867b198c79 (origin/master, master)
|Author: Namratha-shivaraju <s.namratha0705@gmail.com>
|Date:   Thu Aug 26 17:20:17 2021 +0530
|
|  added files
namratha_18bcc083@Namratha-18bcc083-MacBook-Pro DevOps % git checkout -b BRANCH2
Switched to a new branch 'BRANCH2'
namratha_18bcc083@Namratha-18bcc083-MacBook-Pro DevOps % git status
On branch BRANCH2
nothing to commit, working tree clean
namratha_18bcc083@Namratha-18bcc083-MacBook-Pro DevOps % git add .
namratha_18bcc083@Namratha-18bcc083-MacBook-Pro DevOps % git status
On branch BRANCH2
Changes to be committed:
  (use "git reset HEAD <file>" to unstage)

    modified:  SNamratha2.txt

namratha_18bcc083@Namratha-18bcc083-MacBook-Pro DevOps % git push
fatal: The current branch BRANCH2 has no upstream branch.
To push the current branch and set the remote as upstream, use

    git push --set-upstream origin BRANCH2
|
namratha_18bcc083@Namratha-18bcc083-MacBook-Pro DevOps % git push --set-upstream origin BRANCH2
Total 0 (delta 0), reused 0 (delta 0)
remote:
remote: Create a pull request for 'BRANCH2' on GitHub by visiting:
remote:   https://github.com/Namratha-shivaraju/Team30-DevOps/pull/new/BRANCH2
remote:
To https://github.com/Namratha-shivaraju/Team30-DevOps.git
 * [new branch]      BRANCH2 -> BRANCH2
Branch BRANCH2 set up to track remote branch BRANCH2 from origin.
namratha_18bcc083@Namratha-18bcc083-MacBook-Pro DevOps % git log
commit 12a6d2ef70652e3f4a4791d7fcd5da2ba0d2 (HEAD -> BRANCH2, origin/BRANCH2, origin/BRANCH1, BRANCH1)
Author: Namratha-shivaraju <s.namratha0705@gmail.com>
Date:   Thu Aug 26 17:36:31 2021 +0530
|
|  files modified
|commit b335c083e6dabb9e2b0ac4bfc6fe2f7ccae00
|Author: Namratha-shivaraju <s.namratha0705@gmail.com>
|Date:   Thu Aug 26 17:33:49 2021 +0530
|
|    Profit-loss module added
|
|commit 818796699417313ca24986301eb178867b198c79 (origin/master, master)
|Author: Namratha-shivaraju <s.namratha0705@gmail.com>
|Date:   Thu Aug 26 17:20:17 2021 +0530
|
|  added files
namratha_18bcc083@Namratha-18bcc083-MacBook-Pro DevOps %
```

The screenshot shows a GitHub repository page. At the top, there's a search bar and navigation links for Pull requests, Issues, Marketplace, and Explore. The repository name 'Namratha-shivaraju/Team30-DevOps' is displayed, along with metrics for Unwatch (1), Star (0), Fork (0). Below the header, there are tabs for Code, Issues, Pull requests, Actions, Projects, Wiki, Security, Insights, and Settings. The 'Code' tab is selected.

Key features visible on the page include:

- Recent activity:** Notifications for 'BRANCH1' and 'BRANCH2' with recent pushes.
- Branch status:** 'BRANCH1' is shown as having 3 branches and 0 tags.
- Commit history:** A list of commits by 'Namratha-shivaraju' showing changes to 'SNamratha1.txt' and 'SNamratha2.txt'.
- README section:** A callout encouraging users to add a README, with a 'Add a README' button.

On the right side, there are sections for About (no description), Releases (no releases published), and Packages (no packages published).

At the bottom, there are links for GitHub services like Contact GitHub, Pricing, API, Training, Blog, and About.

Instruction 3

```

modified: SNamrathai.txt
namratha_18bc083@Namratha-18bc083-MacBook-Pro DevOps % git merge BRANCH3
Already up-to-date.
namratha_18bc083@Namratha-18bc083-MacBook-Pro DevOps % git checkout BRANCH3
M SNamrathai.txt
Switched to branch 'BRANCH3'
namratha_18bc083@Namratha-18bc083-MacBook-Pro DevOps % echo "some changes" > SNamrathai.txt
namratha_18bc083@Namratha-18bc083-MacBook-Pro DevOps % git commit -am"made some changes"
[BRANCH3 6417597] made some changes
1 file changed, 1 insertion(+), 0 deletion(-)
namratha_18bc083@Namratha-18bc083-MacBook-Pro DevOps % git checkout master
Switched to branch 'master'
Your branch is up-to-date with 'origin/master'.
namratha_18bc083@Namratha-18bc083-MacBook-Pro DevOps % echo "again changes" >>SNamrathai.txt
namratha_18bc083@Namratha-18bc083-MacBook-Pro DevOps % git commit -am"modified"
[master ca13690] modified
1 file changed, 1 insertion(+), 1 deletion(-)
namratha_18bc083@Namratha-18bc083-MacBook-Pro DevOps % git merge BRANCH3
Auto-merging SNamrathai.txt
CONFLICT (content): Merge conflict in SNamrathai.txt
Automatic merge failed; fix conflicts and then commit the result.
namratha_18bc083@Namratha-18bc083-MacBook-Pro DevOps % git reset
Unstaged changes after reset:
M SNamrathai.txt
namratha_18bc083@Namratha-18bc083-MacBook-Pro DevOps % git merge BRANCH3
error: Your local changes to the following files would be overwritten by merge:
SNamrathai.txt
Please commit your changes or stash them before you merge.
Aborting
namratha_18bc083@Namratha-18bc083-MacBook-Pro DevOps % git commit -am"after resolving merge conflict"
[master 1967f1d] after resolving merge conflict
1 file changed, 1 insertion(+)
namratha_18bc083@Namratha-18bc083-MacBook-Pro DevOps % git merge BRANCH3
Auto-merging SNamrathai.txt
CONFLICT (content): Merge conflict in SNamrathai.txt
Automatic merge failed; fix conflicts and then commit the result.
namratha_18bc083@Namratha-18bc083-MacBook-Pro DevOps % git add .
namratha_18bc083@Namratha-18bc083-MacBook-Pro DevOps % git merge BRANCH3
fatal: You have local changes to the following files (use -N to skip):
Please commit your changes before you merge.
namratha_18bc083@Namratha-18bc083-MacBook-Pro DevOps % git commit -am"after resolving merge conflict"
[master 793aae2] after resolving merge conflict
namratha_18bc083@Namratha-18bc083-MacBook-Pro DevOps % git merge BRANCH3
Already up-to-date.
namratha_18bc083@Namratha-18bc083-MacBook-Pro DevOps % git commit -am"merging successful"
On branch master
Your branch is ahead of 'origin/master' by 4 commits.
  (use "git push" to publish your local commits)
nothing to commit, working tree clean
namratha_18bc083@Namratha-18bc083-MacBook-Pro DevOps % git push
Counting objects: 12, done.
Delta compression using up to 4 threads.
Compressing objects: 100% (10/10), done.
Writing objects: 100% (10/10), 0 bytes | 0 bytes/s, done.
Total 10 (delta 1), reused 0 (delta 0)
remote: Resolving deltas: 100% (1/1), done.
To https://github.com/Namratha-shivraj/Team30-DevOps.git
 * [new branch]      master -> master
namratha_18bc083@Namratha-18bc083-MacBook-Pro DevOps % cat .git/HEAD
ref: refs/heads/master
namratha_18bc083@Namratha-18bc083-MacBook-Pro DevOps %

```

Instruction 4

```

[namratha_18bcs083@Namratha-18bcs083-MacBook-Pro DevOps % git checkout -b BRANCH3
Switched to a new branch 'BRANCH3'
namratha_18bcs083@Namratha-18bcs083-MacBook-Pro DevOps % echo "abcde" > SNamratha2.txt
M      SNamratha2.txt
Switched to branch 'master'
Your branch is up-to-date with 'origin/master'.
namratha_18bcs083@Namratha-18bcs083-MacBook-Pro DevOps % git checkout -b BRANCH3
fatal: A branch named 'BRANCH3' already exists.
namratha_18bcs083@Namratha-18bcs083-MacBook-Pro DevOps % git checkout -d BRANCH3
error: unknown switch 'd'
usage: git checkout [<options>] <branch>
  or: git checkout [<options>] <branch> -- <file>...
    -q, --quiet           suppress progress reporting
    -b <branch>          create and checkout a new branch
    -B <branch>          create/reset and checkout a branch
    -l                  create reflog for new branch
    --detach             detach HEAD at named commit
    -t, --track           set upstream info for new branch
    --orphan <new-branch> new unparented branch
    -2, --ours            checkout our version for unmerged files
    -3, --theirs           checkout their version for unmerged files
    -f, --force            force checkout (throw away local modifications)
    -m, --merge            perform a 3-way merge with the new branch
    --overwrite-ignore    update ignored files (default)
    --conflict <style>    conflict style (merge or diff3)
    -p, --patch            select hunks interactively
    --ignore-skip-worktree-bits
                           do not limit pathspecs to sparse entries only
    --ignore-other-worktrees
                           do not check if another worktree is holding the given ref
    --recurse-submodules[=<checkout>]
                           control recursive updating of submodules
    --progress            force progress reporting

namratha_18bcs083@Namratha-18bcs083-MacBook-Pro DevOps % git checkout -D BRANCH3
error: unknown switch 'D'
usage: git checkout [<options>] <branch>
  or: git checkout [<options>] <branch> -- <file>...
    -q, --quiet           suppress progress reporting
    -b <branch>          create and checkout a new branch
    -B <branch>          create/reset and checkout a branch
    -l                  create reflog for new branch
    --detach             detach HEAD at named commit
    -t, --track           set upstream info for new branch
    --orphan <new-branch> new unparented branch
    -2, --ours            checkout our version for unmerged files
    -3, --theirs           checkout their version for unmerged files
    -f, --force            force checkout (throw away local modifications)
    -m, --merge            perform a 3-way merge with the new branch
    --overwrite-ignore    update ignored files (default)
    --conflict <style>    conflict style (merge or diff3)
    -p, --patch            select hunks interactively
    --ignore-skip-worktree-bits
                           do not limit pathspecs to sparse entries only
    --ignore-other-worktrees
                           do not check if another worktree is holding the given ref
    --recurse-submodules[=<checkout>]
                           control recursive updating of submodules
    --progress            force progress reporting

[namratha_18bcs083@Namratha-18bcs083-MacBook-Pro DevOps % git branch -d BRANCH3
Deleted branch BRANCH3 (was b417597).
namratha_18bcs083@Namratha-18bcs083-MacBook-Pro DevOps % git checkout -b BRANCH3
M      SNamratha2.txt
Switched to a new branch 'BRANCH3'
namratha_18bcs083@Namratha-18bcs083-MacBook-Pro DevOps % touch SNamratha3.txt
namratha_18bcs083@Namratha-18bcs083-MacBook-Pro DevOps % git add .
namratha_18bcs083@Namratha-18bcs083-MacBook-Pro DevOps % git push
fatal: The current branch BRANCH3 has no upstream branch.
To push the current branch and set the remote as upstream, use

  git push --set-upstream origin BRANCH3

namratha_18bcs083@Namratha-18bcs083-MacBook-Pro DevOps % git push --set-upstream origin BRANCH3

Total 0 (delta 0), reused 0 (delta 0)
remote:
remote: Create a pull request for 'BRANCH3' on GitHub by visiting:
remote:   https://github.com/Namratha-shivraju/Team38-DevOps/pull/new/BRANCH3
remote:
To https://github.com/Namratha-shivraju/Team38-DevOps.git
 * [new branch]  BRANCH3 -> BRANCH3
Branch BRANCH3 set up to track remote branch BRANCH3 from origin.
namratha_18bcs083@Namratha-18bcs083-MacBook-Pro DevOps % git commit -am"modified"
[BRANCH3 173ae2] modified
 2 files changed, 1 insertion(+), 1 deletion(-)
 create mode 100644 SNamratha3.txt
namratha_18bcs083@Namratha-18bcs083-MacBook-Pro DevOps % git push --set-upstream origin BRANCH3

Counting objects: 4, done.
Delta compression using up to 4 threads.
Compressing objects: 100% (2/2), done.
Writing objects: 100% (4/4), 321 bytes | 0 bytes/s, done.
Total 0 (delta 0), reused 0 (delta 0)
To https://github.com/Namratha-shivraju/Team38-DevOps.git
 ! [new branch]  BRANCH3 -> BRANCH3
Branch BRANCH3 set up to track remote branch BRANCH3 from origin.
namratha_18bcs083@Namratha-18bcs083-MacBook-Pro DevOps %

```

The screenshot shows a GitHub repository page for 'Namratha-shivaraju / Team30-DevOps'. The repository has 1 star, 0 forks, and 0 issues. It contains 2 branches and 0 tags. A merge pull request from 'Namratha-shivaraju / BRANCH3' to 'master' is shown, with 10 commits and 3 files modified. The repository has no description, website, or topics provided. It also has no releases published and no packages published.

Instruction 5

```
To https://github.com/Namratha-shivaraju/Team30-DevOps.git
 * [new branch]      BRANCH3 -> BRANCH3
Branch BRANCH3 set up to track remote branch BRANCH3 from origin.
namratha_18bc083@Namratha-18bc083-MacBook-Pro DevOps % git commit -am"modified"
[BRANCH3 23c3092] modified
 2 files changed, 1 insertion(+), 1 deletion(-)
 create mode 100644 SNamratha3.txt
namratha_18bc083@Namratha-18bc083-MacBook-Pro DevOps % git push --set-upstream origin BRANCH3

Counting objects: 4, done.
Delta compression using up to 4 threads.
Compressing objects: 100% (3/3), done.
Writing objects: 100% (4/4), 321 bytes | 0 bytes/s, done.
Total 4 (delta 0), reused 0 (delta 0)
To https://github.com/Namratha-shivaraju/Team30-DevOps.git
 !    793aae2..173e2e1 BRANCH3 -> BRANCH3
Branch BRANCH3 set up to track remote branch BRANCH3 from origin.
namratha_18bc083@Namratha-18bc083-MacBook-Pro DevOps % git checkout BRANCH2
Switched to branch 'BRANCH2'
namratha_18bc083@Namratha-18bc083-MacBook-Pro DevOps % echo "this is instruction 5" > SNamratha1.txt
namratha_18bc083@Namratha-18bc083-MacBook-Pro DevOps % git mv SNamratha1.txt snamratha1
fatal: bad source, source=SNamratha1, destination=snamratha1
namratha_18bc083@Namratha-18bc083-MacBook-Pro DevOps % git mv snamratha1.txt snamratha1.txt
namratha_18bc083@Namratha-18bc083-MacBook-Pro DevOps % git commit -m "file name changed"
[BRANCH2 23c3092] file name changed
 1 file changed, 0 insertions(+), 0 deletions(-)
 rename SNamratha1.txt => snamratha1.txt (100%)
namratha_18bc083@Namratha-18bc083-MacBook-Pro DevOps % git push
fatal: The current branch BRANCH2 has no upstream branch.
To push the current branch and set the remote as upstream, use

  git push --set-upstream origin BRANCH2

namratha_18bc083@Namratha-18bc083-MacBook-Pro DevOps %   git push --set-upstream origin BRANCH2
Counting objects: 2, done.
Delta compression using up to 4 threads.
Compressing objects: 100% (2/2), done.
Writing objects: 100% (2/2), 282 bytes | 0 bytes/s, done.
Total 2 (delta 0), reused 0 (delta 0)
remote:
To https://github.com/Namratha-shivaraju/Team30-DevOps.git
 * [new branch]      BRANCH2 -> BRANCH2
Branch BRANCH2 set up to track remote branch BRANCH2 from origin.
namratha_18bc083@Namratha-18bc083-MacBook-Pro DevOps % git checkout master
error: Your local changes to the following files would be overwritten by checkout:
  SNamratha1.txt
Please commit your changes or stash them before you switch branches.
error: The following untracked working tree files would be overwritten by checkout:
  SNamratha1.txt
Please move or remove them before you switch branches.
Aborting
namratha_18bc083@Namratha-18bc083-MacBook-Pro DevOps % git merge BRANCH3
error: addinfo.cache failed for path 'snamratha1.txt'
Merge made by the 'recursive' strategy.
 SNamratha2.txt | 2
 SNamratha3.txt | 0
 2 files changed, 1 insertion(+), 1 deletion(-)
 create mode 100644 SNamratha3.txt
namratha_18bc083@Namratha-18bc083-MacBook-Pro DevOps %
```

← → C github.com/Namratha-shivaraju/Team30-DevOps

Search or jump to... Pull requests Issues Marketplace Explore

Namratha-shivaraju / Team30-DevOps

Unwatch 1 Star 0 Fork 0

Code Issues Pull requests 1 Actions Projects Wiki Security Insights Settings

master 3 branches 0 tags Go to file Add file Code

 Namratha-shivaraju Merge pull request #2 from Namratha-shivaraju/BRANCH2 ... f4900b0 now 12 commits

SNamratha2.txt modified 21 minutes ago
SNamratha3.txt modified 21 minutes ago
snamratha1.txt file name changed 3 minutes ago

Help people interested in this repository understand your project by adding a README. Add a README

About No description, website, or topics provided.

Releases No releases published Create a new release

Packages No packages published Publish your first package

© 2021 GitHub, Inc. Terms Privacy Security Status Docs Contact GitHub Pricing API Training Blog About

