

HW-2 Classification: Piyaporn Puangprasert

Code ▼

Class: 33:136:487:01 LG SCALE DATA ANALY

Prof. Jin Wang

Piyaporn Puangprasert(pp712) team with Steven Panagakos (He may sent separate homework)

Due date: Mar 3, 2024

read the Weekly file

Hide


```
library(ISLR2)
# load "Weekly" data set
attach(Weekly)
```

The following objects are masked from Weekly (pos = 3):

```
Direction, Lag1, Lag2, Lag3,
Lag4, Lag5, Today, Volume, Year
```

Hide

```
pairs(Weekly)
```

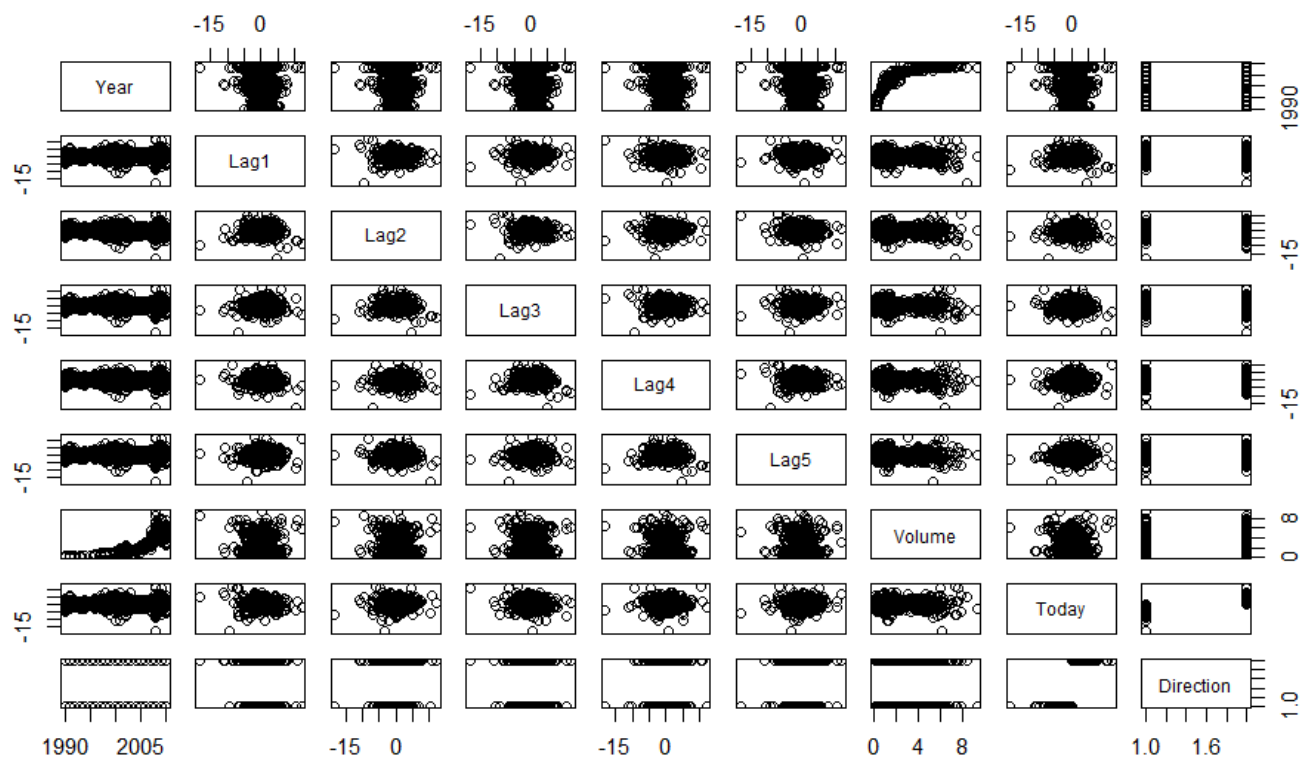

Hide

```
names(Weekly)
```

```
[1] "Year"      "Lag1"      "Lag2"      "Lag3"      "Lag4"      "Lag5"      "Volume"
[8] "Today"     "Direction"
```

View full Weekly data set

Hide

```
View(Weekly)
```

model weeklyview: Direction with 5 lag

Hide

```
WeeklyView = glm(Direction~Lag1+Lag2+Lag3+Lag4+Lag5+Volume, data=Weekly, family=binomial)
summary(WeeklyView)
```

Call:

```
glm(formula = Direction ~ Lag1 + Lag2 + Lag3 + Lag4 + Lag5 +
     Volume, family = binomial, data = Weekly)
```

Deviance Residuals:

Min	1Q	Median	3Q
-1.6949	-1.2565	0.9913	1.0849
Max			
1.4579			

Coefficients:

	Estimate	Std. Error	z value
(Intercept)	0.26686	0.08593	3.106
Lag1	-0.04127	0.02641	-1.563
Lag2	0.05844	0.02686	2.175
Lag3	-0.01606	0.02666	-0.602
Lag4	-0.02779	0.02646	-1.050
Lag5	-0.01447	0.02638	-0.549
Volume	-0.02274	0.03690	-0.616

	Pr(> z)
(Intercept)	0.0019 **
Lag1	0.1181
Lag2	0.0296 *
Lag3	0.5469
Lag4	0.2937
Lag5	0.5833
Volume	0.5377

Signif. codes:

0 '***' 0.001 '**' 0.01 '*' 0.05 '.'
0.1 ' ' 1

(Dispersion parameter for binomial family taken to be 1)

Null deviance: 1496.2 on 1088 degrees of freedom
Residual deviance: 1486.4 on 1082 degrees of freedom
AIC: 1500.4

Number of Fisher Scoring iterations: 4

Answer I. Base on this result, only Lag 2 appears to be statistically significant because of the p-value < 0.05

II. Compute the Confusion matrix and overall fraction of correct predictions

Hide

```
predicted_dir <- ifelse(predict(WeeklyView, type = "response") > 0.5, "Up", "Down")
conf_matrix <- table(predicted_dir, Weekly$Direction)
conf_matrix
```

```
predicted_dir Down Up
Down      54  48
Up       430 557
```

Hide

```
overall_correct <- sum(diag(conf_matrix)) / sum(conf_matrix)
overall_correct
```

```
[1] 0.5610652
```

The confusion matrix can show the type of mistakes made by the logistic regression model. It shows how we correctly classify Up or Down. It also identifies the type of errors made by the model that can be the wrong class. For example, this True Positive (TP) is up 557, True Negatives (TN) is "Down" 54 times when the market is down. False Positive (FP) shows incorrect predicted at 48, and False Negative is Down 430

Calculate prediction = $(54 + 557) / (54 + 48 + 430 + 557) = 0.56$

Hide

```
(557+54)/(54+48+430+557)
```

```
[1] 0.5610652
```

the Up trends = $557 / (48 + 557) = 0.92$

Hide

```
557/(557+48)
```

```
[1] 0.9206612
```

the Down trend = $54 / (430 + 54)$

Hide

```
54/(54+430)
```

```
[1] 0.1115702
```

2. Divide the full data set and Training set

Hide

```
train_data = Weekly[1:900,]
test_data = Weekly [901:nrow(Weekly),]
```

2.2 Fit the logistic regression model using the training data set with Lag2 as only predictor

Hide

```
train_model = glm(Direction~ Lag2, data = train_data, family = binomial)
```

2.3 Compute the confusion matrix and overall fraction of the test data

confusion matrix

Hide

```
# glm.all
glm.all = glm(Direction~., data = Weekly, family = "binomial")
```

Warning: glm.fit: algorithm did not convergeWarning: glm.fit: fitted probabilities numerically 0 or 1 occurred

Hide

```
# get predict probability
prob = predict(glm.all, newdata = Weekly, type = 'response')

pred = rep('Down', nrow(Weekly))
pred[prob>0.5]= 'Up'

# confusion matrix
table(pred,Weekly$Direction)
```

```
pred   Down  Up
Down  484   0
Up     0 605
```

from outsource

Hide

```
test_prob <- predict(train_model, newdata = test_data, type = "response")
test_predicted_direction <- ifelse(test_prob > 0.5, "Up", "Down")

test_conf_matrix <- table(test_predicted_direction, test_data$Direction)
test_overall_correct <- sum(diag(test_conf_matrix)) / sum(test_conf_matrix)

test_overall_correct
```

```
[1] 0.5396825
```

2.4

[Hide](#)

```
thresholds <- c(0.52, 0.53, 0.54)
best_correct <- 0
best_threshold <- 0

for (threshold in thresholds) {
  train_preds <- ifelse(predict(train_model, type = "response") > threshold, "Up", "Down")
  train_conf_matrix <- table(train_preds, train_data$Direction)
  train_correct <- sum(diag(train_conf_matrix)) / sum(train_conf_matrix)

  if (train_correct > best_correct) {
    best_correct <- train_correct
    best_threshold <- threshold
  }
}

best_threshold
```

```
[1] 0.53
```

[Hide](#)

2.5

[Hide](#)

```
test_preds <- ifelse(predict(train_model, newdata = test_data, type = "response") > best_threshold, "Up", "Down")
new_test_conf_matrix <- table(test_preds, test_data$Direction)
new_test_overall_correct <- sum(diag(new_test_conf_matrix)) / sum(new_test_conf_matrix)

new_test_overall_correct
```

```
[1] 0.5767196
```

3.1

[Hide](#)

```
library(MASS)
lda_model <- lda(Direction ~ Lag2, data = train_data)
```

3.2

[Hide](#)

```
lda_test_pred <- predict(lda_model, newdata = test_data)$class
lda_test_conf_matrix <- table(lda_test_pred, test_data$Direction)
lda_test_overall_correct <- sum(diag(lda_test_conf_matrix)) / sum(lda_test_conf_matrix)
```

lda_test_overall_correct