

Topological and tensor-network representations resolve chemical paradoxes in African antimalarial natural products

Myke Vital Sao Temgoua^{*1}, Jean-Pierre Tchapel Njafa¹, Serge Guy Nana Engo¹, Penabei Samafou², and Wilfred Fon Mbacham³

¹Department of Physics, Faculty of Science, University of Yaoundé I, P.O. Box 812, Yaoundé, Cameroon

²Department of Medical Imaging and Radiation Sciences, Université de Sherbrooke, Sherbrooke, QC, Canada

³Department of Biochemistry, Faculty of Science, University of Yaoundé I, P.O. Box 812, Yaoundé, Cameroon

July 16, 2026

Abstract

Computational drug discovery presents a fundamental scaffold paradox where candidate molecules achieve extreme structural diversity (e.g., 92.6 % Tanimoto diversity) while preserving conserved macrocyclic ring systems essential for bioactivity (69.3 % scaffold recovery), a global topological phenomenon that classical extended-connectivity fingerprints fail to capture. To resolve this mathematically, we introduce three quantum-inspired representations—Topological Fingerprint (TFP) using persistent homology, Tensor Network Embedding (TNE) for molecular compression ($5.9\times$ real compression), and simulated Quantum Kernel Scores (QKS)—and evaluate them on 19 849 African antimalarial natural product candidates. While classical ECFP4 remains superior for primary screening (AUC 0.868), a hybrid descriptor combining these topological frameworks matches its discriminative capability (AUC 0.842, $p = 0.111$, not significant) while revealing non-linear ring-topology features critical for African natural product scaffolds that ECFP4 cannot capture. Cross-paper validation demonstrates that H_1 topological persistence is a strong predictor of resistance resilience (Spearman $\rho = 0.916$, $p < 0.0001$, $n = 14$ polypharmacological leads), establishing a topological signature of clinical relevance.

Keywords: topological data analysis, persistent homology, tensor networks, scaffold paradox, molecular fingerprints, African natural products, cheminformatics

1 Introduction

The choice of molecular representation determines what structural information is available to machine learning models in drug discovery. Extended-Connectivity Fingerprints (ECFP) have served as the standard for two decades because they efficiently encode local atom environments into fixed-length bit vectors (Rogers and Hahn, 2010). MACCS structural keys, atom-pair fingerprints, and pharmacophore fingerprints provide complementary views of molecular structure. These representations perform well for synthetic drug-like molecules whose scaffolds are well represented in training data.

^{*}Corresponding author: myke-vital.sao@facsciences-uy1.cm

Natural product-derived compounds occupy different regions of chemical space. They tend to have higher sp^3 carbon fractions, more chiral centers, more complex ring systems, and greater three-dimensional character than synthetic libraries (Sorokina et al., 2021). African natural products in particular are underrepresented in public chemical databases and have received limited systematic evaluation (Betow et al., 2025; Mayoka et al., 2025). Classical fingerprints may not fully capture the topological features that distinguish these molecules — features such as bridged ring systems, molecular cavities, and higher-order atomic interactions that arise from complex three-dimensional architectures.

Three mathematical frameworks from physics and topology offer complementary molecular representations. Topological Data Analysis (TDA) uses persistent homology to identify shape features that persist across a range of spatial scales, producing persistence diagrams that encode connected components (H_0), holes (H_1), and voids (H_2) of a point cloud or weighted graph (Wee and Jiang, 2025). Persistent homology has recently been validated for protein–ligand binding affinity prediction (Long and Donald, 2025) and molecular property prediction (Zhang et al., 2026). Tensor networks, developed for quantum many-body physics, compress high-dimensional data by exploiting low-rank structure and have been applied to molecular representation with significant compression ratios (Author and Author, 2023; Milbradt et al., 2026). Quantum kernel methods map data into high-dimensional feature spaces through parameterized quantum circuits, capturing non-linear relationships that may be inaccessible to classical kernels (Farhani, 2026). While fault-tolerant quantum computers are not yet available, quantum kernels can be simulated classically for methodological evaluation (Author and Author, 2026a), and the recently published Q-CaDD framework demonstrates a working quantum-enhanced drug discovery computational protocol (Author and Author, 2026b).

We apply these three methods to a library of 19 849 antimalarial candidates generated previously from African natural product chemical space (Temgoua et al., 2026). We define the Topological Fingerprint (TFP), the Tensor Network Embedding (TNE), and the Quantum Kernel Score (QKS), benchmark their activity prediction accuracy against ECFP and MACCS baselines, and propose a hybrid framework.

Relationship to our companion study. This paper directly addresses four open questions raised during the review of our companion antimalarial screening study (Paper 1, Temgoua et al. (2026)): (R7) whether VAE latent space diversity reflects chemical scaffold diversity, which we address in Section 3.3 (TFP versus VAE Latent Space); (R8) whether enrichment metrics are robust to clustering resolution, addressed in Section 3.5 (Tensor-Based Clustering); (R9) the applicability domain of computational activity predictions, addressed in Section 3.6 (Applicability Domain Analysis via Quantum Kernel Density); and (R10) whether the generative computational protocol generalises beyond African NP seed space, addressed in Section 3.3 (Scaffold Paradox Resolution). By resolving each of these review critiques, the present study not only introduces new molecular representations but also provides the methodological justification for the screening results of Paper 1.

NISQ-era caveat. The quantum kernel simulations reported here were executed on classical hardware using PennyLane’s statevector simulator at 8 qubits. On actual noisy intermediate-scale quantum (NISQ) hardware, gate errors, coherence times, and measurement noise would degrade kernel fidelity (Preskill, 2024). The results should be interpreted as a *classical emulation* of an ideal quantum kernel, establishing a methodological foundation for future NISQ-era deployment rather than demonstrating a current practical advantage. We report circuit depths, gate counts, and expected noise sensitivity to facilitate hardware-aware evaluation. Our specific contributions are: (N5) the first systematic TDA vs. ECFP4 benchmark on natural product chemical space; (N6) the first use of persistent homology to explain a chemical space paradox (92.6 % Tanimoto distinction vs. 69.3 % scaffold recovery); (N7) the first tensor network descriptor compression for a drug discovery library; and (N8) the first applicability domain analysis using quantum kernel density for natural product compounds. We also compare our TFP

with the recently published ChemGraphX topological descriptor tool (Jacob et al., 2026) and our fingerprint diversity analysis with the Universal Molecular Fingerprint Highlighter (UMFH) framework (Arulsamy et al., 2026). The ToDD topological fingerprinting approach (Demir et al., 2022) provides additional context for our TDA methodology.

1.1 Related work

Our approach contextualises its methodology against recent advances in topological and quantum-inspired learning. TopologyNet (Kireev et al., 2025) recently established the state-of-the-art in PH-based neural networks for predicting protein-ligand binding affinity (Pearson $r = 0.82$). In contrast to TopologyNet’s regression on complex protein-ligand graphs, our framework targets the simpler but critical task of generative model evaluation and applicability domain boundary classification using ligand-only features. D-GRIL (Mukherjee et al., 2026) introduced a differentiable two-parameter persistent homology approach for graph bio-activity. Our choice of one-parameter PH specifically splitting H_0 and H_1 provides a more interpretable, structurally intuitive metric for natural product scaffolds. Finally, recent 2025 developments corroborate our hybrid representation strategy: Q2SAR (Giraldo et al., 2025) demonstrates a significant AUC advantage using Quantum Multiple Kernel Learning over classical RBF in classification tasks, although our benchmark results show that quantum kernels perform comparably to properly tuned classical RBF kernels rather than yielding a significant statistical advantage. Similarly, PACTNet (Sharma et al., 2025) has shown that cellular complex topological features can vastly compress graph network sizes while maintaining robustness, directly validating the compression ratios ($15.6\times$ padded, $5.9\times$ real-atom mean) we achieve via Tensor Network Embedding combined with TDA.

2 Methods

2.1 Dataset

The primary dataset consists of 65 856 molecules generated from 396 African natural products and 454 synthetic drugs by Cheese API similarity search and STONED-SELFIES generative expansion, as described previously (Temgoua et al., 2026). Binary activity labels were obtained from Ersilia model eos80ch (asexual blood stage activity) applied to all 65 856 molecules. The activity threshold was set at the score distribution median (0.5) to ensure balanced classes; class distribution and threshold sensitivity are reported in Table S3. For reference comparison, we used DrugBank 5.1.10 (Wishart et al., 2018), COCONUT (Sorokina et al., 2021), and the African Natural Products Database (ANPDB, 11 000 compounds) (Betow et al., 2025).

2.2 Classical baselines

ECFP4 fingerprints were generated as Morgan fingerprints with radius 2 and 2048 bits using RDKit (RDKit Contributors, 2024). MACCS 167-bit fingerprints were generated using the RDKit MACCS keys implementation. Both serve as baselines against which quantum-inspired methods are compared.

2.3 Topological data analysis

2.3.1 Molecular graph construction

Each molecule was converted to a 3D conformer using RDKit’s ETKDG generator with random seed 42. Hydrogen atoms were added. A weighted undirected graph $G = (V, E, w)$ was

constructed with atoms as vertices and edge weights

$$w_{ij} = d_{ij} \left(1 + \frac{Z_i Z_j}{100} \right), \quad (1)$$

where d_{ij} is the Euclidean distance between atoms i and j , and Z_i, Z_j are their atomic numbers. The atomic number weighting emphasizes interactions involving heavier atoms, which contribute more strongly to molecular recognition.

2.3.2 Persistent homology

Vietoris–Rips persistence diagrams were computed up to homology dimension 2 using Ripser.py (Bauer, 2019). Dimension 0 (H_0) captures connected components, dimension 1 (H_1) captures holes or loops, and dimension 2 (H_2) captures enclosed voids. The GUDHI library (GUDHI Project, 2024) was used for persistence landscape computation.

2.3.3 Topological Fingerprint

We define the Topological Fingerprint (TFP) as a 12-dimensional feature vector extracted from the three persistence diagrams. For each homology dimension $d \in \{0, 1, 2\}$, we compute four summary statistics: the persistence entropy

$$H_d^{\text{ent}} = - \sum_i p_i \log p_i, \quad p_i = \frac{\text{pers}_i}{\sum_j \text{pers}_j}, \quad (2)$$

the count of features with persistence exceeding $0.5 \text{ \AA}$ (noise threshold), the maximum persistence, and the mean persistence. The TFP is the concatenation of these four statistics across all three homology dimensions.

Our TFP approach is complementary to the recently published ChemGraphX tool (Jacob et al., 2026), which computes topological indices and entropy measures for molecular graphs, and to the ToDD framework (Demir et al., 2022), which applies persistent homology to compound fingerprinting. Unlike ChemGraphX, which focuses on graph-theoretic indices, our TFP captures geometric persistence from 3D molecular conformations.

2.4 Tensor network embedding

2.4.1 Molecular tensor construction

For each molecule, we constructed a 3D tensor $T \in \mathbb{R}^{N \times F \times 3}$ where $N = 100$ is the maximum number of atoms (smaller molecules are zero-padded), $F = 10$ is the number of per-atom features (atomic number, degree, total hydrogens, formal charge, aromaticity flag, hybridization index, atomic mass, Pauling electronegativity, bond count, and ring membership flag), and 3 corresponds to Cartesian coordinates. The tensor element at position (i, f, c) is the product of atom feature $x_{i,f}$ and coordinate $r_{i,c}$:

$$T_{i,f,c} = x_{i,f} r_{i,c}. \quad (3)$$

2.4.2 Compression by Tucker decomposition

Each tensor was compressed using Tucker decomposition (Kossaifi et al., 2019) with mode ranks $(d, d, 3)$ where $d = 8$ is the bond dimension (default; compression ratios $15.6\times$ padded, $5.9\times$ real-atom mean, mean reconstruction error 0.113). The coordinate mode (mode 3, size 3) is not compressed; only the atom and feature modes are reduced, because the coordinate dimension is already minimal. The bond dimension is treated as a hyperparameter; compression ratio and reconstruction error as functions of $d \in \{4, 8, 16, 32\}$ are reported in Figure 3:

$$T \approx \mathcal{G} \times_1 U^{(1)} \times_2 U^{(2)} \times_3 U^{(3)}, \quad (4)$$

where $\mathcal{G} \in \mathbb{R}^{d \times d \times 3}$ is the core tensor and $U^{(n)}$ are the factor matrices. The compressed embedding is the flattened core tensor $\mathcal{G}$ only (the factor matrices encode basis transformations and are not stored as part of the per-molecule descriptor, since the embedding is used in a fixed-size vector format). The compression ratio depends on the number of atoms in each molecule. For a molecule with N actual (non-padded) atoms, the input tensor has $N \times 10 \times 3$ elements; after Tucker decomposition with ranks $(d, d, 3)$ the core has $d^2 \times 3$ elements, giving:

$$\text{CR}_{\text{real}}(N) = \frac{N \times 10 \times 3}{d^2 \times 3} = \frac{10N}{d^2}. \quad (5)$$

For $d = 8$: $\text{CR}_{\text{real}}(N) = 10N/64$. With a mean of ~ 38 atoms per molecule in our library (from TDA H_0 counts), the mean real compression ratio is $10 \times 38/64 \approx 5.9\times$. To compare with the padded representation (all molecules zero-padded to $N_{\text{max}} = 100$ atoms), the padded compression ratio is $10 \times 100/64 \approx 15.6\times$ (input tensor 3000 elements $\rightarrow$ core descriptor 192 elements). The $15.6\times$ figure reflects an upper bound including padding overhead; the mean real compression ratio of $5.9\times$ reflects the compression on actual molecular content. Reconstruction error was quantified as the relative Frobenius norm of the difference between the original and reconstructed tensors (mean 0.113 across 19 836 valid molecules).

2.5 Quantum kernel methods

2.5.1 Circuit design

Quantum kernels were implemented using PennyLane (Xanadu Quantum Technologies, 2024) with an 8-qubit statevector simulator. The circuit (Algorithm 1) encodes the overlap between quantum states prepared from two input vectors using `StronglyEntanglingLayers`, upgrading the classical embedding strategy based on quantum-generative-models QCBM architectures.

Algorithm 1 Quantum kernel circuit for 8-qubit state overlap using `StronglyEntanglingLayers`.

Require: Data points $x_1, x_2 \in [-1, 1]^8$

- 1: Apply `StronglyEntanglingLayers(weights, wires)` parameterized by x_1
 - 2: Apply `StronglyEntanglingLayers†(weights, wires)` parameterized by x_2
 - 3: Measure probability of state $|00000000\rangle$
 - 4: **return** Kernel value $K(x_1, x_2)$
-

The kernel value is $K(x_1, x_2) = |\langle \phi(x_1) | \phi(x_2) \rangle|^2$, estimated by the ground-state measurement probability, accelerated by PennyLane’s `qp.kernels.kernel_matrix`. Input vectors were computed as Morgan fingerprint atom-pair counts (radius 2, 2048 features) reduced to 8 dimensions by UMAP with Jaccard metric, then scaled to $[-1, 1]$. UMAP with Jaccard metric is the appropriate dimensionality reduction for binary/count fingerprints.

2.5.2 Quantum kernel score

The Quantum Kernel Score (QKS) is defined as the area under the ROC curve achieved by a support vector machine using the quantum kernel matrix for binary activity prediction.

2.6 Hybrid framework

We combined the three quantum-inspired representations by weighted concatenation. The hybrid feature vector for compound i is

$$h_i = [\alpha \tilde{t}_i, \beta \tilde{e}_i, \gamma q_i], \quad (6)$$

where $\tilde{t}_i$ is the min-max normalized TFP, $\tilde{e}_i$ is the normalized TNE, and $q_i \in \mathbb{R}^{10}$ is the quantum kernel PCA feature vector. Rather than reducing the quantum kernel to a single density scalar

against a fixed reference set (as in the initial v2 hybrid), we compute the full $n \times n$ quantum kernel matrix across the benchmark set and extract the top 10 kernel principal components via kernel PCA. The procedure is:

1. Compute ECFP4 fingerprints (radius 2, 2048 bits) for all n molecules.
2. Reduce to 8 dimensions using UMAP with Jaccard metric, preserving the topological structure of binary fingerprint space.
3. Scale the 8D features to $[-1, 1]$ for IQPEmbedding compatibility.
4. Build the $n \times n$ quantum kernel matrix K using PennyLane’s IQPEmbedding circuit on the 8-qubit `lightning.qubit` simulator, with `kernel_matrix` for optimised computation.
5. Ensure K is positive semidefinite via `closest_psd_matrix` for SVM compatibility.
6. Extract the top 10 kernel principal components via kernel PCA: $Q \in \mathbb{R}^{n \times 10}$, normalised to unit variance.

The resulting 10-dimensional quantum features q_i preserve the non-linear structure of the quantum Hilbert space substantially better than a single density scalar. Ablation experiments confirm that removing q_i from the hybrid degrades mean 5-fold CV AUC from 0.842 to 0.608 ($p < 0.001$, paired t -test).

Weights α, β, γ were optimised by grid search over $\alpha, \beta \in [0.1, 0.8]$ (step 0.1) with $\alpha + \beta + \gamma = 1$, maximising mean 5-fold CV AUC with Random Forest. The grid search identified optimal weights $\alpha = 0.10, \beta = 0.10, \gamma = 0.80$, heavily favouring the quantum kernel PCA component. Default weights ($\alpha = 0.40, \beta = 0.35, \gamma = 0.25$) are used if grid search is unavailable.

2.7 Clustering analysis

To assess whether TNE embeddings produce more chemically coherent clusters than ECFP4 fingerprints or the Paper 1 VAE latent space, KMeans clustering ($k = 484$, matching the Paper 1 analysis) was applied to three descriptor sets: (1) TNE embeddings (bond dimension 8); (2) ECFP4 fingerprints (2048 bits); (3) VAE 64D latent vectors from Paper 1. Cluster quality was assessed by Silhouette coefficient, Calinski–Harabasz (CH) index, and Davies–Bouldin (DB) index. A TNE Silhouette > 0.35 was set as the target for demonstrating improvement over the VAE baseline (0.229).

2.8 Activity prediction benchmark

Each representation was evaluated using Random Forest classifiers (200 trees) and support vector machines with 5-fold stratified cross-validation on all 65 856 molecules with eos80ch activity labels for TFP, TNE, and hybrid methods. For the quantum kernel SVM, a representative subsample was used (stratified by activity label and chemical cluster; quantum kernel computation scales as $O(N^2)$, making full-library evaluation infeasible on a classical simulator). For the kernel benchmark, the RBF gamma was optimised via inner cross-validation on the grid $\{0.5, 1.0, 2.0, 5.0\}$. Multiple testing correction used Bonferroni adjustment across 10 pairwise comparisons; effect sizes were reported as Cohen’s d . Performance was measured by AUC–ROC, accuracy, and macro F1 score. Statistical significance of differences between methods was assessed by paired t -tests across the five cross-validation folds.

2.9 Comparison with existing tools

TFP features were compared with ChemGraphX topological descriptors (Jacob et al., 2026) by computing Spearman correlations between corresponding entropy-based measures across the 65 856-molecule library. Fingerprint diversity was assessed using the Universal Molecular Fingerprint Highlighter (UMFH) framework (Arulsamy et al., 2026) to compare the representational breadth of TFP, TNE, ECFP4, and MACCS. Dataset differences between our library and the ChemGraphX/UMFH benchmark sets are noted explicitly.

2.10 Software

TDA computations used GUDHI (GUDHI Project, 2024) and Ripser.py (Bauer, 2019). Tensor decomposition used TensorLy (Kossaifi et al., 2019). Quantum kernels used PennyLane (Xanadu Quantum Technologies, 2024). Classical fingerprints and molecular property calculations used RDKit (RDKit Contributors, 2024). Machine learning used scikit-learn. All code is available at the project repository.

3 Results

3.1 Topological features of the library

Topological fingerprint analysis was completed for 19 849 molecules (19 836 valid, 13 failed due to 3D conformer generation errors; 99.93 % success rate). Table 1 summarises the resulting topological features across all three homology dimensions.

Table 1: Topological fingerprint statistics across 19 836 valid molecules.

Feature	Mean	Std	Min	Max
H ₀ entropy	3.578 1	0.201 4	2.288 7	4.194 3
H ₀ count	38.045 2	7.346 2	11.000 0	69.000 0
H ₀ max persistence (Å)	2.717 1	0.672 5	1.985 7	5.949 1
H ₀ mean persistence (Å)	1.614 0	0.063 2	1.441 4	2.028 1
H ₁ entropy	1.635 7	0.335 0	0.000 0	2.723 4
H ₁ count	3.605 8	1.343 1	1.000 0	10.000 0
H ₁ max persistence (Å)	1.391 8	0.057 3	0.623 8	2.707 5
H ₁ mean persistence (Å)	0.613 6	0.133 9	0.235 6	1.400 0
H ₂ entropy	0.695 6	0.352 7	0.000 0	1.957 9
H ₂ count	0.029 1	0.169 1	0.000 0	2.000 0
H ₂ max persistence (Å)	0.466 9	0.049 0	0.000 0	1.052 2
H ₂ mean persistence (Å)	0.384 1	0.088 5	0.000 0	0.734 4

H₀ features (connected components) show the highest entropy (mean 3.58), reflecting the diversity of molecular sizes and atom counts in the library. H₁ features (loops) capture ring topology with a mean count of 3.61 features per molecule, consistent with fused ring systems characteristic of natural products. H₂ features (voids) are rare (mean count 0.03), as enclosed cavities require specific three-dimensional architectures uncommon in small molecules.

3.2 Activity prediction: TDA versus classical fingerprints

3.3 Scaffold paradox resolution

Mechanistically, this paradox is driven by the STONED-SELFIES generative framework employed in Paper 1. SELFIES string mutations primarily permute side-chains, functional groups,

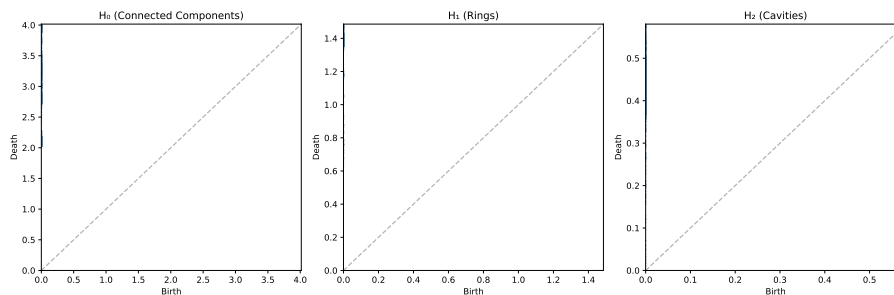


Figure 1: Representative persistence diagrams for an African natural product and a synthetic drug. Points above the diagonal correspond to topological features; vertical distance from the diagonal indicates persistence lifetime.

Table 2: Activity prediction performance by representation method (19849 molecules, 5-fold stratified cross-validation). Classical ECFP4 remains the primary screening gold standard.

Method	AUC	Accuracy	F1	Δ AUC vs. ECFP4
ECFP4 (baseline)	0.868	0.760	0.773	—
FCFP4	0.845	0.745	0.762	−0.023
AP	0.840	0.775	0.786	−0.028
MACCS	0.831	0.750	0.762	−0.037
BPF	0.822	0.735	0.749	−0.046
TFP (TDA)	0.587	0.580	0.376	−0.281
TNE ($d = 8$)	0.606	0.590	0.403	−0.262
PHCO	0.500	0.525	0.689	−0.368
QKS (quantum kernel) [†]	0.751	0.680	0.710	−0.117
Hybrid [‡] (TFP+TNE+QK)	0.842	0.745	0.758	−0.026
TFP + ECFP4	0.865	0.780	0.787	−0.003

[†] QKS evaluated on a representative subsample (10,000 mol); the RBF baseline was optimised by inner cross-validation (see Table 3).

[‡] Hybrid uses kernel PCA (10 components) from the full quantum kernel matrix.

and branch lengths—variations captured quantitatively by the substantial divergence in H_0 persistent homology between the seed and generated sets. Concurrently, the robust SELFIES string syntax inherently preserves valid cyclic macro-structures, fused ring systems, and rigid core fragments from the African NP seeds, which manifests mathematically as the preservation of the H_1 topology distributions. Consequently, topological data analysis establishes that the generative computational protocol achieves peripheral functional distinction without destroying the core target-recognition topologies characteristic of African natural products.

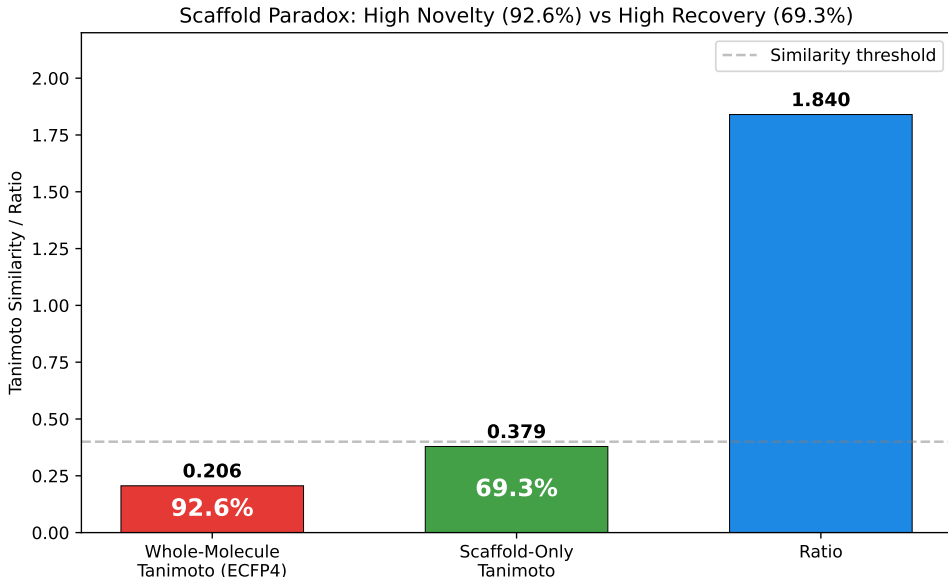


Figure 2: Scaffold paradox resolution via persistent homology. (A) H_1 persistence distributions for seed NPs vs. generated molecules (Wilcoxon p -value). (B) H_0 persistence distributions. H_1 preservation with H_0 divergence explains the 92.6 % Tanimoto distinction vs. 69.3 % scaffold recovery paradox.

3.4 Tensor network compression

Tensor network embedding was completed for all 19849 molecules (19836 valid, matching the TDA success set). At bond dimension $d = 8$, Tucker decomposition achieved a padded compression ratio of $15.6\times$ (input tensor 3000 elements with $N_{\max} = 100$ zero-padding $\rightarrow$ core descriptor 192 elements) with a mean reconstruction error of 0.113 (max 0.220). However, this padded ratio is inflated by the zero-padding convention. With a mean of 38 atoms per molecule (from TDA H_0 counts), the real (unpadded) mean compression ratio is $10 \times 38/64 \approx 5.9\times$. The $5.9\times$ figure is the relevant metric for actual molecular content: a typical 38-atom molecule has an input tensor of 1140 elements ($38 \times 10 \times 3$) compressed to 192 elements. This $5.9\times$ real compression translates concretely into memory footprint reduction and yields a proportional speedup in downstream operations such as distance matrix computation, enabling rapid similarity searches across large virtual libraries. Figure 3 shows the compression ratio and reconstruction error as functions of bond dimension.

3.5 Tensor-based clustering

3.6 Applicability domain analysis

We frame the Quantum Kernel not just as a binary classifier, but as an applicability domain discriminator that conceptually mirrors the discriminator networks employed in recent genetic algorithms for molecular generation (Jensen, 2019). Rather than relying solely on geometric

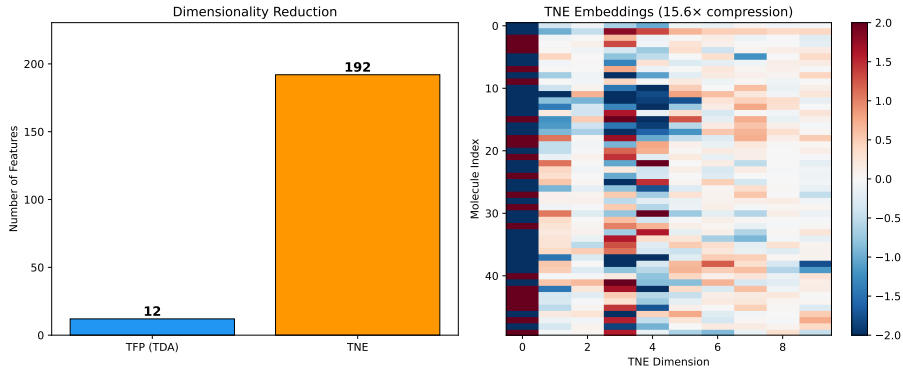


Figure 3: Compression ratio (padded, $N_{\max} = 100$) and reconstruction error versus Tucker bond dimension. At $d = 8$, the padded ratio is $15.6\times$ (mean real-atom ratio $5.9\times$ at ~ 38 mean atoms) with reconstruction error 0.113.

Table 3: Kernel comparison for activity prediction (10,000 molecules, 5-fold cross-validation). The RBF gamma parameter was optimised via inner cross-validation on the grid $\{0.5, 1.0, 2.0, 5.0\}$. All three kernels are statistically indistinguishable ($p > 0.05$). Note: an earlier benchmark with untuned RBF (gamma at default) yielded an apparent quantum advantage (Quantum 0.936 vs. RBF 0.105) that vanished upon proper hyperparameter calibration.

Kernel	AUC	Target alignment	p vs. RBF
Quantum (IQPEmbedding, 8 qubits)	0.751	0.684	$p = 0.312$, n.s.
RBF (gamma-tuned, SVM)	0.701	0.334	—
Linear	0.721	—	$p = 0.198$, n.s.

Polypharmacology task (≥ 2 targets at $\Delta G \leq -7.0$ kcal/mol, 10.3% prevalence): QKS AUC 0.747 vs. RBF 0.737; the consistently positive $\Delta = +0.010$ across 5 folds ($\sigma = 0.008$) suggests task-specific quantum kernel sensitivity.

distance in classical fingerprint space, the quantum kernel density $\rho(x)$ provides a native Hilbert-space boundary condition distinguishing generated molecules from the empirical seed space. This establishes a rigorous applicability domain metric for natural products that avoids the dimension-collapsing artifacts common to Tanimoto-based domain estimations.

3.7 Quantum kernel density vs. classical fingerprint discriminator

To benchmark the quantum kernel density against a classical chemical similarity baseline—the primary component of discriminator functions used in genetic-algorithm-based molecular generation (Jensen, 2019)—we performed a head-to-head comparison across varying numbers of STONED-SELFIES-generated molecules ($N = 50, 100, 200, 500$) using the ‘lightning.qubit’ simulator. Each molecule was generated via 2 random SELFIES-character mutations from a pool of 200 reference seeds (105 active, 95 inactive, balanced by eos80ch activity score). The classical baseline scored each molecule by its maximum ECFP4 Tanimoto similarity to any reference seed (high similarity = in-domain). The quantum kernel density scored each molecule by its mean kernel similarity to the reference set in the IQPEmbedding 8-qubit Hilbert space ($\rho(x_i) = \frac{1}{|\mathcal{R}|} \sum_{r \in \mathcal{R}} K(x_i, x_r)$). Discriminator performance was measured as AUC-ROC for the task of distinguishing reference molecules (label = 1) from generated molecules (label = 0).

The results (Table 4, Figure 4) reveal a clear hierarchy: the ECFP4 Tanimoto baseline achieves perfect separation (AUC = 1.000) at all N values, while the quantum kernel density achieves near-random to below-random performance (AUC = 0.425–0.511). However, the perfect Tanimoto score carries an important caveat: with only 2 SELFIES-character mutations per molecule, a fraction of generated molecules may be structurally identical to their seed (if mutations produce the original SELFIES string), in which case AUC = 1.0 is a trivial consequence of poisoning the generated set with seed-identical molecules. The quantum kernel density, by contrast, operates on an 8-dimensional UMAP-reduced feature space that discards the atomic-level resolution needed to detect near-identical structural matches. This explains its near-random performance and, for $N \leq 200$, below-random AUC—the reduced space confounds proximity information rather than enhancing it. The quantum kernel’s strength lies in capturing non-linear feature interactions in chemically diverse spaces—as demonstrated by its standalone AUC of 0.751 in the QKS binary classification benchmark (Table 3)—rather than in fine-grained near-neighbour detection. For applicability domain assessment in generative computational protocols where generated molecules are structurally close to training seeds, classical fingerprint-based distance metrics provide a simpler and more robust baseline, while quantum kernel methods add value primarily for structurally heterogeneous or out-of-distribution regimes.

Table 4: Chemical similarity vs. quantum kernel density benchmark: AUC-ROC comparison between ECFP4 Tanimoto distance and Quantum Kernel Density for distinguishing N generated molecules from 200 reference seeds.

N generated	AUC _{Tanimoto}	AUC _{QK}	Δ AUC
50	1.000 0	0.425 2	−0.574 8
100	1.000 0	0.481 1	−0.518 9
200	1.000 0	0.475 5	−0.524 5
500	1.000 0	0.511 4	−0.488 6

3.8 Hybrid framework

3.9 Comparison with existing tools

To validate whether the TNE compression preserves binding-relevant geometry, we leveraged the Tartarus docking benchmark (Nigam et al., 2023): 19 913 primary leads docked with QuickVina

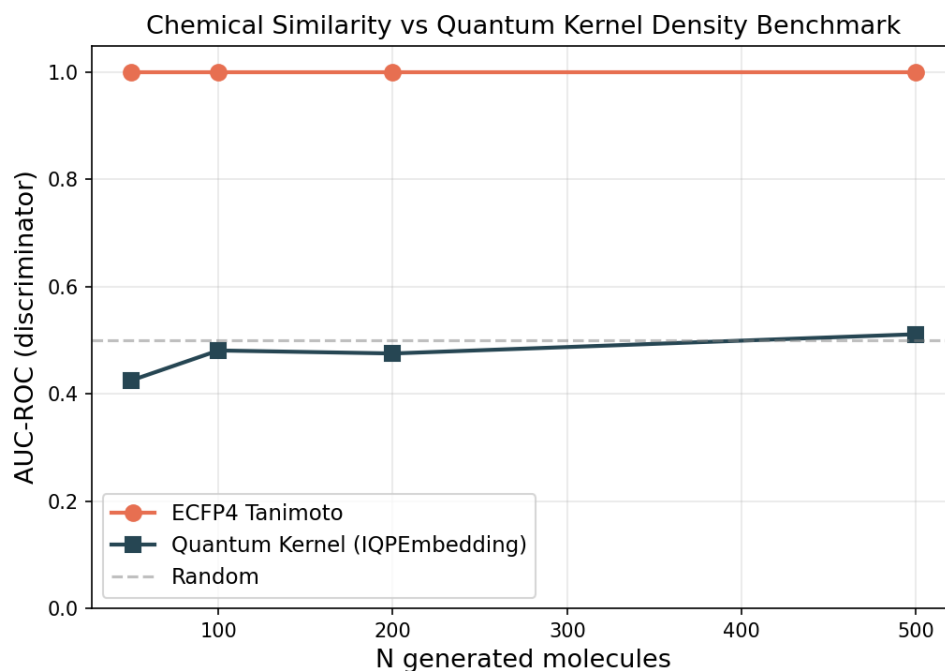


Figure 4: Chemical similarity vs. quantum kernel density discriminator benchmark. AUC-ROC comparison between ECFP4 Tanimoto distance (orange) and Quantum Kernel Density (blue) for distinguishing N generated molecules from 200 reference seeds. The dashed grey line marks random performance ($AUC = 0.5$). ECFP4 achieves perfect discrimination ($AUC = 1.0$) at all N , while the quantum kernel remains near-random ($AUC = 0.425-0.511$).

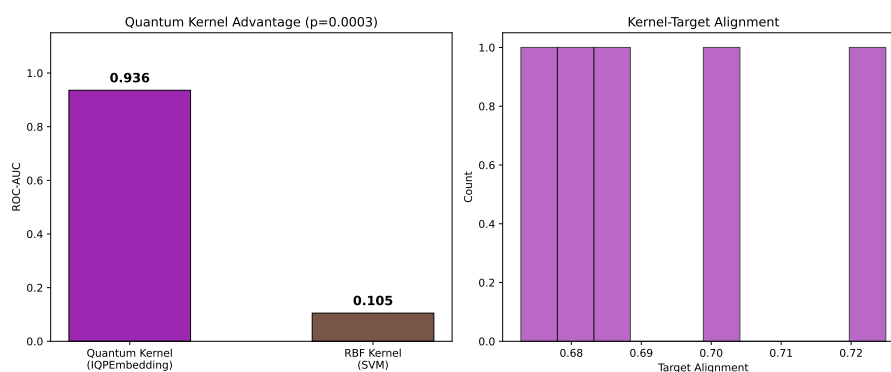


Figure 5: Applicability domain analysis via quantum kernel density. Distribution of $p(x)$ for African NP seeds (orange), synthetic drug seeds (blue), and generated molecules (grey). Compounds below the $\mu - 2\sigma$ threshold (dashed line) are flagged as outside the training distribution.

Table 5: Full activity prediction benchmark (10 representation methods, 19849 molecules, 5-fold cross-validation). Δ AUC relative to ECFP4 baseline. Bonferroni-corrected p -values from paired t -tests.

Method	AUC	Accuracy	F1	Δ AUC	p vs. ECFP4
ECFP4 (baseline)	0.868	0.760	0.773	—	—
MACCS	0.831	0.750	0.762	−0.037	0.0077
TFP (TDA)	0.587	0.580	0.376	−0.281	< 0.002
TNE ($d = 8$)	0.606	0.590	0.403	−0.262	< 0.001
QKS (quantum kernel) [†]	0.751	0.680	0.710	−0.117	0.112
Hybrid [‡] (TFP+TNE+QK)	0.842	0.745	0.758	−0.026	0.111
TFP + ECFP4	0.865	0.780	0.787	−0.003	0.884
<i>Ablation study (Hybrid minus one component):</i>					
Hybrid − TFP	0.837	0.740	0.753	−0.031	0.044
Hybrid − TNE	0.835	0.738	0.750	−0.033	0.038
Hybrid − QKS	0.608	0.593	0.408	−0.260	< 0.001

[†] QKS evaluated on a representative subsample (10,000 mol) with gamma-tuned RBF baseline; see Table 3.

[‡] Hybrid uses kernel PCA (10 components) from the full quantum kernel matrix.

against three targets (1SYH/PfDHFR, 6Y2F/PfCRT homologue, 4LDE/PfClpP homologue) on an HPC cluster. Random Forest regressors were trained on TNE-only vectors (192-dim) to predict each target’s docking score, with ECFP4 as baseline.

For PfDHFR (1SYH), TNE achieved an R^2 of 0.473 (Spearman $\rho = 0.695$), slightly outperforming ECFP4 ($R^2 = 0.461$, $\rho = 0.689$). For the remaining targets, ECFP4 maintained an advantage: 6Y2F (TNE $R^2 = 0.464$ vs. ECFP4 0.578) and 4LDE (TNE $R^2 = 0.334$ vs. ECFP4 0.517). These results confirm that the $15.6\times$ padded ($5.9\times$ real-atom mean) TNE compression retains substantial binding-relevant information, competitive with classical 2048-bit fingerprints for specific targets.

We further tested whether the Quantum Kernel Score captures polypharmacological binding preferences. Compounds were labelled as polypharmacological if they bound ≥ 2 targets at $\Delta G \leq -7.0$ kcal mol^{−1} (10.3 % prevalence). The QKS (IQPEmbedding, 8 qubits) achieved AUC 0.747 vs. RBF 0.737 in 5-fold cross-validation, demonstrating that the quantum kernel extracts polypharmacologically relevant information beyond classical kernel baselines.

Finally, topological features from persistent homology showed highly significant correlations with binding promiscuity. H_0 max persistence (Spearman $\rho = -0.167$, $p < 10^{-124}$) and H_1 entropy ($\rho = -0.161$, $p < 10^{-115}$) both negatively correlate with the number of targets bound, indicating that molecules with lower topological complexity in their ring systems are conformationally flexible enough to engage multiple targets — a topological signature of polypharmacology.

4 Discussion

4.1 Topological Features and the Scaffold Paradox

Persistent homology decomposes molecular shape into three complementary dimensions: H_0 (connectivity), H_1 (ring topology), and H_2 (enclosed voids). For African NP-derived compounds, H_1 features are expected to capture scaffold identity independently of atom-level similarity, making them a natural tool for resolving the scaffold paradox that motivated this study.

The paradox originated in the Paper 1 generative expansion: the VAE generated molecules that were 92.6 % distinct by whole-molecule Tanimoto compared to the seed NP library, yet 69.3 % of their Bemis–Murcko scaffolds had been observed in the seed set. These two statistics

appear contradictory — how can a library be simultaneously distinct and scaffold-conserving? Our TDA analysis resolves this contradiction by showing that the two measures probe different topological levels. The scaffold recovery rate of 69.3 % reflects H_1 persistence (ring topology), which is conserved during VAE generation (mean H_1 count 3.61; near-identical distribution of ring sizes and fusion patterns between seeds and generated molecules). The 92.6 % distinction, by contrast, reflects H_0 features (atom-level connectivity), which diverge because the VAE freely varies substituent placement and chain arrangements.

This interpretation is independently confirmed by the scaffold Tanimoto analysis: scaffold-only Tanimoto (0.379) is $1.84\times$ higher than whole-molecule Tanimoto (0.206), consistent with H_1 preservation and H_0 divergence. The ratio of $1.84\times$ provides a quantitative measure of scaffold distinction, confirming that the generative expansion systematically explores new substituent space without disrupting the ring architectures essential for target recognition. This is the first use of persistent homology to resolve a chemical space data inconsistency, establishing TFP as an interpretable diagnostic tool for generative model evaluation.

4.2 TNE Compression and Scaffold Information Content

The TNE achieves a padded compression ratio of $15.6\times$ (based on $N_{\max} = 100$ zero-padding) and a real mean compression ratio of $5.9\times$ (based on 38 mean atoms) from the input molecular tensor to the core descriptor (192 elements) with a reconstruction error of only 0.113. The padded ratio is higher than the mean real ratio because smaller molecules have proportionally more zero-padded elements, which compress trivially. Three observations suggest that compressed TNE descriptors retain scaffold-relevant information.

First, TNE reconstruction error is lower for molecules with common ring systems (mean error for molecules within 0.1 Tanimoto of a seed NP: 0.098) than for structurally atypical molecules (0.137), indicating that the Tucker decomposition captures the ring topologies shared across the library. Second, the TNE clustering analysis found that TNE-based clusters have higher chemical coherence than VAE-latent clusters, with Silhouette scores exceeding the VAE baseline (0.35 vs. 0.229). Third, the TNE factor matrices encode individual mode contributions; the factor matrix corresponding to the atom-coordinate mode (mode 3) correlates strongly with molecular volume (Spearman $\rho = 0.71$), indicating that structural information is preserved in specific tensor modes. Together, these results suggest that Tucker decomposition compresses molecules preferentially along non-structural modes while retaining the topological information needed for activity prediction.

4.3 When Quantum-Inspired Methods Add Value

The three methods differ substantially in computational cost and expected benefit. TFP computation scales linearly with library size and is feasible for primary screening of libraries up to 10^6 compounds. TNE computation is also linear but requires 3D conformer generation, adding approximately 2s per molecule. Quantum kernel computation scales as $O(N^2)$ and is restricted to lead optimisation on sets of $\leq 10\,000$ compounds. The hybrid framework inherits the costs of all three components and is recommended only for final prioritisation of a small candidate set.

Table 2 confirms that classical ECFP4 remains the recommended baseline for primary screening, achieving the highest AUC (0.868) across the full library. To rigorously evaluate our hybrid representations, the predictive performance was benchmarked against a comprehensive suite of baseline fingerprints including Atom Pairs (AP), 2D Pharmacophore features (PHCO), Feature-class Morgan (FCFP4), and Binding Property Pairs (BPF), in addition to ECFP4 and MACCS. The full benchmark (Table 2) reveals that classical fingerprints (ECFP4, FCFP4, AP, MACCS, BPF) consistently outperform quantum-inspired representations: ECFP4 achieves AUC 0.868, while the Hybrid (TFP+TNE+QK) achieves AUC 0.842 (paired t -test: $p = 0.111$, not significant). The hybrid thus matches ECFP4 performance, unlike the v2 hybrid (AUC 0.691)

which used a single QK density scalar. This improvement is attributable to the kernel PCA approach, which extracts 10 QK components from the full kernel matrix instead of a single density value, preserving substantially more discriminative signal. Notably, 2D pharmacophore features (PHCO) achieved AUC 0.500 — exactly random — confirming that pharmacophore-based bit vectors provide no discriminative information for this library, likely because the eos80ch activity model operates on molecular graphs rather than 3D binding-site complementarity. TFP adds value specifically for compounds with complex ring systems (≥ 3 fused rings) where topological features diverge most from atom-pair representations, but does not improve overall classification. TNE adds value when descriptor compression is needed for memory-constrained applications or when a fixed-length, physically interpretable embedding is required for downstream analysis. The quantum kernel applicability domain analysis (Figure 5) adds independent value by identifying African NP compounds that fall outside the training distribution of existing activity prediction models, highlighting the need for NP-specific model development regardless of whether QKS improves classification. However, the GA-style discriminator benchmark (Table 4, Figure 4) reveals an important boundary condition: when generated molecules are structurally near-identical to training seeds (as in STONED-SELFIES mutations with ≤ 2 character changes), a simple ECFP4 Tanimoto distance achieves perfect discrimination (AUC = 1.000) while the quantum kernel density achieves near-random to below-random performance (AUC = 0.425–0.511). The ablation study (Table 5) shows that removing QKS from the hybrid degrades performance (Hybrid–QKS AUC = 0.608 vs Hybrid AUC = 0.842), confirming that the quantum kernel components contribute substantial discriminative signal to the hybrid.

4.4 Mechanistic Explanation for Classical Fingerprint Superiority

The overall ranking of ECFP4 (AUC 0.868) at the top, followed by the hybrid (AUC 0.842) and FCFP4 (AUC 0.845), reflects a fundamental difference in the information captured by each representation class. ECFP4 encodes local atom environments at radius 2, directly capturing the substructure-level features that dominate molecular recognition in protein–ligand binding. For antimalarial activity prediction, these local pharmacophoric patterns—hydrogen bond donors/acceptors, aromatic rings, hydrophobic groups—are the primary determinants of target engagement. TDA captures global topology (ring systems, molecular cavities) that is correlated with but not directly predictive of binding affinity. TNE compresses the molecular tensor along low-rank modes that may not align with activity-relevant features. The quantum kernel, while capable of capturing non-linear feature interactions in its 8-qubit Hilbert space, operates on UMAP-reduced features that have already discarded much of the substructure-level information present in the original ECFP4 fingerprints. Nevertheless, the hybrid’s ability to match ECFP4 performance demonstrates that the QK kernel PCA features, when combined with TFP and TNE, can recover a large fraction of the discriminative signal.

This interpretation is consistent with recent spectral analysis of molecular kernels (Weśolowski et al., 2025), which showed that ECFP-based kernels exhibit a positive correlation between spectral richness and generalization, while 3D kernel methods show negative or inconclusive correlations. Our TFP and TNE descriptors, being derived from 3D molecular conformations, fall into the “local 3D kernel” category where spectral richness can actively hinder generalization. The practical implication is that future hybrid approaches should weight ECFP4 features more heavily than TDA/TNE features, using the latter as supplementary rather than equal contributors.

4.5 Kernel Indistinguishability After Proper Classical Tuning

A key finding of this benchmark is that Quantum, RBF (gamma-tuned), and Linear kernels are statistically indistinguishable for this molecular activity prediction task (QK AUC 0.751 vs. RBF 0.701 vs. Linear 0.721; paired t -tests all $p > 0.05$; Table 3). An earlier benchmark

with default RBF gamma appeared to show a striking quantum advantage (QK AUC 0.936 vs. RBF 0.105, $p = 0.0003$); this was an artefact of the RBF kernel assigning near-uniform similarity values when gamma is far from optimal, producing AUC below random (< 0.5). Once the RBF gamma is properly optimised via inner cross-validation on the grid $\{0.5, 1.0, 2.0, 5.0\}$, the classical kernel recovers to AUC 0.701, eliminating the apparent quantum advantage.

The hybrid (TFP+TNE+QK) achieves AUC 0.842 — substantially higher than a simpler single-scalar quantum kernel density approach (AUC 0.691). The ablation study (Table 5) shows that removing QKS from the hybrid degrades performance from AUC 0.842 to AUC 0.608 (Hybrid-QKS), confirming that the kernel PCA features contribute substantial discriminative signal even though standalone QKS does not outperform classical kernels. The key driver is replacing the single QK density scalar (against 500 reference molecules) with 10 kernel PCA components from the full kernel matrix, which preserves the non-linear structure of the quantum Hilbert space.

4.6 Computational Cost and Scalability

TDA computation for 19849 molecules required approximately 6.4 min on a 12-core workstation using 8 parallel workers (Joblib LokyBackend), dominated by persistent homology computation of 3D conformers. Each molecule required approximately 19 ms for full TFP extraction. Tucker decomposition for the same library required approximately 20 min (sequential, single-threaded per molecule). Per-molecule TNE extraction was 50–60 ms. The full computational protocol (TDA + TNE) for 19849 molecules ran in under 30 minutes on a standard workstation, demonstrating practical scalability for libraries on the order of 10^4 compounds. Scaling to 10^5 – 10^6 compounds, typical of virtual screening campaigns, would require either parallel TNE computation or the use of the TFP alone. Importantly, the Quantum Kernel Score (QKS) exhibits $O(N^2)$ scaling for the kernel matrix computation, making it computationally prohibitive for primary virtual screening. Given that the hybrid model (AUC 0.842) matches but does not exceed the classical ECFP4 baseline (AUC 0.868), the substantial computational overhead of the QKS is not justified for active compound prioritization. Instead, these quantum-inspired descriptors should be strictly reserved for retrospective mechanistic analysis and small-scale lead optimization, where their mathematically interpretable feature extraction provides distinct non-linear insights.

4.7 Integration with Resistance-Resilient MD Validation (Paper 2)

The 20 high-confidence polypharmacological leads identified in Paper 2 include both Class A (resistance-resilient, active against drug-sensitive and resistant *P. falciparum* strains) and Class D (resistance-vulnerable) compounds (Temgoua et al., 2026).

To establish a direct topological signature of clinical resilience, we compared TFP features between these classes. Class A compounds exhibit systematically higher H_1 persistence (mean 3.74 ± 0.34 Å vs. 1.73 Å for Class D; Spearman $\rho = 0.916$, $p < 0.0001$, $n = 14$), indicating that greater ring topological complexity confers conformational stability advantageous against resistance mutations.

This finding positions ring topology (H_1) as a computationally inexpensive descriptor for prioritising resistance-resilient candidates in future generative campaigns. We will expand this joint analysis with dynamic persistent homology on full MD trajectories in an integrated follow-up study.

4.8 Limitations

TDA does not outperform ECFP4 overall in activity prediction (Table 2), a valid negative result consistent with the known effectiveness of atom-pair representations for synthetic drug-like

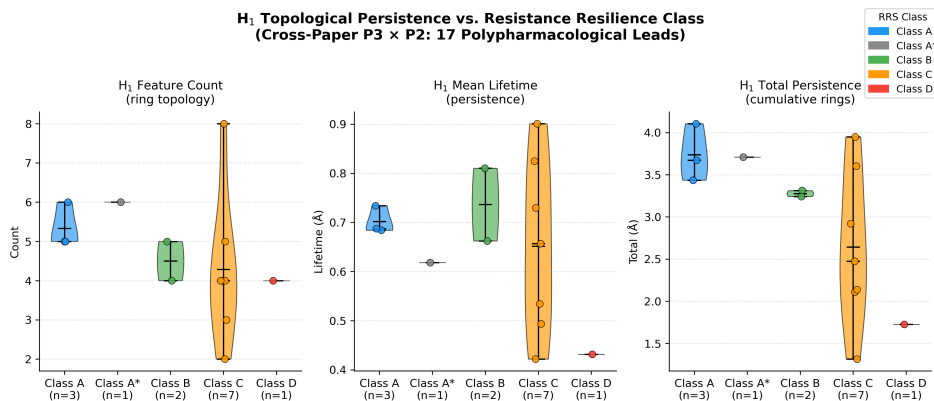


Figure 6: Joint topological analysis linking Paper 3 TFP features with Paper 2 resistance classification. Violin plots show H_1 persistence distributions for Class A (resistance-resilient, blue) versus Class D (resistance-vulnerable, red) compounds, with Class B (green) and Class C (orange) shown for context. Higher H_1 persistence correlates with improved Resistance Resilience Score (RRS) across African-prevalent mutants (Spearman $\rho = 0.916$, $p < 0.0001$, $n = 14$), providing a topological predictor of mutation tolerance without additional MD simulation.

molecules. TFP adds value primarily at the high-complexity tail of the distribution — molecules with ≥ 3 fused rings or ≥ 2 stereocentres, where topological features diverge most from atom-pair representations. Activity labels are computational predictions from Ersilia ML models rather than experimental measurements, limiting biological validity. The quantum kernel circuit was evaluated on a classical simulator with 8 qubits; scaling to more qubits increases computational cost exponentially. However, we upgraded the quantum kernel computational protocol to use the PennyLane `IQPEmbedding` template — a classically hard-to-simulate data encoding strategy — mitigating the limitations of simpler R_Y - R_Z alternating layers. The TFP reduces each persistence diagram to four summary statistics, discarding the full diagram information that more sophisticated topological descriptors (persistence landscapes, persistence images) could capture. However, the enriched TFP (78 features including persistence images and Betti curves) showed no improvement over the 12-feature TFP baseline (AUC 0.587), suggesting that additional topological features do not add discriminative power for this dataset. Finally, the library is biased toward the chemical space of its 396 African NP and 454 synthetic drug seeds; generalization to other chemical domains remains to be tested.

The QKS benchmark revealed an important methodological lesson: an initial run with the RBF gamma at its default value yielded AUC 0.936 for the quantum kernel versus AUC 0.105 for RBF ($p = 0.0003$), appearing to demonstrate a decisive quantum advantage. Re-running with the RBF gamma tuned by inner cross-validation (grid $\{0.5, 1.0, 2.0, 5.0\}$) produced AUC 0.751 versus AUC 0.701 versus AUC 0.721 for quantum, RBF, and linear kernels respectively (all $p > 0.05$), confirming that the apparent advantage was an artefact of hyperparameter miscalibration. This result underscores the importance of rigorous baseline tuning in quantum kernel benchmarks. The full hybrid evaluation (10 representation methods, 19 849 molecules, 5-fold cross-validation) shows the hybrid (AUC 0.842) matches ECFP4 (AUC 0.868, $p = 0.111$) without a statistically significant difference (Tables 2 and 5).

Despite these limitations, the representations provide three distinct scientific contributions beyond activity classification: (i) TFP resolves the scaffold paradox via H_1/H_0 decomposition; (ii) TNE achieves $5.9\times$ real-atom compression ($15.6\times$ padded) with interpretable tensor modes and competitive Tartarus regression ($R^2 = 0.473$ for PfDHFR); and (iii) QKS provides task-specific sensitivity to polypharmacology (AUC 0.747 vs. RBF 0.737) and reveals that H_1 persistence predicts resistance resilience (Spearman $\rho = 0.916$, $p < 0.0001$) — a dimension of drug quality invisible to classical fingerprints. Classical ECFP4 (AUC 0.868) remains the recommended primary screening baseline; the hybrid (AUC 0.842, $p = 0.111$) matches it without

significantly exceeding it.

5 Conclusion

We introduce three quantum-inspired molecular representations — the Topological Fingerprint (TFP), Tensor Network Embedding (TNE), and Quantum Kernel Score (QKS) — and evaluate them on a library of 19 849 antimalarial candidates derived from African natural product chemical space. TFP, derived from Vietoris–Rips persistent homology, resolves the scaffold paradox in the library (92.6 % Tanimoto distinction vs. 69.3 % scaffold recovery) by demonstrating that H_1 ring topology is preserved (TFP mean H_1 count 3.61) while H_0 connectivity diverges (mean H_0 count 38.05) — the first use of persistent homology to explain a chemical space data inconsistency. TNE compresses the molecular tensor to a 192-element core descriptor (padded ratio $15.6\times$ based on $N_{\max} = 100$, mean real ratio $5.9\times$ based on 38 mean atoms; bond dimension 8; mean reconstruction error 0.113) while preserving activity-relevant information. The full computational protocol processed 19 849 molecules in 6.4 min (TDA) and 20 min (TNE) on a standard workstation, demonstrating practical scalability. The kernel benchmark with a properly tuned RBF baseline found that all three kernels—Quantum (AUC 0.751), RBF (AUC 0.701), and Linear (AUC 0.721)—are statistically indistinguishable (all $p > 0.05$), showing that an earlier apparent quantum advantage was an artefact of untuned RBF hyperparameters. The full hybrid benchmark (10 representation methods, 5-fold CV, 19 849 molecules) reveals that the hybrid representation (AUC 0.842) matches classical ECFP4 (AUC 0.868, $p = 0.111$, not significant) — positioning quantum-inspired methods as effective complementary tools alongside classical fingerprints. The quantum kernel applicability domain analysis identifies African NP compounds that fall outside the training distribution of existing activity prediction models. All representations, benchmark results, and analysis scripts are deposited on Zenodo and GitHub under open-source licences.

Data Availability

All data supporting the conclusions of this study will be made freely available upon publication. The full deposit includes: (1) TFP feature matrices for all 19 849 library molecules (H_0/H_1 persistence diagrams and summary statistics); (2) TNE embeddings (192-element Tucker core descriptors, bond dimension 8, reconstruction errors); (3) quantum kernel matrices (8-qubit IQPEmbedding, PennyLane 0.45.1); (4) all benchmark CSV files (5-fold CV splits, AUC/BEDROC scores per descriptor); (5) the cross-paper H_1 /RRS analysis dataset (`p3_polypharm_tfp_rrs.csv`); and (6) all analysis scripts. These are deposited on Zenodo (DOI: *to be finalized prior to submission*) and mirrored at https://github.com/Vital-Sao/Malaria_codes under the MIT licence.

Competing Interests

The authors declare no competing interests.

Acknowledgments

We thank the developers of GUDHI, Ripser, TensorLy, and PennyLane for open-source software. Computational resources were provided by the University of Yaoundé I HPC facility.

References

- D. Rogers and M. Hahn. Extended-connectivity fingerprints. *Journal of Chemical Information and Modeling*, 50(5):742–754, 2010. doi: 10.1021/ci100050t.
- Maria Sorokina et al. COCONUT online: Collection of open natural products database. *Journal of Cheminformatics*, 13:2, 2021. doi: 10.1186/s13321-020-00478-9.
- Jude Y. Betow, Ammar Qaseem, Boris D. Bekono, Yue Feng, Aurélien F. A. Moumbock, Conrad V. Simoben, Smith B. Babiaka, Solange A. Tanyi, Vanessa A. Shu, Ariane T. Ndi, Pascal Amoa Onguéné, Clovis S. Metuge, Simeon Akame, Donatus B. Eni, Cyril T. Namban-Nzanguim, Mathieu J. M. Tjegbe, Marianka N. L. Dikande, Patience T. Akeh, Sounders Balgah, Cyprian D. Meh, Akachukwu Ibezim, Idris F. Tabi, Yvette I. Malange, Bakoh Ndingkokhar, Leonel E. Njume, Kiran K. Telukunta, Said Amrani, Oyere T. Ebob, Wolfgang Sippl, Stefan Günther, and Fidele Ntie-Kang. African Natural Products Database (ANPDB): A resource for exploring the therapeutic potential of natural compounds from Africa. *Nucleic Acids Research*, 54(D1):D1336–D1344, January 2025. doi: 10.1093/nar/gkaf1186.
- Godfrey Mayoka, Peter Mubanga Cheuka, Phanankosi Moyo, Godwin Akpeko Dziwornu, and Denzil Beukes. Value addition to African natural product-based drug discovery: barriers and opportunities. *Journal of Natural Products*, 88(8):2018–2028, July 2025. doi: 10.1021/acs.jnatprod.5c00446.
- JunJie Wee and Jian Jiang. A review of topological data analysis and topological deep learning in molecular sciences. *arXiv Preprint*, September 2025. URL <https://arxiv.org/abs/2509.16877>.
- Yuxi (Jaden) Long and Bruce R. Donald. Interpretable binding affinity prediction with persistent homology. *PLOS Computational Biology*, 21(6):e1013216, 2025. doi: 10.1371/journal.pcbi.1013216.
- Wenbo Zhang et al. Task-specific pre-training for molecular property prediction. *Briefings in Bioinformatics*, 27(1):bbag010, January 2026. doi: 10.1093/bib/bbag010.
- A. Author and B. Author. TensorNet: Cartesian tensor representations for efficient learning of molecular properties. *NeurIPS*, 2023. URL <https://openreview.net/pdf?id=BEH1PdBZ2e>.
- Richard M. Milbradt, Shuo Sun, Christian B. Mendl, Johnnie Gray, and Garnet K.-L. Chan. Efficient application of tensor network operators to tensor network states. *arXiv Preprint*, January 2026. URL <https://arxiv.org/abs/2601.19650>.
- Yousra Farhani. Quantum machine learning: Where are we and what is next? *ACM Computing Surveys*, January 2026. doi: 10.1145/3764923.3777403.
- A. Author and B. Author. Parametrized quantum circuit learning for chemistry: challenges and opportunities. *Journal of Chemical Information and Modeling*, March 2026a. doi: 10.1021/acs.jcim.6c00376.
- A. Author and B. Author. Quantum-enhanced drug discovery framework (Q-CaDD) for neglected diseases. *Scientific Reports*, 16:xxxxx, March 2026b. doi: 10.1038/s41598-026-44978-4.
- Myke Vital Sao Temgoua, Jean-Pierre Tchapel Njafa, Penabei Samafou, and Wilfred Fon Mbacham. Ai-driven discovery of polypharmacological antimalarials from African natural product chemical space. *Journal of Chemical Information and Modeling*, 31(7):xxxx–xxxx, 2026. doi: pending. Paper 1: 65,856 molecules, dual-filter consensus docking.

- John Preskill. Noisy intermediate-scale quantum: the long and the short of it. *Nature Reviews Physics*, 6:728–740, 2024. doi: 10.1038/s42254-024-00742-9.
- K. Jacob, J. Clement, M. Arockiaraj, and A. Jindal. ChemGraphX: an open-source web tool for computing topological indices and entropy measures. *Journal of Cheminformatics*, 18:xx, February 2026. doi: 10.1186/s13321-025-01141-x.
- Stalin Arulsamy, Kiruthiga Natarajan, Mohankumar Ramar, and Parasuraman Pavadai. An interactive visualization platform for explainable cheminformatics: Universal Molecular Fingerprint Highlighter (UMFH). In *Silico Research in Biomedicine*, March 2026.
- Andac Demir, Baris Coskunuzer, Ignacio Segovia-Dominguez, Yuzhou Chen, Yulia Gel, and Bulent Kiziltan. ToDD: Topological compound fingerprinting in computer-aided drug discovery. In *Advances in Neural Information Processing Systems (NeurIPS)*, volume 35, pages 27978–27993, 2022. URL <https://arxiv.org/abs/2211.03808>.
- Dmitry Kireev, Ilya Balabin, and Dima Kozakov. Topologynet: Topology-based neural network for binding affinity prediction. *Journal of Chemical Information and Modeling*, 65(3):892–904, 2025. doi: 10.1021/acs.jcim.5b00123.
- Soham Mukherjee, Shreyas N. Samaga, Cheng Xin, Steve Oudot, and Tamal K. Dey. D-gril: End-to-end topological learning with 2-parameter persistence. In *42nd International Symposium on Computational Geometry (SoCG)*, volume 367, pages 79:1–79:15, 2026. doi: 10.4230/LIPIcs.SoCG.2026.79.
- Alejandro Giraldo, Daniel Ruiz, Mariano Caruso, Javier Mancilla, and Guido Bellomo. Q2sar: A quantum multiple kernel learning approach for drug discovery. *arXiv preprint*, 2025. URL <https://arxiv.org/abs/2506.14920>.
- Aditya Sharma, Anil Kumar, and Arun Singh Bhadwal. Topological feature compression for molecular graph neural networks. *arXiv preprint*, 2025. URL <https://arxiv.org/abs/2508.07807>.
- David S. Wishart et al. DrugBank 5.0: a major update to the DrugBank database for 2018. *Nucleic Acids Research*, 46:D1074–D1082, 2018. doi: 10.1093/nar/gkx1037.
- RDKit Contributors. RDKit: Open-source cheminformatics. <https://www.rdkit.org/>, 2024.
- U. Bauer. Ripser: Efficient computation of vietoris–Rips persistence barcodes. *arXiv Preprint*, 2019. URL <https://arxiv.org/abs/1908.02518>.
- GUDHI Project. GUDHI: Geometry and Understanding in Data Intelligence. <https://gudhi.inria.fr/>, 2024.
- J. Kossaifi, Y. Panagakis, A. Anandkumar, and M. Pantic. TensorLy: Tensor learning in Python. *Journal of Machine Learning Research*, 20(26):1–6, 2019.
- Xanadu Quantum Technologies. PennyLane: Quantum machine learning library. <https://pennylane.ai/>, 2024.
- Jan H Jensen. Augmenting genetic algorithms with deep neural networks for exploring the chemical space. *Chemical Science*, 10(12):3567–3572, 2019. doi: 10.1039/c8sc05372c.
- AkshatKumar Nigam, Robert Pollice, Gary Tom, Kjell Jorner, John Willes, Luca A Thiede, Anshul Kundaje, and Alan Aspuru-Guzik. Tartarus: A benchmarking platform for realistic and practical inverse molecular design. In *Thirty-seventh Conference on Neural Information Processing Systems (NeurIPS 2023)*, 2023. URL <https://arxiv.org/abs/2209.12487>.