
PIZZA SALES SQL QUERIES

A. KPI's

1. Total Revenue:

```
SELECT SUM(total_price) AS Total_Revenue FROM pizza_sales;
```

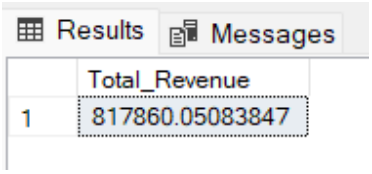


Results | Messages

	Total_Revenue
1	817860.05083847

2. Average Order Value

```
SELECT (SUM(total_price) / COUNT(DISTINCT order_id)) AS Avg_order_Value
FROM pizza_sales
```

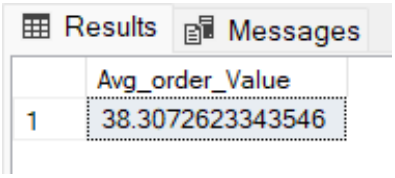


Results | Messages

	Avg_order_Value
1	38.3072623343546

3. Total Pizzas Sold

```
SELECT SUM(quantity) AS Total_pizza_sold FROM pizza_sales
```

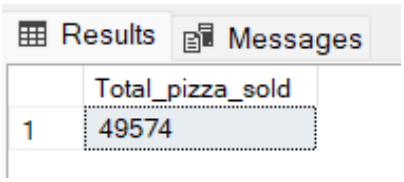


Results | Messages

	Total_pizza_sold
1	49574

4. Total Orders

```
SELECT COUNT(DISTINCT order_id) AS Total_Orders FROM pizza_sales
```

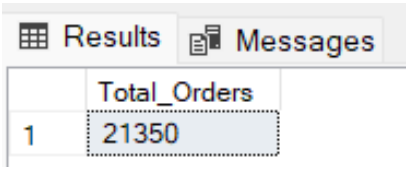


Results | Messages

	Total_Orders
1	21350

5. Average Pizzas Per Order

```
SELECT CAST(CAST(SUM(quantity) AS DECIMAL(10,2)) /
CAST(COUNT(DISTINCT order_id) AS DECIMAL(10,2)) AS DECIMAL(10,2))
AS Avg_Pizzas_per_order
FROM pizza_sales
```

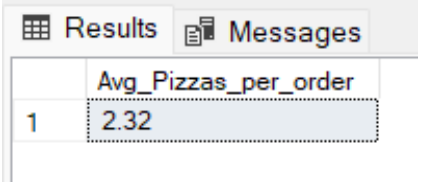


Results | Messages

	Avg_Pizzas_per_order
1	2.32

B. Daily Trend for Total Orders

```
SELECT DAYNAME (order_date_clean) AS order_day,
       COUNT(DISTINCT order_id) AS total_orders
FROM pizza_sales
GROUP BY DAYNAME (order_date_clean)
ORDER BY FIELD(order_day,
               'Monday','Tuesday','Wednesday',
               'Thursday','Friday','Saturday','Sunday');
```

Output:

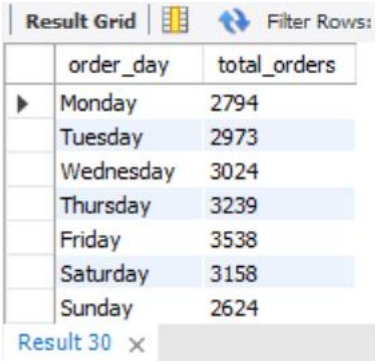

Result Grid | Filter Rows:

order_day	total_orders
Monday	2794
Tuesday	2973
Wednesday	3024
Thursday	3239
Friday	3538
Saturday	3158
Sunday	2624

Result 30

C. Monthly Trend for Orders

```
SELECT MONTHNAME (order_date_clean) AS Month_Name,
       COUNT(DISTINCT order_id) AS Total_Orders
FROM pizza_sales
WHERE order_date_clean IS NOT NULL
GROUP BY MONTH(order_date_clean), MONTHNAME(order_date_clean)
ORDER BY MONTH(order_date_clean);
```

Output:



Month_Name	Total_Orders
January	1845
February	1685
March	1840
April	1799
May	1853
June	1773
July	1935
August	1841
September	1661
October	1646
November	1792
December	1680

D. % of Sales by Pizza Category

```
SELECT pizza_category, CAST(SUM(total_price) AS DECIMAL(10,2)) as
total_revenue,
CAST(SUM(total_price) * 100 / (SELECT SUM(total_price) from pizza_sales)
AS DECIMAL(10,2)) AS PCT
FROM pizza_sales
GROUP BY pizza_category
```

Output

Results Messages

	pizza_category	total_revenue	PCT
1	Classic	220053.10	26.91
2	Chicken	195919.50	23.96
3	Veggie	193690.45	23.68
4	Supreme	208197.00	25.46

E. % of Sales by Pizza Size

```
SELECT pizza_size, CAST(SUM(total_price) AS DECIMAL(10,2)) as
total_revenue,
CAST(SUM(total_price) * 100 / (SELECT SUM(total_price) from pizza_sales)
AS DECIMAL(10,2)) AS PCT
FROM pizza_sales
GROUP BY pizza_size
ORDER BY pizza_size
```

Output

Results Messages

	pizza_size	total_revenue	PCT
1	L	375318.70	45.89
2	M	249382.25	30.49
3	S	178076.50	21.77
4	XL	14076.00	1.72
5	XXL	1006.60	0.12

F. Total Pizzas Sold by Pizza Category

```
SELECT pizza_category, SUM(quantity) as Total_Quantity_Sold
FROM pizza_sales
WHERE MONTH(order_date_clean) = 1
GROUP BY pizza_category
ORDER BY Total_Quantity_Sold DESC
```

Output

Result Grid | Filter Rows:

pizza_category	Total_Quantity_Sold
Classic	1257
Supreme	1044
Veggie	1018
Chicken	913

G. Top 5 Pizzas by Revenue

```
SELECT pizza_name, SUM(total_price) AS Total_Revenue
FROM pizza_sales
GROUP BY pizza_name
ORDER BY Total_Revenue DESC
LIMIT 5
```

Results | Messages

	pizza_name	Total_Revenue
1	The Thai Chicken Pizza	43434.25
2	The Barbecue Chicken Pizza	42768
3	The California Chicken Pizza	41409.5
4	The Classic Deluxe Pizza	38180.5
5	The Spicy Italian Pizza	34831.25

H. Bottom 5 Pizzas by Revenue

```
SELECT  pizza_name, SUM(total_price) AS Total_Revenue
FROM pizza_sales
GROUP BY pizza_name
ORDER BY Total_Revenue ASC
LIMIT 5
```

	pizza_name	Total_Revenue
1	The Brie Carre Pizza	11588.4998130798
2	The Green Garden Pizza	13955.75
3	The Spinach Supreme Pizza	15277.75
4	The Mediterranean Pizza	15360.5
5	The Spinach Pesto Pizza	15596

I. Top 5 Pizzas by Quantity

```
SELECT pizza_name, SUM(quantity) AS Total_Pizza_Sold
FROM pizza_sales
GROUP BY pizza_name
ORDER BY Total_Pizza_Sold DESC

LIMIT 5
```

Output

	pizza_name	Total_Pizza_Sold
1	The Classic Deluxe Pizza	2453
2	The Barbecue Chicken Pizza	2432
3	The Hawaiian Pizza	2422
4	The Pepperoni Pizza	2418
5	The Thai Chicken Pizza	2371

J. Bottom 5 Pizzas by Quantity

```
SELECT pizza_name, SUM(quantity) AS Total_Pizza_Sold

FROM pizza_sales
GROUP BY pizza_name
ORDER BY Total_Pizza_Sold ASC LIMIT 5
```

Output

Results Messages

	pizza_name	Total_Pizza_Sold
1	The Brie Carre Pizza	490
2	The Mediterranean Pizza	934
3	The Calabrese Pizza	937
4	The Spinach Supreme Pizza	950
5	The Soppressata Pizza	961

K. Top 5 Pizzas by Total Orders

```
SELECT pizza_name, COUNT(DISTINCT order_id) AS Total_Orders
FROM pizza_sales
GROUP BY pizza_name
ORDER BY Total_Orders DESC LIMIT 5
```

Results | Messages

	pizza_name	Total_Orders
1	The Classic Deluxe Pizza	2329
2	The Hawaiian Pizza	2280
3	The Pepperoni Pizza	2278
4	The Barbecue Chicken Pizza	2273
5	The Thai Chicken Pizza	2225

L. Bottom 5 Pizzas by Total Orders

```
SELECT pizza_name, COUNT(DISTINCT order_id) AS Total_Orders
FROM pizza_sales
GROUP BY pizza_name
ORDER BY Total_Orders ASC LIMIT 5
```

Result Grid | Filter Rows:

pizza_name	Total_orders
The Brie Carre Pizza	480
The Mediterranean Pizza	912
The Calabrese Pizza	918
The Spinach Supreme Pizza	918
The Chicken Pesto Pizza	938

NOTE

If you want to apply the pizza_category or pizza_size filters to the above queries you can use WHERE clause. Follow some of below examples

```
SELECT pizza_name, COUNT(DISTINCT order_id) AS Total_Orders
FROM pizza_sales
WHERE pizza_category = 'Classic'
GROUP BY pizza_name
ORDER BY Total_Orders ASC LIMIT 5
```