

DAY 9

NAME: Nandhini V

DATE: 21-07-2025

Tasks:

Git Commands

1. Open Git bash shell and create a new folder “**GitDemo**” and initialize as git repository
2. Git bash initializes the “**GitDemo**” repository.
3. Create a file “**welcome.txt**” and add content to the file (use echo or cat command)
4. To verify if the file “welcome.txt” is created, execute ls-al
5. To verify the content, execute the command cat filename
6. Execute git status
7. Signup with GitHub and create a remote repository “**GitDemo**”
8. Add remote origin
9. Create files and push the local to remote repository.
10. Make changes in the remote and pull the changes to the local.
11. Create a .gitignore file to ignore contents of temp folder

Docker

1. What is Docker-compose.yaml file? Give sample docker-compose file.
2. What is Docker hub?

Answers:

Git

```
nandhini.v@PTPLL609 MINGW64 /d
$ mkdir GitDemo
```

```
nandhini.v@PTPLL609 MINGW64 /d
$ cd GitDemo
```

```
nandhini.v@PTPLL609 MINGW64 /d/GitDemo
$ git init
Initialized empty Git repository in D:/GitDemo/.git/
```

```
nandhini.v@PTPLL609 MINGW64 /d/GitDemo (master)
$ touch welcome.txt
```

```
nandhini.v@PTPLL609 MINGW64 /d/GitDemo (master)
$ cat >> welcome.txt
This is a sample file for learning git commands
```

```
nandhini.v@PTPLL609 MINGW64 /d/GitDemo (master)
$ ls -al
total 5
drwxr-xr-x 1 nandhini.v 1049089  0 Jul 21 16:52 ./
drwxr-xr-x 1 nandhini.v 1049089  0 Jul 21 16:51 ../
drwxr-xr-x 1 nandhini.v 1049089  0 Jul 21 16:52 .git/
-rw-r--r-- 1 nandhini.v 1049089 212 Jul 21 16:53 welcome.txt
```

```
nandhini.v@PTPLL609 MINGW64 /d/GitDemo (master)
$ cat welcome.txt
This is a sample file for git commands for learning git commands
```

```
nandhini.v@PTPLL609 MINGW64 /d/GitDemo (master)
$ git status
On branch master
```

No commits yet

```
Untracked files:
  (use "git add <file>..." to include in what will be committed)
    welcome.txt
```

nothing added to commit but untracked files present (use "git add" to track)

nandhini.v@PTPLL609 MINGW64 /d/GitDemo (master)

\$ git add .

warning: in the working copy of 'welcome.txt', LF will be replaced by CRLF the next time Git touches it

nandhini.v@PTPLL609 MINGW64 /d/GitDemo (master)

\$ git commit -m "Initial Commit"

[master (root-commit) ed052b5] Initial Commit

1 file changed, 1 insertion(+)

create mode 100644 welcome.txt

nandhini.v@PTPLL609 MINGW64 /d/GitDemo (master)

\$ git branch -M main

nandhini.v@PTPLL609 MINGW64 /d/GitDemo (main)

\$ git remote add origin https://github.com/Nandhiniv22/GitDemo.git

nandhini.v@PTPLL609 MINGW64 /d/GitDemo (main)

\$ git push -u origin main

Enumerating objects: 3, done.

Counting objects: 100% (3/3), done.

Delta compression using up to 4 threads

Compressing objects: 100% (2/2), done.

Writing objects: 100% (3/3), 284 bytes | 142.00 KiB/s, done.

Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)

To https://github.com/Nandhiniv22/GitDemo.git

* [new branch] main -> main

branch 'main' set up to track 'origin/main'.

nandhini.v@PTPLL609 MINGW64 /d/GitDemo (main)

\$ git pull origin main

remote: Enumerating objects: 5, done.

remote: Counting objects: 100% (5/5), done.

remote: Compressing objects: 100% (2/2), done.

remote: Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)

Unpacking objects: 100% (3/3), 962 bytes | 43.00 KiB/s, done.

From https://github.com/Nandhiniv22/GitDemo

* branch main -> FETCH_HEAD

ed052b5..98e204a main -> origin/main

Updating ed052b5..98e204a

Fast-forward

welcome.txt | 3 ++-

1 file changed, 2 insertions(+), 1 deletion(-)

```
nandhini.v@PTPLL609 MINGW64 /d/GitDemo (main)
$ touch .gitignore
```


```
nandhini.v@PTPLL609 MINGW64 /d/GitDemo (main)
$ mkdir temp
```


```
nandhini.v@PTPLL609 MINGW64 /d/GitDemo (main)
$ cat >> .gitignore
temp/
```

```
nandhini.v@PTPLL609 MINGW64 /d/GitDemo (main)
$ git add .gitignore
warning: in the working copy of '.gitignore', LF will be replaced by CRLF the next time Git
touches it
```

```
nandhini.v@PTPLL609 MINGW64 /d/GitDemo (main)
$ git commit -m "commit msg of gitignore"
[main 72e6eee] commit msg of gitignore
1 file changed, 1 insertion(+)
create mode 100644 .gitignore
```

```
nandhini.v@PTPLL609 MINGW64 /d/GitDemo (main)
$ git push -u origin main
Enumerating objects: 4, done.
Counting objects: 100% (4/4), done.
Delta compression using up to 4 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 297 bytes | 148.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/Nandhiniv22/GitDemo.git
98e204a..72e6eee main -> main
branch 'main' set up to track 'origin/main'.
```

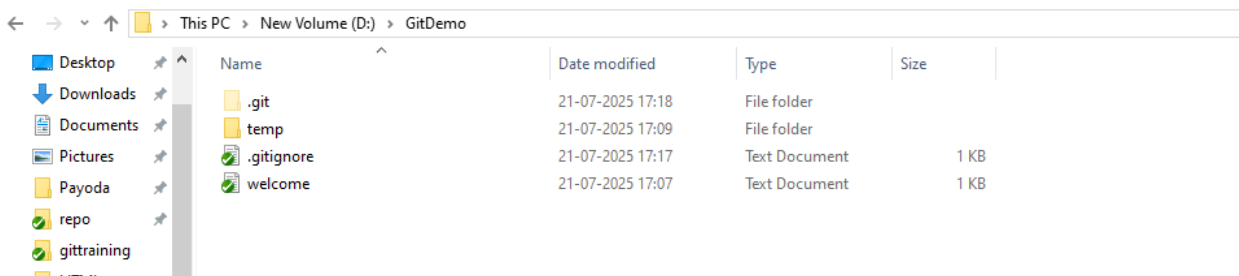

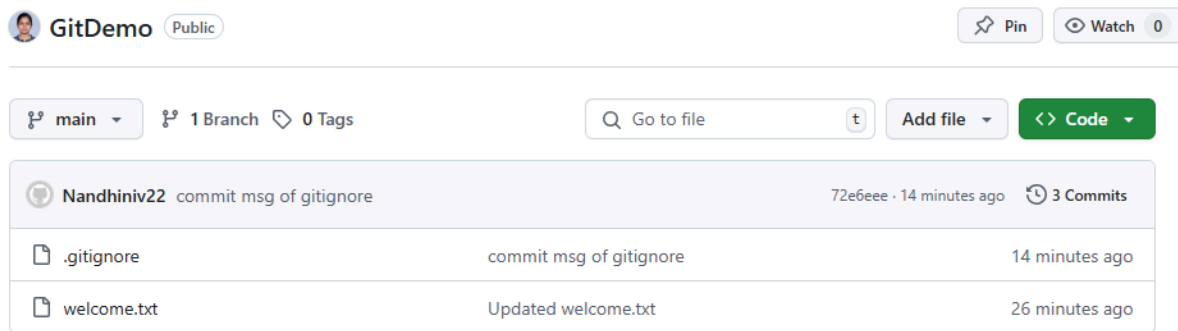

Docker

1. The docker-compose.yml file is used to define and run multi-container Docker applications. It specifies services, networks, and volumes in a single file, making deployment easier.

Sample file:

```
version: '3'
services:
  web:
    image: nginx
    ports:
      - "8080:80"
  app:
    image: myapp
    depends_on:
      - db
  db:
    image: mysql
    environment:
      MYSQL_ROOT_PASSWORD: password
```

2. Docker Hub is a cloud-based repository where you can find, share, and store Docker images. It's like GitHub, but for Docker containers.