



mkdir Angular ApplicationOnGit

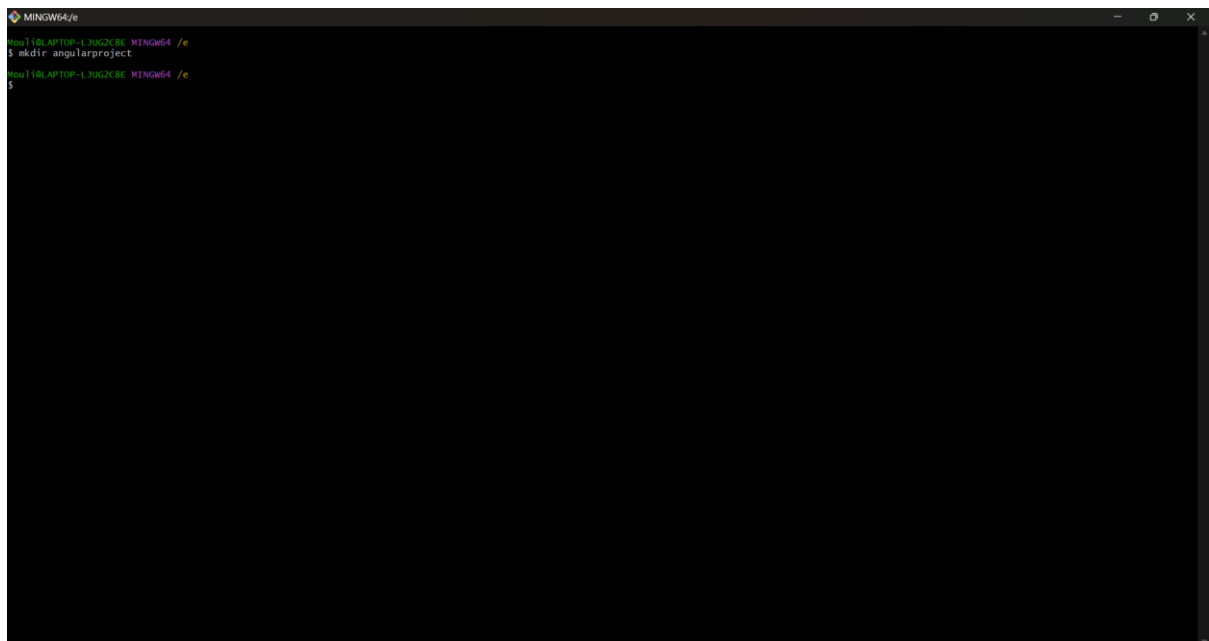

```
MINGW64/e
msu11@LAPTOP-L3UG2CBE MINGW64 /e
$ mkdir angularproject
msu11@LAPTOP-L3UG2CBE MINGW64 /e
$
```

Cd project

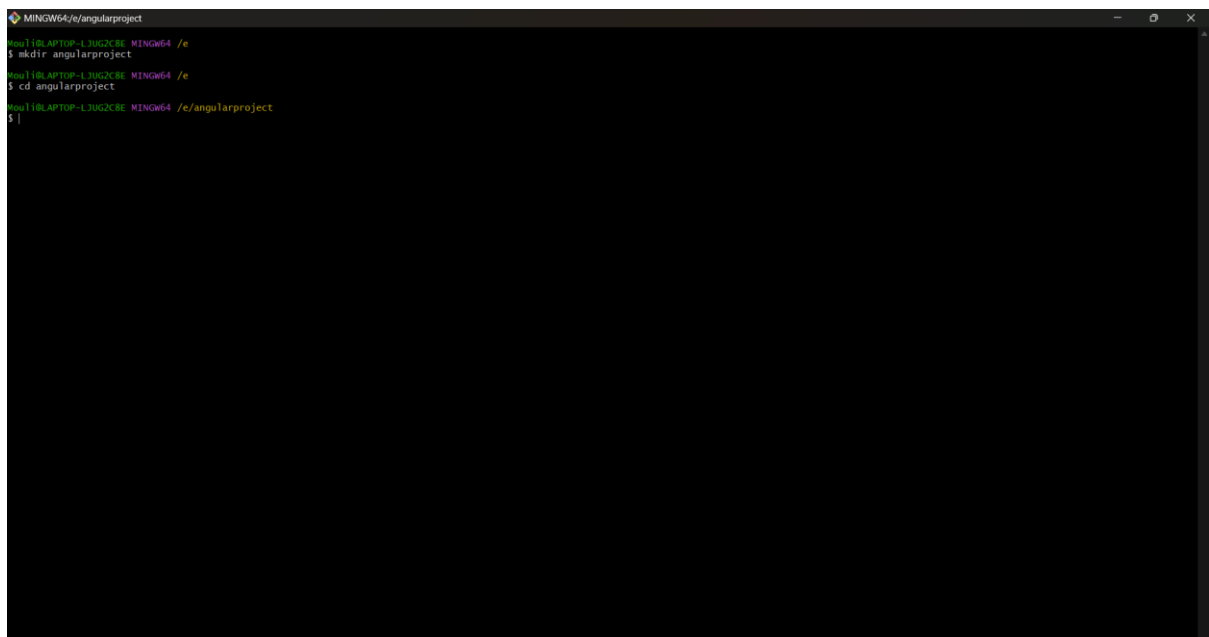

```
MINGW64/e/angularproject
msu11@LAPTOP-L3UG2CBE MINGW64 /e
$ mkdir angularproject
msu11@LAPTOP-L3UG2CBE MINGW64 /e
$ cd angularproject
msu11@LAPTOP-L3UG2CBE MINGW64 /e/angularproject
$ |
```

Git init

```
MINGW64/e/angularproject
$ mkdir angularproject
$ cd angularproject
$ git init
Initialized empty Git repository in E:/angularproject/.git/
$
```

Nano app components

```
GNU nano 2.2.1 app.components.ts
import { Component } from '@angular/core';

@Component({
  selector: 'app-root',
  styleUrls: ['app.component.scss'],
  templateUrl: 'app.component.html',
})
export class AppComponent {
}
```

Nano app module

```
MINGW64~/angularproject
GNU nano 7.2 app.module.ts
import { NgModule } from '@angular/core';
import { BrowserModule } from '@angular/platform-browser';
import { AppComponent } from './app.component';

@NgModule({
  imports: [
    BrowserModule
  ],
  bootstrap: [
    AppComponent
  ],
  declarations: [
    AppComponent
  ]
})
export class AppModule {}

AG Help      AO Write Out  AW Where Is  AK Cut       AT Execute   AC Location  M-U Undo    M-A Set Mark M-] To Bracket M-Q Previous AB Back      A+ Prev Word
OX Exit      AR Read File  AX Replace   AD Paste     AJ Justify   AZ Go To Line M-E Redo    M-G Copy     AQ Where Was M-W Next    AF Forward   A+ Next Word
```

App css

```
MINGW64~/angularproject
GNU nano 7.2 app.css
box-sizing: border-box;
-webkit-box-sizing: border-box;
-moz-box-sizing: border-box;
font: 300 13px/1.4 -apple-system,BlinkMacSystemFont,"Segoe UI",Helvetica,Arial,sans-serif,"Apple Color Emoji","Segoe UI Emoji","Segoe UI Symbol";

html, body {
  height: 100%;
  margin: 0;
  padding: 0;
  background: #fff;
  -webkit-font-smoothing: antialiased;
  color: #34566f;
}

img {
  vertical-align: bottom;
}

img a {
  border: 0;
}

ol {
  list-style: none;
  margin: 0;
  padding: 0;
}

a {
  color: #9f72e6;
  text-decoration: none;
}

input,
button {
  outline: 0;
}

input[type=text],
input[type=email],
input[type=number] {
  border: none;
  background: #fff;
  font-size: 13px;
  padding: 6px 30px 6px 10px;
  border-radius: 1px;
  box-shadow: 1px 1px 3px 1px #ccc;
  border: 1px solid #eee;
}

button {
  cursor: pointer;
  background: #9f72e6;
  border: 0;
  border-radius: 2px;
  padding: 5px 10px;
  text-align: center;
}
```

Ts config.json

```
MINGW64/e/angularproject
GNU nano 7.2
tsconfig.json
{
  "compilerOptions": {
    "module": "commonjs",
    "esModuleInterop": true,
    "strict": true,
    "skipLibCheck": true,
    "forceConsistentCasingInFileNames": true
  },
  "include": [
    "src"
  ],
  "exclude": [
    "node_modules"
  ],
  "awesomeTypescriptLoaderOptions": {
    "useWebpackText": true,
    "forkChecker": true,
    "useCache": true
  },
  "compileOnSave": false,
  "buildOnSave": false
}
```

Ls

```
MINGW64/e/angularproject
root@BLAPTOP-L3UG2CBE MINGW64 /e
$ mkdir angularproject
root@BLAPTOP-L3UG2CBE MINGW64 /e
$ cd angularproject
root@BLAPTOP-L3UG2CBE MINGW64 /e/angularproject
$ git init
Initialized empty Git repository in E:/angularproject/.git/
root@BLAPTOP-L3UG2CBE MINGW64 /e/angularproject (master)
$ nano app.components.ts
root@BLAPTOP-L3UG2CBE MINGW64 /e/angularproject (master)
$ nano app.module.ts
root@BLAPTOP-L3UG2CBE MINGW64 /e/angularproject (master)
$ nano app.css
root@BLAPTOP-L3UG2CBE MINGW64 /e/angularproject (master)
$ nano main.ts
root@BLAPTOP-L3UG2CBE MINGW64 /e/angularproject (master)
root@BLAPTOP-L3UG2CBE MINGW64 /e/angularproject (master)
$ ls
app.components.ts  app.css  app.module.ts  main.ts  tsconfig.json
```

Git status


```
MINGW64/e/angularproject
root@BLAPTOP-L3UG2CBE MINGW64 /e
$ mkdir angularproject
root@BLAPTOP-L3UG2CBE MINGW64 /e
$ cd angularproject
root@BLAPTOP-L3UG2CBE MINGW64 /e/angularproject
$ git init
Initialized empty Git repository in E:/angularproject/.git/
root@BLAPTOP-L3UG2CBE MINGW64 /e/angularproject (master)
$ nano app.components.ts
root@BLAPTOP-L3UG2CBE MINGW64 /e/angularproject (master)
$ nano app.module.ts
root@BLAPTOP-L3UG2CBE MINGW64 /e/angularproject (master)
$ nano app.css
root@BLAPTOP-L3UG2CBE MINGW64 /e/angularproject (master)
$ nano main.ts
root@BLAPTOP-L3UG2CBE MINGW64 /e/angularproject (master)
root@BLAPTOP-L3UG2CBE MINGW64 /e/angularproject (master)
$ ls
app.components.ts  app.css  app.module.ts  main.ts  tsconfig.json
root@BLAPTOP-L3UG2CBE MINGW64 /e/angularproject (master)
$ git status
On branch master

No commits yet


Untracked files:
  (use "git add <file>..." to include in what will be committed)
    app.components.ts
    app.css
    app.module.ts
    main.ts
    tsconfig.json

nothing added to commit but untracked files present (use "git add" to track)
root@BLAPTOP-L3UG2CBE MINGW64 /e/angularproject (master)
$
```

.js

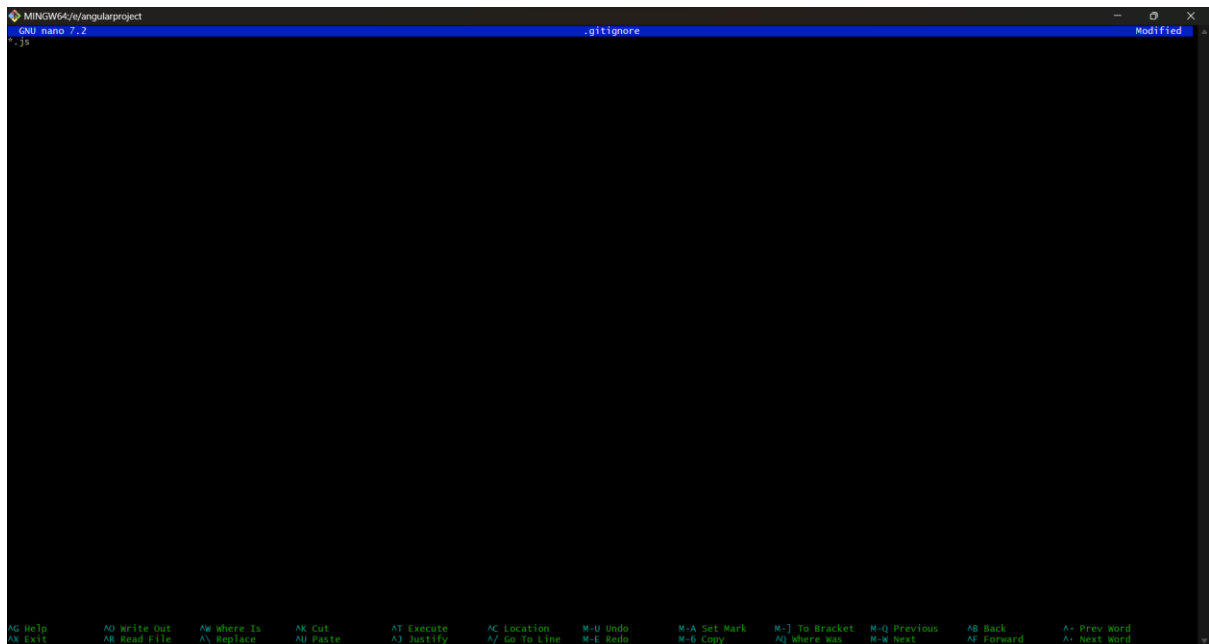


Git add

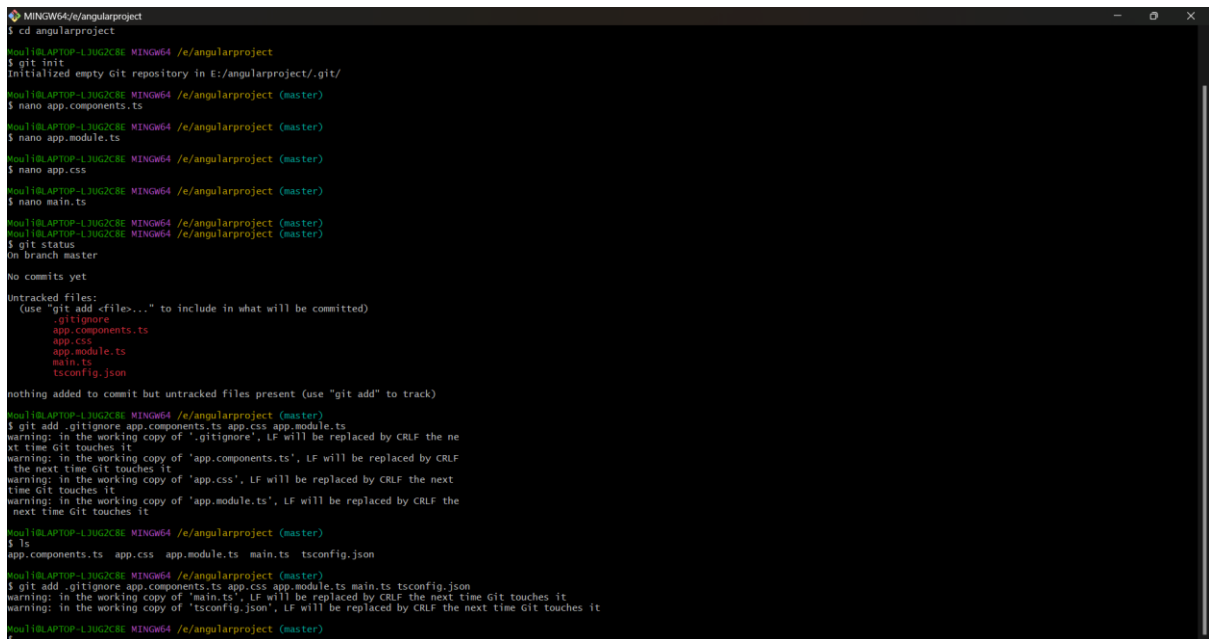

Project done

```
MINGW64/e/angularproject
$ nano app.css
$ nano main.ts
$ git status
on branch master
no commits yet
Untracked files:
  (use "git add <file>..." to include in what will be committed)
        .gitignore
        app.components.ts
        app.css
        app.module.ts
        main.ts
        tsconfig.json
nothing added to commit but untracked files present (use "git add" to track)
$ git add .gitignore app.components.ts app.css app.module.ts
warning: in the working copy of '.gitignore', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'app.components.ts', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'app.css', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'app.module.ts', LF will be replaced by CRLF the next time Git touches it
$ ls
app.components.ts  app.css  app.module.ts  main.ts  tsconfig.json
$ git add .gitignore app.components.ts app.css app.module.ts main.ts tsconfig.json
warning: in the working copy of 'main.ts', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'tsconfig.json', LF will be replaced by CRLF the next time Git touches it
$ git commit -m "project done"
[master (root-commit) 862d758] project done
6 files changed, 180 insertions(+)
create mode 100644 .gitignore
create mode 100644 app.components.ts
create mode 100644 app.css
create mode 100644 app.module.ts
create mode 100644 main.ts
create mode 100644 tsconfig.json
$
```


Create rep

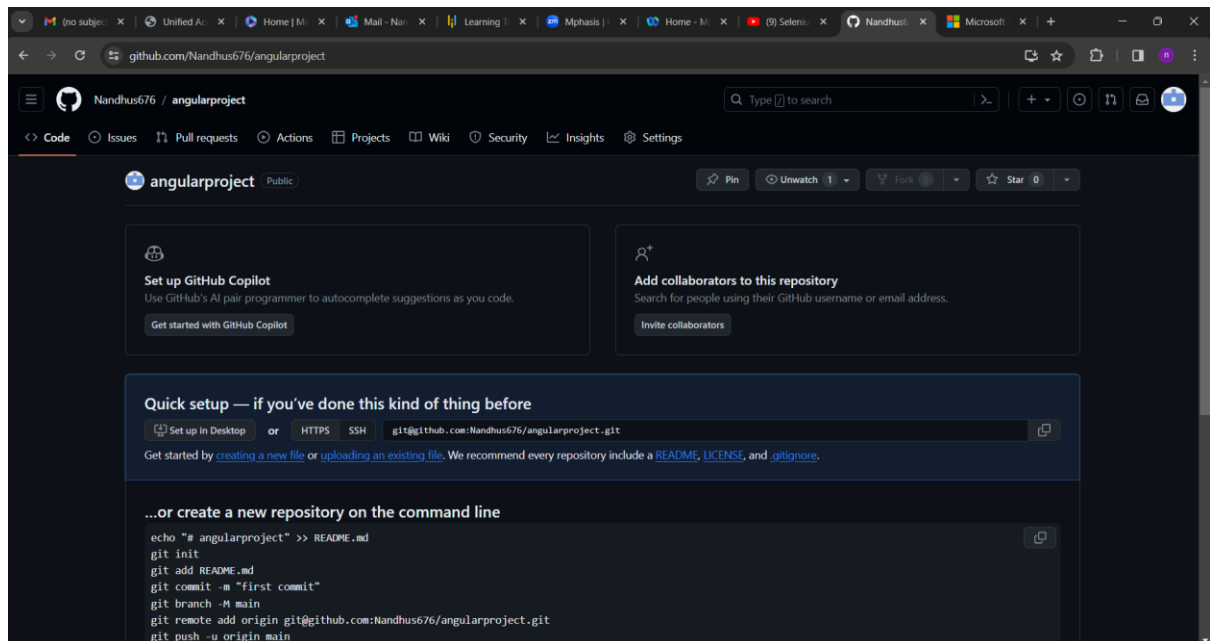

Git push origin master

```
MINGW64/e/angularproject
untracked files:
  (use "git add <file>..." to include in what will be committed)
        .gitignore
        app.components.ts
        app.css
        app.module.ts
        main.ts
        tsconfig.json

nothing added to commit but untracked files present (use "git add" to track)
Nandhus676@MINGW64 /e/angularproject (master)
$ git add .gitignore app.components.ts app.css app.module.ts
warning: in the working copy of '.gitignore', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'app.components.ts', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'app.css', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'app.module.ts', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'tsconfig.json', LF will be replaced by CRLF the next time Git touches it
Nandhus676@MINGW64 /e/angularproject (master)
$ ls
app.components.ts  app.css  app.module.ts  main.ts  tsconfig.json
Nandhus676@MINGW64 /e/angularproject (master)
$ git add .gitignore app.components.ts app.css app.module.ts main.ts tsconfig.json
warning: in the working copy of 'main.ts', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'tsconfig.json', LF will be replaced by CRLF the next time Git touches it
Nandhus676@MINGW64 /e/angularproject (master)
$ git commit -m"project done"
[master (root-commit) 862d758] project done
 6 files changed, 180 insertions(+)
 create mode 100644 .gitignore
 create mode 100644 app.components.ts
 create mode 100644 app.css
 create mode 100644 app.module.ts
 create mode 100644 main.ts
 create mode 100644 tsconfig.json
Nandhus676@MINGW64 /e/angularproject (master)
$ git remote add origin git@github.com:Nandhus676/angularproject.git
Nandhus676@MINGW64 /e/angularproject (master)
$ git push origin master
Enumerating objects: 8, done.
Counting objects: 100% (8/8), done.
Delta compression using up to 8 threads
Compressing objects: 100% (7/7), done.
Writing objects: 100% (8/8), 1.64 KiB | 1.64 MiB/s, done.
Total 8 (delta 0), reused 0 (delta 0), pack-reused 0
to github.com:Nandhus676/angularproject.git
+ [new branch] master -> master
Nandhus676@MINGW64 /e/angularproject (master)
```

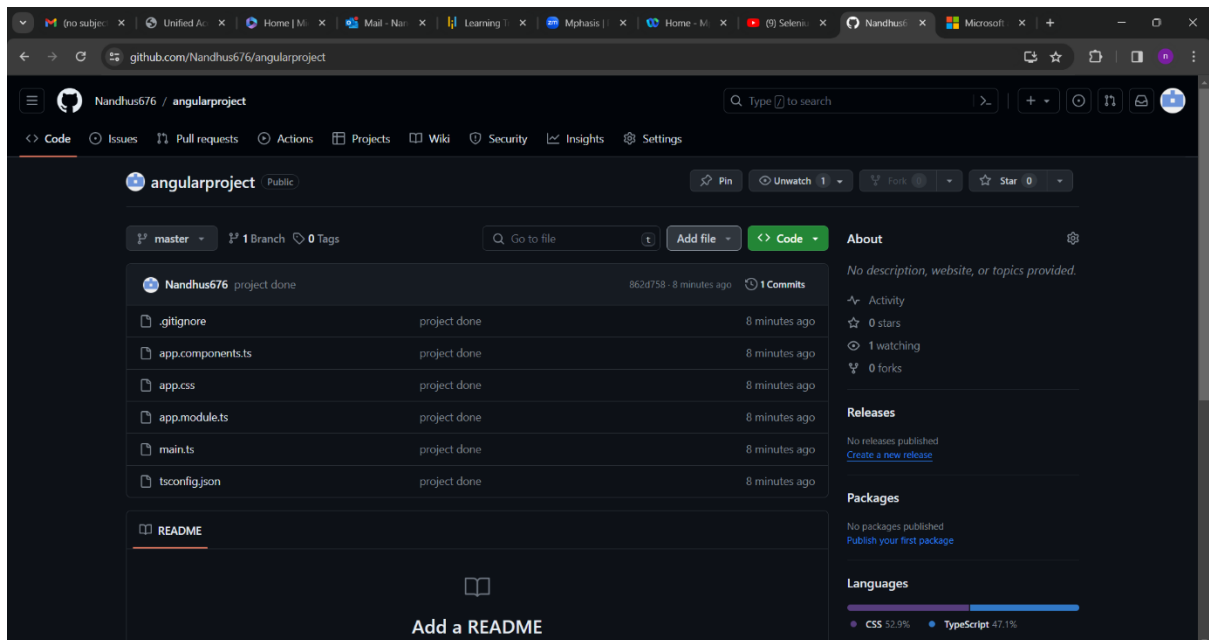

Rep link

<https://github.com/Nandhus676/angularproject>