



Client Integration APIs

Software Version: 7.9.2

Document Version: 7.9.2

May 2025



Partnering for Success

Notice

This document contains information that is proprietary to Sapiens International Corporation N.V or any of its affiliates. No part of this publication may be reproduced, modified, or distributed without prior written authorization of Sapiens International Corporation N.V or any of its affiliates.

This document is provided as is, without warranty of any kind.

Trademarks

Sapiens International Corporation N.V.® is a registered trademark.

Sapiens Decision™ is a trademark of Sapiens International Corporation N.V.

Other names mentioned in this publication are owned by their respective holders.

Statement of Conditions

The information contained in this document is subject to change without notice. Sapiens International Corporation N.V. and/or any of its affiliates shall not be liable for errors contained herein or for any damage or losses arising out of or in connection with the furnishing, performance, or use of this document or the software supplied with it.

Caution

Any changes or modifications of the software not expressly approved in writing by the manufacturer could void the user's authority to use the application and its warranty.

Document Revision History

Revision	Release Date	Author	Description	Approved by
7.8.5	August 2024	Sapiens Decision Documentation	Defines client APIs and methods of client integration with Decision Manager (DM)	Sapiens Decision Product Management
7.8.12	February 2025	Sapiens Decision Documentation	Defines client APIs and methods of client integration with Decision Manager (DM)	Sapiens Decision Product Management
7.9.2	May 2025	Sapiens Decision Documentation	Defines client APIs and methods of client integration with Decision Manager (DM)	Sapiens Decision Product Management

Document Authorization

This document is digitally signed and authorized by the Sapiens Decision documentation team. The steps to authenticate the digital certificate are documented in the Index file present in the documentation package. In case of any queries or feedback on the document, send an e-mail to Decision_documentation@sapiens.com.



Copyright © 2025 by Sapiens International Corporation N.V. All rights reserved.

Contents

Introduction.....	6
User-Defined Functions.....	6
Invoking the client API's from HTTP client	7
When DM is running in header authentication.....	7
When DM is running in internal authentication.....	7
When DM is running in SSO authentication.....	8
REST Web Service APIs	9
Healthcheck Services.....	9
Heartbeat.....	9
Healthcheck	9
Global Healthcheck.....	10
Check DE Connection.....	23
Glossary Services	23
Export Glossary.....	23
Report Services.....	33
Generate Report.....	33
DevOps Services	36
Export Tag In Project	36
List Deployment Requests.....	37
Download Deployment Package.....	42
Removing deprecated test tables.....	43
Purge Services.....	43
Count Knowledge Sources to be Purged	43
Purge Knowledge Sources	44
Count Test Cases to be Purged	45
Purge Test Cases.....	46
SOAP Web Service APIs	47
Glossary Services	47
Find All Glossaries.....	47
Find All Fact Types In Glossary.....	47
Find All Fact Types In Glossary By Id.....	51
Report Services.....	53

Find All Saved Queries	53
Run Saved Query By Name	54
Run Saved Repo Query	56
Task Services.....	57
Find Task Transition And Violations	57
Complete Task	60
DevOps Services	61
Create Tag from Latest Revision in Branch.....	61
Create Tag If Not Exists And Export	62
Export Tag In Project	62
Redeploy Revision Deployment.....	64
Mark Export As Deployed	65
Unmark Export Deployed	65
Appendix.....	67
Java Code Sample for Header Authentication.....	67
Java Code Sample for Internal Authentication.....	68
Java Code Sample for SSO/OAuth Authentication	69
Postman Sample for OAuth Authentication.....	73

Introduction

Decision Manager (DM) works with a set of APIs (Application Programming Interfaces) that are used to perform client requests, operations, and system integration.

External APIs used by clients are identified and processed as Web Services in the DM system.

User-Defined Functions

DM offers various core functions to use in modeling. In some cases, it may be necessary to override the behavior of these functions with customized implementations of the core function or through the use of an entirely new function.

To modify or replace a core function, the following needs to be done:

- The prototype of the function needs to be defined, so that it can be used for modeling in DM.
- The custom implementation of a function must be added to DM's Test Module, to facilitate its testing within DM.
- The mapping of a custom function must be defined for the adapters in use (such as the BDES-Drools Adapter).
- Customized implementation of a function must be added to the executing target system build path (such as the BDES-Drools Server).

Invoking the client API's from HTTP client

Decision Manager can be configured with various authentication modes. The following sections explain how to invoke client API's in each authentication scenarios:

When DM is running in header authentication

While using header authentication, the request should contain a header named *iv-user* which will have the value of the user id. If the header is not present, then the DM server will respond with 403 status code.

For example, `curl 'http://<dmhost>:<dmport>/dm/ws/api/current-user' --header 'iv-user: admin'`

Refer to the [Java Code Sample for Header Authentication](#) section to view a sample program to invoke the Glossary Export service of DM.

When DM is running in internal authentication

With internal authentication, you can obtain a login session and then pass a cookie with the session and xsrf token. To obtain this login session, you must first invoke the login service.

To invoke the login service, use the following options:

- **URL:** `http://<dm-hostname>:<dm-portnumber>/dm/login`
- **Header:** `Content-Type: application/x-www-form-urlencoded`
- **Body:** `username=<username>&password=<password>`

The response should look like the following:

```
HTTP/1.1 302
x-b3-traceid=727db6857a90d7b0
Set-Cookie=JSESSIONID=07DDE87A9DA0EDDDDD342F06124A88DF; Path=/dm;
HttpOnly; SameSite=Lax
Set-Cookie=XSRF-TOKEN=5ed79697-5e45-410c-96af-523998eb485f; Path=/dm;
SameSite=Lax
Cache-Control=no-cache, no-store, max-age=0, must-revalidate
Pragma=no-cache
Expires=0
X-XSS-Protection=1; mode=block
X-Frame-Options=SAMEORIGIN
X-Content-Type-Options=nosniff
Content-Security-Policy=frame-ancestors 'self'
X-Content-Security-Policy=default-src 'self'
X-WebKit-CSP=default-src 'self'
Location=/dm/enterprise/index.html
Content-Length=0
Date=Tue, 02 May 2023 10:13:08 GMT
Keep-Alive=timeout=20
Connection=keep-alive
```

From the above response, you must select the **Session ID** and the **XSRF Token** and use them in your subsequent API request.

To invoke the other services, use the following options:

Sample service URL for Glossary Export:

<http://<hostname>:<portnumber>/dm/ws/api/viewgroups/glossary/1014481/export?fileFormat=xml&includeGlossaryHierarchy=true>

Headers: Add the following headers to your request:

- **Cookie:** `JSESSIONID=C09F339F6AF420CBA155F08943E7803C`
- **X-XSRF-Token:** `c7e9479b-411b-464a-aa61-e5f55545b7ce`

Refer to the [Java Code Sample for Internal Authentication](#) section to view the sample program to perform the above-mentioned steps in Java for the Glossary Export service.

When DM is running in SSO authentication

If you are running DM in SSO authentication, to call the API services from an external client DM should also have OAuth IDP configured.

Refer to the **Integrating OAuth with DM** section in *Decision Manager (DM) Installation and Configuration Guide* to know more about OAuth configuration.

Refer to the [Java Code Sample for SSO Authentication](#) section to view a sample program to invoke the Glossary Export service of DM.

REST Web Service APIs

This section details the REST Web Service APIs that are currently in use.

Healthcheck Services

Heartbeat

Description

The DM heartbeat API returns the service version.

Request Example

It's a GET service and can be accessed at following REST endpoint in DM. DM Service.

Endpoint URL: <http://<host>:<port>/dm/ws/rs/heartbeat>

Response Example

```
{"version": "7.5"}
```

Healthcheck

Description

The DM health check API checks for the Database connectivity and DE connectivity.

Request Example

It's a GET service and can be accessed at the following REST endpoint in DM Service.

Endpoint URL: <http://<host>:<port>/dm/ws/api/actuator/health>

Response Example

```
{
  "status": "UP",
  "components": {
    "database": {
      "status": "UP",
      "details": {
        "time": 1
      }
    },
    "deService": {
      "status": "UP",
      "details": {
        "version": "7.1",
        "time": 4
      }
    },
    "serviceDetails": {
      "status": "UP",
      "details": {
        "serviceName": "dm",
        "version": "7.5",
```

```
        "time": 0
      }
    }
  }
}
```

Global Healthcheck

Description

The global health check API checks for each service's (DM, DE, DT) health.

Request Example

GET request

Endpoint URL: <http://<host>:<port>/health-service/actuator/health>

Response Example

```
{
  "status": "UP",
  "components": {
    "clientConfigServer": {
      "status": "UNKNOWN",
      "details": {
        "error": "no property sources located"
      }
    },
    "discoveryComposite": {
      "description": "Discovery Client not initialized",
      "status": "UNKNOWN",
      "components": {
        "discoveryClient": {
          "description": "Discovery Client not initialized",
          "status": "UNKNOWN"
        }
      }
    },
    "diskSpace": {
      "status": "UP",
      "details": {
        "total": 39103025152,
        "free": 20730855424,
        "threshold": 10485760,

```

```
        "exists": true
    },
    "ping": {
        "status": "UP"
    },
    "refreshScope": {
        "status": "UP"
    },
    "serviceDetails": {
        "status": "UP",
        "details": {
            "serviceName": "healthService",
            "version": "0.0.3",
            "time": 0
        }
    },
    "services": {
        "status": "UP",
        "details": {
            "time": 238,
            "dmService": {
                "status": "UP",
                "components": {
                    "database": {
                        "status": "UP",
                        "details": {
                            "time": 2
                        }
                    }
                }
            },
            "deService": {
                "status": "UP",
                "details": {
                    "version": "7.1",
                    "time": 3
                }
            }
        }
    },
}
```

```
    "serviceDetails": {
      "status": "UP",
      "details": {
        "serviceName": "dm",
        "version": "7.5",
        "time": 0
      }
    },
    "time": 19
  },
  "de": {
    "status": "UP",
    "components": {
      "database": {
        "status": "UP",
        "details": {
          "time": 2
        }
      }
    },
    "serviceDetails": {
      "status": "UP",
      "details": {
        "serviceName": "de",
        "version": "7.1",
        "time": 0
      }
    }
  },
  "time": 7
},
"dt-repair": {
  "status": "UP",
  "components": {
    "clientConfigServer": {
      "status": "UNKNOWN",
      "details": {
```

```
        "error": "no property sources located"
    },
    "discoveryComposite": {
        "description": "Discovery Client not initialized",
        "status": "UNKNOWN",
        "components": {
            "discoveryClient": {
                "description": "Discovery Client not initialized",
                "status": "UNKNOWN"
            }
        }
    },
    "diskSpace": {
        "status": "UP",
        "details": {
            "total": 39103025152,
            "free": 20730859520,
            "threshold": 10485760,
            "exists": true
        }
    },
    "hazelcast": {
        "status": "UP",
        "details": {
            "serviceNodeCount": 5,
            "time": 0
        }
    },
    "ping": {
        "status": "UP"
    },
    "reactiveDiscoveryClients": {
        "description": "Discovery Client not initialized",
        "status": "UNKNOWN",
        "components": {
            "Simple Reactive Discovery Client": {
```

```
        "description": "Discovery Client not initialized",
        "status": "UNKNOWN"
    }
}
},
"refreshScope": {
    "status": "UP"
},
"repositoryService": {
    "status": "UP",
    "details": {
        "version": "1.6",
        "time": 12
    }
},
"serviceDetails": {
    "status": "UP",
    "details": {
        "serviceName": "dm",
        "version": "1.6",
        "time": 0
    }
}
},
"time": 18
},
"dt-orchestrate": {
    "status": "UP",
    "components": {
        "clientConfigServer": {
            "status": "UNKNOWN",
            "details": {
                "error": "no property sources located"
            }
        }
    }
},
"discoveryComposite": {
    "description": "Discovery Client not initialized",
```

```
"status": "UNKNOWN",
"components": {
  "discoveryClient": {
    "description": "Discovery Client not initialized",
    "status": "UNKNOWN"
  }
},
"diskSpace": {
  "status": "UP",
  "details": {
    "total": 39103025152,
    "free": 20730855424,
    "threshold": 10485760,
    "exists": true
  }
},
"dmService": {
  "status": "UP",
  "details": {
    "version": "7.5",
    "time": 9
  }
},
"executorService": {
  "status": "UP",
  "details": {
    "version": "1.6",
    "time": 5
  }
},
"generateService": {
  "status": "UP",
  "details": {
    "version": "1.6",
    "time": 5
  }
}
```

```
    },
    "hazelcast": {
      "status": "UP",
      "details": {
        "serviceNodeCount": 5,
        "time": 0
      }
    },
    "ping": {
      "status": "UP"
    },
    "reactiveDiscoveryClients": {
      "description": "Discovery Client not initialized",
      "status": "UNKNOWN",
      "components": {
        "Simple Reactive Discovery Client": {
          "description": "Discovery Client not initialized",
          "status": "UNKNOWN"
        }
      }
    },
    "refreshScope": {
      "status": "UP"
    },
    "repairService": {
      "status": "UP",
      "details": {
        "version": "1.6",
        "time": 6
      }
    },
    "repositoryService": {
      "status": "UP",
      "details": {
        "version": "1.6",
        "time": 4
      }
    }
  }
```



```
    },
    "serviceDetails": {
      "status": "UP",
      "details": {
        "serviceName": "dm",
        "version": "1.6",
        "time": 0
      }
    }
  },
  "time": 39
},
"dt-repo": {
  "status": "UP",
  "components": {
    "clientConfigServer": {
      "status": "UNKNOWN",
      "details": {
        "error": "no property sources located"
      }
    }
  },
  "database": {
    "status": "UP",
    "details": {
      "time": 0,
      "status": "UP"
    }
  }
},
"discoveryComposite": {
  "description": "Discovery Client not initialized",
  "status": "UNKNOWN",
  "components": {
    "discoveryClient": {
      "description": "Discovery Client not initialized",
      "status": "UNKNOWN"
    }
  }
}
```

```
    },
    "diskSpace": {
      "status": "UP",
      "details": {
        "total": 39103025152,
        "free": 20730855424,
        "threshold": 10485760,
        "exists": true
      }
    },
    "hazelcast": {
      "status": "UP",
      "details": {
        "serviceNodeCount": 5,
        "time": 0
      }
    },
    "ping": {
      "status": "UP"
    },
    "r2dbc": {
      "status": "UP",
      "details": {
        "database": "PostgreSQL",
        "validationQuery": "validate(REMOTE) "
      }
    },
    "reactiveDiscoveryClients": {
      "description": "Discovery Client not initialized",
      "status": "UNKNOWN",
      "components": {
        "Simple Reactive Discovery Client": {
          "description": "Discovery Client not initialized",
          "status": "UNKNOWN"
        }
      }
    },
  },
```

```
    "refreshScope": {
      "status": "UP"
    },
    "serviceDetails": {
      "status": "UP",
      "details": {
        "serviceName": "de",
        "version": "1.6",
        "time": 0
      }
    }
  },
  "time": 109
},
"dt-exec": {
  "status": "UP",
  "components": {
    "clientConfigServer": {
      "status": "UNKNOWN",
      "details": {
        "error": "no property sources located"
      }
    }
  },
  "deService": {
    "status": "UP",
    "details": {
      "version": "7.1",
      "time": 10
    }
  },
  "discoveryComposite": {
    "description": "Discovery Client not initialized",
    "status": "UNKNOWN",
    "components": {
      "discoveryClient": {
        "description": "Discovery Client not initialized",
        "status": "UNKNOWN"
```

```
    }
  }
},
"diskSpace": {
  "status": "UP",
  "details": {
    "total": 39103025152,
    "free": 20730855424,
    "threshold": 10485760,
    "exists": true
  }
},
"hazelcast": {
  "status": "UP",
  "details": {
    "serviceNodeCount": 5,
    "time": 0
  }
},
"ping": {
  "status": "UP"
},
"reactiveDiscoveryClients": {
  "description": "Discovery Client not initialized",
  "status": "UNKNOWN",
  "components": {
    "Simple Reactive Discovery Client": {
      "description": "Discovery Client not initialized",
      "status": "UNKNOWN"
    }
  }
},
"refreshScope": {
  "status": "UP"
},
"repositoryService": {
  "status": "UP",
```

```
        "details": {
            "version": "1.6",
            "time": 12
        }
    },
    "serviceDetails": {
        "status": "UP",
        "details": {
            "serviceName": "dm",
            "version": "1.6",
            "time": 0
        }
    }
},
"time": 31
},
"dt-generate": {
    "status": "UP",
    "components": {
        "clientConfigServer": {
            "status": "UNKNOWN",
            "details": {
                "error": "no property sources located"
            }
        }
    }
},
"discoveryComposite": {
    "description": "Discovery Client not initialized",
    "status": "UNKNOWN",
    "components": {
        "discoveryClient": {
            "description": "Discovery Client not initialized",
            "status": "UNKNOWN"
        }
    }
},
"diskSpace": {
    "status": "UP",
```

```
    "details": {
      "total": 39103025152,
      "free": 20730855424,
      "threshold": 10485760,
      "exists": true
    }
  },
  "hazelcast": {
    "status": "UP",
    "details": {
      "serviceNodeCount": 5,
      "time": 0
    }
  },
  "ping": {
    "status": "UP"
  },
  "reactiveDiscoveryClients": {
    "description": "Discovery Client not initialized",
    "status": "UNKNOWN",
    "components": {
      "Simple Reactive Discovery Client": {
        "description": "Discovery Client not initialized",
        "status": "UNKNOWN"
      }
    }
  },
  "refreshScope": {
    "status": "UP"
  },
  "repositoryService": {
    "status": "UP",
    "details": {
      "version": "1.6",
      "time": 8
    }
  },
}
```

```
        "serviceDetails": {
            "status": "UP",
            "details": {
                "serviceName": "dm",
                "version": "1.6",
                "time": 0
            }
        },
        "time": 15
    }
}
```

Check DE Connection

Description

Used to check the DE connection and version compatibility between DM and DE. It is a REST API service.

Endpoint URL: <http://<host>:<port>/dm/ws/api/checkDeConnection>

Request Example

```
{
  "user": "admin",
  "password": "admin",
  "url": "http://localhost:9081/bdes/",
  "role": "ROLE_ADMIN"
}
```

Response Example

```
{
  "responseMessage": "DE Version 6.14-SNAPSHOT is available and confirmed. This version is compatible with the current DM version. DE is configured with security disabled.",
  "statusCode": "Successful"
}
```

Glossary Services

Export Glossary

Description

Apart from exporting the glossary using the **Export Glossary** button on the user interface, you can use the Client API service to export a Glossary by giving the **Glossary Name**. You can make an API call using the following parameters:

- **glossaryName** – This is a mandatory parameter.
- **communityName** – This is an optional parameter.
This parameter is required when more than one glossary with the same name exists in different communities.
- **fileFormat** - XML or CSV (Default is XML)
- **includeGlossaryHierarchy** – True, False (Default is false but anything other than 'true' also counts as false).

The response that you will receive will be in byte array format as per the **File Format** selected.

Note: This is a REST webservice only, not SOAP.

Permission Required

GLS_EXPORT

Request example

Standard

URL: <http://<host>:<port>/dm/ws/api/glossary/{glossaryName}/export?communityName={communityName}&fileFormat={fileFormat}&includeGlossaryHierarchy={includeGlossaryHierarchy}>

For example: <http://localhost:9080/dm/ws/api/glossary/ATR/export>, where ATR is name of the glossary you are exporting.

Response example

```
<?xml version="1.0" encoding="UTF-8"?>
<glossaryImportExport xmlns="com.sapiens.decision.bdms.Glossary"
    glossaryFileHash="27229194000a791fc364e2d62c81e7a1">
    <decision-glossary-schema-version>4.2.1</decision-glossary-schema-version>
    <glossaries>
        <glossary>
            <name>Sample Glossary</name>
            <factTypes>
                <factType isDeployable="true" status="APPROVED">
                    <id>1020805</id>
                    <hash>800c0db973c27bbec05763d1509c9003</hash>
                    <name>FT1</name>
                    <createdDate>2023-03-17</createdDate>
                    <approvedDate>2023-03-17</approvedDate>
```



```
<createdBy displayName="Administrator">admin</createdBy>
<approvedBy displayName="Administrator">admin</approvedBy>
<version>1.0</version>
<factDomain>
  <domain>
    <domainType>ANY_VALUE</domainType>
    <dataType>TEXT</dataType>
    <ranges/>
    <domainValues/>
  </domain>
</factDomain>
<factTypeDefinition>
  <qualifiers/>
  <modelMappings/>
  <customMetaData/>
  <synonyms/>
  <factTypeDefinitionId>1020801</factTypeDefinitionId>
  <systemOfRecordName>Decision</systemOfRecordName>
  <systemOfRecordId>ce8cbe9a-4e98-45c1-8d7c-
alaed14450a0</systemOfRecordId>
  <isExternallyManaged>false</isExternallyManaged>
</factTypeDefinition>
<type>REGULAR</type>
<aliases/>
</factType>
<factType isDeployable="true" status="APPROVED">
  <id>1020923</id>
  <hash>479e30fddb1562084e9938c8a503ba1</hash>
  <name>FT2</name>
  <createdDate>2023-03-17</createdDate>
  <approvedDate>2023-03-17</approvedDate>
  <createdBy displayName="Administrator">admin</createdBy>
  <approvedBy displayName="Administrator">admin</approvedBy>
  <version>1.0</version>
  <factDomain>
    <domain>
      <domainType>ANY_VALUE</domainType>
```

```
<dataType>TEXT</dataType>
<ranges/>
<domainValues/>
</domain>
</factDomain>
<factTypeDefinition>
  <qualifiers/>
  <modelMappings/>
  <customMetaData/>
  <synonyms/>
  <factTypeDefinitionId>1020919</factTypeDefinitionId>
  <systemOfRecordName>Decision</systemOfRecordName>
  <systemOfRecordId>9d57e15d-a565-4c74-b082-
d066491b6d19</systemOfRecordId>
  <isExternallyManaged>false</isExternallyManaged>
</factTypeDefinition>
<type>REGULAR</type>
<aliases/>
</factType>
<factType isDeployable="true" status="APPROVED">
  <id>1020988</id>
  <hash>305ec33349d46c40babca82bb348b376</hash>
  <name>FT3</name>
  <createdDate>2023-03-17</createdDate>
  <approvedDate>2023-03-17</approvedDate>
  <createdBy displayName="Administrator">admin</createdBy>
  <approvedBy displayName="Administrator">admin</approvedBy>
  <version>1.0</version>
<factDomain>
  <domain>
    <domainType>ANY_VALUE</domainType>
    <dataType>TEXT</dataType>
    <ranges/>
    <domainValues/>
  </domain>
</factDomain>
<factTypeDefinition>
```

```
<qualifiers/>
<modelMappings/>
<customMetaData/>
<synonyms/>
<factTypeDefinitionId>1020984</factTypeDefinitionId>
<systemOfRecordName>Decision</systemOfRecordName>
<systemOfRecordId>3af06ef8-2c2b-47d3-90da-
d6d2da067662</systemOfRecordId>
<isExternallyManaged>>false</isExternallyManaged>
</factTypeDefinition>
<type>REGULAR</type>
<aliases/>
</factType>
<factType isDeployable="true" status="APPROVED">
  <id>1021166</id>
  <hash>5908cea7c1e91f29d4c88e79fc4d4c13</hash>
  <name>FT4</name>
  <createdDate>2023-03-17</createdDate>
  <approvedDate>2023-03-17</approvedDate>
  <createdBy displayName="Administrator">admin</createdBy>
  <approvedBy displayName="Administrator">admin</approvedBy>
  <version>1.0</version>
  <factDomain>
    <domain>
      <domainType>ANY_VALUE</domainType>
      <dataType>TEXT</dataType>
      <ranges/>
      <domainValues/>
    </domain>
  </factDomain>
</factTypeDefinition>
  <qualifiers/>
  <modelMappings/>
  <customMetaData/>
  <synonyms/>
  <factTypeDefinitionId>1021162</factTypeDefinitionId>
  <systemOfRecordName>Decision</systemOfRecordName>
```

```
<systemOfRecordId>c97785fb-2bf5-4380-846c-
35987ce19745</systemOfRecordId>
  <isExternallyManaged>>false</isExternallyManaged>
</factTypeDefinition>
<type>REGULAR</type>
<aliases/>
</factType>
<factType isDeployable="true" status="APPROVED">
  <id>1021279</id>
  <hash>d2756cb6a56b9e9b75e04fd744d8fdfb</hash>
  <name>FT5</name>
  <createdDate>2023-03-17</createdDate>
  <approvedDate>2023-03-17</approvedDate>
  <createdBy displayName="Administrator">admin</createdBy>
  <approvedBy displayName="Administrator">admin</approvedBy>
  <version>1.0</version>
  <factDomain>
    <domain>
      <domainType>ANY_VALUE</domainType>
      <dataType>TEXT</dataType>
      <ranges/>
      <domainValues/>
    </domain>
  </factDomain>
</factTypeDefinition>
  <qualifiers/>
  <modelMappings/>
  <customMetaData/>
  <synonyms/>
  <factTypeDefinitionId>1021215</factTypeDefinitionId>
  <systemOfRecordName>Decision</systemOfRecordName>
  <systemOfRecordId>5f85f6aa-2f78-4e92-bb89-
27f51e66e7f4</systemOfRecordId>
  <isExternallyManaged>>false</isExternallyManaged>
</factTypeDefinition>
<type>REGULAR</type>
<aliases/>
</factType>
```

```
<factType isDeployable="true" status="APPROVED">
  <id>1021383</id>
  <hash>2160f5a9a7c24aabe2dc7f4b4eb7b197</hash>
  <name>FT6</name>
  <createdDate>2023-03-17</createdDate>
  <approvedDate>2023-03-30</approvedDate>
  <createdBy displayName="Administrator">admin</createdBy>
  <approvedBy displayName="Administrator">admin</approvedBy>
  <version>1.0</version>
  <factDomain>
    <domain>
      <domainType>ANY_VALUE</domainType>
      <dataType>TEXT</dataType>
      <ranges/>
      <domainValues/>
    </domain>
  </factDomain>
  <factTypeDefinition>
    <qualifiers/>
    <modelMappings/>
    <customMetaData/>
    <synonyms/>
    <factTypeDefinitionId>1021379</factTypeDefinitionId>
    <systemOfRecordName>Decision</systemOfRecordName>
    <systemOfRecordId>d21e6baf-d8c7-453a-94a4-
9dableb75ad9</systemOfRecordId>
    <isExternallyManaged>false</isExternallyManaged>
  </factTypeDefinition>
  <type>REGULAR</type>
  <aliases/>
</factType>
<factType isDeployable="true" status="APPROVED">
  <id>1023812</id>
  <hash>e79a5dbb5140bcc7b366ccb9ed178ee3</hash>
  <name>FT7</name>
  <createdDate>2023-04-04</createdDate>
  <approvedDate>2023-04-04</approvedDate>
```

```
<createdBy displayName="Administrator">admin</createdBy>
<approvedBy displayName="Administrator">admin</approvedBy>
<version>1.0</version>
<factDomain>
  <domain>
    <domainType>ANY_VALUE</domainType>
    <dataType>TEXT</dataType>
    <ranges/>
    <domainValues/>
  </domain>
</factDomain>
<factTypeDefinition>
  <fullyQualifiedName>Unassigned</fullyQualifiedName>
  <businessConcept
path="/*/1012964/">Unassigned</businessConcept>
  <qualifiers/>
  <modelMappings>
    <modelMapping modelDefinition="ModelMapping"
      modelInfo="ftMp"
      modelVersion="1.0.0">
      <dynamicProperties>
        <dynamicProperty>
          <name>CustomProperty</name>
          <value>cp</value>
        </dynamicProperty>
      </dynamicProperties>
      <valueMappings/>
    </modelMapping>
  </modelMappings>
  <customMetaData/>
  <synonyms/>
  <factTypeDefinitionId>1023811</factTypeDefinitionId>
  <systemOfRecordName>Decision</systemOfRecordName>
  <systemOfRecordId>0addf19a-68d2-4c6e-a97f-
9cdf166a79b1</systemOfRecordId>
  <isExternallyManaged>false</isExternallyManaged>
</factTypeDefinition>
<type>REGULAR</type>
```

```

        <aliases/>
    </factType>
</factTypes>
<glossaryContent>
    <domainTemplates>
        <domainTemplate>
            <domainTemplateName>Complete-
Incomplete</domainTemplateName>
            <domainType>REGULAR_SET</domainType>
            <dataType>INDICATOR</dataType>
            <displayFormat>Text</displayFormat>
            <domainValues>
                <domainVal>Complete</domainVal>
                <domainVal>Incomplete</domainVal>
            </domainValues>
            <ranges/>
        </domainTemplate>
        <domainTemplate>
            <domainTemplateName>Compliant-
NonCompliant</domainTemplateName>
            <domainType>REGULAR_SET</domainType>
            <dataType>INDICATOR</dataType>
            <displayFormat>Text</displayFormat>
            <domainValues>
                <domainVal>Compliant</domainVal>
                <domainVal>Non-Compliant</domainVal>
            </domainValues>
            <ranges/>
        </domainTemplate>
        <domainTemplate>
            <domainTemplateName>Eligible-
Ineligible</domainTemplateName>
            <domainType>REGULAR_SET</domainType>
            <dataType>INDICATOR</dataType>
            <displayFormat>Text</displayFormat>
            <domainValues>
                <domainVal>Eligible</domainVal>
                <domainVal>Ineligible</domainVal>
            </domainValues>
            <ranges/>
        </domainTemplate>
    </domainTemplates>
</glossaryContent>

```

```
        </domainValues>
        <ranges/>
    </domainTemplate>
    <domainTemplate>
        <domainTemplateName>Valid-Invalid</domainTemplateName>
        <domainType>REGULAR_SET</domainType>
        <dataType>INDICATOR</dataType>
        <displayFormat>Text</displayFormat>
        <domainValues>
            <domainVal>Invalid</domainVal>
            <domainVal>Valid</domainVal>
        </domainValues>
        <ranges/>
    </domainTemplate>
</domainTemplates>
</glossaryContent>
</glossary>
</glossaries>
<targetModels>
    <targetModel>
        <targetModelDynamicProperties>
            <targetModelDynamicProperty>
                <name>CustomProperty</name>
                <dataType>TEXT</dataType>
                <requiredIndicator>true</requiredIndicator>
                <domainType>ANY_VALUE</domainType>
                <allowedValues/>
            </targetModelDynamicProperty>
        </targetModelDynamicProperties>
        <definition>ModelMapping</definition>
        <versions>
            <version versionValue="1.0.0"/>
        </versions>
    </targetModel>
</targetModels>
</glossaryImportExport>
```


Report Services

Generate Report

Description

In addition to generating reports from the User Interface (UI), you can also use the Client API service to generate system provided reports and custom reports. The reports can be generated in HTML, PDF, CSV, or JSON format.

Note: JSON format is not available from the UI.

Request Example

Standard URL: `http://`

```
<host>:<port>/dm/ws/rsapi/api/reports/<reportName>/generateReport?outputType=<OutputType>&pageType=<PageType>&showHeaderFooter=<boolean value>
```

Parameters

- **Report Name:** This is a mandatory field for the report to be generated.
- **Output Type:** This is a mandatory field for generate report API. The possible values are HTML, PDF, CSV, or JSON.
- **Page Type:** This is not a mandatory field. The possible values are same as the options available on the UI Generate Report page. These values must be selected from the network payload/browser URL while generating report from the UI. Default value for this field is 'Page_A4_Landscape' if not passed during the API call.
- **Header Footer:** The value is either 'true' or 'false'.
 - To generate a report with Header and Footer, pass the value as 'true'.
 - To generate a report without Header and Footer, pass the value as 'false'.

Notes:

- JSON does not support Header Footer.
- The default value is 'false'.

Following examples are for reports that have parameters. Each parameter is provided as a key-value pair:

Flow Report

```
[  
  {  
    "key": "communityId",  
    "value": "Sample Community"  
  },  
  {  
    "key": "latestDecisionFlow",  
    "value": "true"  
  }  
]
```

```

    },
    {
      "key": "decisionFlowId",
      "value": "Pizza Acceptability Indicator Ver. 1.0"
    },
    {
      "key": "category",
      "value": "Informational;Critical"
    },
    {
      "key": "message",
      "value": "message"
    }
  ]

```

Glossary Report

```

[
  {
    "key": "community",
    "value": "Sample Community"
  },
  {
    "key": "folder",
    "value": "Sample Community"
  },
  {
    "key": "decision",
    "value": "Pizza Acceptability Indicator (Base) [0] - DRAFT"
  },
  {
    "key": "modelDefinition",
    "value": "Sample Model Mapping"
  },
  {
    "key": "modelVersion",
    "value": "1.0.0"
  },
  {
    "key": "factTypeInUse",
    "value": "true"
  },
  {
    "key": "searchInHierarchy",
    "value": "true"
  }
]

```

Following is an example for report with date input:

Admin Report

```
[
  {
    "key": "actionType",
    "value": "DELETE"
  },
  {
    "key": "entityType",
    "value": "Asset"
  },
  {
    "key": "user",
    "value": "User1"
  },
  {
    "key": "fromDate",
    "value": "21/08/2023 00:00:00"
  },
  {
    "key": "toDate",
    "value": "29/08/2023 00:00:00"
  },
  {
    "key": "sortedBy",
    "value": "Entity Name"
  }
]
```

Permission Required

ALLOW_RUN_REPORTS

Note: To run any report, you must have the ALLOW_RUN_REPORTS permission. In addition, each specific report may require additional permissions to run as indicated in the Required Permission section for each report.

For information regarding Required Permission for each report, refer to the **Reports** section in the *Decision Manager (DM) User Guide*.

Response Example

The response that you will receive will be in byte array format as per the **File Format** selected.

Note: This is a REST webservice only.

Following is a response example for JSON format:

```
[
  {
    "Decision Name": "Pizza Acceptability Indicator (View: Base)",
    "RF Version": "1.0.0",
    "Conditions and Conclusion": "If ((Pizza Cheese Type
Acceptability Indicator = 1) and (Pizza Crust Acceptability
Indicator = 1) and (Pizza Price = 1) and (Pizza Topping
Acceptability Indicator = 1) , then (Pizza Acceptability
Indicator = valid)",
    "Rule Row Id": "8303730",
    "RF Approved By": "User1",
    "RF Name": "Pizza Acceptability Indicator (View: Base)",
    "RF Approved Date": "06/19/2023 13:04:36"
  },
  {
    "Decision Name": "Pizza Acceptability Indicator (View: Base)",
    "RF Version": "1.0.0",
    "Conditions and Conclusion": "If ((Pizza Cheese Amount Code = 1)
), then (Pizza Cheese Type Code = 1)",
    "Rule Row Id": "8303824",
    "RF Approved By": "User1",
    "RF Name": "Pizza Cheese Type Acceptability Indicator (View:
Base)",
    "RF Approved Date": "06/19/2023 13:04:37"
  },
  {
    "Decision Name": "Pizza Acceptability Indicator (View: Base)",
    "RF Version": "1.0.0",
    "Conditions and Conclusion": "If ((Pizza Crust Flavor Code = 1)
), then (Pizza Crust Shape Code = 1)",
    "Rule Row Id": "8303831",
    "RF Approved By": "User1",
    "RF Name": "Pizza Crust Acceptability Indicator (View: Base)",
    "RF Approved Date": "06/19/2023 13:04:37"
  }
]
```

DevOps Services

Export Tag In Project

Description

The **Export Tag in Project** service allows users to initiate the export of a specified tag from a given project to a target environment. This service ensures deployments occur within the appropriate community hierarchy, addressing the issue of non-unique environment names. It requires three inputs: the **Project Name** (the project within the system from which the tag is exported), **Tag Name** (the tag to be exported), and **Environment Name** (the target environment for the export).

The service first identifies the community associated with the specified release project. It then searches for the specified environment within that community. If a usable environment is not found, the service searches up the community hierarchy until it locates the first usable instance of the environment. The deployment always takes place in the community where the release project is defined.

Upon execution, the service triggers an **asynchronous deployment request** but does not return the deployment package. Users must monitor the deployment progress using the **List Deployment**

Requests service and retrieve the exported package through the **Download Deployment Package** service once the process is complete. The response message provides insights into the request's outcome. A successful request is typically indicated by a message such as **"Export Started Successfully"**.

The following are different types of failure messages indicating specific issues:

- **"Couldn't find environment: <Environment Name>"** – The target environment doesn't exist.
- **"Environment <Environment Name> is Retired "** – The target environment is retired and unavailable for exports.
- **"Environment <Environment Name> is Disabled "** – The target environment is disabled and unavailable for exports.
- **"Environment <Environment Name> is Deprecated"** – The target environment is deprecated and unavailable for exports. A deprecated environment allows redeployment but cannot be deployed using the deploy operation. However, it can be redeployed using the redeploy action from the release history page within Decision Manager.
- **Environment <"Environment Name"> is not unique in the community <"Community Name">** – appears when multiple environments with the same name exist within the community, regardless of case. Since environment names are case-insensitive, variations such as **"DE"**, **"de"**, **"De"** and **"dE"** are considered the same. To resolve this issue, the environments must be renamed to ensure uniqueness.

Note: Users should always verify the response message to determine whether the export request was successful or if further action is needed.

Endpoint URL:

<http://<host>:<port>/dm/ws/rsapi/api/export/tag/{projectName}/{tagName}/{environmentName}>

Permission Required

REVISION_EXPORT

Request Example

The Export Tag in Project API is a POST service.

- <http://<host>:<port>/dm/ws/rsapi/api/export/tag/Project1/Tag1/Env1>

Response Example

Export Started Successfully

List Deployment Requests

Description

A RESTful web service to provide a list of the deployment history. The Query parameters are, status, formatAdapter, environment, projectName, type, community, and fromDateTime. Typically, a source DevOps process will retain the last download timestamp and call the service with the following properties:

- Status (e.g., EXPORTED) to obtain exported releases ready for download and processing.

- FromDateTime set to the last DateTime the service was polled to get a list of downloads (Note that if a completed Download and deployment of a release package is completed the “Mark Export as Deployed” web service can be called to mark an export as deployed and only checking on the status may be sufficient).

The Type (e.g., Development, UAT, Production) can be used for managing where to push the deployment. The formatAdapter can be used to only retrieve the types of exports to be processed such as “Java” if other deployments such as “DE” are managed via a separate process.

Note: All the above query parameters are optional.

To enable the List Deployment Requests API, set the value of the following property to ‘true’ in DM application.properties file:

- decision.enable.webservices.download-deploymentpackage-revisionhistory=true

The default value is ‘true’

Endpoint URL: <http://<host>:<port>/dm/ws/rsapi/api/revisionExportHistory>

Permission Required

EXPORT_HISTORY_READ_WS

Request Example

- <http://<host>:<port>/dm/ws/rsapi/api/revisionExportHistory>

OR

- <http://<host>:<port>/dm/ws/rsapi/api/revisionExportHistory?status=<deploymentstatus>>
- <http://<host>:<port>/dm/ws/rsapi/api/revisionExportHistory?environment=<environment name>&community=<communityname>>

Response Example

```
[
  {
    "@id": "1",
    "id": 8303965,
    "exportDate": "2024-02-19T12:24:29.058+0000",
    "exportStatus": "DEPLOYED",
    "exportStatusDate": "2024-02-19T12:24:30.906+0000",
    "revisionId": 8304008,
    "revisionTagName": "8304008",
    "exportName": "API-SNAPSHOT",
    "environmentId": 8243722,
    "environmentName": "1122",
    "environmentType": {
      "name": "Production",
      "production": true
    }
  }
]
```

```
    },
    "formatDefinition": {
      "@id": "2",
      "identifierName": "BdesExporter",
      "implBeanName": "bdesExporter",
      "displayName": "DECISION Execution (DE)",
      "entityStatus": "ENABLED",
      "isModelDefinitionRequired": false,
      "incrementalExportSupported": false,
      "checkConnection": false
    },
    "repositoryDefinition": {
      "@id": "3",
      "identifierName": "BdesRepository",
      "implBeanName": "bdesRepositoryDeployer",
      "displayName": "DECISION Execution (DE)",
      "entityStatus": "ENABLED",
      "checkConnection": false
    },
    "exporterName": "user",
    "projectName": "user",
    "fullExportFile": {
      "@id": "4",
      "id": 8304074
    },
    "incrementalExportFile": {
      "@id": "5",
      "id": 8304075
    },
    "ownersFlowState": {
      "@id": "6",
      "id": 8303967,
      "workflowStatus": "APPROVED",
      "entityType": {
        "@id": "7",
        "id": 1015414,
        "auditType": "NONE"
      }
    }
  }
}
```

```
    },
    "requestor": {
      "@id": "8",
      "id": 8292494,
      "name": "user",
      "displayName": "user",
      "isActive": true
    },
    "creationDate": "2024-02-19T12:24:29.062+0000",
    "ownersFlowApprovalStrategy": {
      "@id": "9",
      "id": 8303968,
      "approvalStrategyType": "NONE",
      "distinctUser": false
    }
  },
  "incremental": false
},
{
  "@id": "10",
  "id": 8328280,
  "exportDate": "2024-03-05T12:49:20.786+0000",
  "exportStatus": "DEPLOYED",
  "exportStatusDate": "2024-03-05T12:49:29.896+0000",
  "revisionId": 8328414,
  "revisionTagName": "8328414",
  "exportName": "API11-SNAPSHOT",
  "environmentId": 8243722,
  "environmentName": "1122",
  "environmentType": {
    "name": "Production",
    "production": true
  },
  "formatDefinition": {
    "@id": "11",
    "identifierName": "BdesExporter",
    "implBeanName": "bdesExporter",
```



```
        "displayName": "DECISION Execution (DE)",
        "entityStatus": "ENABLED",
        "isModelDefinitionRequired": false,
        "incrementalExportSupported": false,
        "checkConnection": false
    },
    "repositoryDefinition": {
        "@id": "12",
        "identifierName": "BdesRepository",
        "implBeanName": "bdesRepositoryDeployer",
        "displayName": "DECISION Execution (DE)",
        "entityStatus": "ENABLED",
        "checkConnection": false
    },
    "exporterName": "user",
    "projectName": "user",
    "fullExportFile": {
        "@id": "13",
        "id": 8328300
    },
    "incrementalExportFile": {
        "@id": "14",
        "id": 8328301
    },
    "ownersFlowState": {
        "@id": "15",
        "id": 8328282,
        "workflowStatus": "APPROVED",
        "entityType": {
            "@id": "16",
            "id": 1015414,
            "auditType": "NONE"
        },
        "requestor": {
            "@id": "17",
            "id": 8292494,
            "name": "user",
```

```
        "displayName": "user",
        "isActive": true
    },
    "creationDate": "2024-03-05T12:49:20.812+0000",
    "ownersFlowApprovalStrategy": {
        "@id": "18",
        "id": 8328283,
        "approvalStrategyType": "NONE",
        "distinctUser": false
    }
},
"incremental": false
}
]
```

Note: The RecordID or the Revision and Time stamp fields, they can be used with the “Download Deployment Package” web service to download a specific Project Release.

Download Deployment Package

Description

A RESTful web service to provide the deployment package from the database, similar to the current Download service from the Deployment History page. The Query parameters are deploymentHistoryRecordId, or revisionId, exportDateTime.

To enable the Download Deployment Package API, set the value of the following property to ‘true’ in DM application.properties file. The default value is ‘true’

- decision.enable.webservices.download-deploymentpackage-revisionhistory=true

Endpoint URL's:

- <http://<host>:<port>/dm/ws/rsapi/api/deploymentPackage?deploymentHistoryRecordId=<recordID>>

OR

- <http://<host>:<port>/dm/ws/rsapi/api/deploymentPackage?revisionId=<revisionId>&exportDateTime=<exportDateTime>>

If the Download Deployment Package feature is Off and you want to execute the web service, the message "The feature is not enabled for this environment." will be displayed.

Permission Required

REVISION_EXPORT_DOWNLOAD_WS

Request Example

It's a GET service and can be accessed at the following REST endpoints in DM Service.

http://<host>:<port>/dm/ws/rs/api/deploymentPackage?deploymentHistoryRecordId=<recordID>

OR

http://<host>:<port>/dm/ws/rs/api/deploymentPackage?revisionId=<revisionId>&exportDateTime=<exportDateTime>

Response Example

The response should always be saved in zip format. Extract the package to see the contents of the package.

Removing deprecated test tables

Description

A RESTful web service to drop retained and deprecated testing tables from DM using the Web Services Management option under Administration. There are no default values for this web service. If the testing tables exist in the DM schema, then those will be dropped after executing the following Web Service:

- /ws/rs/administration/dropTestingTables/

Note: This service is a one-time use service to remove deprecated test tables that are no longer in use after V7.0.

Request Example

It's a GET service and can be accessed at the following REST endpoints in DM Service.

http://<host>:<port>/dm/ws/rs/administration/dropTestingTables/

Response Example

The response will be displayed in a log file in the administration.log.

The log file will display the following logs:

```
http-nio-8123-exec-2 21 May 2024 04:36:55,612 INFO [RestWebServiceAspectLogger]
[3e0e1764223f537b] WS: /administration/dropTestingTables has started
```

```
http-nio-8123-exec-2 21 May 2024 04:36:55,617 INFO [AdministrationWebServiceImpl]
[3e0e1764223f537b] Drop testing tables webservice has started successfully and it may take
sometime to complete. You can check the logs for progress.
```

```
http-nio-8123-exec-2 21 May 2024 04:36:55,618 INFO [RestWebServiceAspectLogger]
[3e0e1764223f537b] WS: /administration/dropTestingTables has completed
```

```
pool-26-thread-1 21 May 2024 04:36:55,872 INFO [AdministrationWebServiceImpl]
[3e0e1764223f537b] Testing Tables dropped successfully for the current schema.
```

If the tables are already dropped, the following message will be displayed:

```
pool-26-thread-2 21 May 2024 04:46:25,667 INFO [AdministrationWebServiceImpl]
[6435a701a86db820] Testing Tables already dropped on this Schema.
```

Purge Services

Count Knowledge Sources to be Purged

Description

The webservice provides the number of Knowledge Sources that will be purged for the configured purge duration. The webservice can be used for various reasons, such as:

- Identifying the total number of Knowledge Sources to be purged for the default Purge duration.
- Identifying the total number of Knowledge Sources to be purged for any purge duration (by explicitly passing as parameter to webservice).
- Checking the progress of the purge execution when the purge webservice is in progress.

Request Example

Count Service: The following is the URL endpoint used to access the service:

dm-root/ws/api/purge/knowledgeSources/count

The service provides a count of the Knowledge Sources that are eligible for the purge for the default duration of 1095 days (i.e., Knowledge Sources created 3 years before the current date).

Optionally, you can run a parameterized version of this service if you want to know the count for any other custom duration like the following that shows the count of the Knowledge Sources created 50 days before the current date:

dm-root/ws/api/purge/knowledgeSources/count?purgeDuration=50

Response Example

Purge Duration (days): 50

Purge Statement: Knowledge Source created before 2023-05-03T12:39:16.077 will be purged.

Count Of Knowledge Sources To Be Purged: 7645

Purge Knowledge Sources

Description

A RESTful webservice that will purge all the Knowledge Sources created before the configured days (purge duration) and logs the association details in the purge log. Any errors during the purge will be logged in the purge error log.

For information on the log files, refer to **Execution Purge Log File** and **Error Purge Log File** under the **Purge Knowledge Sources** section in the *Decision Manager (DM) Admin Guide*.

Note: To utilize resources efficiently, the webservice is limited to execute for a configured run duration. The run duration property can be overridden by explicitly passing it as parameter with the webservice execution.

Permissions Required

KS_PURGE

Request Example

Purge Service: The following is the URL endpoint used to access the service:

<dm root context>/purge-knowledge-sources/purge

This service will execute the Knowledge Source purge service. By default, it runs for 120 mins. If any Knowledge Sources that are eligible for purge are still available, then you can run the service again from the webservice management screen or schedule an HTTP client program to run it. Also, by default it purges the Knowledge Sources older than 1095 days.

If you want to run the purge process for a duration that is different than 120 mins, you must use a parameterized endpoint as mentioned in the following example for 60 mins:

```
<dm root context>/purge-knowledge-sources/purge?purgeRunDuration=60
```

Note: Notice the difference between the purgeDuration in count and purgeRunDuration in the actual purge service. The purgeDuration is the duration that defines how old a Knowledge Source needs to be to be eligible for purge, while the purgeRunDuration defines the maximum process run time in minutes.

If you want to run it and purge assets created before a custom duration, you can overwrite the 1095 value in DM's application.properties file by updating the following property (example shown below for 2 years (730 days)):

```
ks.purge.duration=730
```

Response Example

A standard HTTP 200 will be sent back to the HTTP client.

Response Text: "Purge webservice started successfully and it may take some time to complete purging of eligible Knowledge Sources. You can check the logs for progress."

Count Test Cases to be Purged

Description

The webservice provides the number of Test Cases that will be purged for the configured purge duration. The webservice can be used for various reasons, such as:

- Identifying the total number of Test Cases to be purged for the default Purge duration.
- Identifying the total number of Test Cases to be purged for any purge duration (by explicitly passing as parameter to webservice).
- Checking the progress of the purge execution when the purge webservice is in progress.

Request Example

Count Service: The following is the URL endpoint used to access the service:

```
dm-root/ws/api/testing/repo/purge-test-cases/count
```

The service provides a count of the Test Cases that are eligible for the purge for the default duration of 1095 days (i.e., Test Cases created 3 years before the current date).

Optionally, you can run a parameterized version of this service if you want to know the count for any other custom duration like the following that shows the count of the Test Cases created 50 days before the current date:

```
dm-root/ws/api/testing/repo/purge-test-cases/count?purgeDuration=50
```

Response Example

Purge Duration (Days): 50

Purge Statement : Test cases created before 2023-05-03T12:38:33.054 will be purged
Count Of Test Cases To Be Purged : 9865

Purge Test Cases

Description

A RESTful webservice that will purge all the Test Cases created before the configured days (purge duration). The webservice purges the Test Cases on a per Asset per Test Group basis and logs all the Asset and Test Group details in the purge log. Any errors during the purge will be logged in the purge error log.

For information on the log files, refer to **Execution Purge Log File** and **Error Purge Log File** under the **Purge Test Cases** section in the *Decision Manager (DM) Admin Guide*.

Note: To utilize resources efficiently, the webservice is limited to execute for the configured run duration. The run duration property can be overridden by explicitly passing as parameter with web service execution.

Request Example

Purge Service: The following is the URL endpoint used to access the service:

dm-root/ws/api/testing/repo/purge-test-cases/purge

This service will execute the Test Case purge service. By default, it runs for 120 mins. If any Test Cases that are eligible for purge are still available, then you can run the service again from the webservice management screen or schedule an HTTP client program to run it. Also, by default it purges the Test Cases older than 1095 days.

If you want to run the purge process for a duration that is different than 120 mins, you must use a parameterized endpoint as mentioned in the following example for 60 mins:

dm-root/ws/api/testing/repo/purge-test-cases/purge?purgeRunDuration=60

Note: Notice the difference between the purgeDuration in count and purgeRunDuration in the actual purge service. The purgeDuration is the duration that defines how old a Test Case needs to be to be eligible for purge, while the purgeRunDuration defines the maximum process run time in minutes.

If you want to run it and purge assets created before a custom duration, you can overwrite the 1095 value in DT Repository's application.properties file by updating the following property (example shown below for 2 years (730 days)):

test.cases.purge.duration =730

Response Example

A standard HTTP 200 will be sent back to the HTTP client.

Response Text: "Purge webservice started successfully and it may take sometime to complete purging of eligible Test cases. You can check the logs for progress."

SOAP Web Service APIs

This section details the SOAP Web Service APIs that are currently in use.

Glossary Services

Find All Glossaries

Description

Retrieves all Glossaries defined for Communities.

Permissions Required

GLS_READ

Request Example

```
<soapenv:Envelope
  xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:face="http://face.service.api.bdms.sapiens.com/">
  <soapenv:Header/>
  <soapenv:Body>
    <face:findAllGlossaries/>
  </soapenv:Body>
</soapenv:Envelope>
```

Response Example

```
<soap:Envelope
  xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
  <soap:Body>
    <ns3:findAllGlossariesResponse
      xmlns:ns2="urn:com.sapiens.bdms.core.common.model.decision"
      xmlns:ns3="http://face.service.api.bdms.sapiens.com/">
      <return>
        <id>245</id>
        <name>WORLD</name>
      </return>
      <return>
        <id>198921</id>
        <name>Loan</name>
      </return>
    </ns3:findAllGlossariesResponse>
  </soap:Body>
</soap:Envelope>
```

Find All Fact Types In Glossary

Description

Retrieves all approved Fact Types in a specific Glossary.

Permissions Required

FT_READ

Request Example

```
<soapenv:Envelope
xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:face="http://face.service.api.bdms.sapiens.com/">
  <soapenv:Header/>
  <soapenv:Body>
    <face:findAllFactTypesInGlossary>
      <glossaryName>Loan</glossaryName>
      <approvedSinceDate>
        2012-03-01T00:00:00.000+03:00
      </approvedSinceDate>
    </face:findAllFactTypesInGlossary>
  </soapenv:Body>
</soapenv:Envelope>
```

Response Example

```
soap:Envelope      xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
  <soap:Body>
    <ns3:findAllFactTypesInGlossaryResponse
xmlns:ns2="urn:com.sapiens.bdms.core.common.model.decision"
xmlns:ns3="http://face.service.api.bdms.sapiens.com/">
      <return>
        <id>1062194</id>
        <approvedBy>
          <id>221</id>
          <isActive>true</isActive>
        </approvedBy>
        <approvedDate>
          2012-04-11T12:01:19.540+03:00
        </approvedDate>
        <createdBy>
          <id>221</id>
          <isActive>true</isActive>
        </createdBy>
        <createdDate>2012-04-11T12:01:19.195+03:00</createdDate>
        <editNumber>1</editNumber>
        <haveWarning>false</haveWarning>
        <internalSign>
          436461a4bf62c31dd51cc389791df626
        </internalSign>
      </return>
    </ns3:findAllFactTypesInGlossaryResponse>
  </soap:Body>
</soap:Envelope>
```



```
</internalSign>
<isLatestVersion>true</isLatestVersion>
<name>FT-test</name>
<state>APPROVED</state>
<valid>true</valid>
<version>
  <label>1</label>
  <number>1</number>
</version>
<businessFriendlyName>FT-test</businessFriendlyName>
<displayFormat>
  <id>1035263</id>
  <name>Text</name>
  <example>Hello!</example>
</displayFormat>
<factDomain>

  <id>1062188</id>
  <approvedBy>
    <id>221</id>
    <isActive>true</isActive>
  </approvedBy>
  <approvedDate>
    2012-04-11T12:01:19.535+03:00
  </approvedDate>
  <createdBy>
    <id>221</id>
    <isActive>true</isActive>
  </createdBy>
  <createdDate>
    2012-04-11T12:01:18.776+03:00
  </createdDate>
  <editNumber>1</editNumber>
  <haveWarning>false</haveWarning>
  <internalSign>
    a6533f4aad7573fa0f3f5fd2652255e1
  </internalSign>
```

```
<isLatestVersion>true</isLatestVersion>
<state>APPROVED</state>
<valid>true</valid>
<version>
  <label>1</label>
  <number>1</number>
</version>
<dataType>NAME</dataType>
<decimalPoint>0</decimalPoint>
<domain>
  <id>1062187</id>
  <dataType>NAME</dataType>
  <required>false</required>
  <domainValues>
    <val>NotCompliant</val>
  </domainValues>
  <domainValues>
    <val>Compliant</val>
  </domainValues>
</domain>
<factDomainDefinition>
  <id>1062186</id>
</factDomainDefinition>
</factDomain>
<factTypeDefinition>
  <id>1062189</id>
  <latestBusinessFriendlyName>
    FT-Eitan1
  </latestBusinessFriendlyName>
  <description>This fact type is test</description>
  <businessConcept>
    <id>450</id>
  </businessConcept>
  <customMetadataInstances>
    <id>1062190</id>
    <customMetadataElement>
      <id>310</id>
      <required>false</required>
```

```

        </customMetadataElement>
        <metadata>N/A</metadata>
    </customMetadataInstances>
    <customMetadataInstances>
        <id>1062193</id>
        <customMetadataElement>
            <id>304</id>
            <required>false</required>
        </customMetadataElement>
        <metadata>Interim Value</metadata>
    </customMetadataInstances>
    <customMetadataInstances>
        <id>1062192</id>
        <customMetadataElement>
            <id>300</id>
            <required>false</required>
        </customMetadataElement>
        <metadata>Active</metadata>
    </customMetadataInstances>
    <customMetadataInstances>
        <id>1062191</id>
        <customMetadataElement>
            <id>302</id>
            <required>false</required>
        </customMetadataElement>
        <metadata>FALSE</metadata>
    </customMetadataInstances>
</factTypeDefinition>
<isDeployable>true</isDeployable>
<isFormula>false</isFormula>
<isList>false</isList>
</return>

```

Find All Fact Types In Glossary By Id

Description

Locates all Fact Types in a Glossary according to their ID numbers.

Permissions Required

FT_READ

Request Example

```
<?xml version='1.0' encoding='UTF-8'>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:face="http://face.service.api.bdms.sapiens.com">
  <soapenv:Header/>
  <soapenv:Body>
    <face:findAllFactTypesInGlossaryById>
      <!--Optional:-->
      <glossaryId>1014481</glossaryId>
      <!--Optional:-->
      <approvedSinceDate>2015-12-15</approvedSinceDate>
    </face:findAllFactTypesInGlossaryById>
  </soapenv:Body>
</soapenv:Envelope>
```

Response Example

```

<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
  <soap:Body>
    <ns3:findAllFactTypesInGlossaryByIdResponse xmlns:ns2="urn:com.sapiens.bdms.core.common.model.decision" xmlns:ns3="http://face.service.api.bdms.sapiens.com/" xmlns:ns4="com.sapiens.bdms.core"
      <return>
        <id>1059904</id>
        <name>FT-input-code</name>
        <businessFriendlyName>FT-input-code</businessFriendlyName>
        <decimalPoint>0</decimalPoint>
        <isLatestVersion>true</isLatestVersion>
        <isDeployable>true</isDeployable>
        <isFormula>false</isFormula>
        <isList>false</isList>
        <state>APPROVED</state>
        <approvedDate>2015-12-21T13:34:27.623Z</approvedDate>
        <createdDate>2015-12-21T13:25:38.731Z</createdDate>
        <domain>
          <id>1059902</id>
          <domainType>REGULAR_SET</domainType>
          <dataType>CODE</dataType>
          <required>false</required>
          <domainValues>
            <val-A</val>
          </domainValues>
          <domainValues>
            <val-B</val>
          </domainValues>
          <domainValues>
            <val-C</val>
          </domainValues>
          <domainValues>
            <val-D</val>
          </domainValues>
          <domainValues>
            <val-E</val>
          </domainValues>
          <domainValues>
            <val-F</val>
          </domainValues>
          <isTemplate>false</isTemplate>
          <isDeprecated>false</isDeprecated>
          <isLocal>false</isLocal>
        </domain>
        <displayFormat>
          <id>1012376</id>
          <name>Text</name>
          <example>Hello</example>
        </displayFormat>
        <factTypeDefinition>
          <id>1045029</id>
          <fullFactTypeName>Unassigned</fullFactTypeName>
          <latestBusinessFriendlyName>FT-input-code</latestBusinessFriendlyName>
          <businessConcept>
            <id>1012964</id>
          </businessConcept>
          <factTypeDefinition>
            <version>
              <label>1.1</label>
              <number>1</number>
            </version>
          </factTypeDefinition>
        </return>
      </ns3:findAllFactTypesInGlossaryByIdResponse>
    </soap:Body>
  </soap:Envelope>

```

Report Services

Find All Saved Queries

Description

Retrieves a list of saved queries.

Note: This service is not available in the current version. It will be supported in the future version.

Permissions Required

RQB_READ

Request Example

```
<soapenv:Envelope
  xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:face="http://face.service.api.bdms.sapiens.com/">
  <soapenv:Header />
  <soapenv:Body>
    <face:findAllSavedQueries />
  </soapenv:Body>
</soapenv:Envelope>
```

Response Example

```
<soap:Envelope ·
  xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">¶
  <soap:Body>¶
    <ns3:findAllSavedQueriesResponse ·
      xmlns:ns2="urn:com.sapiens.bdms.core.common.model.decision" ·
      xmlns:ns3="http://face.service.api.bdms.sapiens.com/">¶
      <return>¶
        <creationDate>¶
          2012-02-09T14:54:47.622+02:00¶
        </creationDate>¶
        <name>Query messages</name>¶
        <id>844617</id>¶
      </return>¶
      <return>¶
        <creationDate>¶
          2012-02-10T21:30:57.866+02:00¶
        </creationDate>¶
        <name>2-10-12 Query 2</name>¶
        <id>846309</id>¶
      </return>¶
    </ns3:findAllSavedQueriesResponse>¶
  </soap:Body>¶
</soap:Envelope>¶
```

Run Saved Query By Name

Description

Executes a saved query.

Note: This service is not available in the current version. It will be supported in the future version.

Permissions Required

RQB_READ

Request Example

```
<soapenv:Envelope ·  
  xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" ·  
  xmlns:face="http://face.service.api.bdms.sapiens.com/">␣  
    <soapenv:Header/>␣  
    <soapenv:Body>␣  
      <face:runSavedQueryByName>␣  
        <queryBasketName>·  
          Query messages␣  
        </queryBasketName>␣  
      </face:runSavedQueryByName>␣  
    </soapenv:Body>␣  
  </soapenv:Envelope>␣
```

Response Example

```

<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
  <soap:Body>
    <ns3:runSavedQueryByNameResponse xmlns:ns2="urn:com.sapiens.bdms.core.common.model.decision" xmlns:ns3="http://face.service.api.bdms.sapiens.com/">
      <return>
        <id>123867</id>
        <name>Compliance</name>
        <entityType>
          <id>948469</id>
          <name>RULE FAMILY VIEW</name>
          <entityClass>com.sapiens.bdms.core.common.model.decision.RuleFamilyView</entityClass>
          <camelCasedName>RuleFamilyView</camelCasedName>
          <displayName>Rule Family View</displayName>
        </entityType>
        <assetState>APPROVED</assetState>
        <bcdName>Import</bcdName>
        <createdBy>admin</createdBy>
        <approvedBy>admin</approvedBy>
        <versionInc>MINOR</versionInc>
        <versionLabel>1</versionLabel>
        <editNumber>0</editNumber>
        <isVgGlossary>false</isVgGlossary>
        <isVgHasChildren>false</isVgHasChildren>
      </return>
    </ns3:runSavedQueryByNameResponse>
  </soap:Body>
</soap:Envelope>

```

Run Saved Repo Query

Description

Runs a saved query according to its ID number.

Note: This service is not available in the current version. It will be supported in the future version.

Permissions Required

RQB_READ

Request Example

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:face="http://face.sei
  <soapenv:Header/>
  <soapenv:Body>
    <face:runSavedRepoQuery>
      <queryBasketId>1062044</queryBasketId>
    </face:runSavedRepoQuery>
  </soapenv:Body>
</soapenv:Envelope>
```

Response Example

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
  <soap:Body>
    <ns3:runSavedRepoQueryResponse xmlns:ns2="urn:com.sapiens.bdms.core.common.model.decision" xmlns:ns3="http
      <return>
        <id>1058688</id>
        <name>test1</name>
        <entityType>
          <id>1012572</id>
          <name>BCR</name>
          <entityClass>com.sapiens.bdms.bcr.common.model.Bcr</entityClass>
          <auditType>NONE</auditType>
          <camelCasedName>Bcr</camelCasedName>
          <displayName>BCR</displayName>
        </entityType>
        <versionInc>MINOR</versionInc>
        <editNumber>0</editNumber>
        <isVgGlossary>false</isVgGlossary>
        <isVgHasChildren>false</isVgHasChildren>
        <singleParentViewGroup>
          <id>1013511</id>
          <name>Sample Community</name>
        </singleParentViewGroup>
        <hasSingleOrNoContext>false</hasSingleOrNoContext>
        <isLatesVersionInQueryContext>false</isLatesVersionInQueryContext>
      </return>
    </ns3:runSavedRepoQueryResponse>
  </soap:Body>
</soap:Envelope>
```

Task Services*Find Task Transition And Violations***Description**

Finds available transitions for a task and performs task validations.

Permissions Required

BCD_READ

Request Example

```
<soapenv:Envelope
  xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:face="http://face.service.api.bdms.sapiens.com/">
  <soapenv:Header/>
  <soapenv:Body>
    <face:findTaskTransitionAndViolations>
      <bcdTaskId>1060905</bcdTaskId>
    </face:findTaskTransitionAndViolations>
  </soapenv:Body>
</soapenv:Envelope>
```

Response Example

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
  <soap:Body>
    <ns3:findTaskTransitionAndViolationsResponse
      xmlns:ns2="urn:com.sapiens.bdms.core.common.model.decision"
      xmlns:ns3="http://face.service.api.bdms.sapiens.com/"
      xmlns:ns4="com.sapiens.bdms.core.common.model.decision.repeatingGroup">
      <return>
        <submitViolationDto>
          <validationErr>0</validationErr>
          <conflicts>0</conflicts>
          <unApproveFactType>0</unApproveFactType>
          <notDeplableFt>0</notDeplableFt>

          <assetsWithOnlyNonVersionChange>0</assetsWithOnlyNonVersionChange>
          <unchangedAssets>0</unchangedAssets>
          <openSubTasks>0</openSubTasks>
          <unResolvedWarnings>0</unResolvedWarnings>
          <unApproveAlias>0</unApproveAlias>
          <duplicateAsset>0</duplicateAsset>

          <dvToBeRetiredAndInFlowUse>0</dvToBeRetiredAndInFlowUse>
          <suppressedWarnings>0</suppressedWarnings>
        </submitViolationDto>
        <transitionDtos>
          <transition>
            <id>2900230</id>
            <state>
              <id>1013247</id>
              <name>Whiteboard</name>
            </state>
            <nextState>
              <id>1019217</id>
              <name>Peer Reviewer</name>
            </nextState>
            <actionName>Send for Peer Review</actionName>
            <resultAssetState>CANDIDATE</resultAssetState>
          </transition>
        </transitionDtos>
      </return>
    </ns3:findTaskTransitionAndViolationsResponse>
  </soap:Body>
</soap:Envelope>
```

```

        <enable>true</enable>
        <actionName>Send for Peer Review</actionName>
    </transitionDtos>
    <bcdTaskStatus>IN_PROGRESS</bcdTaskStatus>
    <taskReadyForNextTransitionInfo>
        <hasOutdatedAssets>false</hasOutdatedAssets>
        <hasUnChangedAssets>false</hasUnChangedAssets>
        <violationMessage>
            <validationType>ERROR</validationType>
            <violationMessage>You are not the assignee of
this task.</violationMessage>

        <messageKey>USER_IS_NOT_TASK_OWNER</messageKey>
    </violationMessage>
    </taskReadyForNextTransitionInfo>
</return>
</ns3:findTaskTransitionAndViolationsResponse>
</soap:Body>
</soap:Envelope>

```

Complete Task

Description

Performs a task transition.

Permissions Required

PERM_ACCESS

Request Example

```

<soapenv:Envelope
xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:face="http://face.service.api.bdms.sapiens.com/">
    <soapenv:Header/>
    <soapenv:Body>
        <face:completeTask>
            <taskId>1060905</taskId>
        </face:completeTask>
    </soapenv:Body>
</soapenv:Envelope>

```

Response Example

```
<soap:Envelope
xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">

  <soap:Body>

    <ns3:completeTaskResponse
xmlns:ns2="urn:com.sapiens.bdms.core.common.model.decision"
xmlns:ns3="http://face.service.api.bdms.sapiens.com/">

      <return>true</return>

    </ns3:completeTaskResponse>
```

DevOps Services

Create Tag from Latest Revision in Branch

Description

Creates a Tag from the latest Revision in a Branch.

Permissions Required

BRANCH_REVISION_WRITE

Request Example

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" x
  <soapenv:Header/>
  <soapenv:Body>
    <face:createTagFromLatestRevisionInBranch>
      <!--Optional:-->
      <projectName>My Candidate</projectName>
      <!--Optional:-->
      <branchName>Master</branchName>
      <!--Optional:-->
      <tagName>NewTag</tagName>
    </face:createTagFromLatestRevisionInBranch>
  </soapenv:Body>
</soapenv:Envelope>
```

Response Example

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
  <soap:Body>
    <ns3:createTagFromLatestRevisionInBranchResponse xmlns:ns2="urn:com.sa
      <return>Successfully created tag for revision: NewTag</return>
    </ns3:createTagFromLatestRevisionInBranchResponse>
  </soap:Body>
</soap:Envelope>
```

Create Tag If Not Exists And Export

Description

Creates a Tag if it does not already exist and exports it.

Permissions Required

BRANCH_REVISION_WRITE, REVISION_EXPORT

Request Example

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/">
  <soapenv:Header/>
  <soapenv:Body>
    <face:createTagIfNotExistsAndExport>
      <!--Optional:-->
      <projectName>My Candidate</projectName>
      <!--Optional:-->
      <branchName>Master</branchName>
      <!--Optional:-->
      <tagName>Brand New</tagName>
      <!--Optional:-->
      <environmentName>New</environmentName>
    </face:createTagIfNotExistsAndExport>
  </soapenv:Body>
</soapenv:Envelope>
```

Response Example

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
  <soap:Body>
    <ns3:createTagIfNotExistsAndExportResponse xmlns:ns2="urn:com.sapiens.bdms.com"
      <return>Successfully created tag for revision: Brand New
      Export Successfully Completed</return>
    </ns3:createTagIfNotExistsAndExportResponse>
  </soap:Body>
</soap:Envelope>
```

Export Tag In Project

Description

The **Export Tag in Project** service allows users to initiate the export of a specified tag from a given project to a target environment. This service ensures deployments occur within the appropriate community hierarchy. It requires three inputs: the **Project Name** (the project within the system from which the tag is exported), **Tag Name** (the tag to be exported), and **Environment Name** (the target environment for the export).

The service first identifies the community associated with the specified release project. It then searches for the specified environment within that community. If a usable environment is not found, the service searches up the community hierarchy until it locates the first usable instance of the environment. The deployment always takes place in the community where the release project is

defined.

Upon execution, the service triggers an **asynchronous deployment request** but does not return the deployment package. Users must monitor the deployment progress using the **List Deployment Requests** service and retrieve the exported package through the **Download Deployment Package** service once the process is complete.

The response message provides insights into the request's outcome. A successful request is typically indicated by a message such as **"Export Started Successfully"**.

The following are different types of failure messages indicating specific issues:

- **"Couldn't find environment: <Environment Name>"** – The target environment doesn't exist.
- **"Environment <Environment Name> is Retired "** – The target environment is retired and unavailable for exports.
- **"Environment <Environment Name> is Disabled "** – The target environment is disabled and unavailable for exports.
- **"Environment <Environment Name> is Deprecated"** – The target environment is deprecated and unavailable for exports. A deprecated environment allows redeployment but cannot be deployed using the deploy operation. However, it can be redeployed using the redeploy action from the release history page within Decision Manager.
- **Environment <"Environment Name"> is not unique in the community <"Community Name">** – appears when multiple environments with the same name exist within the community, regardless of case. Since environment names are case-insensitive, variations such as **"DE"**, **"de"**, **"De"** and **"dE"** are considered the same. To resolve this issue, the environments must be renamed to ensure uniqueness.

Note: Users should always verify the response message to determine whether the export request was successful or if further action is needed.

Permission Required

REVISION_EXPORT

Request Example

```
<soapenv:Envelope
xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:face="http://face.service.api.bdms.sapiens.com/">
  <soapenv:Header/>
  <soapenv:Body>
    <face:exportTagInProject>
      <tagName>Tag1</tagName>
      <projectName>Test123</projectName>
      <environmentName>xm</environmentName>
    </face:exportTagInProject>
  </soapenv:Body>
</soapenv:Envelope>
```

Response Example

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
  <soap:Body>
    <ns3:exportTagInProjectResponse
xmlns:ns2="urn:com.sapiens.bdms.core.common.model.decision"
xmlns:ns3="http://face.service.api.bdms.sapiens.com/"
xmlns:ns4="com.sapiens.bdms.core.common.model.decision.repeatingGroup">
      <return>Export Started Successfully</return>
    </ns3:exportTagInProjectResponse>
  </soap:Body>
</soap:Envelope>
```

Redeploy Revision Deployment

Description

Redeploy a tested release in one environment to another. It will redo the deployment without regenerating the code. It will just redeploy the Repository Adapter with the selected previously generated release package.

Permission Required

REVISION_EXPORT

Request Example

```
<soapenv:Envelope
xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:face="http://face.service.exportCore.bdms.sapiens.com/">
  <soapenv:Header/>
  <soapenv:Body>
    <face:redeployRevisionDeployment>
      <revisionId>? </revisionId>
      <exportDateTime> ? </exportDateTime>
    </face:redeployRevisionDeployment>
  </soapenv:Body>
</soapenv:Envelope>
```

Note: The export date and time format should be YYYY-MM-DD'T'hh:mm:ss.xxxZ.

The REST endpoint takes same inputs in the URL itself as given below:

<http://<host>:<port>/dm/ws/rsapi/api/revisions/{REVISIONID}/{exportDateTime}/redeploy>

Response Example

The following responses codes might occur based on the executed request:

- **HTTP 200:** This success response is displayed if the redeployment service is invoked.
- **HTTP 403:** This error is displayed for users without the required permission.
- **HTTP 404:** This error is displayed if the service is not reachable.
- **HTTP 500:** This error is displayed when there is a server error.

Mark Export As Deployed

Description

Sets exports to 'Deployed'.

Permission Required

EXPORT_HISTORY_MARK_AS_DEPLOYED

Request Example

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:face="http://face.service.exportCore">
  <soapenv:Header/>
  <soapenv:Body>
    <face:markExportAsDeployed>
      <revisionId>35927136</revisionId>
      <!--Optional:-->
      <exportDateTime>2016-01-03T13:11:23.641Z</exportDateTime>
    </face:markExportAsDeployed>
  </soapenv:Body>
</soapenv:Envelope>
```

Response Example

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
  <soap:Body>
    <ns3:markExportAsDeployedResponse xmlns:ns1="urn:com.sapiens.bdms.core.common.model.decision" xmlns:ns3="http://face.service.exportCore.bdms.sapiens.com" xsi:type="xsd:string">
      <return>Service markExportAsDeployed successfully completed for Revision 35927136 Export Date 2016-01-03T13:11:23.641Z</return>
    </ns3:markExportAsDeployedResponse>
  </soap:Body>
</soap:Envelope>
```

Unmark Export Deployed

Description

Unmarks the 'Deployed' setting for exports.

Permission Required

EXPORT_HISTORY_UNMARK_DEPLOYED

Request Example

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:face="http://face.service.exportCore">
  <soapenv:Header/>
  <soapenv:Body>
    <face:unmarkExportDeployed>
      <revisionId>35927136</revisionId>
      <!--Optional:-->
      <exportDateTime>2016-01-03T13:11:23.641Z</exportDateTime>
    </face:unmarkExportDeployed>
  </soapenv:Body>
</soapenv:Envelope>
```

Response Example

```
<?xml version='1.0' encoding='UTF-8'>
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
  <soap:Body>
    <ns3:unmarkExportDeployedResponse xmlns:ns1="urn:com.sapiens.bdms.core.common.model.decision" xmlns:ns3="http://face.service.exportCore.bdms.sapiens.com/">
      <return>Service unmarkExportDeployed successfully completed for Revision 35927136 Export Date 2016-01-03T13:11:23.641Z</return>
    </ns3:unmarkExportDeployedResponse>
  </soap:Body>
</soap:Envelope>
```

Appendix

Java Code Sample for Header Authentication

The following is a sample Java program to invoke the Glossary Export service as an example:

```
import org.apache.http.client.methods.CloseableHttpResponse;
import org.apache.http.client.methods.HttpGet;
import org.apache.http.client.methods.HttpRequestBase;
import org.apache.http.impl.client.CloseableHttpClient;
import org.apache.http.impl.client.HttpClients;
import java.io.ByteArrayOutputStream;
import java.io.IOException;

public class HTTPClientReferenceHeaderAuthentication {
    private static String apiURL =
"http://localhost:9080/dm/ws/api/viewgroups/glossary/1014481/export?fileFo
rmat=xml&includeGlossaryHierarchy=true";
    private static CloseableHttpClient httpClient =
HttpClients.createDefault();

    public static void main(String[] args) throws IOException {
        CloseableHttpResponse apiResponse = null;
        try {
            apiResponse = getApiResponse(apiURL);
            System.out.println("API RESPONSE CODE:
"+apiResponse.getStatusLine().getStatusCode());
            ByteArrayOutputStream baos =
getByteArrayOutputStream(apiResponse);
            System.out.println(baos);
        }
        finally {
            httpClient.close();
            apiResponse.close();
        }
    }

    private static CloseableHttpResponse getApiResponse(String apiURL)
throws IOException {
        HttpRequestBase requestBase = new HttpGet(apiURL);
        requestBase.setHeader("iv-user", "admin");

        return httpClient.execute(requestBase);
    }

    private static ByteArrayOutputStream
getByteArrayOutputStream(CloseableHttpResponse apiResponse) throws
IOException {
        ByteArrayOutputStream baos = new ByteArrayOutputStream();
        byte[] b = new byte[1024];
        int length;
        while((length = apiResponse.getEntity().getContent().read(b)) != -
1) {
```

```

        baos.write(b, 0, length);
    }
    return baos;
}
}

```

Java Code Sample for Internal Authentication

The following is a sample Java program to invoke the Glossary Export service as an example:

```

import org.apache.http.client.methods.*;
import org.apache.http.entity.StringEntity;
import org.apache.http.impl.client.CloseableHttpClient;
import org.apache.http.impl.client.HttpClients;

import java.io.ByteArrayOutputStream;
import java.io.IOException;

public class HTTPClientReference {
    private static String loginURL= "http://<dmhost>:<dmport>/dm/login";
    private static String apiURL = "http://
    <dmhost>:<dmport>/dm/ws/api/viewgroups/glossary/1014481/export?fileFormat=
    xml&includeGlossaryHierarchy=true";
    private static CloseableHttpClient httpClient =
    HttpClients.createDefault();

    public static void main(String[] args) throws IOException {
        CloseableHttpResponse loginResponse = null;
        CloseableHttpResponse apiResponse = null;
        try {
            loginResponse = getLoginResponse();
            String jSessionId = getJSessionId(loginResponse);
            String xsrfToken = getXsrfToken(loginResponse);
            apiResponse = getApiResponse(jSessionId,xsrfToken,"GET",null);

            System.out.println("API RESPONSE CODE:
            "+apiResponse.getStatusLine().getStatusCode());
            ByteArrayOutputStream baos = getByteArrayOutputStream(apiResponse);
            System.out.println(baos);
        }
        finally {
            httpClient.close();
            loginResponse.close();
            apiResponse.close();
        }
    }

    private static CloseableHttpResponse getLoginResponse() throws IOException
    {
        HttpPost request = new HttpPost(loginURL);
        request.addHeader("Content-Type", "application/x-www-form-urlencoded");
        request.setEntity(new StringEntity("username=admin&password=Password"));
        return httpClient.execute(request);
    }
}

```

```
}  
private static String getXsrfToken(CloseableHttpResponse loginResponse) {  
    return loginResponse.getLastHeader("Set-Cookie").getValue().split(";") [0].split("=") [1];  
}  
private static String getJSessionId(CloseableHttpResponse loginResponse) {  
    return loginResponse.getFirstHeader("Set-Cookie").getValue().split(";") [0];  
}  
private static CloseableHttpResponse getApiResponse(String jSessionId,  
String xsrfToken,  
String method,  
String requestBody) throws IOException {  
    HttpRequestBase requestBase = null;  
    switch (method) {  
        case "GET":  
            requestBase = new HttpGet(apiURL);  
            break;  
        case "POST":  
            requestBase = new HttpPost(apiURL);  
            if(requestBody != null)  
                ((HttpPost) requestBase).setEntity(new StringEntity(requestBody));  
            break;  
        case "DELETE":  
            requestBase = new HttpDelete(apiURL);  
            break;  
        case "PUT":  
            requestBase = new HttpPut(apiURL);  
            if(requestBody != null)  
                ((HttpPut) requestBase).setEntity(new StringEntity(requestBody));  
            break;  
    }  
    requestBase.setHeader("Cookie", jSessionId);  
    requestBase.setHeader("X-XSRF-TOKEN", xsrfToken);  
    return httpClient.execute(requestBase);  
}  
private static ByteArrayOutputStream  
getByteArrayOutputStream(CloseableHttpResponse apiResponse) throws  
IOException {  
    ByteArrayOutputStream baos = new ByteArrayOutputStream();  
    byte[] b = new byte[1024];  
    int length;  
    while ((length = apiResponse.getEntity().getContent().read(b)) != -1) {  
        baos.write(b, 0, length);  
    }  
    return baos;  
}  
}
```

Java Code Sample for SSO/OAuth Authentication

The following is a sample program in Java for invoking the Glossary Export service as an example:

```
import org.springframework.http.HttpHeaders;
import org.springframework.http.MediaType;
import
org.springframework.security.oauth2.client.AuthorizedClientServiceReactive
OAuth2AuthorizedClientManager;
import
org.springframework.security.oauth2.client.InMemoryReactiveOAuth2Authorize
dClientService;
import
org.springframework.security.oauth2.client.ReactiveOAuth2AuthorizedClientP
rovider;
import
org.springframework.security.oauth2.client.ReactiveOAuth2AuthorizedClientP
roviderBuilder;
import
org.springframework.security.oauth2.client.endpoint.WebClientReactiveClien
tCredentialsTokenResponseClient;
import
org.springframework.security.oauth2.client.registration.ClientRegistration
;
import
org.springframework.security.oauth2.client.registration.ClientRegistration
s;
import
org.springframework.security.oauth2.client.registration.InMemoryReactiveCl
ientRegistrationRepository;
import
org.springframework.security.oauth2.client.registration.ReactiveClientRegi
strationRepository;
import
org.springframework.security.oauth2.client.web.reactive.function.client.Se
rverOAuth2AuthorizedClientExchangeFilterFunction;
import org.springframework.security.oauth2.core.AuthorizationGrantType;
import
org.springframework.web.reactive.function.client.ExchangeStrategies;
import org.springframework.web.reactive.function.client.WebClient;
import java.util.Map;
import java.util.function.Consumer;

/*
Properties to add in DM's application.properties file:
=====
decision.oauth2.resourceserver.jwt.authorized.party.keys=clientId
spring.security.oauth2.resourceserver.jwt.issuer-
uri=http://<OAuthIDPhostname>:9999/realms/<realmname>*/

/*
Compile Time Dependencies:
=====
```

```

    <dependency>
        <groupId>org.springframework.security</groupId>
        <artifactId>spring-security-core</artifactId>
        <version>5.8.3</version>
    </dependency>
    <dependency>
        <groupId>org.springframework.boot</groupId>
        <artifactId>spring-boot-starter-oauth2-client</artifactId>
        <version>2.7.6</version>
    </dependency>
    <dependency>
        <groupId>org.springframework.boot</groupId>
        <artifactId>spring-boot-starter-webflux</artifactId>
        <version>2.7.6</version>
    </dependency>
*/
/*****
SAMPLE CODE BELOW TO CALL A DM API USING OAUTH2 CLIENT
*****/

public class OAuthClientReference {
    private static int MAX_BUFFER_SIZE = 1000000;
    private static String oAuthServerRegistrationId = "dmsvr"; //Unique
string to create client attributes
    private static String dmAuthorizationBaseUrl =
http://<dmhost>:<dmpport>/dm; //Base URL of DM server
    private static String clientId="MyClientUser"; //Client ID registered
in Keycloak and also provided in DM's application.properties file as user
    private static String clientSecret
="d5w5R2yl2tVfnVDU0Voo5JYjacRcbpwd"; //The client secret copied from the
IDP (Keycloak in our example)
    private static String issuerUri
="http://<OAuthIDPhostname>:9999/realms/<realmname>; //Oauth server URL
(Keycloak in our example)
    private static String apiURL =
"/ws/api/viewgroups/glossary/1012967/export?fileFormat=xml&includeGlossary
Hierarchy=false"; // URL of the desired API to be called

    public static void main(String... args){
        Consumer<Map<String, Object>> dmServerAttributes =
ServerOAuth2AuthorizedClientExchangeFilterFunction.clientRegistrationId(oA
uthServerRegistrationId);
        Object body = dmWebClient().get().uri(apiURL)
            .attributes(dmServerAttributes)
            .retrieve().bodyToMono(String.class).block();
        System.out.println("data" + body);
    }
    public static WebClient dmWebClient() {
        ServerOAuth2AuthorizedClientExchangeFilterFunction oauth =
getOAuthClientIdFilterFunction();
        return WebClient.builder()
            .exchangeStrategies(ExchangeStrategies.builder()

```

```

        .codecs(configurer -> configurer
            .defaultCodecs()
            .maxInMemorySize(MAX_BUFFER_SIZE))
        .build())
    .baseUrl(dmAuthorizationBaseUrl)
    .defaultHeader(HttpHeaders.CONTENT_TYPE,
MediaTypes.APPLICATION_JSON_VALUE)
    .filter(oauth)
    .build();
}

private static ServerOAuth2AuthorizedClientExchangeFilterFunction
getOAuthClientIdFilterFunction() {
    ReactiveClientRegistrationRepository
reactiveClientRegistrationRepository =
reactiveClientRegistrationRepository();
    InMemoryReactiveOAuth2AuthorizedClientService clientService = new
InMemoryReactiveOAuth2AuthorizedClientService(reactiveClientRegistrationRe
pository);
    ReactiveOAuth2AuthorizedClientProvider clientProvider =
ReactiveOAuth2AuthorizedClientProviderBuilder.builder()
        .refreshToken()
        .clientCredentials(clientCredentialsGrantBuilder -> {
            WebClientReactiveClientCredentialsTokenResponseClient
clientCredentialsTokenResponseClient = new
WebClientReactiveClientCredentialsTokenResponseClient();

            clientCredentialsGrantBuilder.accessTokenResponseClient(clientCredentialsT
okenResponseClient);
        }).build();
    AuthorizedClientServiceReactiveOAuth2AuthorizedClientManager
authorizedClientManager = new
AuthorizedClientServiceReactiveOAuth2AuthorizedClientManager(reactiveClien
tRegistrationRepository, clientService);
    ServerOAuth2AuthorizedClientExchangeFilterFunction oauth = new
ServerOAuth2AuthorizedClientExchangeFilterFunction(authorizedClientManager
);

    authorizedClientManager.setAuthorizedClientProvider(clientProvider);
    return oauth;
}

private static ReactiveClientRegistrationRepository
reactiveClientRegistrationRepository() {
    return new
InMemoryReactiveClientRegistrationRepository(clientRegistration());
}

private static ClientRegistration clientRegistration() {
    return ClientRegistrations.fromIssuerLocation(issuerUri)
        .registrationId(oAuthServerRegistrationId)
        .clientId(clientId)
        .clientSecret(clientSecret)

```



```
.authorizationGrantType(AuthorizationGrantType.CLIENT_CREDENTIALS).build()  
;  
    }  
}
```

Postman Sample for OAuth Authentication


To use OAuth 2.0 when making web service requests, in the request header you will need to specify the “OAuth 2.0” authorization type and add the appropriate access token obtained from the OAuth 2.0 provider.

Important Note:

For requests to work, you will need a DM user corresponding to the “client_id” or turn on autouser creation.

Get Token

An example of how to obtain access token using Postman is given below:

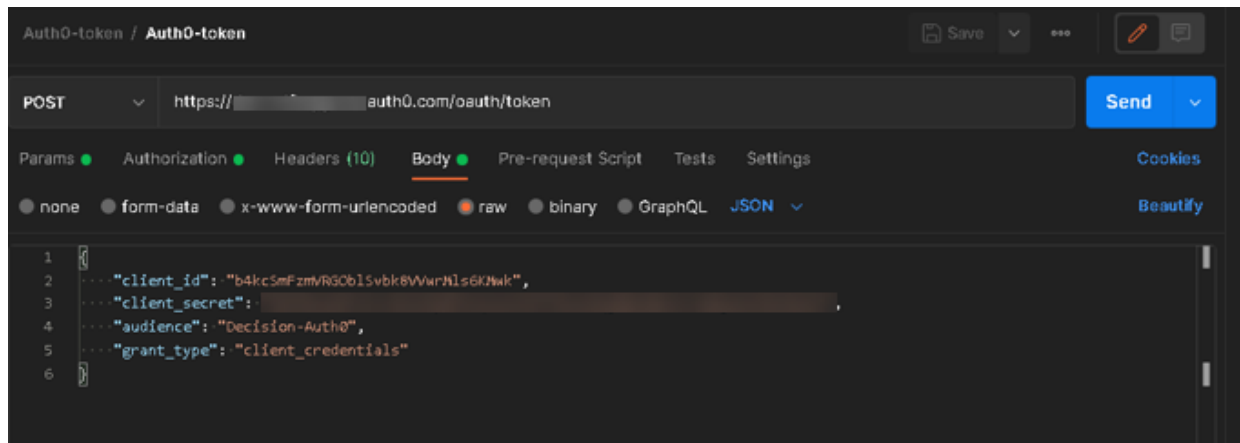


Obtaining Access token using Postman

API Request

To invoke the API's using the access token in Postman:

1. Navigate to the **Authorization** tab.
2. Select the type as **OAuth 2.0**.
3. In the **Access Token** field, add the generated/obtained access token.

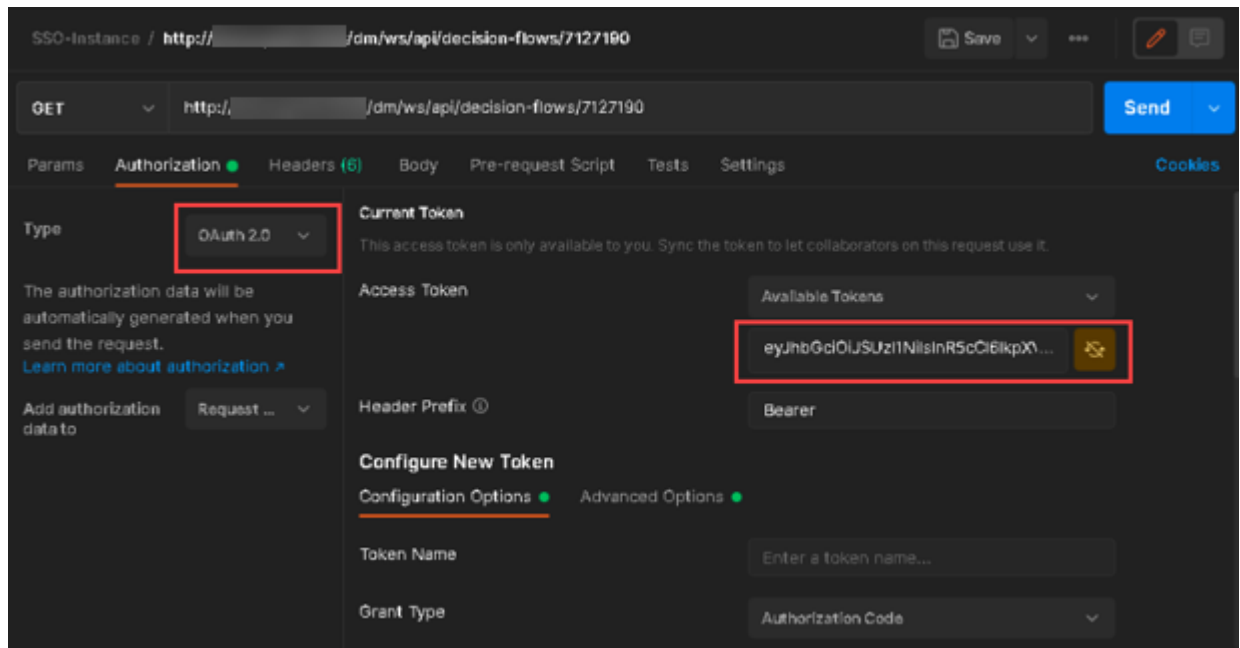

Invoke API using access token

SAPIENS

Partnering for Success

Contact Us

For more information, please visit or contact us at:

info.sapiens@sapiens.com

For Support related queries, contact us at:

Decision.Support@sapiens.com

For Documentation related queries, contact us at:

Decision_documentation@sapiens.com

© 2025 Copyright Sapiens International. All Rights Reserved.

www.sapiensdecision.com



Partnering for Success