


3D Convolutional Autoencoder · parallel branches per excitation

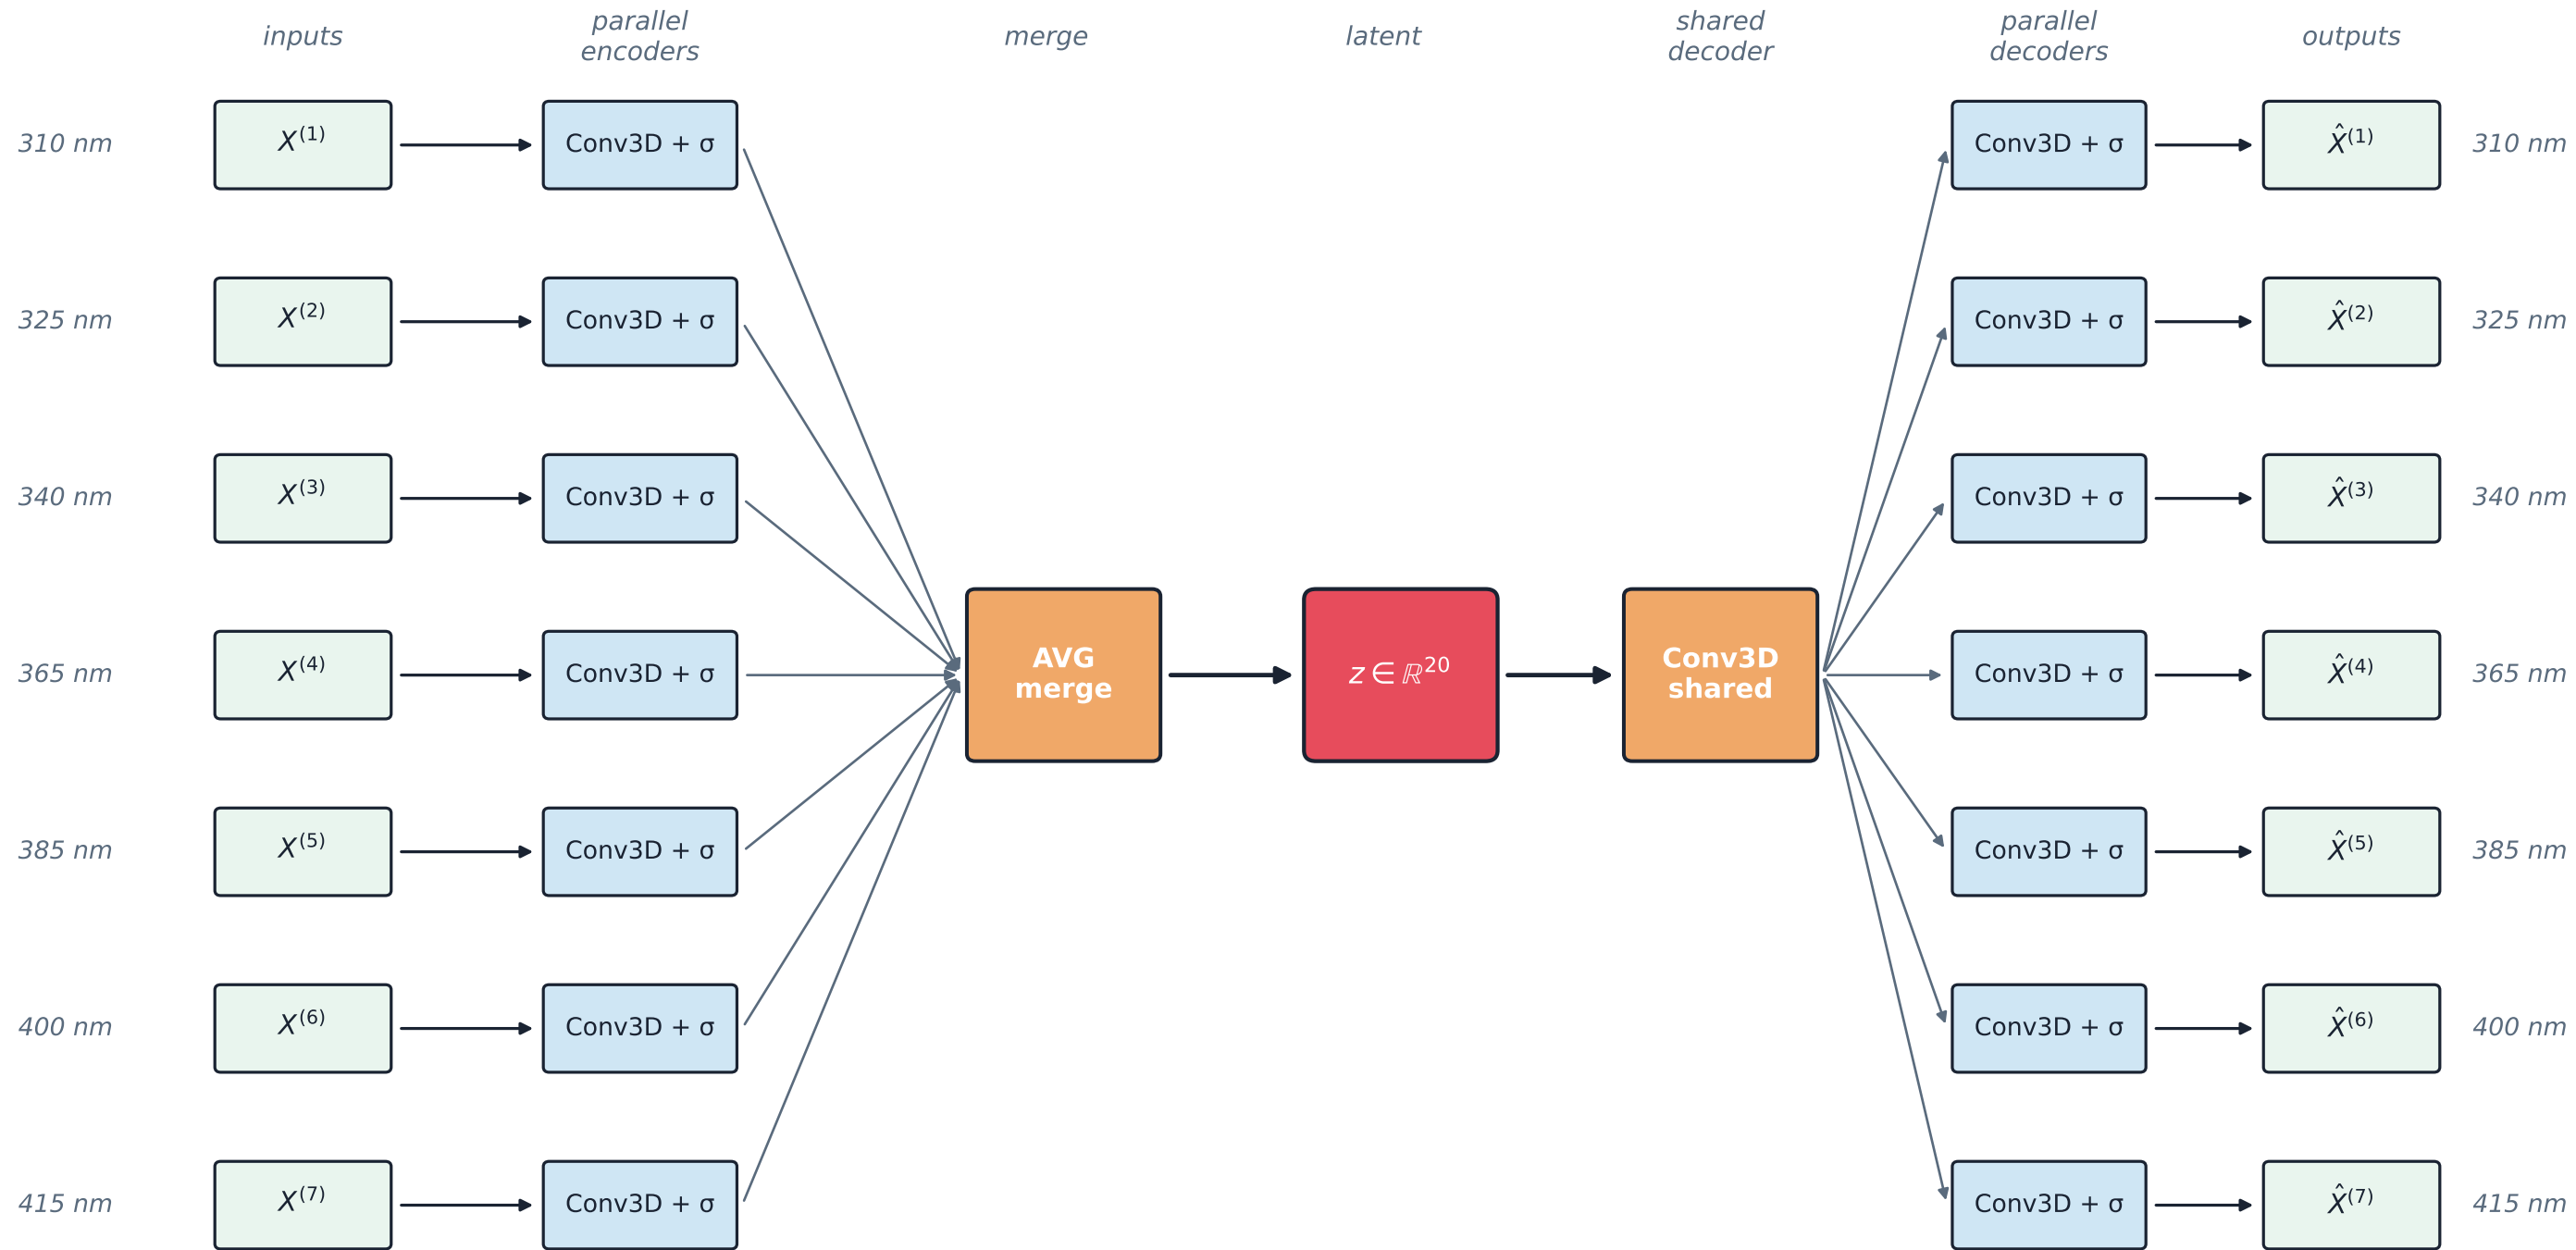

One encoder branch per excitation; features averaged into a 20-dim shared latent. Reconstruction uses a shared decoder + per-excitation decoders.