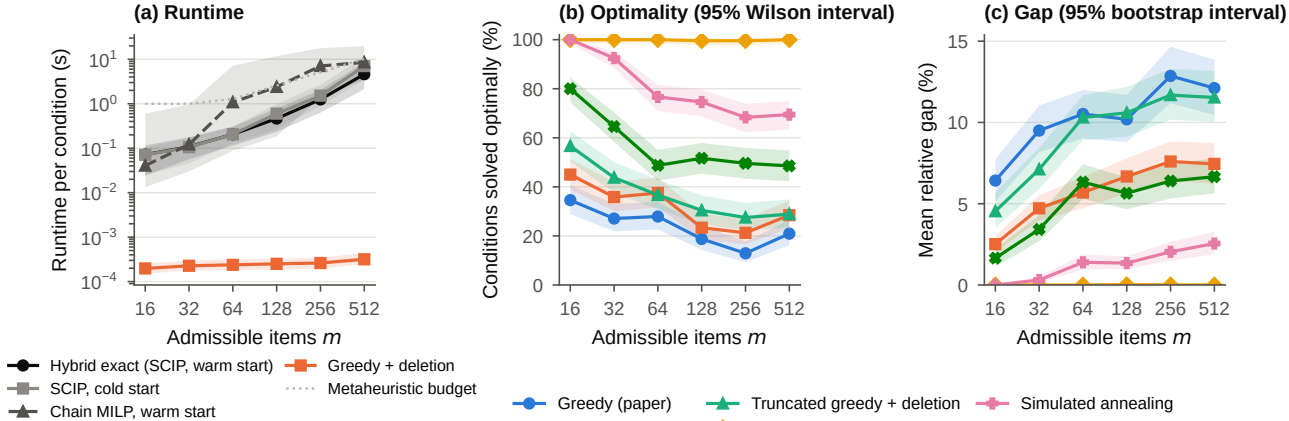
(a) Runtime
Runtime per condition (s)
10^{1}
10^{0}
10^{-1}
10^{-2}
10^{-3}
10^{-4}
16
32
64
128
256
512
Admissible items m
(b) Optimality (95% Wilson interval)
Conditions solved optimally (%)
100
80
60
40
20
0
16
32
64
128
256
512
Admissible items m
(c) Gap (95% bootstrap interval)
Mean relative gap (%)
15
10
5
0
16
32
64
128
256
512
Admissible items m
Hybrid exact (SCIP, warm start)
SCIP, cold start
Chain MILP, warm start
Greedy + deletion
Metaheuristic budget
Greedy (paper)
Greedy + deletion
Truncated greedy + deletion
GA (seeded, repair)
Simulated annealing
Tabu search