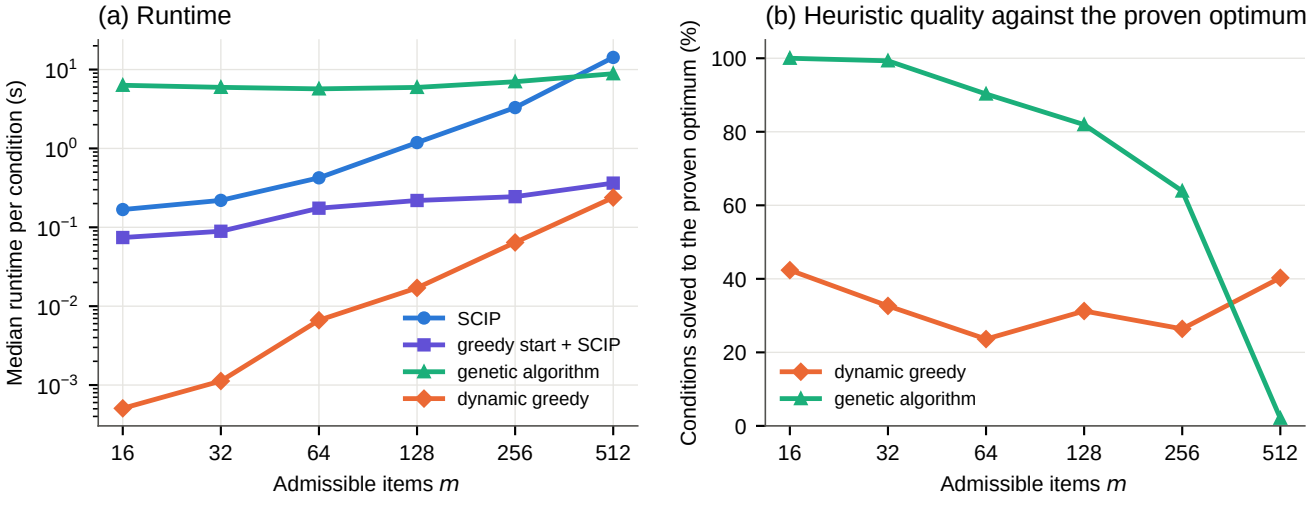
(a) Runtime
Median runtime per condition (s)
10^{1}
10^{0}
10^{-1}
10^{-2}
10^{-3}
SCIP
greedy start + SCIP
genetic algorithm
dynamic greedy
16
32
64
128
256
512
Admissible items m
(b) Heuristic quality against the proven optimum
Conditions solved to the proven optimum (%)
100
80
60
40
20
0
dynamic greedy
genetic algorithm
16
32
64
128
256
512
Admissible items m