

## Exercise 14 - Create and Execute an ExecutionList


### Objective

By the end of this exercise, you will be able to create an ExecutionList and link it to the Requirement Set.

### Why is this important?

TestCases are actually run, or executed, in the Execution section of Tosca, via ExecutionLists.

### Key elements:

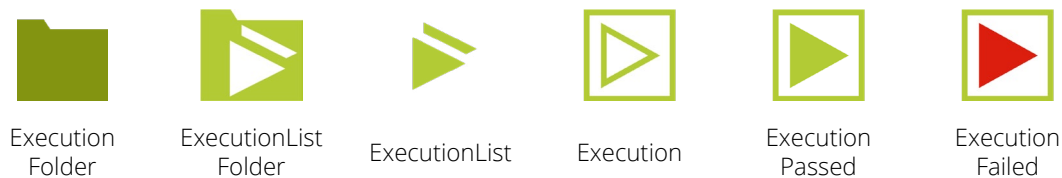

### Instructions

1. Navigate to the ExecutionLists Folder in the **Execution** section. Create an ExecutionList Folder named "**14 Create and Execute an ExecutionList**" within the Folder named "**Automated**".
2. Create a new **ExecutionList** named "**Web Shop**".
3. Confirm that all the **TestCases** are complete and that all the **Business Parameters** are entered.
4. Drag and drop the TestCases with the TestCase WorkState "**COMPLETED**" into the ExecutionList "**Web Shop**".
5. Drag and drop the **ExecutionList** onto the Requirement Set "**Webshop Frontend**".
6. Run the **ExecutionList**.

### Hints

- » Business Parameters will have been applied to all TestCases that used the Reusable TestStepBlock "Precondition".
- » If you have many orders in your overview, the final TestCase may take a couple of minutes to run.