

Exam Questions 1z0-808

Java SE 8 Programmer I

<https://www.2passeasy.com/dumps/1z0-808/>



NEW QUESTION 1

Given the code fragment:

```
public static void main(String[] args) {
    int ans;
    try {
        int num = 10;
        int div = 0;
        ans = num / div;
    } catch (ArithmeticException ae) {
        ans = 0; // line n1
    } catch (Exception e) {
        System.out.println("Invalid calculation");
    }
    System.out.println("Answer = " + ans); // line n2
}
```

What is the result?

- A. Answer = 0
- B. Invalid calculation
- C. Compilation fails only at line n1.
- D. Compilation fails only at line n2.
- E. Compilation fails at line n1 and line2.

Answer: C

Explanation:

```
1 public class Test {
2     public static void main(String[] args) {
3         int ans;
4         try {
5             int num = 10;
6             int div = 0;
7             ans = num / div;
8         } catch (ArithmeticException ae) {
9             ans = 0;
10        } catch (Exception e) {
11            System.out.println("Invalid calculation");
12        }
13        System.out.println("Answer = " + ans); //line n2
14    }
15 }
16 }
17 }
```

✖ variable ans might not have been initialized

✖

NEW QUESTION 2

Given the following classes:

```
public class Employee {
    public int salary;
}

public class Manager extends Employee {
    public int budget;
}

public class Director extends Manager {
    public int stockOptions;
}
```

And given the following main method:

```
public static void main(String[] args) {
    Employee employee = new Employee();
    Manager manager = new Manager();
    Director director = new Director();
    //line n1
}
```

Which two options fail to compile when placed at line n1 of the main method? (Choose two.)

- A. employee.salary = 50_000;
- B. director.salary = 80_000;
- C. employee.budget = 200_000;
- D. manager.budget = 1_000_000;
- E. manager.stockOption = 500;

F. director.stockOptions = 1_000;

Answer: CE

NEW QUESTION 3

Given the code fragment:

```
int x = 100;
int a = x++;
int b = ++x;
int c = x++;
int d = (a < b) ? (a < c) ? a: (b < c) ? b: c: x;
System.out.println(d);
```

What is the result?

- A. 100
- B. 101
- C. 102
- D. 103
- E. Compilation fails

Answer: E

NEW QUESTION 4

Given:

```
public class App {
    int count;
    public static void displayMsg () {
        count++; // line n1
        System.out.println ("Welcome "+"Visit Count: "+count); // line n2
    }
    public static void main (String [] args) {
        App.displayMsg (); // line n3
        App.displayMsg (); // line n4
    }
}
```

What is the result?

- A. Compilation fails at line n3 and line n4.
- B. Compilation fails at line n1 and line n2.
- C. Welcome Visit Count:1Welcome Visit Count: 1
- D. Welcome Visit Count:1Welcome Visit Count: 2

Answer: B

NEW QUESTION 5

Which two are benefits of polymorphism? (Choose two.)

- A. Faster code at runtime
- B. More efficient code at runtime
- C. More dynamic code at runtime
- D. More flexible and reusable code
- E. Code that is protected from extension by other classes

Answer: BD

NEW QUESTION 6

Given:

```
class A {
    public void test () {
        System.out.println ("A");
    }
}
class B extends A {
    public void test () {
        System.out.println ("B");
    }
}
public class C extends A {
    public void test () {
        System.out.println ("C");
    }
}

public static void main (String [] args) {
    A b1 = new A ();
    A b2 = new C ();

    b1 = (A) b2;           //line n1
    A b3 = (B) b2;         //line n2
    b1.test ();
    b3.test ();
}
```

What is the result?

- A. AB
- B. AC
- C. CC
- D. A ClassCastException is thrown only at line n1.
- E. A ClassCastException is thrown only at line n2.

Answer: B

NEW QUESTION 7

Given the code fragment:

```
public static void main(String[] args) {
    int ii = 0;
    int jj = 7;
    for (ii = 0; ii < jj - 1; ii = ii + 2) {
        System.out.print(ii + " ");
    }
}
```

What is the result?

- A. 2 4
- B. 0 2 4 6
- C. 0 2 4
- D. Compilation fails

Answer: C

NEW QUESTION 8

This grid shows the state of a 2D array:

| | | |
|---|---|---|
| 0 | 0 | |
| | X | 0 |
| X | | X |

The grid is created with this code:

```
char[][] grid = new char[3][3];
grid[1][1] = 'X';
grid[0][0] = '0';
grid[2][0] = 'X';
grid[0][1] = '0';
grid[2][2] = 'X';
grid[1][2] = '0';
//line n1
```


Which line of code, when inserted in place of //line n1, adds an X into the grid so that the grid contains three consecutive Xs?

- A. grid[2][1] = 'X';
- B. grid[3][2] = 'X';
- C. grid[3][1] = 'X';
- D. grid[2][3] = 'X';

Answer: D

NEW QUESTION 9

Given the code fragment:

```
public static void main(String[] args) {
    LocalDate date = LocalDate.of(2012, 1, 30);
    date.plusDays(10);
    System.out.println(date);
}
```

What is the result?

- A. 2012-02-10 00:00
- B. 2012-01-30
- C. 2012-02-10
- D. A DateTimeException is thrown at runtime.

Answer: B

Explanation:



NEW QUESTION 10

Given:

```
public class Test {
    public static void main(String[] args) {
        boolean a = new Boolean(Boolean.valueOf(args[0]));
        boolean b = new Boolean(args[1]);
        System.out.println(a + " " + b);
    }
}
```

And given the commands:

```
javac Test.java
java Test 1 null
```

What is the result?

- A. 1 null
- B. true false
- C. false false
- D. true true
- E. A ClassCastException is thrown at runtime.

Answer: D

NEW QUESTION 10

Given the code fragment:

```
public class Employee {
    String name;
    boolean contract;
    double salary;
    Employee() {
        // line n1
    }
    public String toString() {
        return name + ":" + contract + ":" + salary;
    }
    public static void main(String[] args) {
        Employee e = new Employee();
        // line n2
        System.out.print(e);
    }
}
```

Which two modifications, when made independently, enable the code to print Joe:true: 100.0? (Choose two.)

- ☐ A) Replace line n2 with:
 e.name = "Joe";
 e.contract = true;
 e.salary = 100;
- ☐ B) Replace line n2 with:
 this.name = "Joe";
 this.contract = true;
 this.salary = 100;
- ☐ C) Replace line n1 with:
 this.name = new String("Joe");
 this.contract = new Boolean(true);
 this.salary = new Double(100);
- ☐ D) Replace line n1 with:
 name = "Joe";
 contract = TRUE;
 salary = 100.0f;
- ☐ E) Replace line n1 with:
 this("Joe", true, 100);

- A. Option A
- B. Option B
- C. Option C
- D. Option D
- E. Option E

Answer: AC

NEW QUESTION 15

Which three statements are true about exception handling? (Choose three.)

- A. Only unchecked exceptions can be rethrown.
- B. All subclasses of the RuntimeException class are not recoverable.
- C. The parameter in a catch block is of Throwable type.
- D. All subclasses of the RuntimeException class must be caught or declared to be thrown.
- E. All subclasses of the RuntimeException class are unchecked exceptions.
- F. All subclasses of the Error class are not recoverable.

Answer: BCD

NEW QUESTION 16

Given the code fragment:

```
abstract class Toy {
    int price;
    // line n1
}
```

Which three code fragments are valid at line n1?

A

```
public static void insertToy() {  
    /* code goes here */  
}
```

B

```
final Toy getToy() {  
    return new Toy();  
}
```

C

```
public void printToy();
```

D

```
public int calculatePrice() {  
    return price;  
}
```

E

```
public abstract int computeDiscount();
```

- A. Option A
- B. Option B
- C. Option C
- D. Option D
- E. Option E

Answer: CDE

NEW QUESTION 18

Given the code fragment:

```
public static void main(String[] args) {  
    LocalDate date = LocalDate.of(2012, 01, 32);  
    date.plusDays(10);  
    System.out.println(date);  
}
```

What is the result?

- A. 2012-02-10
- B. 2012-02-11
- C. Compilation fails
- D. A DateTimeException is thrown at runtime.

Answer: D

NEW QUESTION 20

Given:

```
interface I {  
    public void displayI();  
}  
abstract class C2 implements I {  
    public void displayC2() {  
        System.out.print("C2");  
    }  
}  
class C1 extends C2 {  
    public void displayI() {  
        System.out.print("C1");  
    }  
}
```

And the code fragment:

```
C2 obj1 = new C1();
I obj2 = new C1();

C2 s = (C2) obj2;
I t = obj1;


t.displayI();
s.displayC2();
```

What is the result?

- A. C1C2
- B. C1C1
- C. Compilation fails.
- D. C2C2

Answer: A

Explanation:

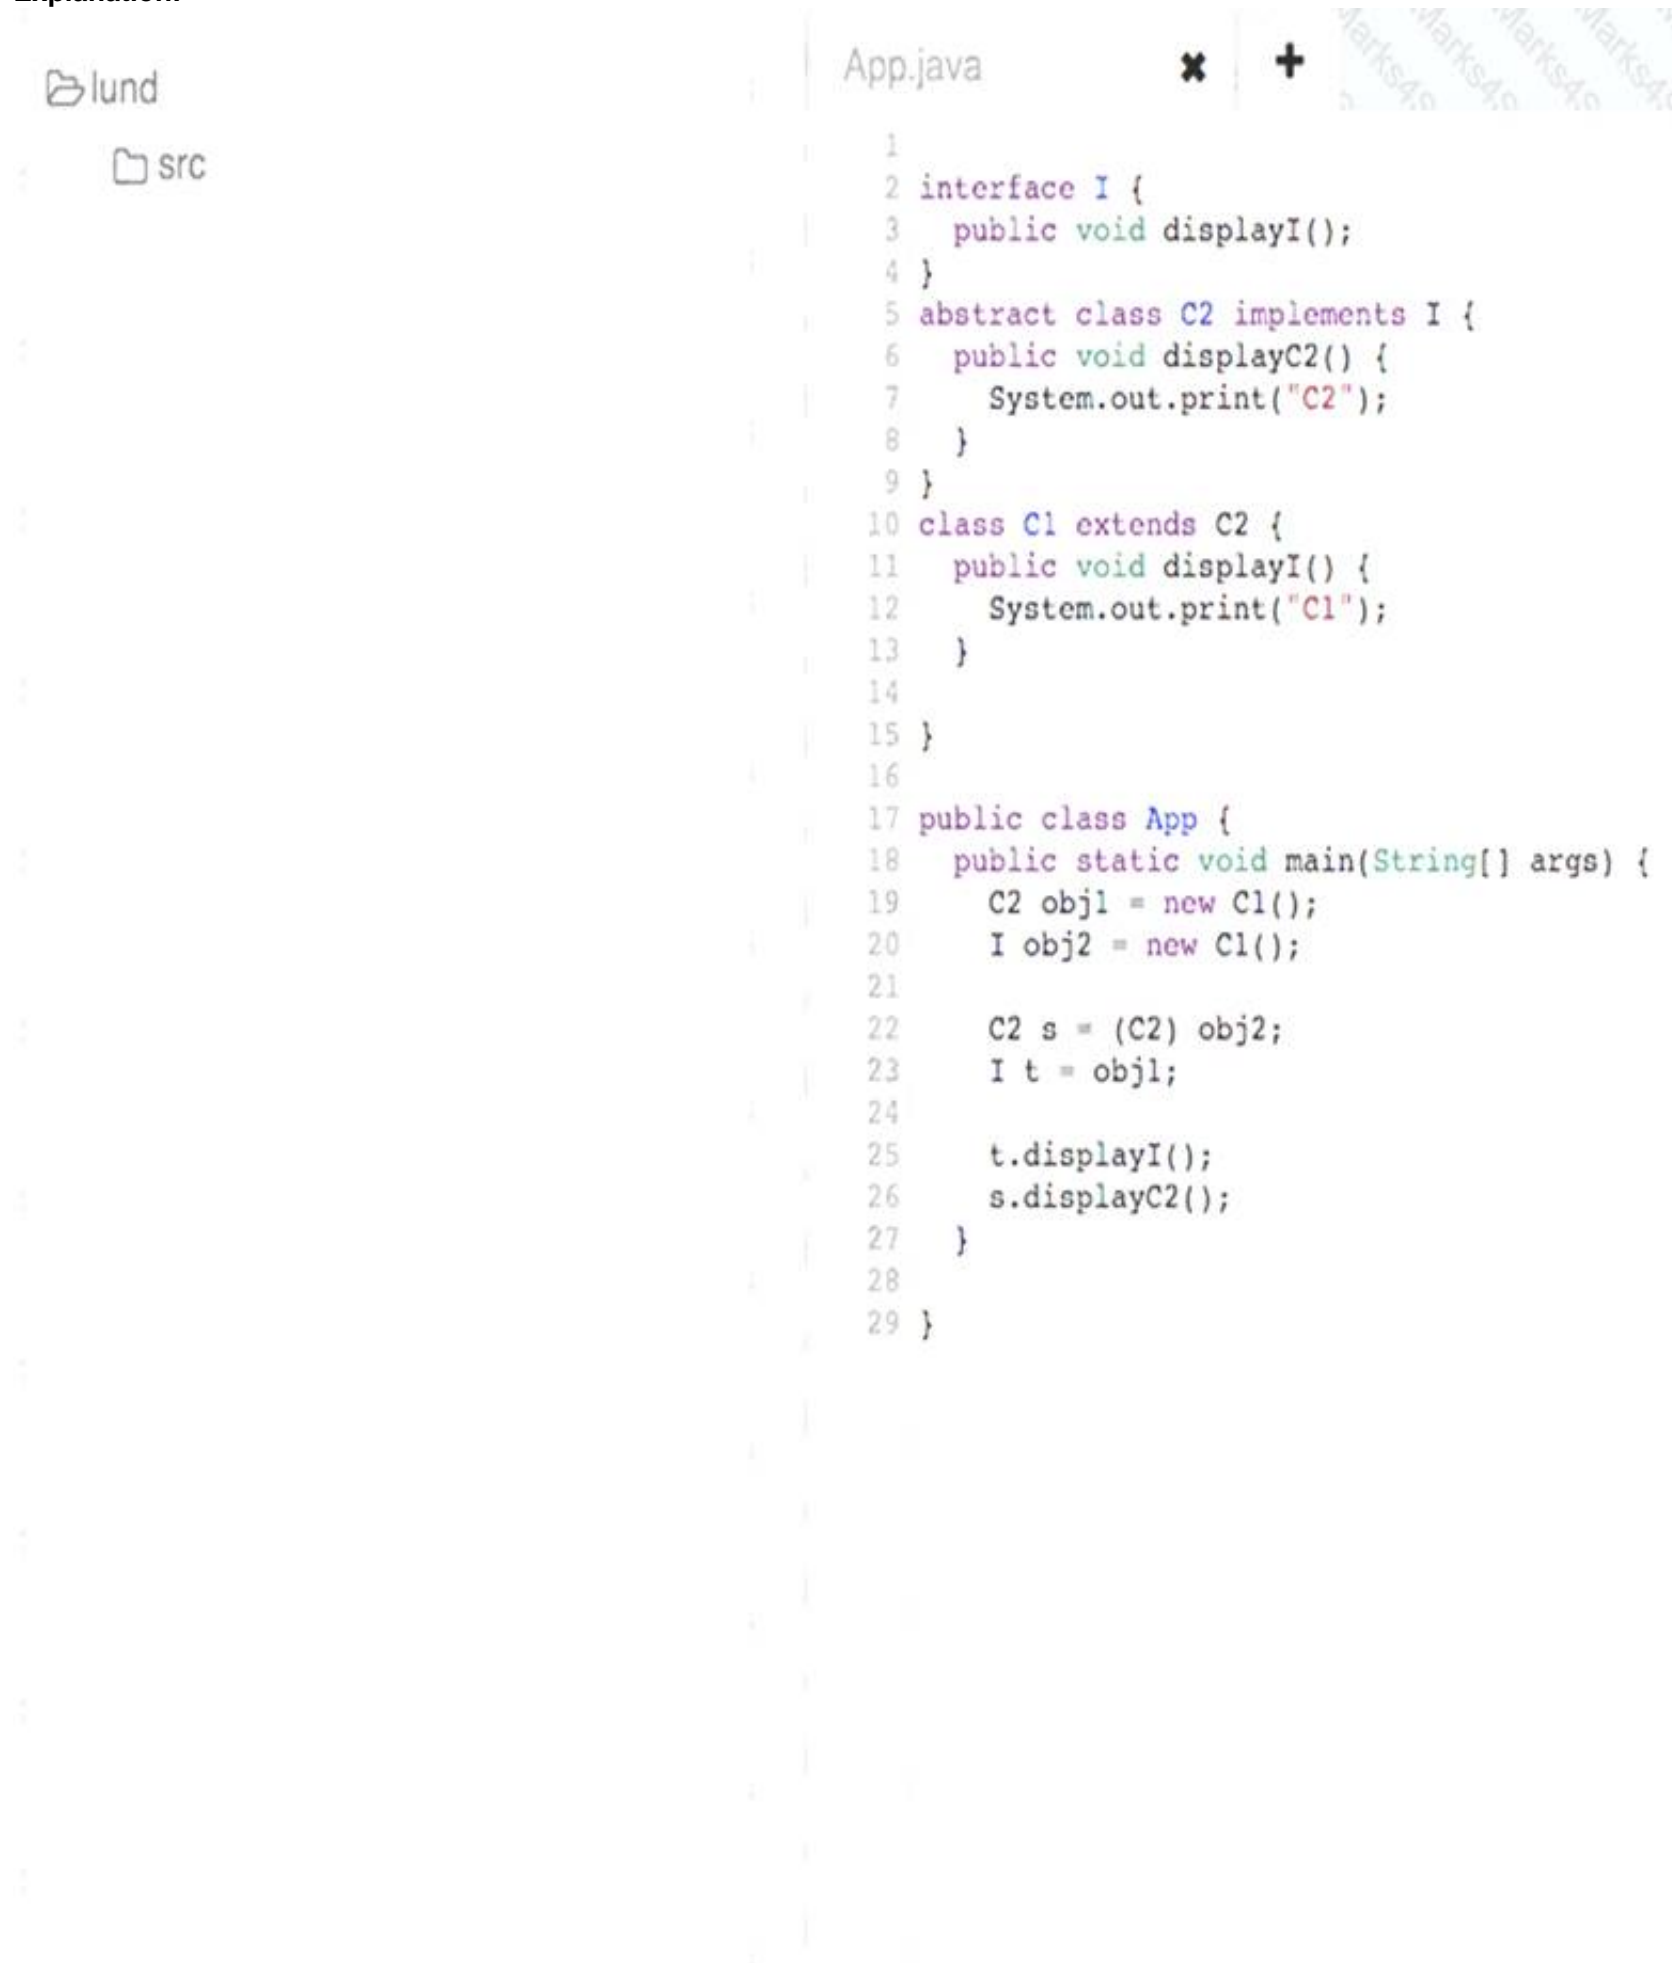

Console 1 ✖ Console 2 ✖ Console 3 ✖ Console 4 ✖
 C1C2
 Completed with exit code: 0

NEW QUESTION 25

Given this class:

```
public class CheckingAccount {
    public int amount;
    //line n1
}
```

And given this main method, located in another class:

```
public static void main(String[] args) {
    CheckingAccount acct = new CheckingAccount();
    //line n2
}
```

Which three pieces of code, when inserted independently, set the value of amount to 100?

A

At line n1 insert:

```
public CheckingAccount() {
    amount = 100;
}
```

B

At line n2 insert:

```
this.amount = 100;
```

C

At line n2 insert:

```
amount = 100;
```

D

At line n1 insert:

```
public CheckingAccount() {
    this.amount = 100;
}
```

E

At line n2 insert:

```
acct.amount = 100;
```

F

At line n1 insert:

```
public CheckingAccount() {
    acct.amount = 100;
}
```

- A. Option A
- B. Option B
- C. Option C
- D. Option D
- E. Option E
- F. Option F

Answer: DE

NEW QUESTION 27

Given the code fragment:

```
7.  StringBuilder sb1 = new StringBuilder("Duke");
8.  String str1 = sb1.toString();
9.  // insert code here
10. System.out.print(str1 == str2);
```

Which code fragment, when inserted at line 9, enables the code to print true?

- A. String str2 = str1;
- B. String str2 = new String(str1);
- C. String str2 = sb1.toString();
- D. String str2 = "Duke";

Answer: A

NEW QUESTION 28

Given the code snippet from a compiled Java source file:

```
public class MyFile
{
    public static void main (String[] args)
    {
        String arg1 = args[1];
        String arg2 = args[2];
        String arg3 = args[3];
        System.out.println("Arg is " + arg3);
    }
}
```

Which command-line arguments should you pass to the program to obtain the following output? Arg is 2

- A. java MyFile 1 3 2 2
- B. java MyFile 2 2 2
- C. java MyFile 1 2 2 3 4
- D. java MyFile 0 1 2 3

Answer: A

NEW QUESTION 30

Given the code fragment:

```
public static void main(String[] args) {
    LocalDate date = LocalDate.of(2012, 1, 30);
    date.plusDays(10);
    System.out.println(date);
}
```

What is the result?

- A. 2012-02-10
- B. 2012-01-30
- C. 2012-02-10 00:00
- D. A DateTimeException is thrown at runtime.

Answer: C

NEW QUESTION 31

Given:

```
public class Triangle {
    static double area;
    int b = 2, h = 3;
    public static void main(String[] args) {
        double p, b, h;           //line n1
        if (area == 0) {
            b = 3;
            h = 4;
            p = 0.5;
            area = p * b * h;      //line n2
        }
        System.out.println("Area is " + area);
    }
}
```

What is the result?

- A. Area is 6.0
- B. Area is 3.0
- C. Compilation fails at line n1
- D. Compilation fails at line n2.

Answer: D

NEW QUESTION 35

Given the code fragment:

```
public static void main(String[] args) {  
    String myStr = "Hello World ";  
    myStr.trim();  
    int i1 = myStr.indexOf(" ");  
    System.out.println(i1);  
}
```

What is the result?

- A. An exception is thrown at runtime.
- B. -1
- C. 5
- D. 10

Answer: A

NEW QUESTION 37

Which two code fragments cause a compilation error? (Choose two.)

- A. float flt = 100.00F;
- B. float flt = (float) 1_11.00;
- C. Float flt = 100.00;
- D. double y1 = 203.22;float flt = y1;
- E. int y2 = 100;float flt = (float) y2 ;

Answer: AD

NEW QUESTION 38

Given:

```
class Test {  
    public static void main (String [] args) {  
        int numbers [ ];  
        numbers = new int [2];  
        numbers [0] = 10;  
        numbers [1] = 20;  
  
        numbers = new int [4];  
        numbers [2] = 30;  
        numbers [3] = 40;  
        for (int x : numbers) {  
            System.out.print (" " + x) ;  
        }  
    }  
}
```

What is the result?

- A. 10 20 30 40
- B. 0 0 30 40
- C. Compilation fails.
- D. An exception is thrown at runtime.

Answer: C

NEW QUESTION 42

Given:

```
class Caller {
    private void init () {
        System.out.println("Initialized");
    }

    private void start () {
        init();
        System.out.println("Started");
    }
}

public class TestCall {
    public static void main(String[] args) {
        Caller c - new Caller();
        c.start();
        c.init();
    }
}
```

What is the result?

- A. An exception is thrown at runtime.
- B. InitializedStartedInitialized
- C. InitializedStarted
- D. Compilation fails.

Answer: D

NEW QUESTION 47

Which statement best describes encapsulation?

- A. Encapsulation ensures that classes can be designed so that only certain fields and methods of an object are accessible from other objects.
- B. Encapsulation ensures that classes can be designed so that their methods are inheritable.
- C. Encapsulation ensures that classes can be designed with some fields and methods declared as abstract.
- D. Encapsulation ensures that classes can be designed so that if a method has an argument MyType x, any subclass of MyType can be passed to that method.

Answer: A

NEW QUESTION 50

Which two statements are true? (Choose two.)

- A. Error class is unextendable.
- B. Error class is extendable.
- C. Error is a RuntimeException.
- D. Error is an Exception.
- E. Error is a Throwable.

Answer: BC

NEW QUESTION 54

Which statement will empty the contents of a StringBuilder variable named sb?

- A. s
- B. deleteAll ();
- C. s
- D. delete (0, s
- E. size ());
- F. s
- G. delete (0, s
- H. length ());
- I. s
- J. removeAll ();

Answer: C

NEW QUESTION 55

Given:

```
class Vehicle {
    int x;
    Vehicle() {
        this(10); // line n1
    }
    Vehicle(int x) {
        this.x = x;
    }
}

class Car extends Vehicle {
    int y;
    Car() {
        super();
        this(20); // line n2
    }
    Car(int y) {
        this.y = y;
    }
    public String toString() {
        return super.x + ":" + this.y;
    }
}
```

And given the code fragment:

And given the code fragment:

```
Vehicle y = new Car();
System.out.println(y);
```

What is the result?

- A. 10:20
- B. 0:20
- C. Compilation fails at line n1
- D. Compilation fails at line n2

Answer: D

NEW QUESTION 60

Given the code fragment:

```
if (aVar++ < 10) {
    System.out.println(aVar + " Hello Universe!");
} else {
    System.out.println(aVar + " Hello World!");
}
```

What is the result if the integer aVar is 9?

- A. Compilation fails.
- B. 10 Hello Universe!
- C. 10 Hello World!
- D. 9 Hello World!

Answer: B

NEW QUESTION 63

Given:

```
public class App {
    public static void main(String[] args) {
        int i = 10;
        int j = 20;
        int k = (j += i) / 5;
        System.out.print(i + " : " + j + " : " + k);
    }
}
```

What is the result?

- A. 10 : 30 : 6
- B. 10 : 22 : 22
- C. 10 : 22 : 20
- D. 10 : 22 : 6

Answer: A

NEW QUESTION 67

.....

THANKS FOR TRYING THE DEMO OF OUR PRODUCT

Visit Our Site to Purchase the Full Set of Actual 1z0-808 Exam Questions With Answers.

We Also Provide Practice Exam Software That Simulates Real Exam Environment And Has Many Self-Assessment Features. Order the 1z0-808 Product From:

<https://www.2passeasy.com/dumps/1z0-808/>

Money Back Guarantee

1z0-808 Practice Exam Features:

- * 1z0-808 Questions and Answers Updated Frequently
- * 1z0-808 Practice Questions Verified by Expert Senior Certified Staff
- * 1z0-808 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * 1z0-808 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year