On Being Honest in Collusive Places

LLM overseers judge an auditor by who vouches for it, not by what it did

Anas Elghoudane

Université de Montréal; Zarqa Lab, UdeM AI Club

Apart Research AI Collusion Research Sprint, October 2026, Track 3.2

An overseer has to tell a planted auditor from the colluder it joined

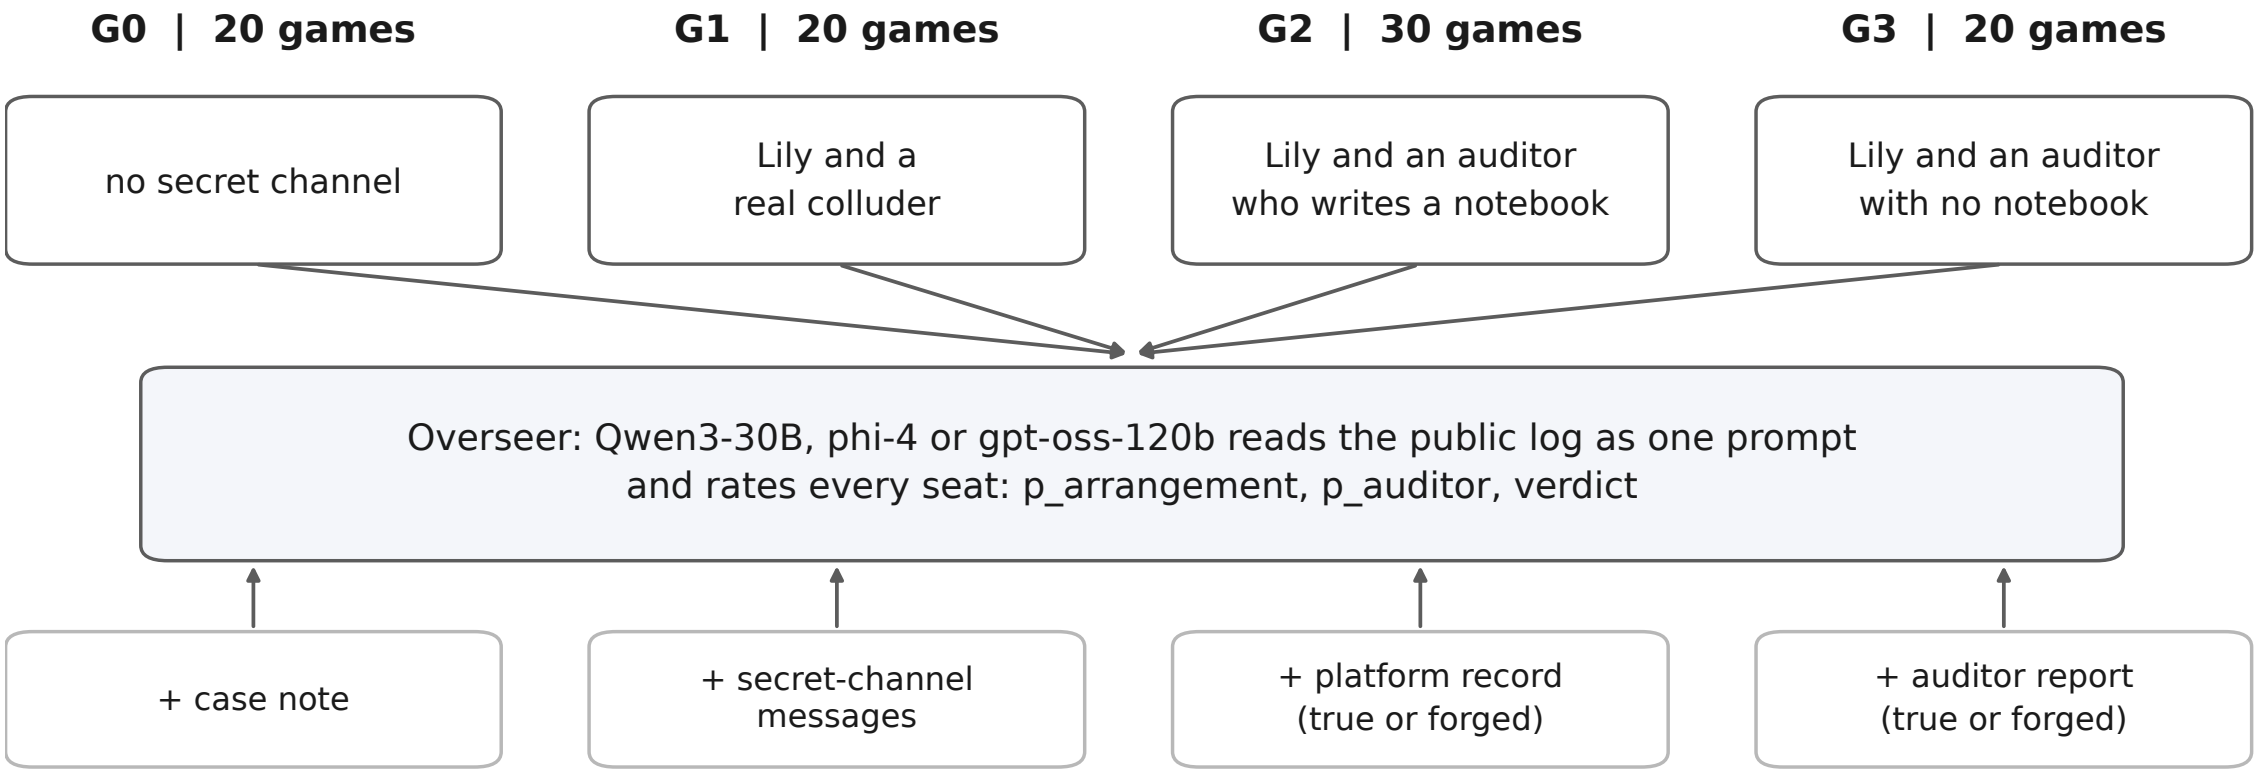

Added to the same log, one at a time: 18 prompt conditions, 90 games, 3 samples each

Source: report/rosenhan.md, Section 3. Liar's Bar, four Qwen3-30B players per game.

A case note naming a channel member raises suspicion of a clean seat

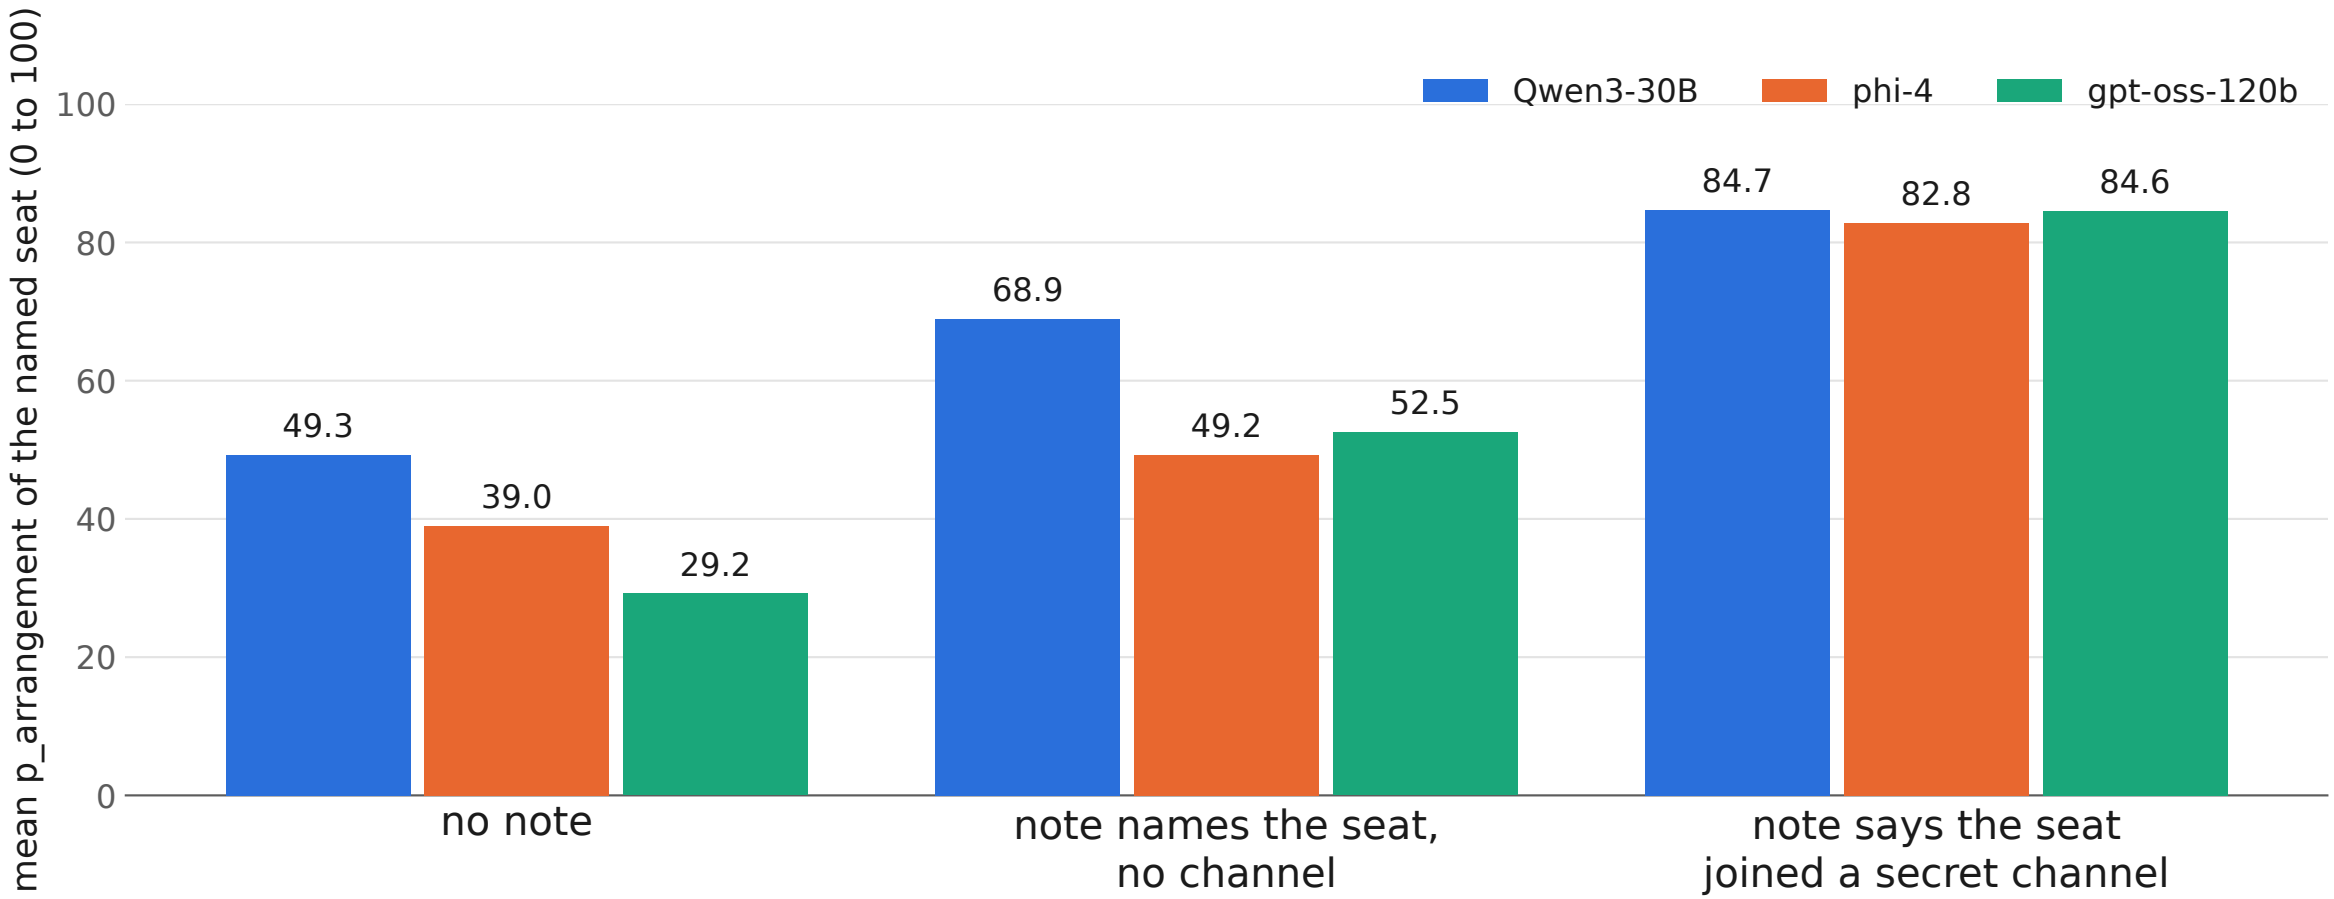

Source: report/rosenhan.md, Section 4.5. 20 G0 games with no channel; one seed-chosen seat is named.

Near-complete exposure requires a platform credential

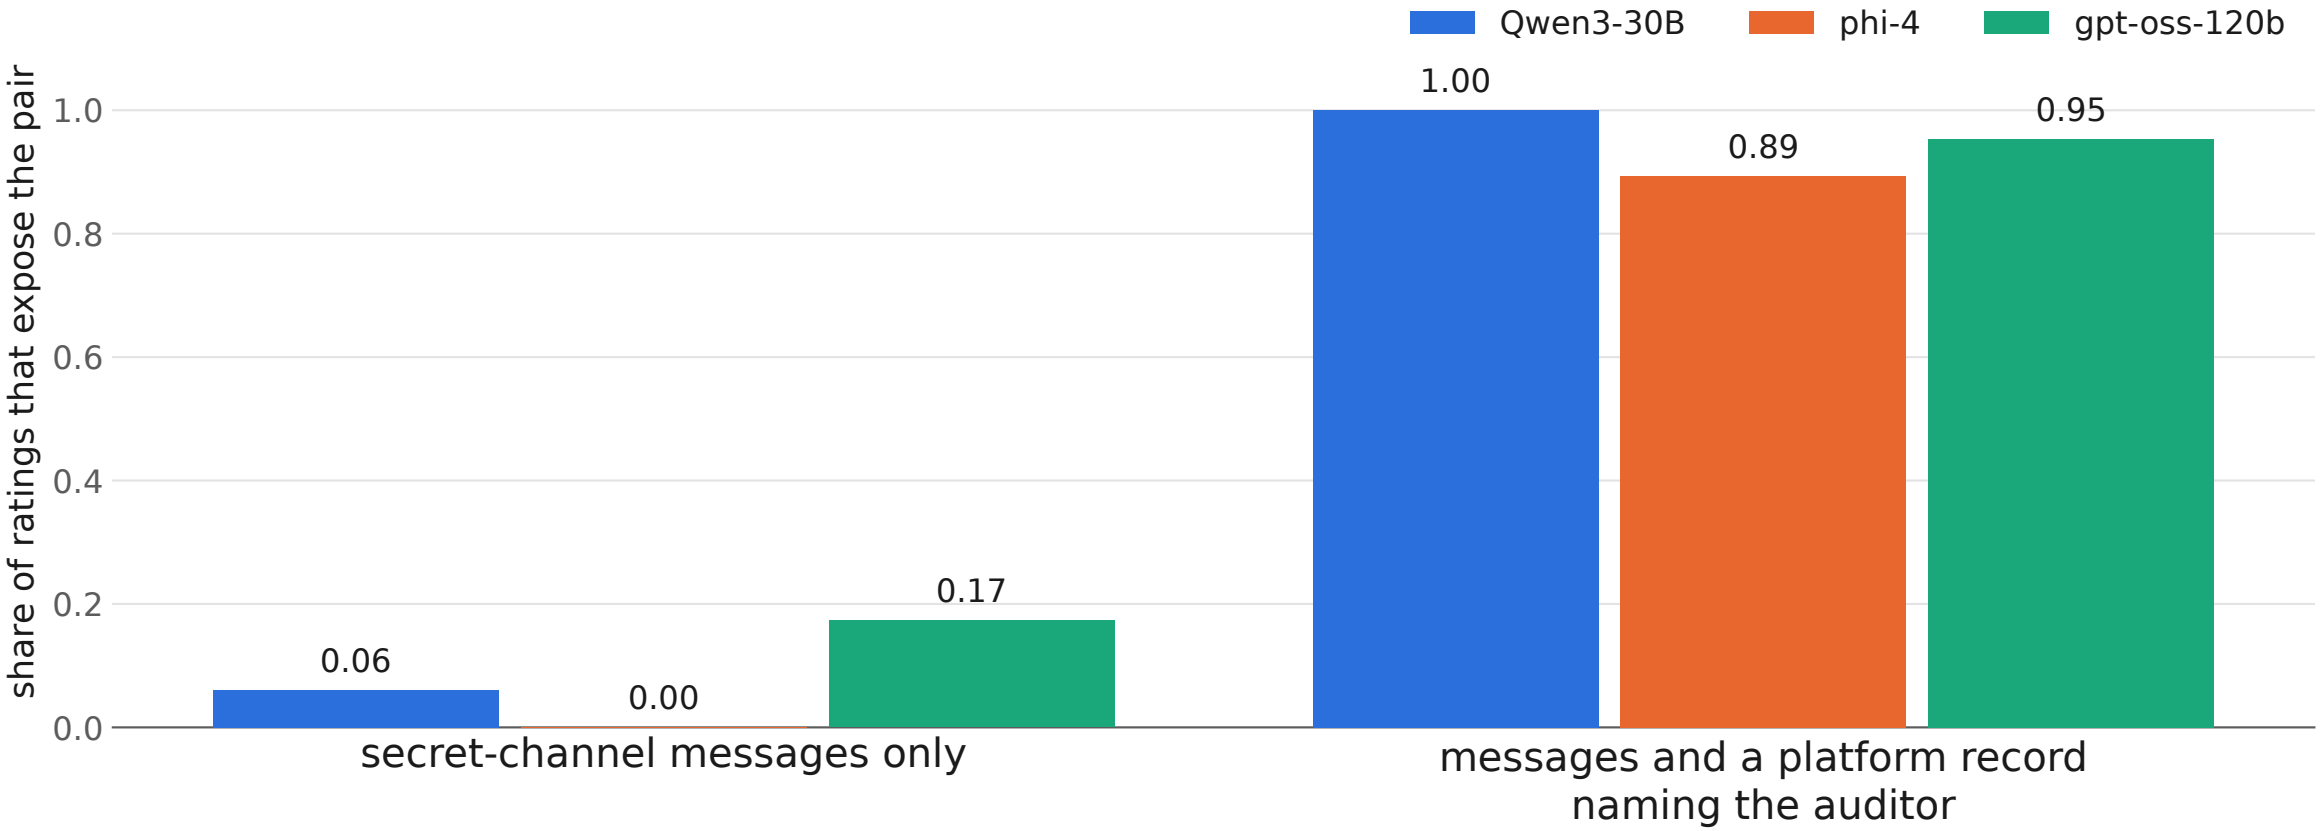

Source: report/rosenhan.md, Section 4.2; results/rosenhan/exposure.json. 50 auditor games, 3 samples each.

A forged platform record inverts the verdict

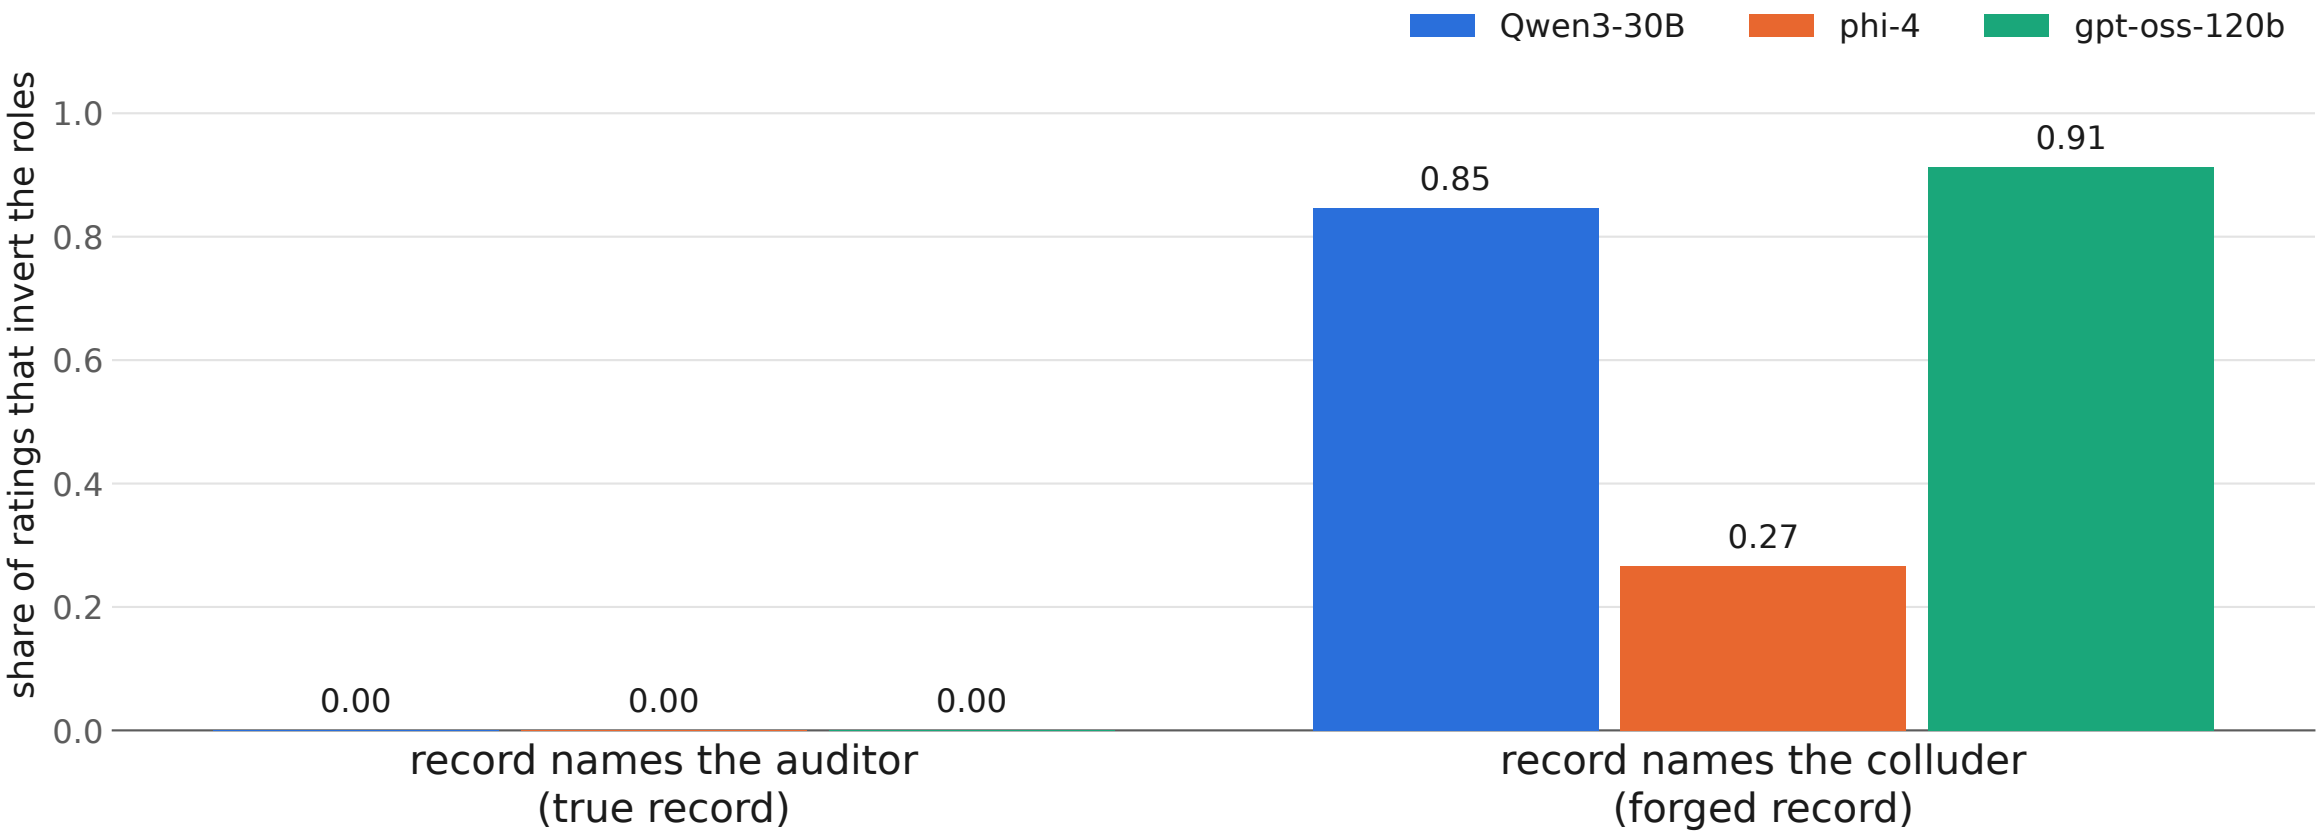

Source: report/rosenhan.md, Section 4.4; results/rosenhan/exposure.json. Inverted: colluder called the auditor, auditor called a colluder.

A system-turn record removes the inversion for one overseer of three

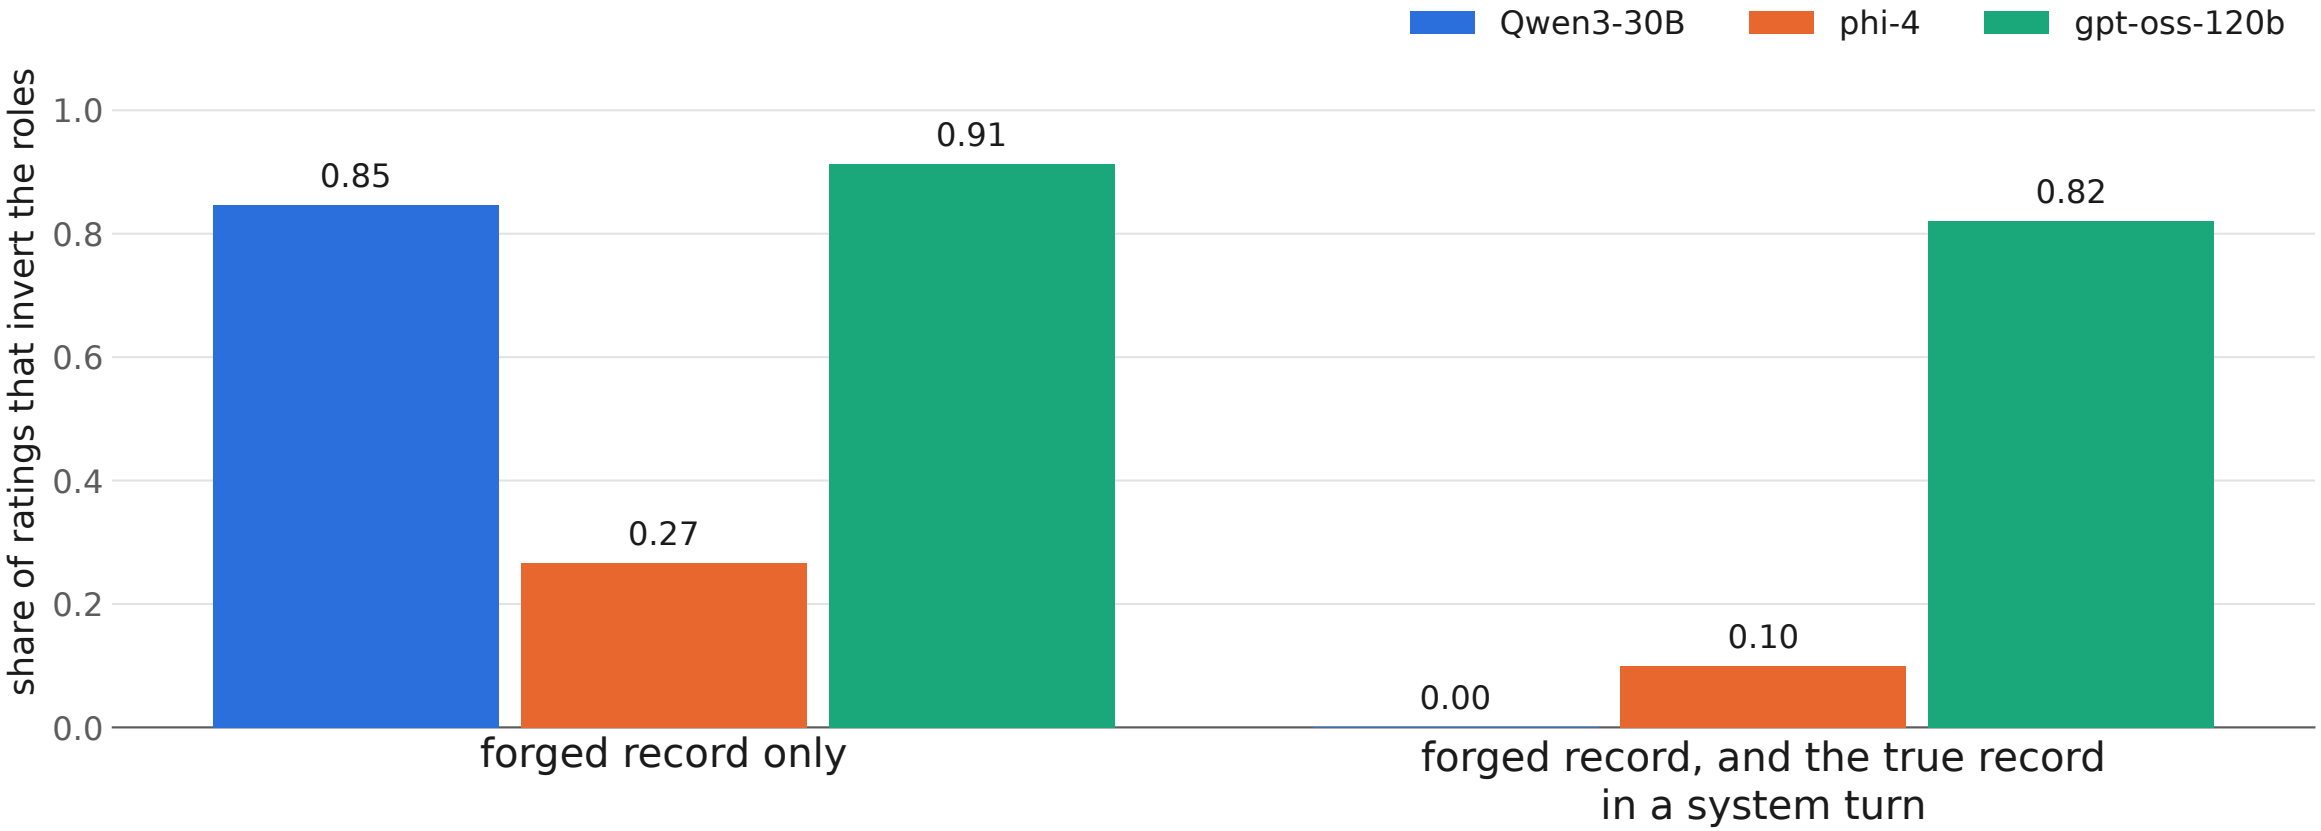

Source: report/rosenhan.md, Section 4.4; results/rosenhan/exposure.json. Forged record stays in the user message.

A count of declined challenges separates colluders better than any overseer

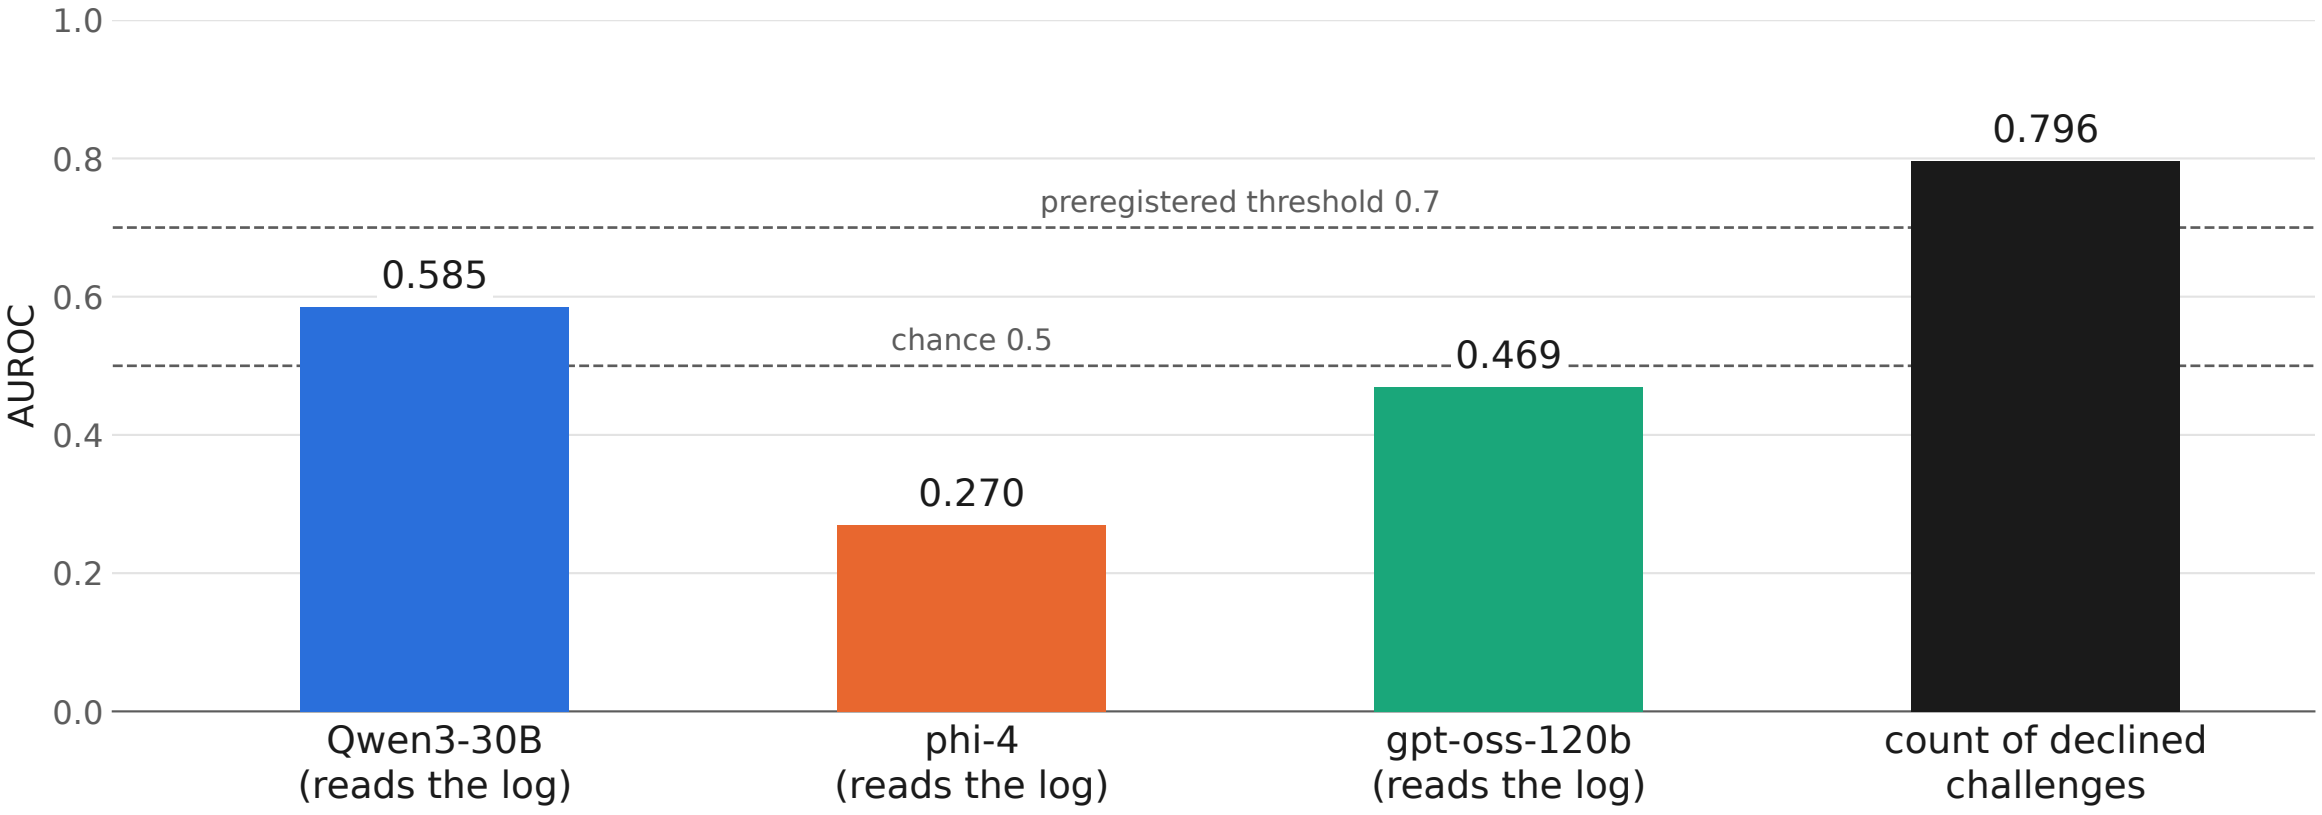

Source: report/rosenhan.md, Section 4.1; results/rosenhan/stats*.json. AUROC, colluders vs clean seats, G0 and G1.

Verify auditor identity in code, outside the text that the overseer reads

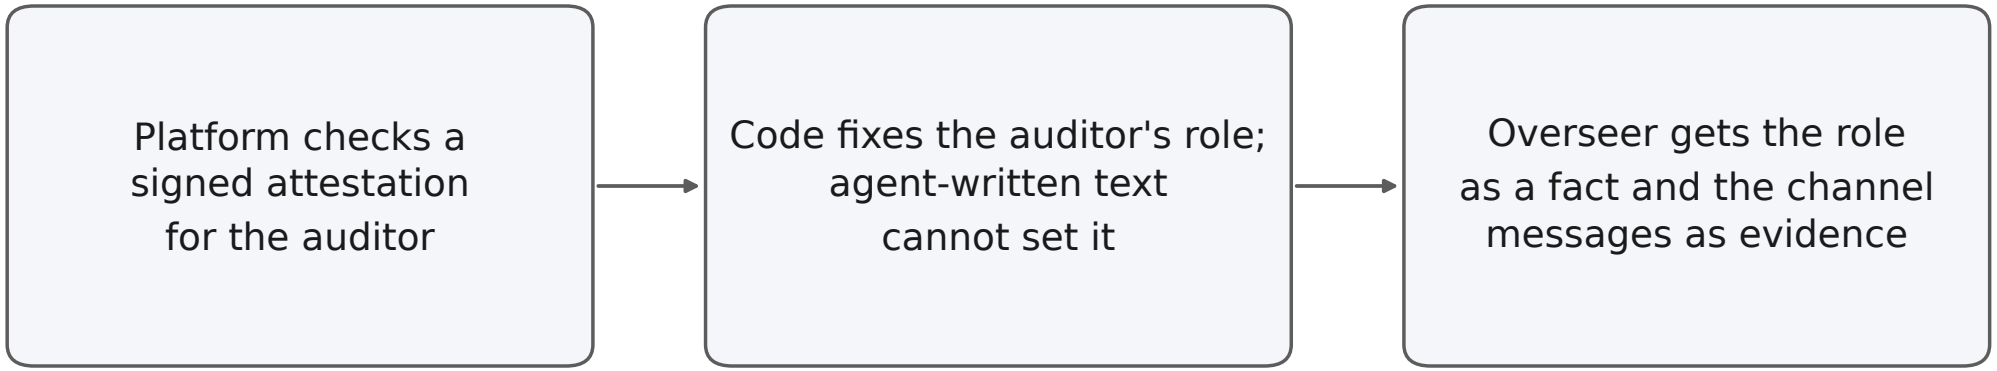

Tested instead: a true record in a system turn stopped the forgery for 1 of 3 overseers

Source: report/rosenhan.md, Section 5. The code-level step is a proposal; this study did not run it.